KANISH KUMAR S

23MIS0141

Agile Development and Devops DA-2

TASK 1: Jenkins Familiarization Objective: Understand Jenkins UI and basic navigation

Tasks: 1. Open Jenkins Dashboard in browser

Url: http://localhost:8080/

2. Identify: o Dashboard

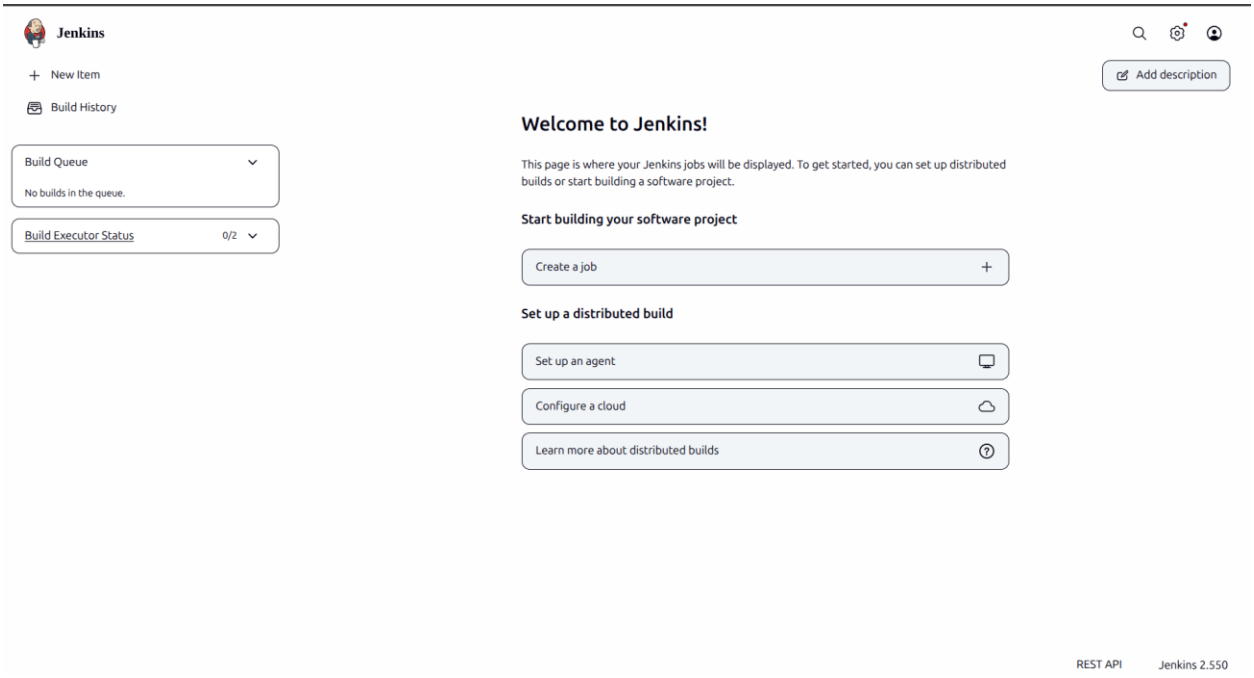

o Manage Jenkins

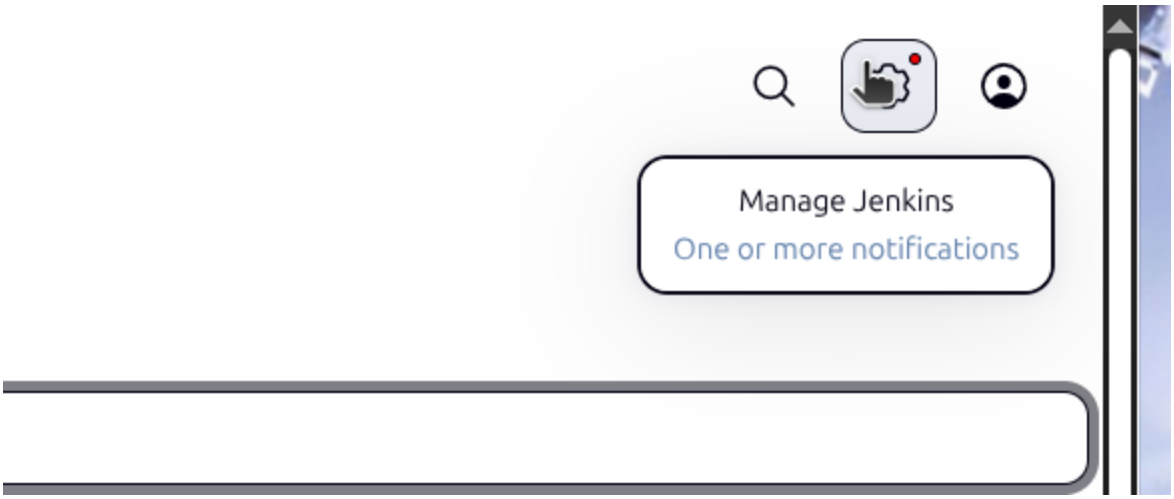
Manage Jenkins
One or more notifications

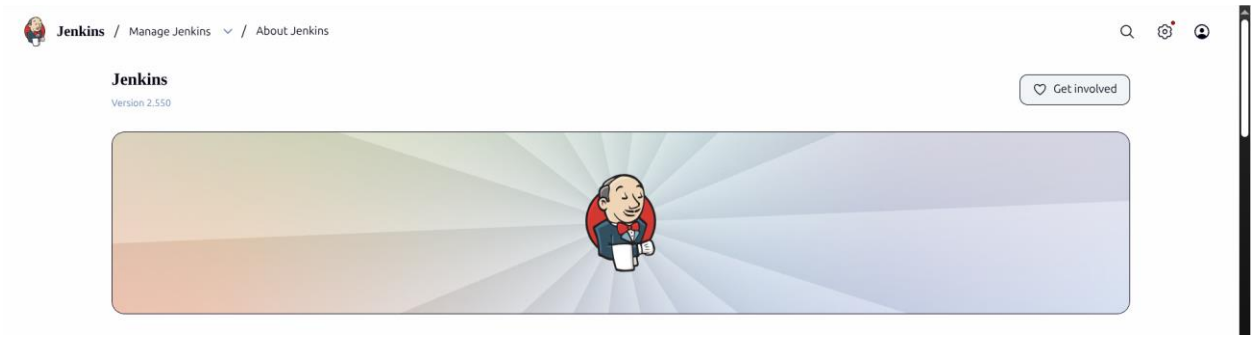
Jenkins / Manage Jenkins / About Jenkins
Jenkins
Version 2.550
Get involved

New Item

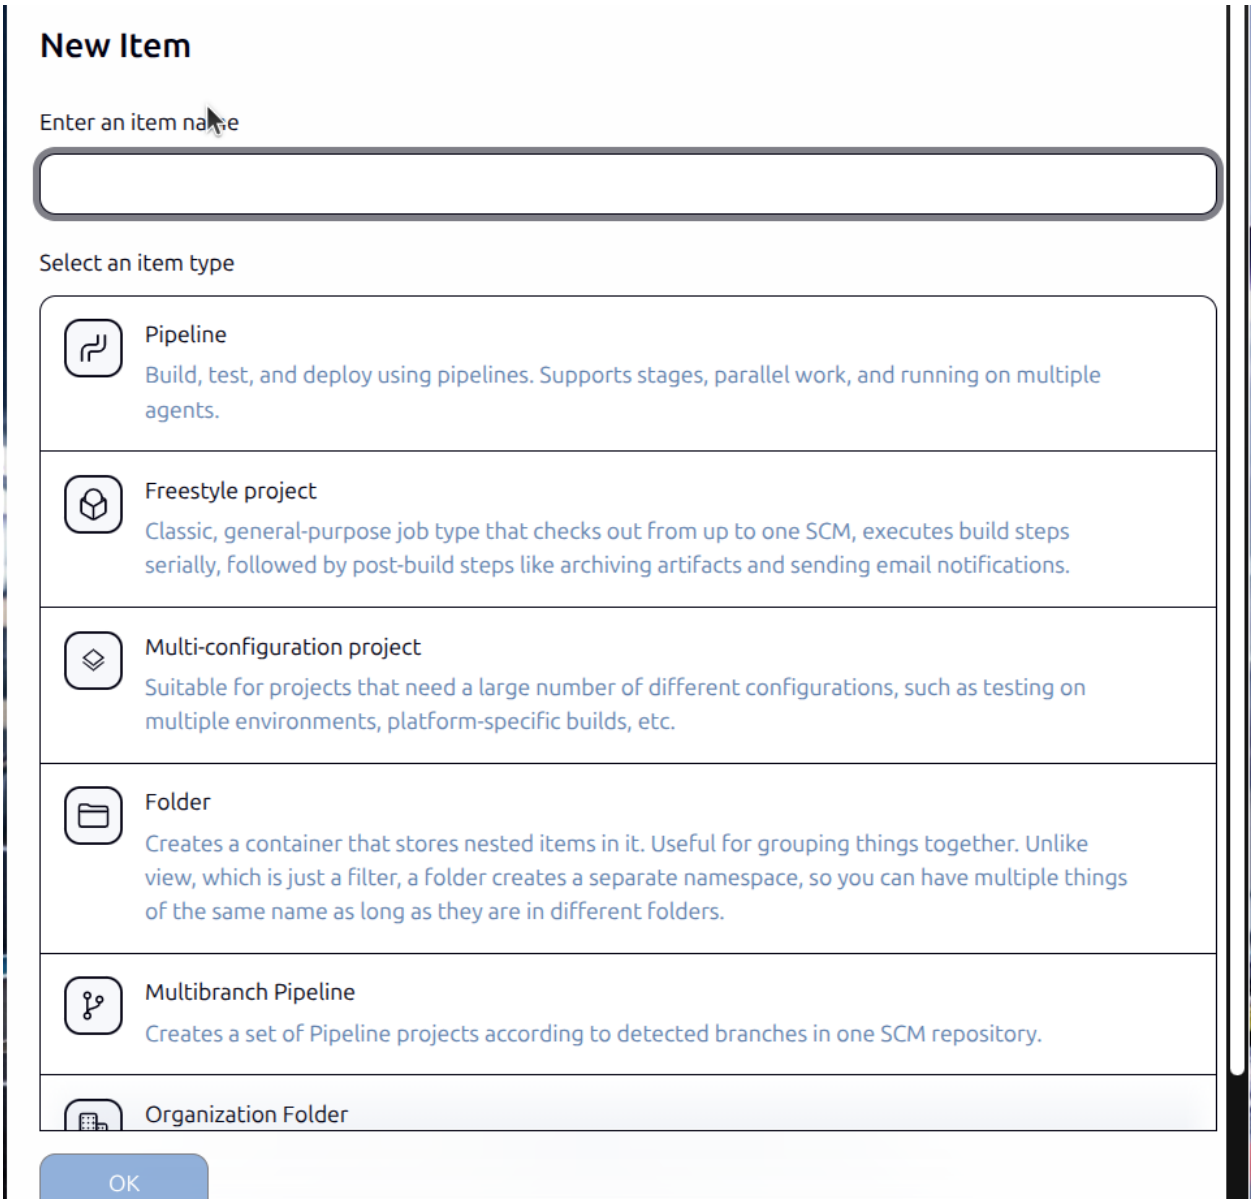

Build History

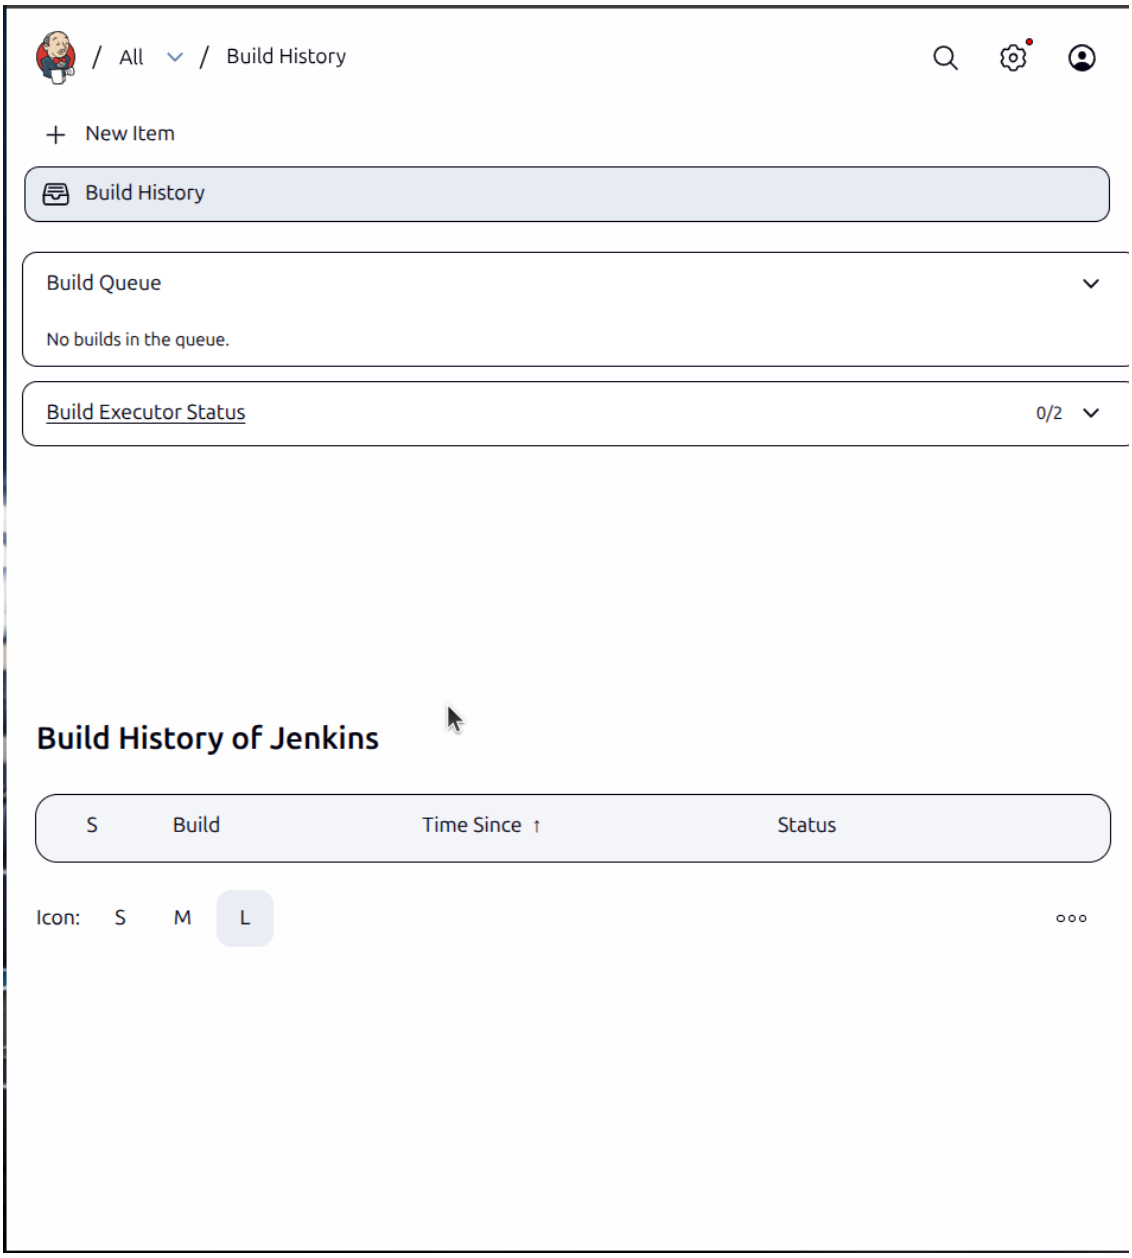

3. Check Jenkins version

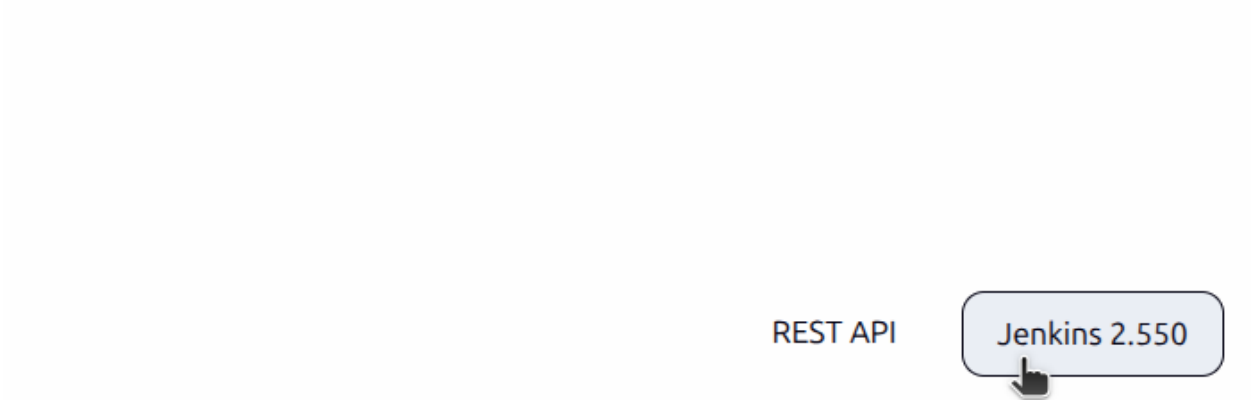

TASK 2: Create First Freestyle Job Objective: Create and run a Jenkins job

Tasks: 1. Create a Freestyle project named Hello-Jenkins

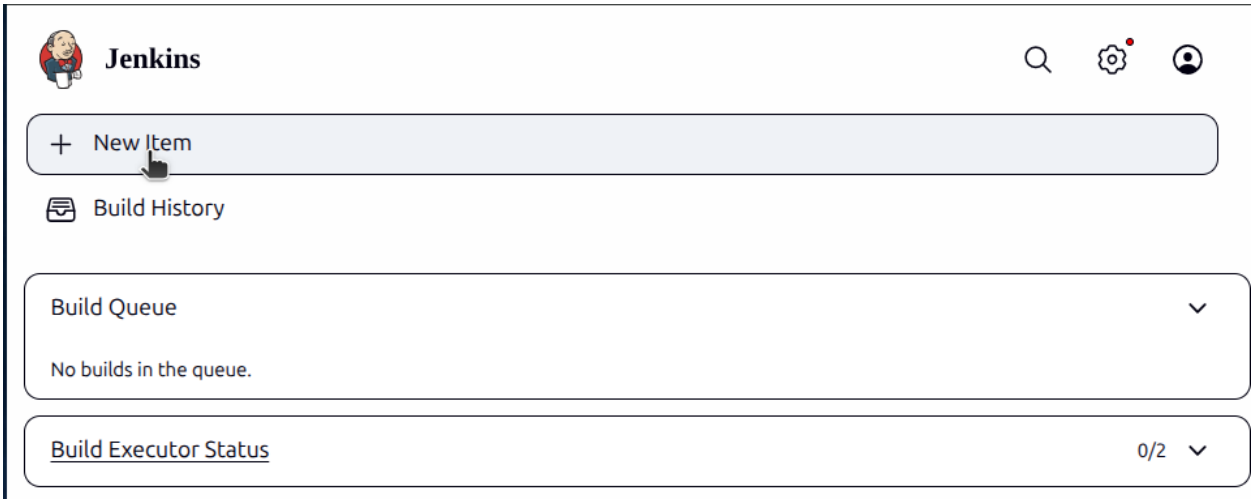

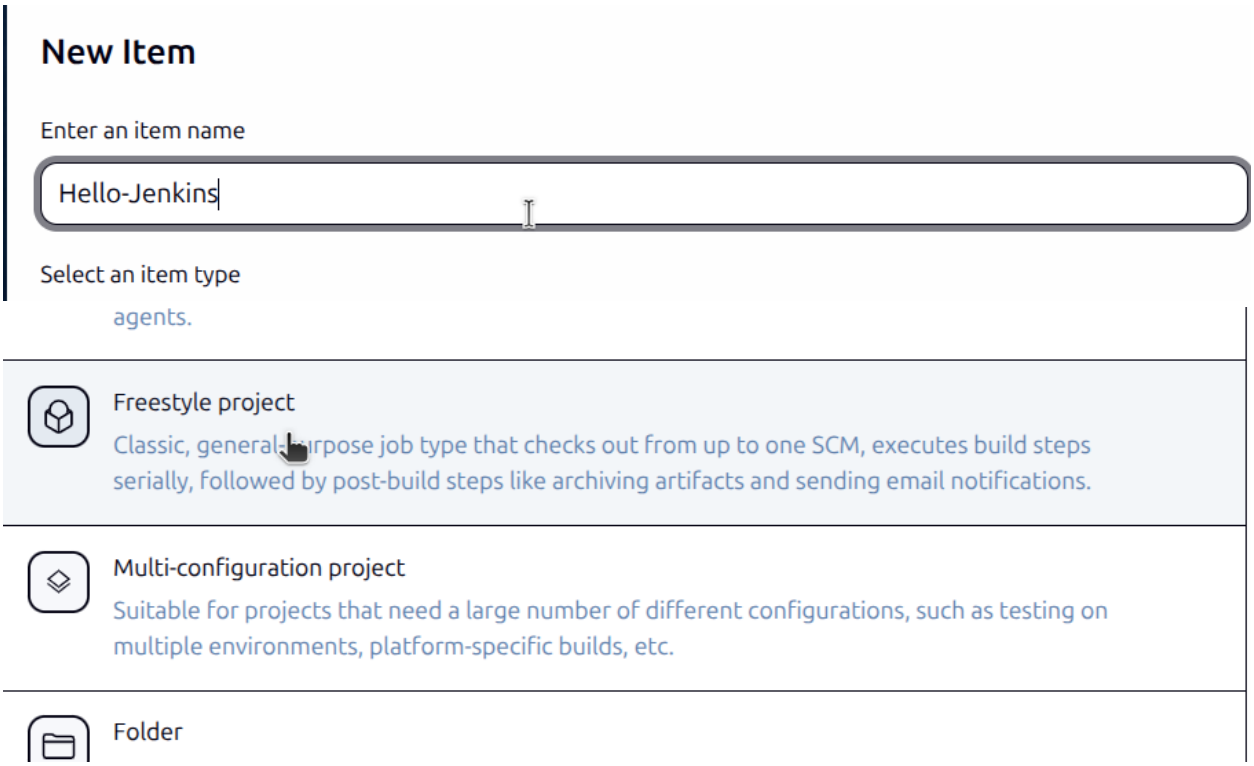

2. Add a description

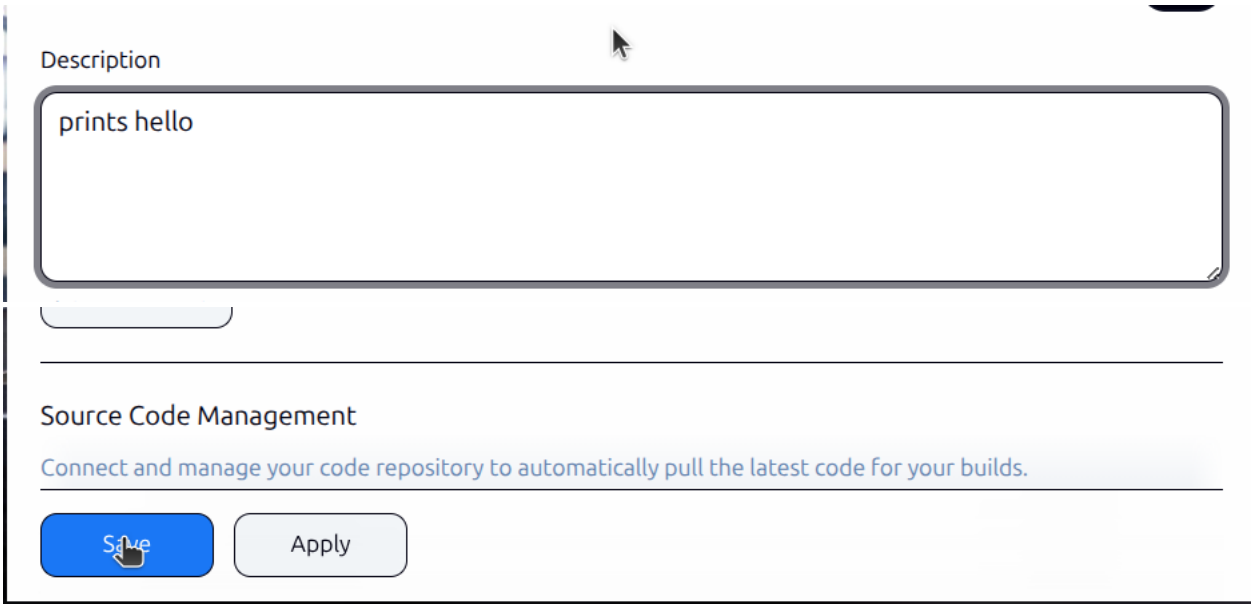

3. Add build step:

Build Steps
Automate your build process with ordered tasks like code compilation, testing, and deployment.
+ Add build step
Filter
Execute Windows batch command
Execute shell
Invoke Ant
Invoke Gradle script
Invoke top-level Maven targets
Run with timeout
Set build status to "pending" on GitHub commit
sending notifications, archiving artifacts, or triggering other jobs.

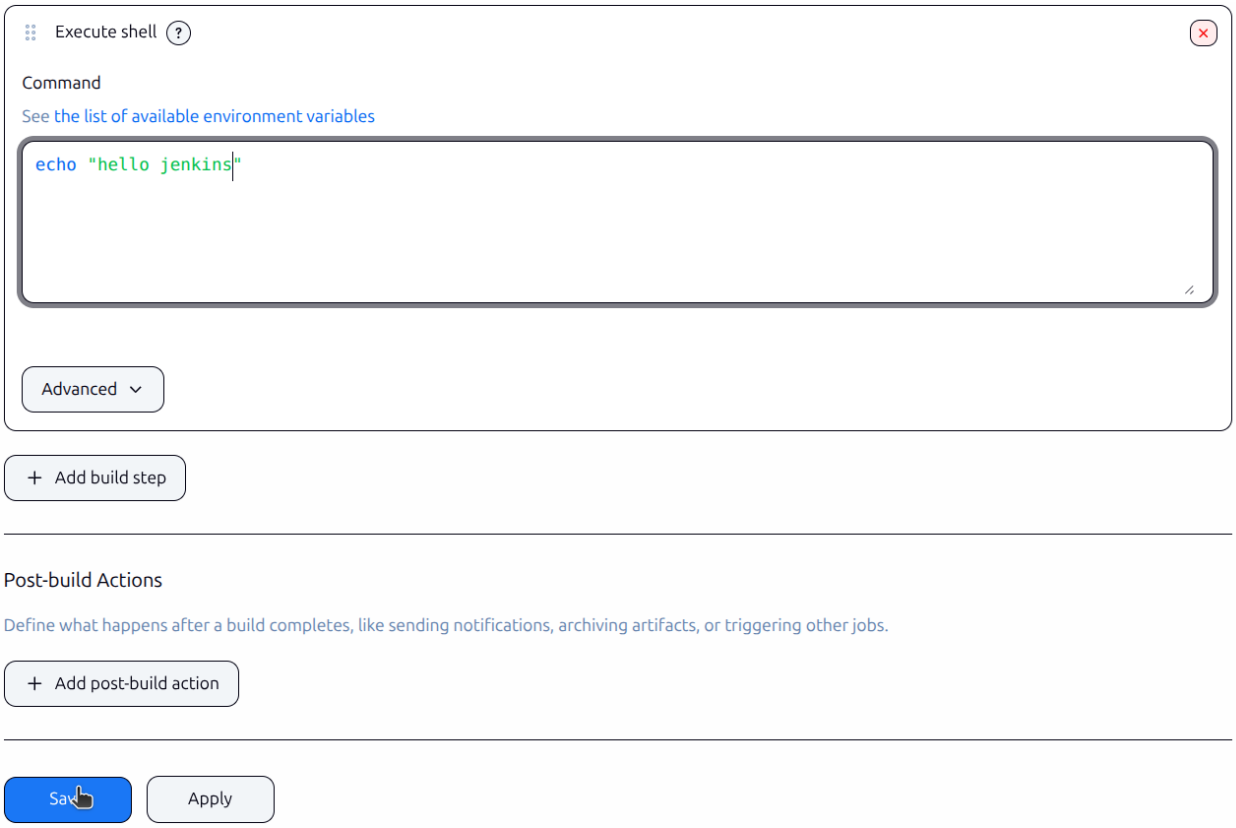
Execute shell
Command
See the list of available environment variables
echo "hello jenkins"
Advanced
+ Add build step
Post-build Actions
Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.
+ Add post-build action
Save
Apply

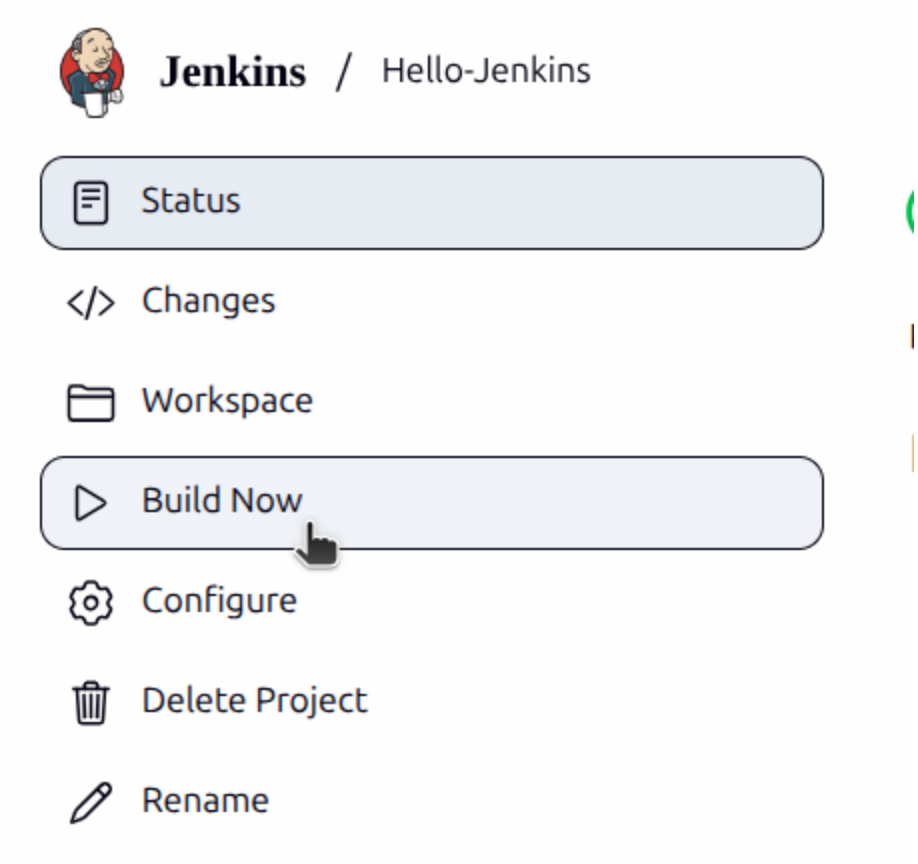

Execute shell / Windows batch command

4. Build the job manually

TASK 3: Jenkins Workspace & Commands Objective: Understand workspace usage Tasks:

1. Navigate to job workspace

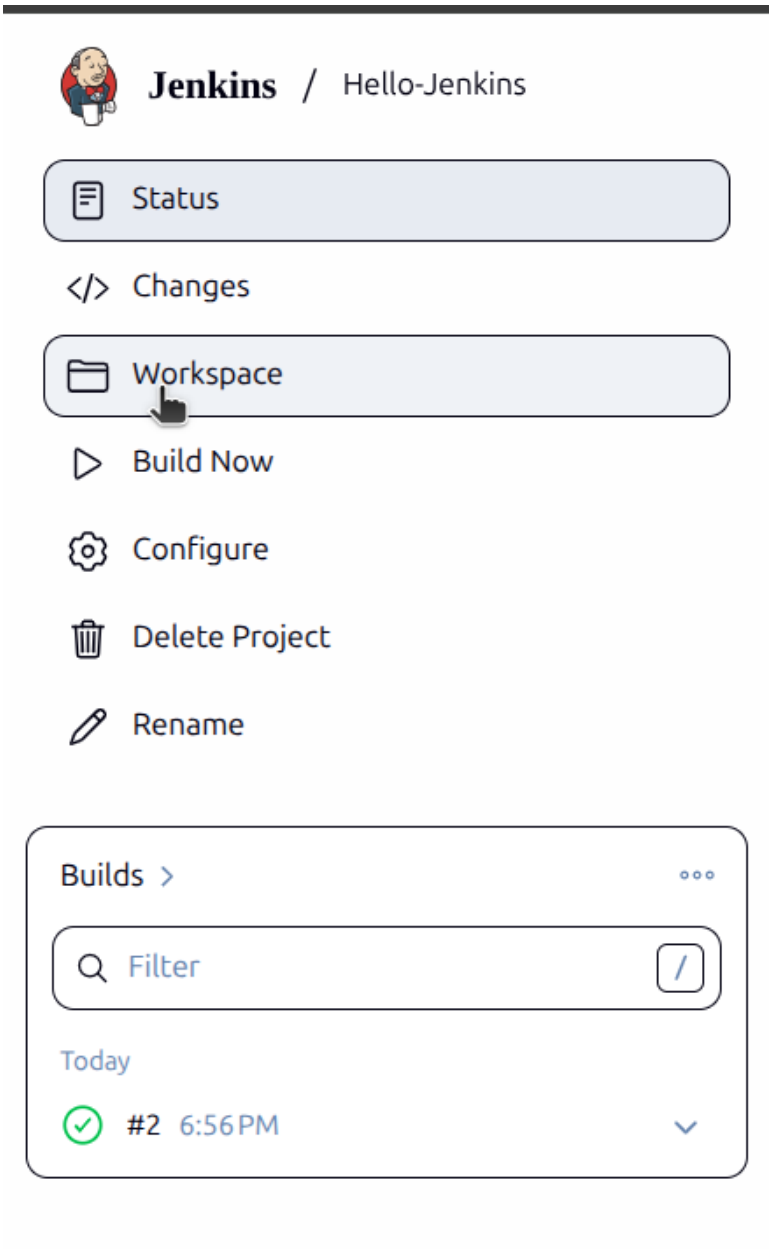

2. Create a text file using build step

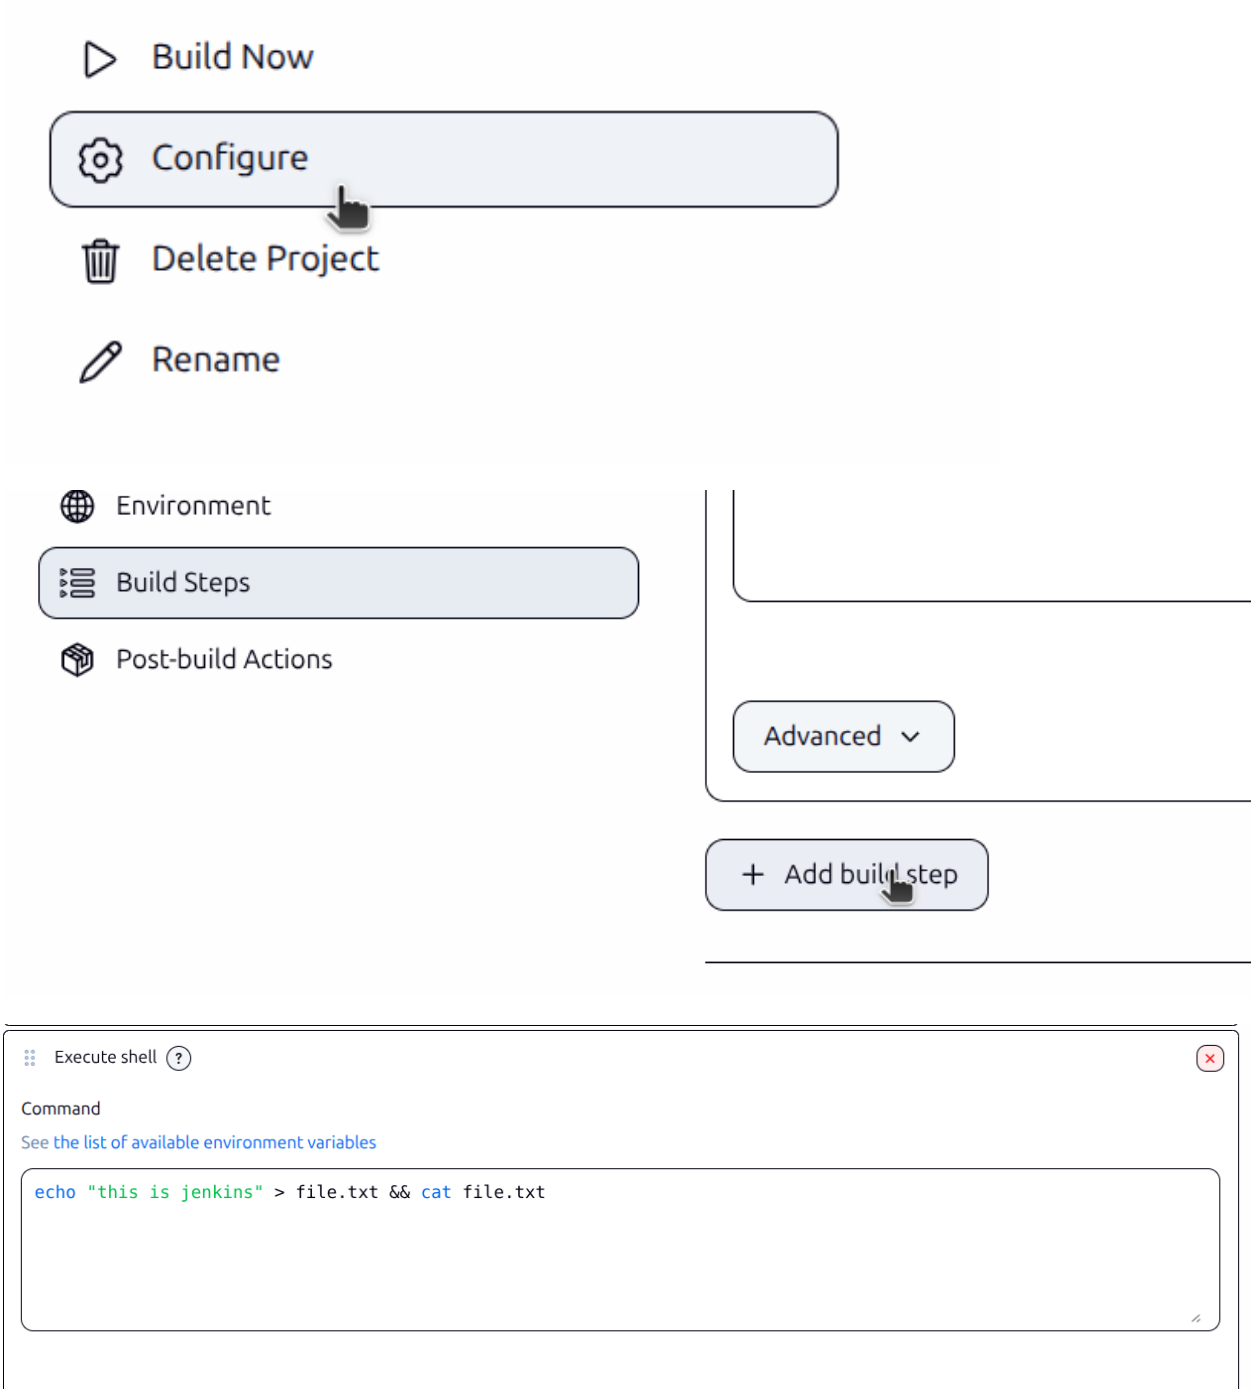

3. Display file contents in console Expected

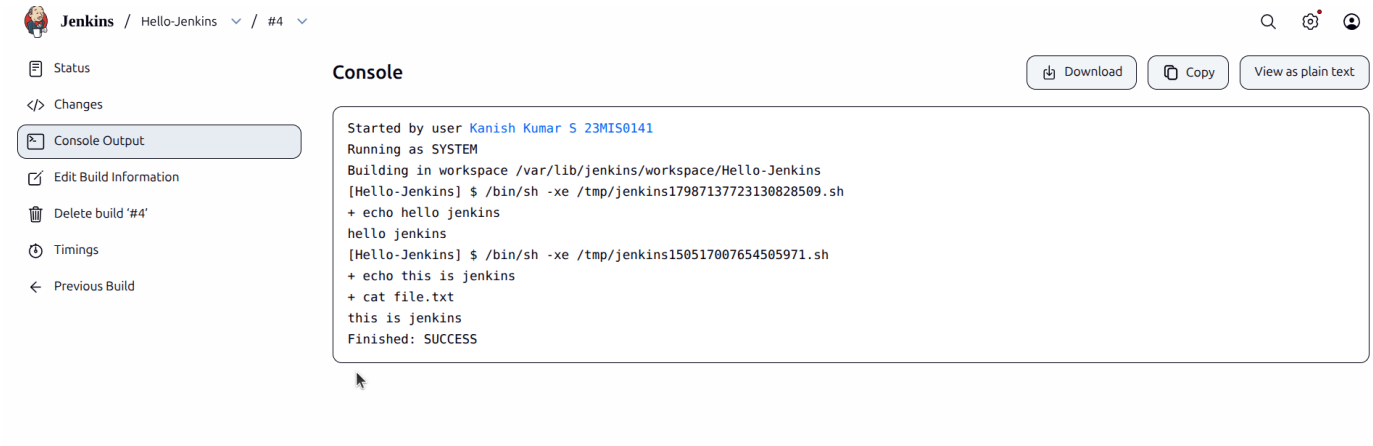

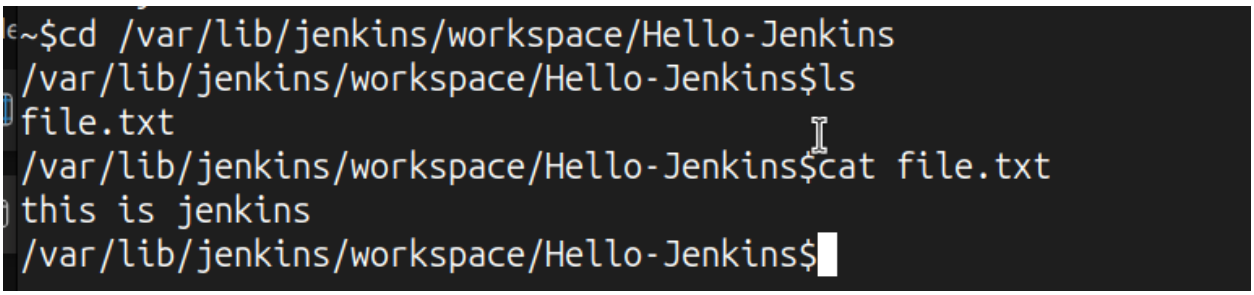

TASK 4: Git Integration Objective: Integrate Jenkins with GitHub

Tasks: 1. Create a GitHub repository with sample code

Create repo

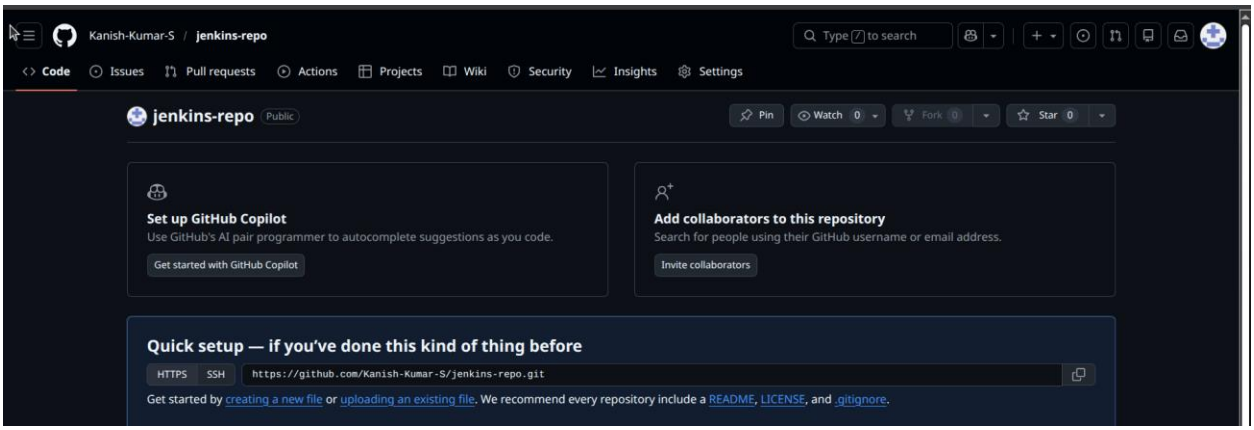

Clone repo

```
~/Public/agile/jk-gh/jenkins-repo$git clone https://github.com/Kanish-Kumar-S/jenkins-repo
```

Push samp file

```
~/Public/agile/jk-gh/jenkins-repo$touch samp.java
~/Public/agile/jk-gh/jenkins-repo$vim samp.java
~/Public/agile/jk-gh/jenkins-repo$javac samp.java
~/Public/agile/jk-gh/jenkins-repo$java samp
hello world
~/Public/agile/jk-gh/jenkins-repo$ git add samp.java
~/Public/agile/jk-gh/jenkins-repo$git commit -m "samp added"
[main (root-commit) ceba590] samp added
 1 file changed, 9 insertions(+)
 create mode 100644 samp.java
~/Public/agile/jk-gh/jenkins-repo$git push origin https://github.com/Kanish-Kumar-S/jenkins-repo master
fatal: invalid refspec 'https://github.com/Kanish-Kumar-S/jenkins-repo'
~/Public/agile/jk-gh/jenkins-repo$git branch
* main
~/Public/agile/jk-gh/jenkins-repo$git push origin https://github.com/Kanish-Kumar-S/jenkins-repo main
fatal: invalid refspec 'https://github.com/Kanish-Kumar-S/jenkins-repo'
~/Public/agile/jk-gh/jenkins-repo$git push -u origin  main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 16 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 321 bytes | 321.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Kanish-Kumar-S/jenkins-repo
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
~/Public/agile/jk-gh/jenkins-repo$
```

2. Configure Git in Jenkins

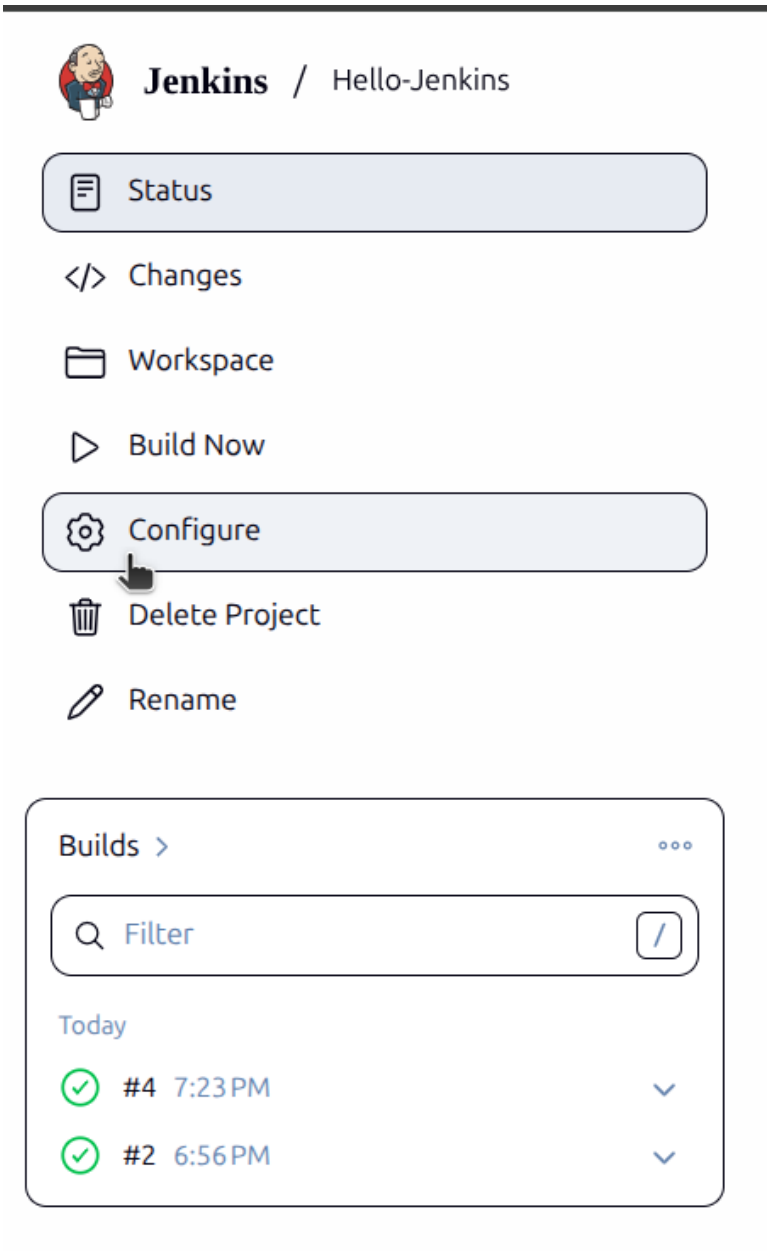

3. Add Git repository URL in job

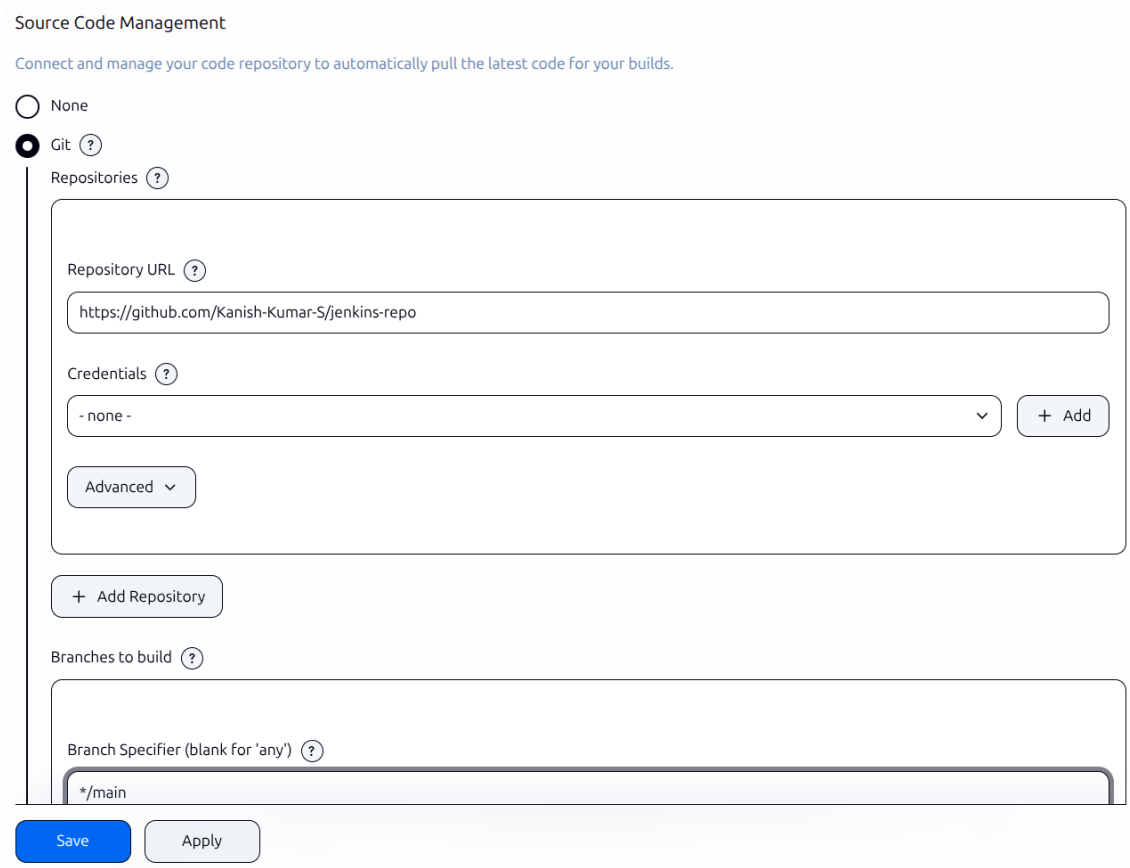

4. Build and verify code checkout

```
Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/Hello-Jenkins
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/Kanish-Kumar-S/jenkins-repo
 > git init /var/lib/jenkins/workspace/Hello-Jenkins # timeout=10
Fetching upstream changes from https://github.com/Kanish-Kumar-S/jenkins-repo
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git fetch --tags --force --progress -- https://github.com/Kanish-Kumar-S/jenkins-repo +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git config remote.origin.url https://github.com/Kanish-Kumar-S/jenkins-repo # timeout=10
 > git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision ceba590b7989fedcf0682c40cba3724bab684760 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f ceba590b7989fedcf0682c40cba3724bab684760 # timeout=10
Commit message: "samp added"
First time build. Skipping changelog.
[Hello-Jenkins] $ /bin/sh -xe /tmp/jenkins15700927293766689158.sh
+ echo hello jenkins
hello jenkins
[Hello-Jenkins] $ /bin/sh -xe /tmp/jenkins9176695836018524622.sh
+ echo this is jenkins
+ cat file.txt
this is jenkins
Finished: SUCCESS
```

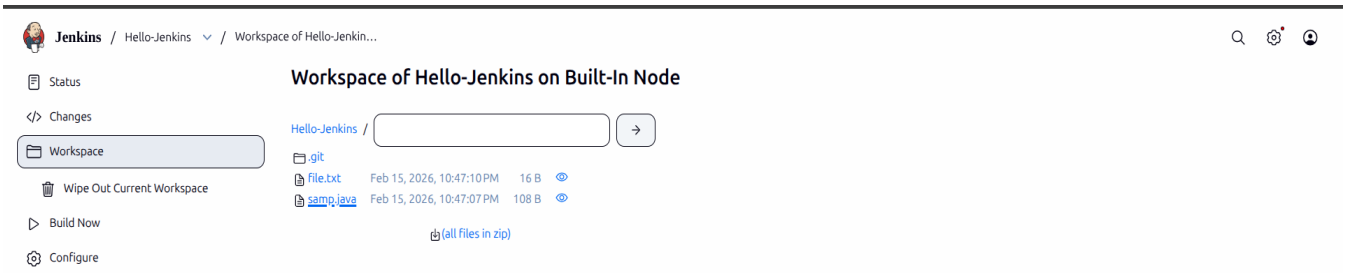

TASK 5: Poll SCM Trigger Objective: Automatically trigger builds on code change

Tasks:

1. Enable Poll SCM 2. Set schedule: * * * * *

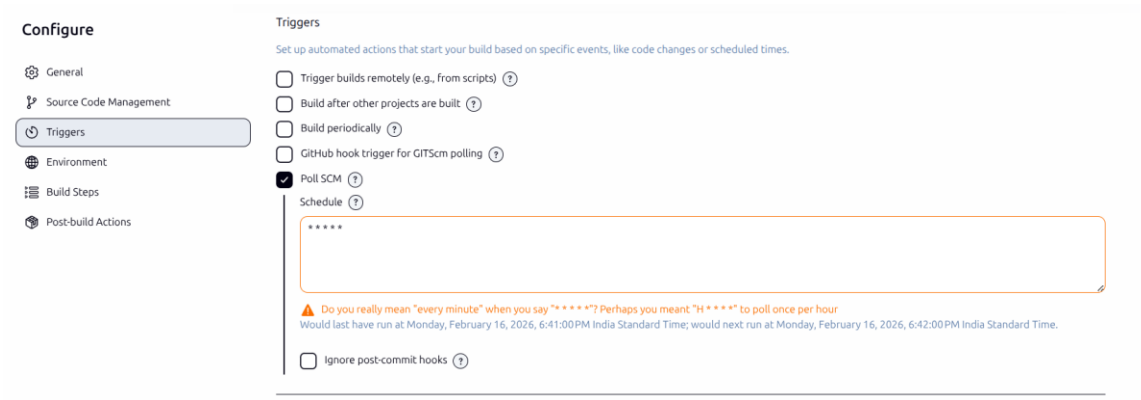

3.Modify GitHub file and commit

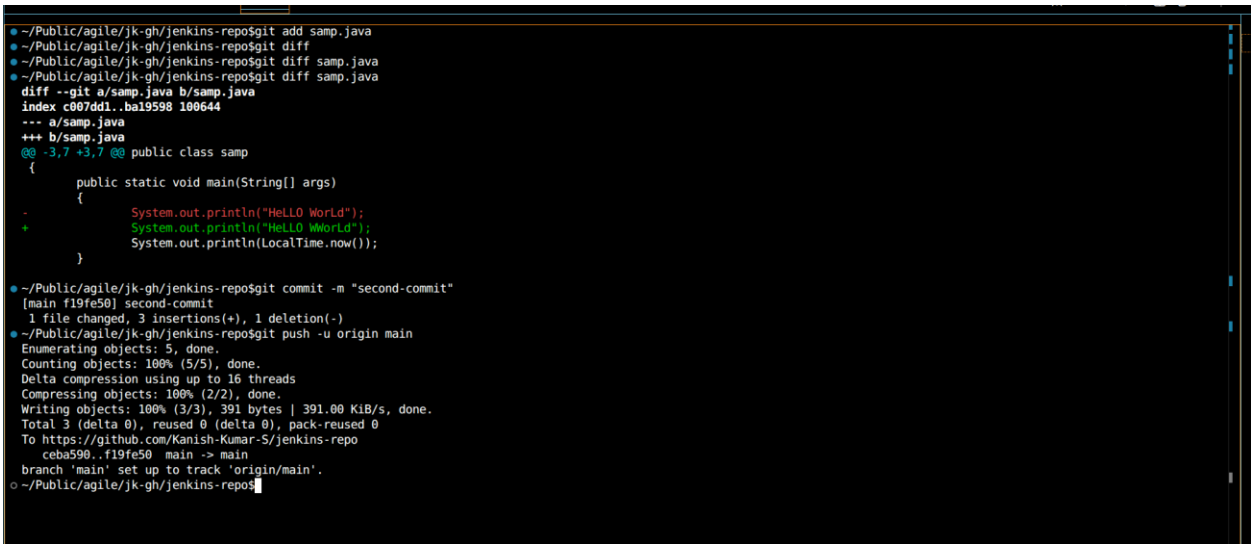

4. Observe automatic build

Git Polling Log

```
Started on Feb 16, 2026, 7:12:12 PM
Using strategy: Default
[poll] Last Built Revision: Revision f19fe5017c0d94340406d7c5bef7c9badaa3545b (refs/remotes/origin/main)
The recommended git tool is: NONE
No credentials specified
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git ls-remote -h -- https://github.com/Kanish-Kumar-S/jenkins-repo # timeout=10
Found 1 remote heads on https://github.com/Kanish-Kumar-S/jenkins-repo
[poll] Latest remote head revision on refs/heads/main is: f19fe5017c0d94340406d7c5bef7c9badaa3545b - already built by 13
Done. Took 1 sec
No changes
```

localhost:8080/job/Hello-Jenkins/ws/samp.java

```
import  java.time.LocalTime;
public class samp
{
        public static void main(String[] args)
        {
                System.out.println("HeLLO WorLd");
                System.out.println(LocalTime.now());
        }

}
```

TASK 6: Parameterized Build Objective: Use parameters in Jenkins job

Tasks: 1. Enable parameterized build

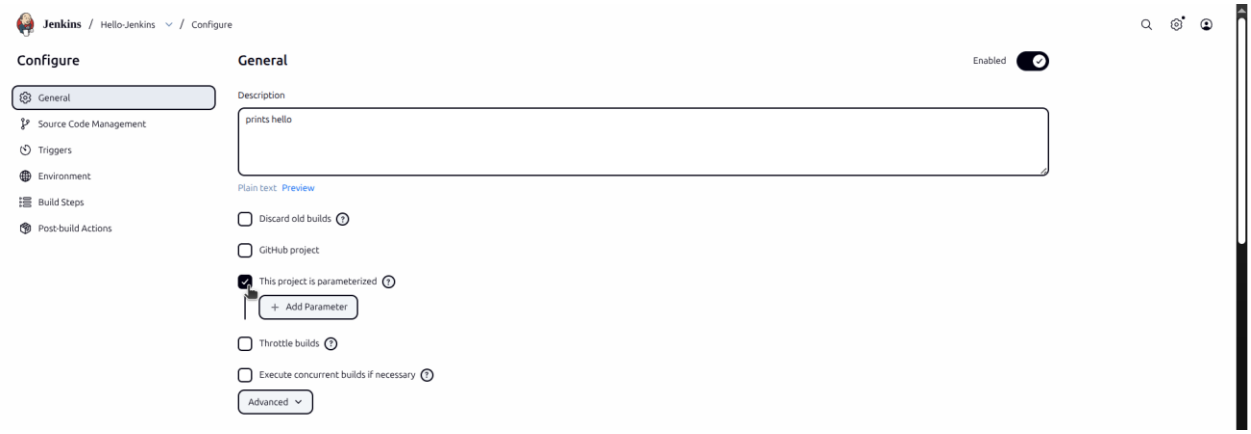

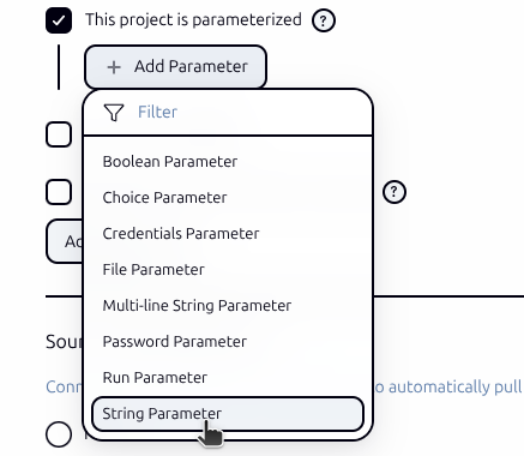

2. Add String parameter USERNAME

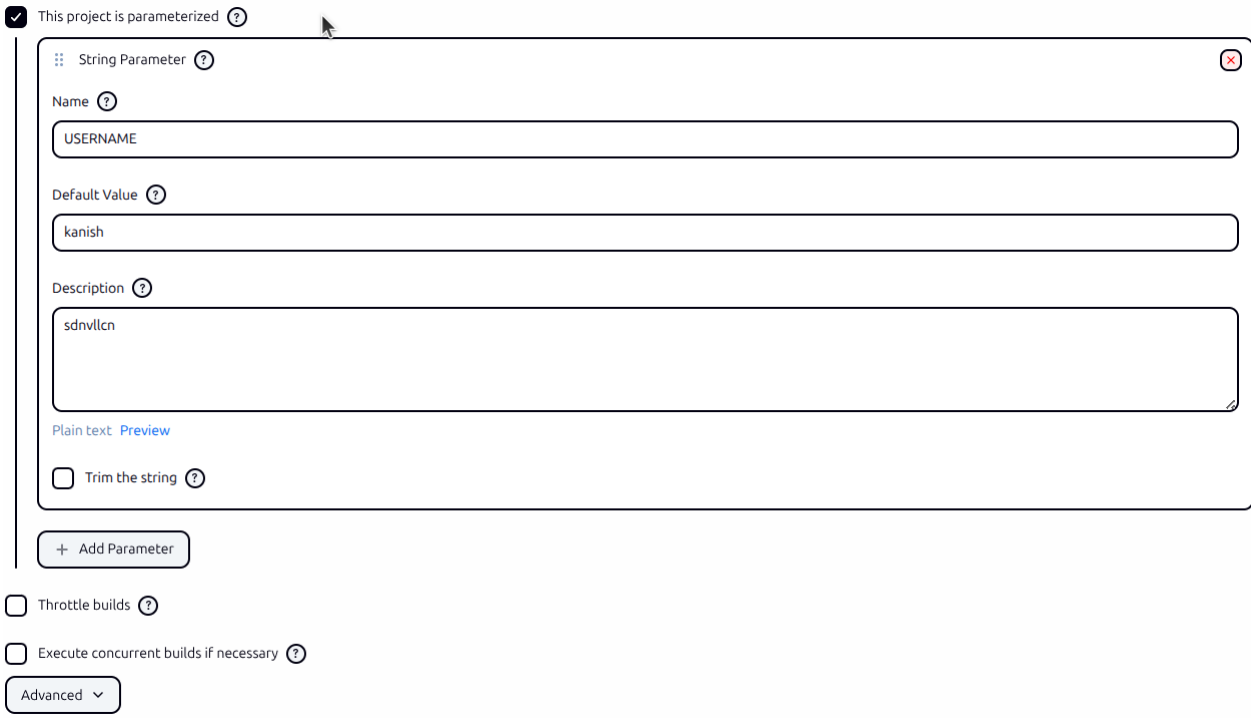

3. Print parameter value in build step

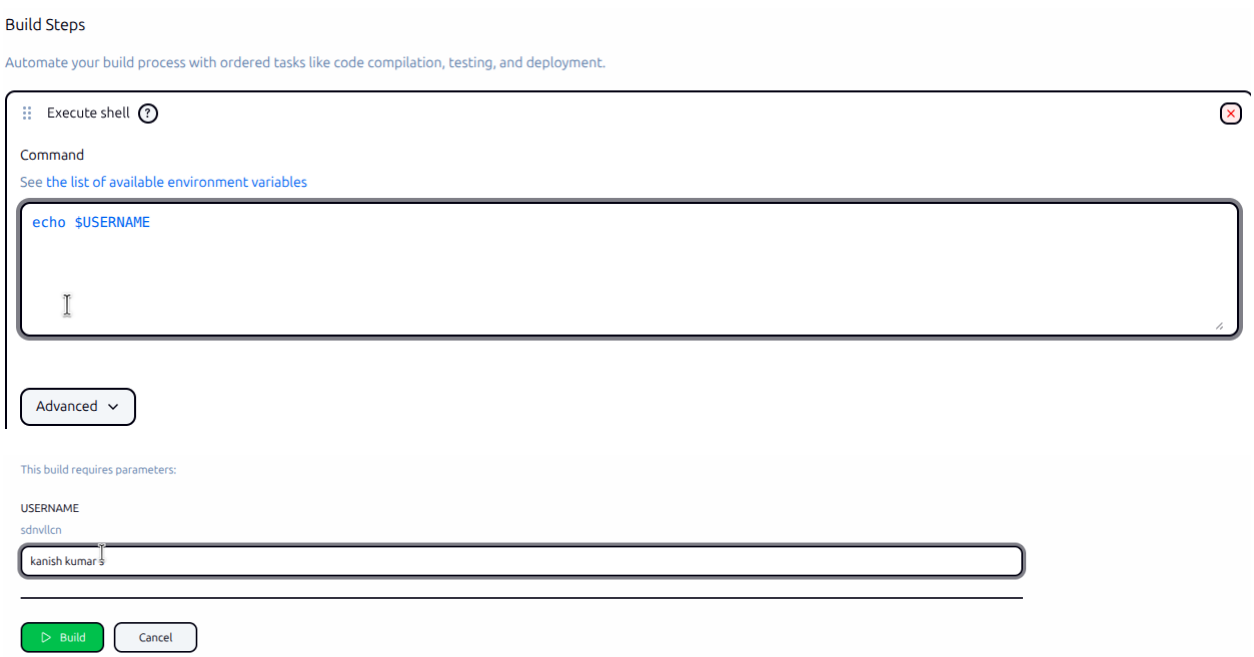

```
Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/Hello-Jenkins
[Hello-Jenkins] $ /bin/sh -xe /tmp/jenkins9409647720392819695.sh
+ echo kanish kumar s
kanish kumar s
Finished: SUCCESS
```

TASK 7: Java Build Using Jenkins Objective: Compile Java program using Jenkins

Tasks: 1. Create simple Hello.java

Execute shell

Command

See the list of available environment variables

```
echo 'public class Hello{public static void main(String[] args){System.out.println("hello");}}' > Hello.java && javac Hello.jav
```

Advanced

2. Compile using javac 3. Run Java program

```
Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/Hello-Jenkins
[Hello-Jenkins] $ /bin/sh -xe /tmp/jenkins357837093298517004.sh
+ echo public class Hello{public static void main(String[] args){System.out.println("hello");}}
+ javac Hello.java
+ java Hello
hello
Finished: SUCCESS
```

TASK 8: Archive Artifacts Objective: Store build outputs

Tasks: 1. Generate .class or .jar file

Class file already generated by previous compilation2. Archive artifacts in post-build actio

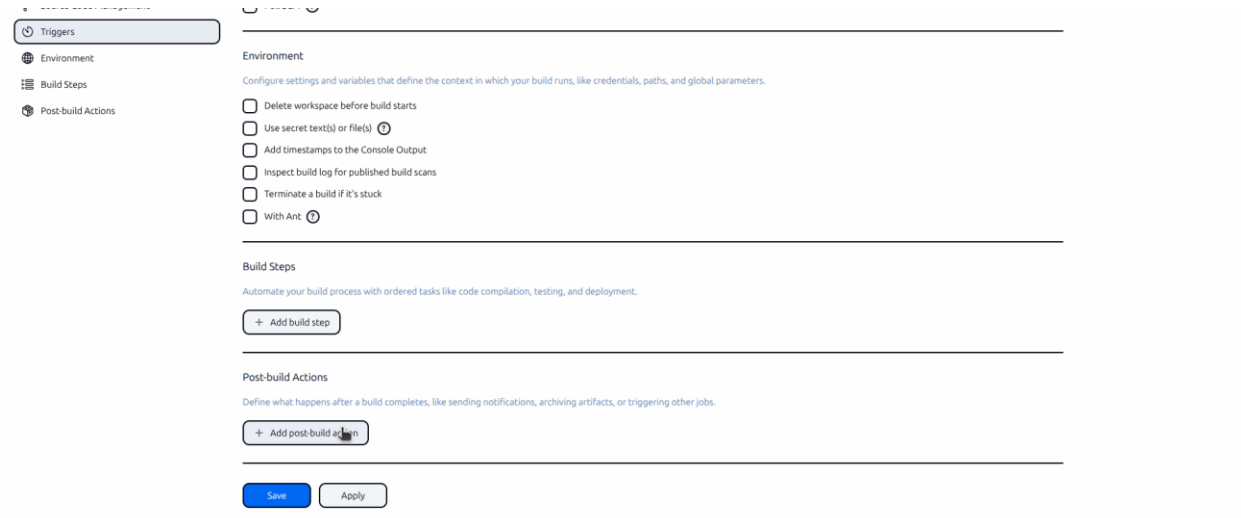

3. Download artifact from Jenkins UI

```
Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/Hello-Jenkins
Archiving artifacts
Finished: SUCCESS
```

TASK 9: Users & Roles Objective: Manage Jenkins users

Tasks: 1. Create two users

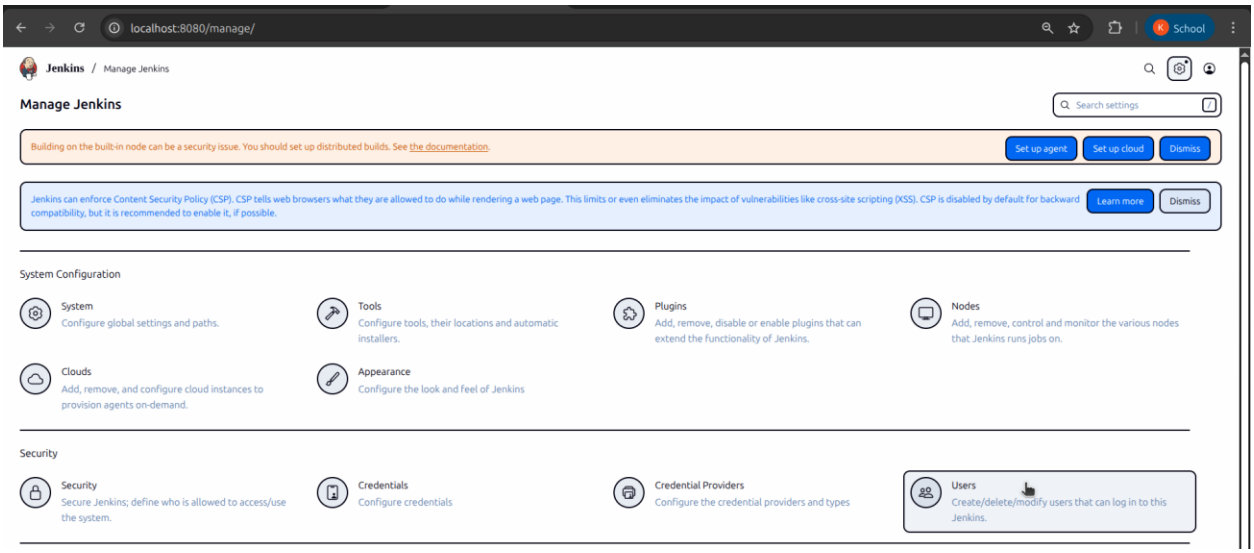
localhost:8080/manage/
Jenkins / Manage Jenkins
Manage Jenkins
Search settings
Building on the built-in node can be a security issue. You should set up distributed builds. See the documentation.
Set up agent
Set up cloud
Dismiss
Jenkins can enforce Content Security Policy (CSP). CSP tells web browsers what they are allowed to do while rendering a web page. This limits or even eliminates the impact of vulnerabilities like cross-site scripting (XSS). CSP is disabled by default for backward compatibility, but it is recommended to enable it, if possible.
Learn more
Dismiss
System Configuration
System
Configure global settings and paths.
Tools
Configure tools, their locations and automatic installers.
Plugins
Add, remove, disable or enable plugins that can extend the functionality of Jenkins.
Nodes
Add, remove, control and monitor the various nodes that Jenkins runs jobs on.
Clouds
Add, remove, and configure cloud instances to provision agents on-demand.
Appearance
Configure the look and feel of Jenkins
Security
Security
Secure Jenkins; define who is allowed to access/use the system.
Credentials
Configure credentials
Credential Providers
Configure the credential providers and types
Users
Create/delete/modify users that can log in to this Jenkins.

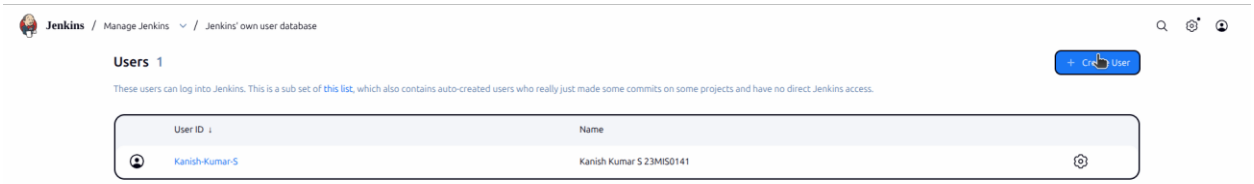
Jenkins / Manage Jenkins / Jenkins' own user database
Users 1
+ Create User
These users can log into Jenkins. This is a sub set of this list, which also contains auto-created users who really just made some commits on some projects and have no direct Jenkins access.
User ID
Name
Kanish-Kumar-S
Kanish Kumar S 23MIS0141

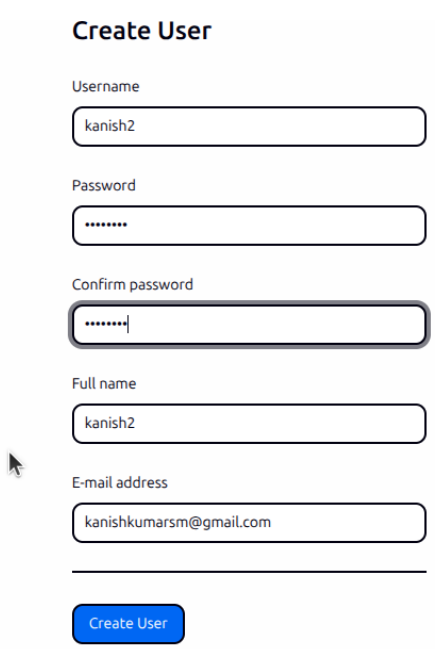
Create User
Username
kanish2
Password
Confirm password
Full name
kanish2
E-mail address
kanishkumarsm@gmail.com
Create User

2. Assign read-only permission to one user

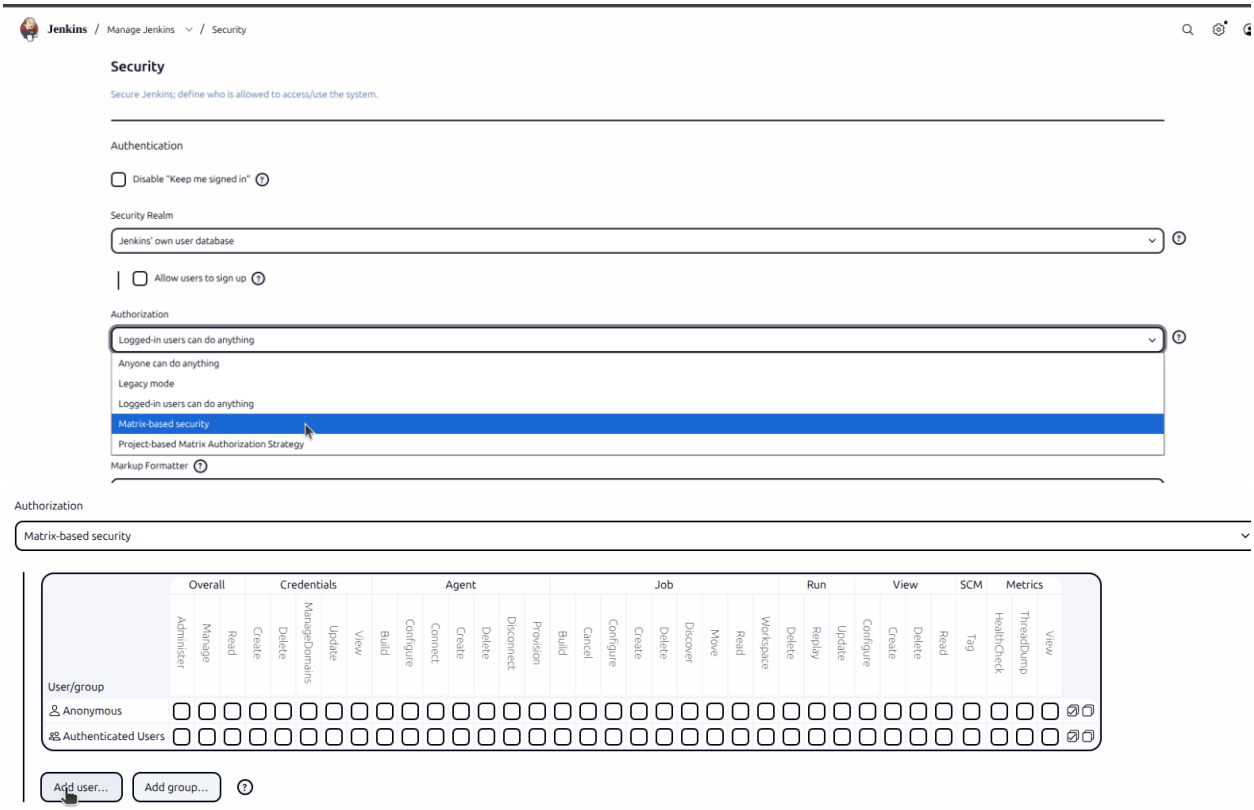

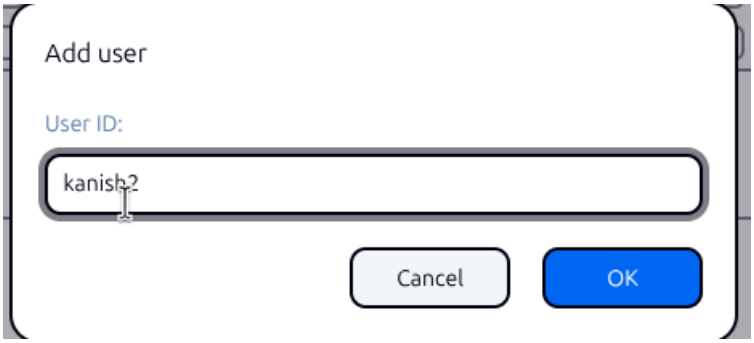

3. Assign build permission to another user

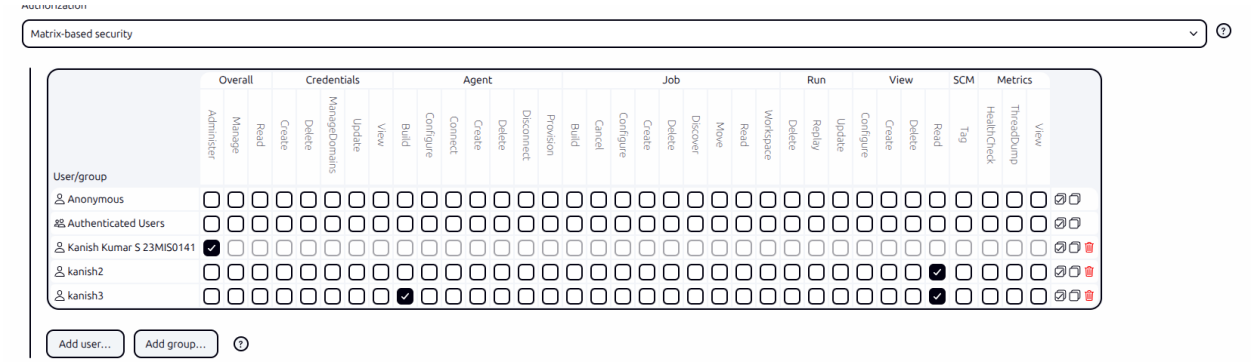

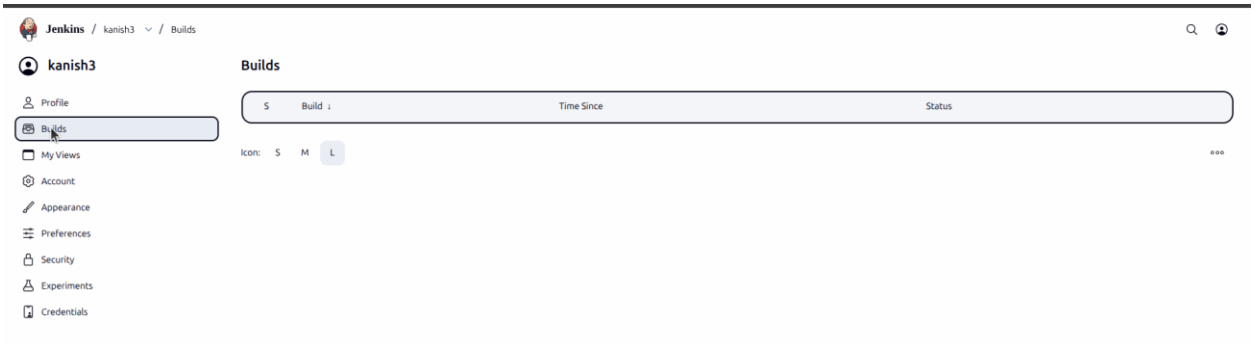

TASK 10: Simple Jenkins Pipeline Objective: Create basic pipeline Tasks:

1. Create Pipeline job

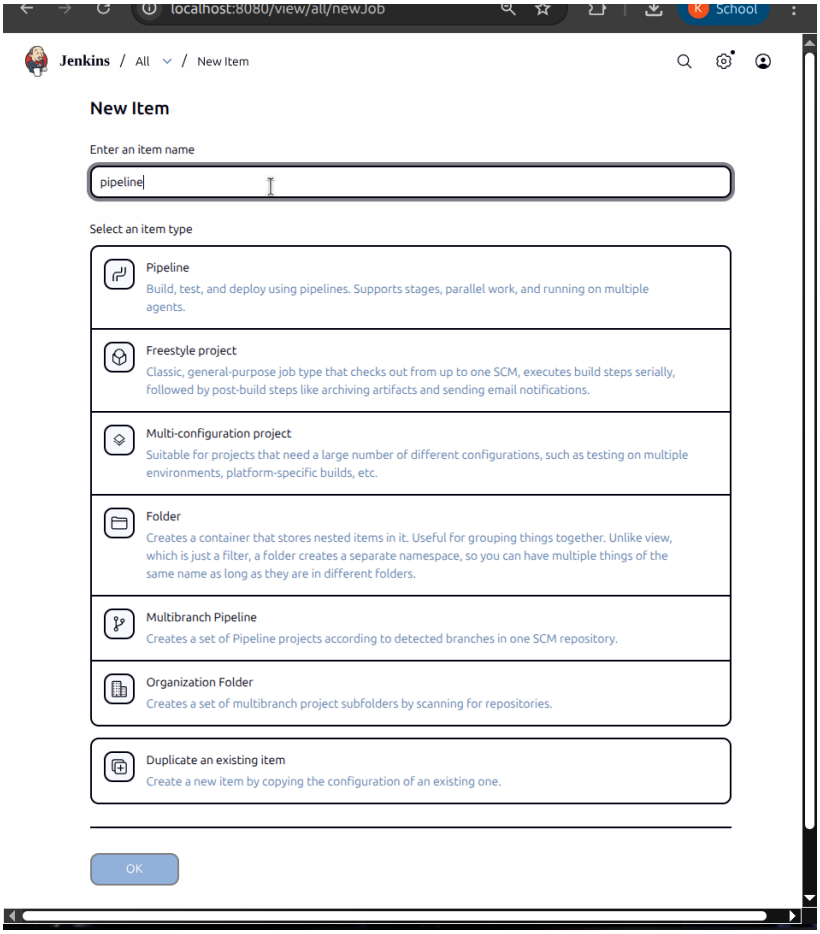

2. Write pipeline with stages:

Definition

Pipeline script

Script

try sample Pipeline...

```
pipeline {
    agent any

    stages {
        stage('Checkout') {
            steps {
                echo 'Checking out code...'
            }
        }

        stage('Build') {
            steps {
                echo 'Building project...'
            }
        }

        stage('Test') {
            steps {
                echo 'Testing project...'
            }
        }
    }
}
```

3. Run pipeline

```
Started by user Kanish Kumar S 23MIS0141
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/pipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Checkout)
[Pipeline] echo
Checking out code...
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Building project...
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Test)
[Pipeline] echo
Testing project...
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

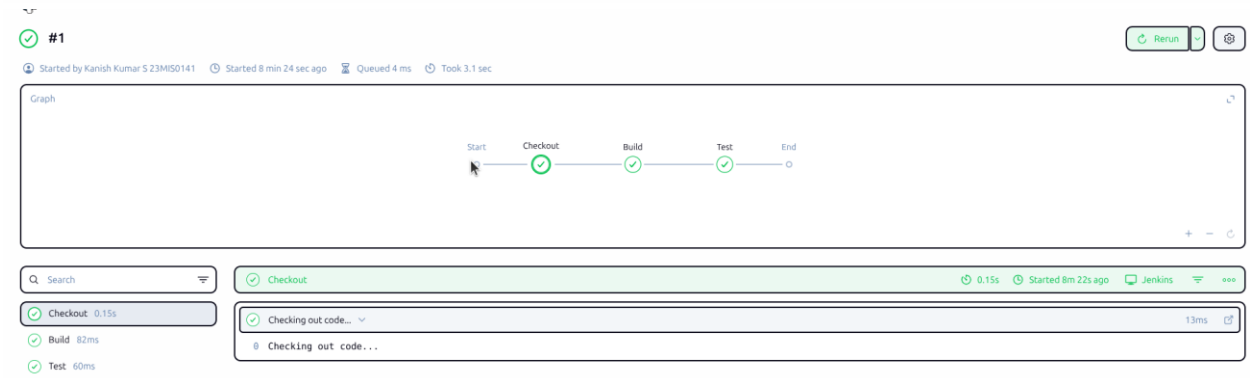

TASK 11: Jenkinsfile from Git Objective: Pipeline as Code Tasks:

1. Create Jenkinsfile in Git repo

```
PROBLEMS   OUTPUT   DEBUG CONSOLE   TERMINAL   PORTS                                   Run: samp

pipeline {
    agent any

    stages {
        stage('Build') {
            steps {
                echo 'Running pipeline from Git...'
            }
        }
    }
}

~
~
~
~
```

```
~/Public/agile/jk-gh/jenkins-repo$vim jenkinsfile
~/Public/agile/jk-gh/jenkins-repo$mv jenkinsfile Jenkinsfile
~/Public/agile/jk-gh/jenkins-repo$ls
Jenkinsfile  samp.class  samp.java
~/Public/agile/jk-gh/jenkins-repo$git add Jenkinsfile
~/Public/agile/jk-gh/jenkins-repo$git commit -m "Jenkinsfile"
[main 7633d53] Jenkinsfile
 1 file changed, 12 insertions(+)
 create mode 100644 Jenkinsfile
~/Public/agile/jk-gh/jenkins-repo$cat Jenkinsfile
pipeline {
    agent any

    stages {
        stage('Build') {
            steps {
                echo 'Running pipeline from Git...'
            }
        }
    }
}

~/Public/agile/jk-gh/jenkins-repo$git push -u origin
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 16 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 386 bytes | 386.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Kanish-Kumar-S/jenkins-repo
   f19fe50..7633d53  main -> main
branch 'main' set up to track 'origin/main'.
~/Public/agile/jk-gh/jenkins-repo$
```

2. Configure pipeline from SCM

New Item

Enter an item name

pl from git

Select an item type

Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.

Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

Multibranch Pipeline
Creates a set of Pipeline projects according to detected branches in one SCM repository.

Organization Folder
Creates a set of multibranch project subfolders by scanning for repositories.

Duplicate an existing item
Create a new item by copying the configuration of an existing one.

OK

3. Trigger build

#1 (Feb 16, 2026, 10:27:13 PM)

Add description | Keep this bu

Started by user Kanish Kumar S 23MIS0141

Starte
Took 4

This run spent:

- 6 ms waiting;
- 4.1 sec build duration;
- 4.1 sec total from scheduled to completion.

Revision: 7633d534d747f351483f96f415fcf2b508ebab01
Repository: https://github.com/Kanish-Kumar-S/jenkins-repo

- refs/remotes/origin/main

No changes.

```
Started by user Kanish Kumar S 23MIS0141
Obtained Jenkinsfile from git https://github.com/Kanish-Kumar-S/jenkins-repo
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/pl from git
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/Kanish-Kumar-S/jenkins-repo
 > git init /var/lib/jenkins/workspace/pl from git # timeout=10
Fetching upstream changes from https://github.com/Kanish-Kumar-S/jenkins-repo
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git fetch --tags --force --progress -- https://github.com/Kanish-Kumar-S/jenkins-repo +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git config remote.origin.url https://github.com/Kanish-Kumar-S/jenkins-repo # timeout=10
 > git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 7633d534d747f351483f96f415fcf2b508ebab01 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 7633d534d747f351483f96f415fcf2b508ebab01 # timeout=10
Commit message: "Jenkinsfile"
First time build. Skipping changelog.
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Running pipeline from Git...
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

TASK 12: Post-Build Actions Objective: Handle build result Tasks:

1. Add post section

```
● ~/Public/agile/jk-gh/jenkins-repo$vim Jenkinsfile
● ~/Public/agile/jk-gh/jenkins-repo$git add Jenkinsfile
● ~/Public/agile/jk-gh/jenkins-repo$git commit -m "Jenkinsfile modification"
  [main c05c67b] Jenkinsfile modification
   1 file changed, 13 insertions(+), 1 deletion(-)
● ~/Public/agile/jk-gh/jenkins-repo$git push -u origin
  Enumerating objects: 5, done.
  Counting objects: 100% (5/5), done.
  Delta compression using up to 16 threads
  Compressing objects: 100% (3/3), done.
  Writing objects: 100% (3/3), 458 bytes | 458.00 KiB/s, done.
  Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
  To https://github.com/Kanish-Kumar-S/jenkins-repo
     7633d53..c05c67b  main -> main
  branch 'main' set up to track 'origin/main'.
○ ~/Public/agile/jk-gh/jenkins-repo$
```

```
● ~/Public/agile/jk-gh/jenkins-repo$cat Jenkinsfile
pipeline {
    agent any

    stages {
        stage('Build') {
            steps {
                echo 'Building project...'
            }
        }
    }

    post {
        success {
            echo 'Build Successful '
        }
        failure {
            echo 'Build Failed '
        }
        always {
            echo 'This runs no matter what'
        }
    }
}

○ ~/Public/agile/jk-gh/jenkins-repo$
```

2. Print message on success/failure Expected Output: ⍰ Appropriate message displayed

Console

Download Copy View as plain text

```
Started by user Kanish Kumar S 23MIS0141
Obtained Jenkinsfile from git https://github.com/Kanish-Kumar-S/jenkins-repo
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/pl from git
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/pl from git/.git # timeout=10
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Kanish-Kumar-S/jenkins-repo # timeout=10
Fetching upstream changes from https://github.com/Kanish-Kumar-S/jenkins-repo
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git fetch --tags --force --progress -- https://github.com/Kanish-Kumar-S/jenkins-repo +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision c05c67ba489b6c7619e0a160ea881cd3880a568c (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f c05c67ba489b6c7619e0a160ea881cd3880a568c # timeout=10
Commit message: "Jenkinsfile modification"
 > git rev-list --no-walk 7633d534d747f351483f96f415fcf2b508ebab01 # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Building project...
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
This runs no matter what
[Pipeline] echo
Build Successful
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

TASK 13: Trigger Job from Another Job Objective: Job chaining Tasks:

1. Create Job-A and Job-B

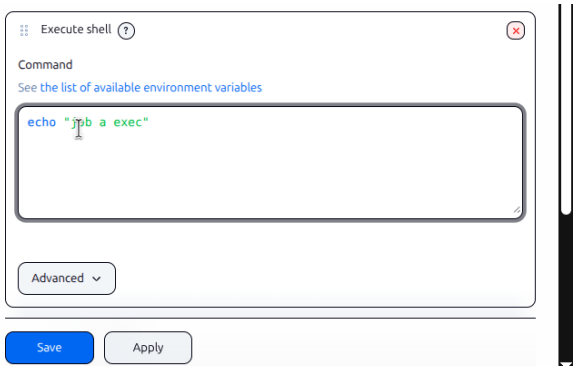

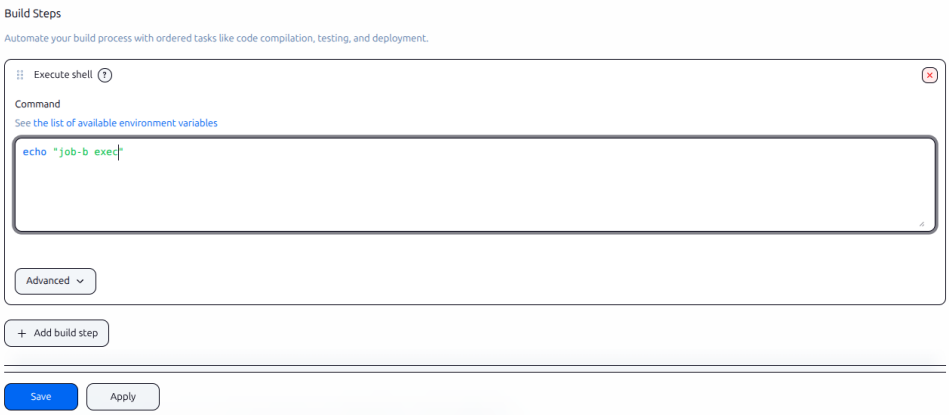

2. Configure Job-B to trigger after Job-A

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Build other projects

Projects to build

job b,

- (●) Trigger only if build is stable
- ( ) Trigger even if the build is unstable
- ( ) Trigger even if the build fails

+ Add post-build action

Save | Apply

```
Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/job a
[job a] $ /bin/sh -xe /tmp/jenkins7605140860814528468.sh
+ echo job a exec
job a exec
Triggering a new build of job b
Finished: SUCCESS
```

```
Started by upstream project "job a" build number 1
originally caused by:
 Started by user Kanish Kumar S 23MIS0141
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/job b
[job b] $ /bin/sh -xe /tmp/jenkins9035849843259178077.sh
+ echo job-b exec
job-b exec
Finished: SUCCESS
```

TASK 14: Workspace Cleanup Objective: Manage disk usage

Tasks: 1. Install Workspace Cleanup plugin

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings

workspa

Name ↓	Health	Enabled
Pipeline: Nodes and Processes 1464.v2d3f5c68f84c Pipeline steps locking agents and workspaces, and running external processes that may survive a Jenkins restart or agent reconnection. Report an issue with this plugin	100	
Workspace Cleanup Plugin 0.49 This plugin deletes the project workspace when invoked. Report an issue with this plugin	97	

2. Clean workspace before build

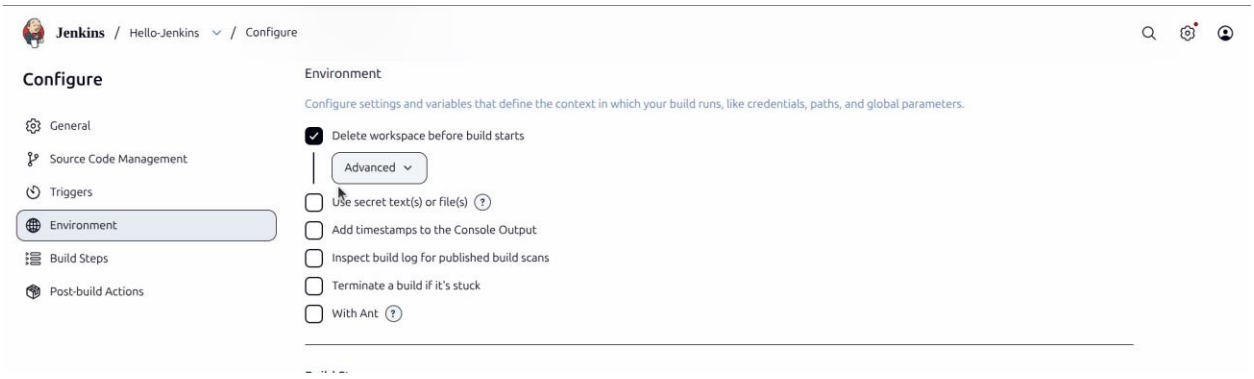

TASK 15: Mini CI Project13

Objective: Implement basic CI flow

T asks:

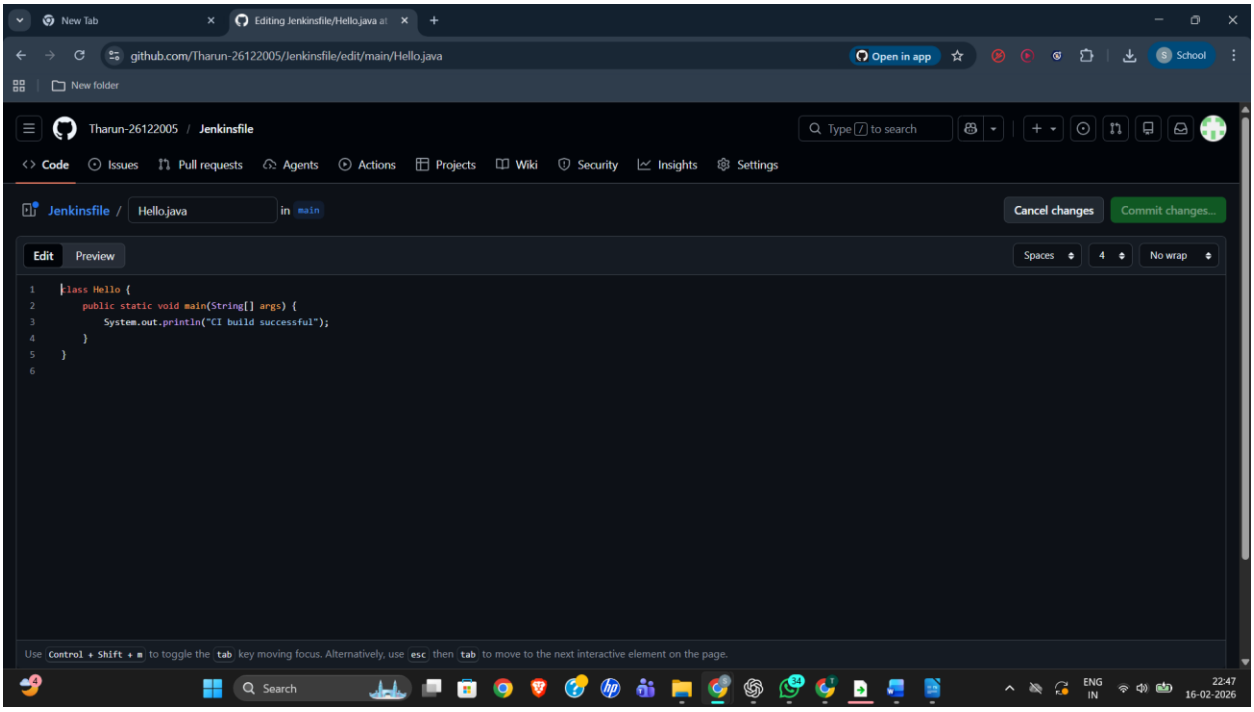
New Tab
Editing Jenkinsfile/Hello.java at
github.com/Tharun-26122005/Jenkinsfile/edit/main/Hello.java
Open in app
School
New folder
Tharun-26122005 / Jenkinsfile
Type / to search
Code
Issues
Pull requests
Agents
Actions
Projects
Wiki
Security
Insights
Settings
Jenkinsfile / Hello.java in main
Cancel changes
Commit changes...
Edit
Preview
Spaces
4
No wrap
class Hello {
public static void main(String[] args) {
System.out.println("CI build successful");
}
}
Use Control + Shift + m to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.
Search
ENG
IN
22:47
16-02-2026

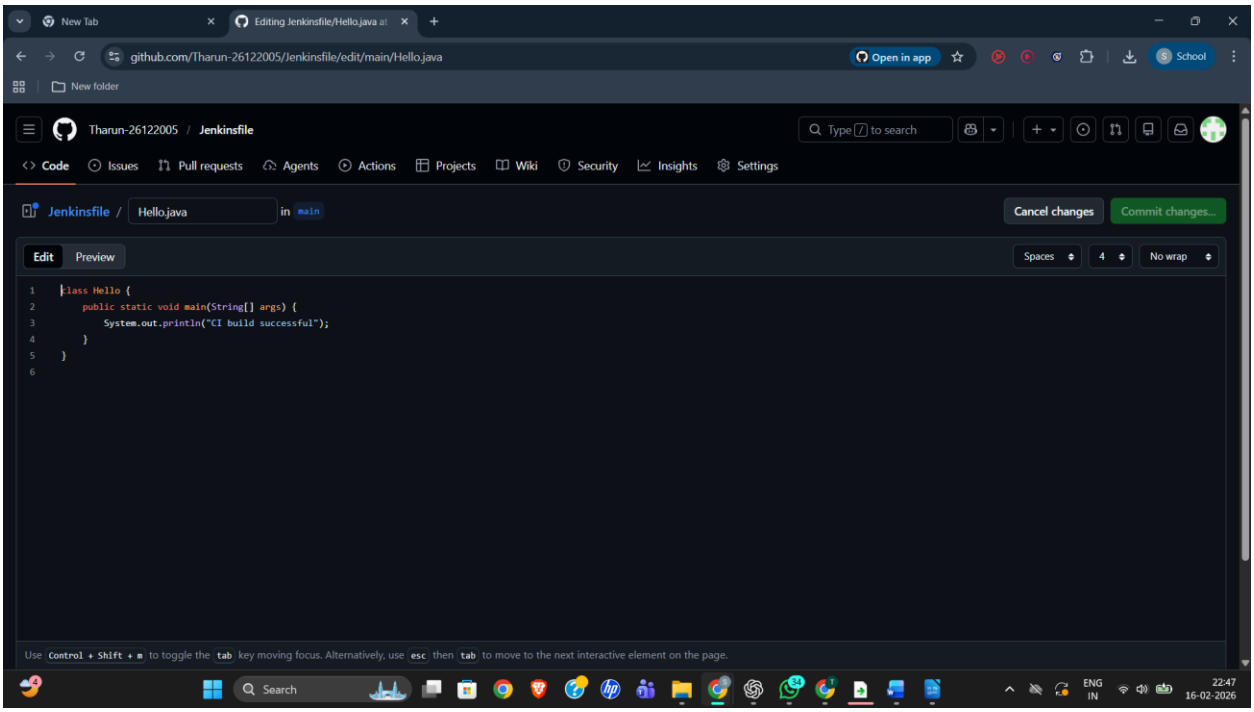
New Tab
Editing Jenkinsfile/Hello.java at
github.com/Tharun-26122005/Jenkinsfile/edit/main/Hello.java
Open in app
School
New folder
Tharun-26122005 / Jenkinsfile
Type / to search
Code
Issues
Pull requests
Agents
Actions
Projects
Wiki
Security
Insights
Settings
Jenkinsfile / Hello.java in main
Cancel changes
Commit changes...
Edit
Preview
Spaces
4
No wrap
class Hello {
public static void main(String[] args) {
System.out.println("CI build successful");
}
}
Use Control + Shift + m to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.
Search
ENG
IN
22:47
16-02-2026

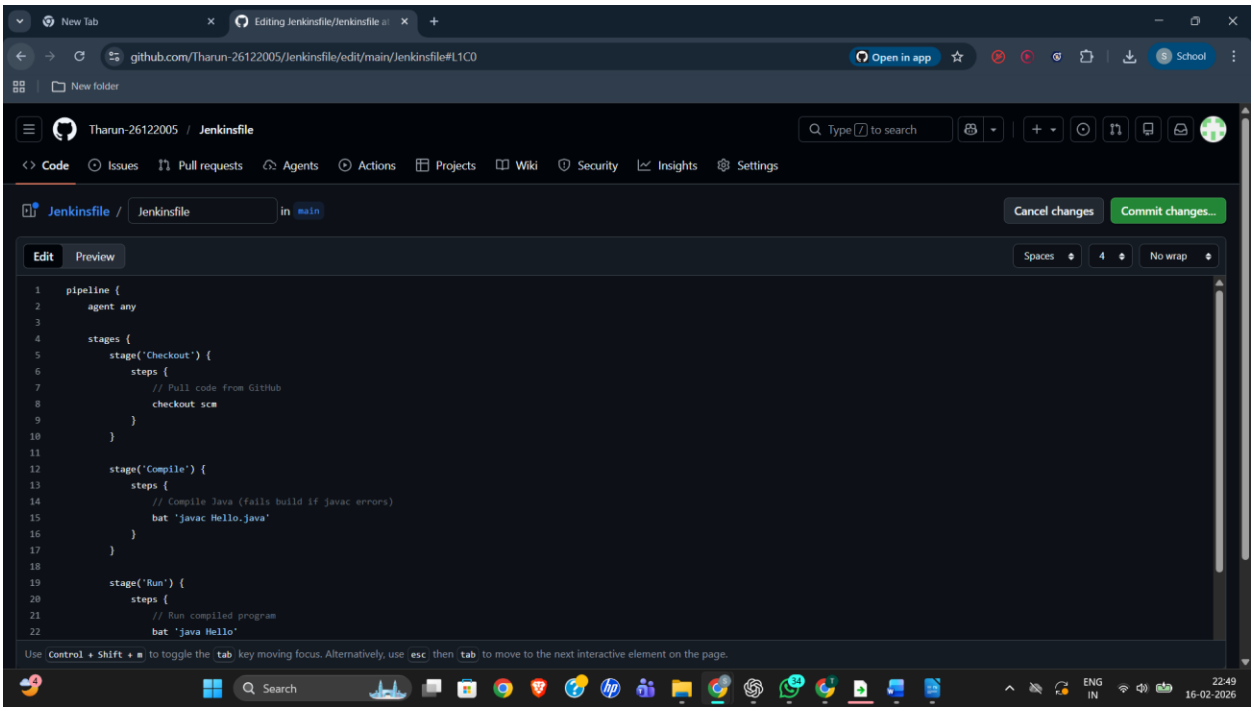
New Tab
Editing Jenkinsfile/Jenkinsfile at
github.com/Tharun-26122005/Jenkinsfile/edit/main/Jenkinsfile#L1C0
Open in app
School
New folder
Tharun-26122005 / Jenkinsfile
Type / to search
Code
Issues
Pull requests
Agents
Actions
Projects
Wiki
Security
Insights
Settings
Jenkinsfile / Jenkinsfile in main
Cancel changes
Commit changes...
Edit
Preview
Spaces
4
No wrap
pipeline {
agent any
stages {
stage('Checkout') {
steps {
// Pull code from GitHub
checkout scm
}
}
stage('Compile') {
steps {
// Compile Java (fails build if javac errors)
bat 'javac Hello.java'
}
}
stage('Run') {
steps {
// Run compiled program
bat 'java Hello'
Use Control + Shift + m to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.
Search
ENG
IN
22:49
16-02-2026

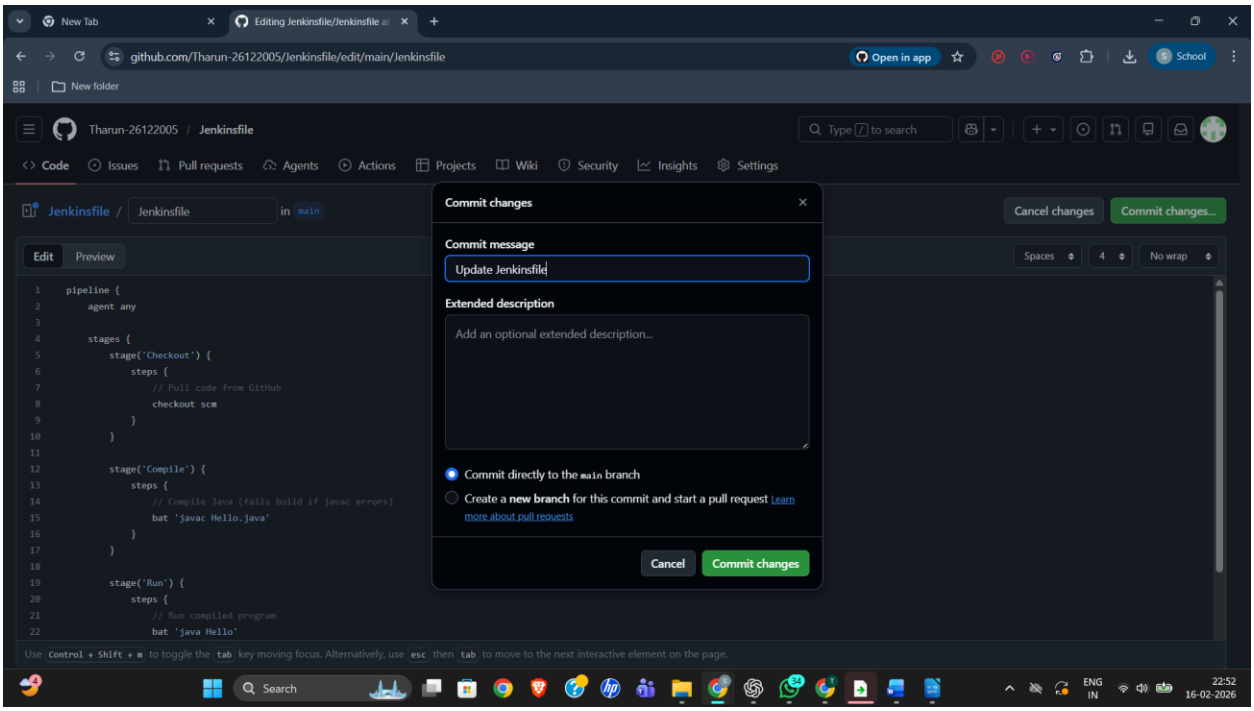
New Tab
Editing Jenkinsfile/Jenkinsfile at
github.com/Tharun-26122005/Jenkinsfile/edit/main/Jenkinsfile
Open in app
School
New folder
Tharun-26122005 / Jenkinsfile
Type / to search
Code
Issues
Pull requests
Agents
Actions
Projects
Wiki
Security
Insights
Settings
Jenkinsfile / Jenkinsfile in main
Cancel changes
Commit changes...
Edit
Preview
Spaces
4
No wrap
pipeline {
agent any
stages {
stage('Checkout') {
steps {
// Pull code from GitHub
checkout scm
}
}
stage('Compile') {
steps {
// Compile Java (fails build if javac errors)
bat 'javac Hello.java'
}
}
stage('Run') {
steps {
// Run compiled program
bat 'java Hello'
Commit changes
Commit message
Update Jenkinsfile
Extended description
Add an optional extended description...
Commit directly to the main branch
Create a new branch for this commit and start a pull request Learn more about pull requests
Cancel
Commit changes
Use Control + Shift + m to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.
Search
ENG IN
22:52
16-02-2026

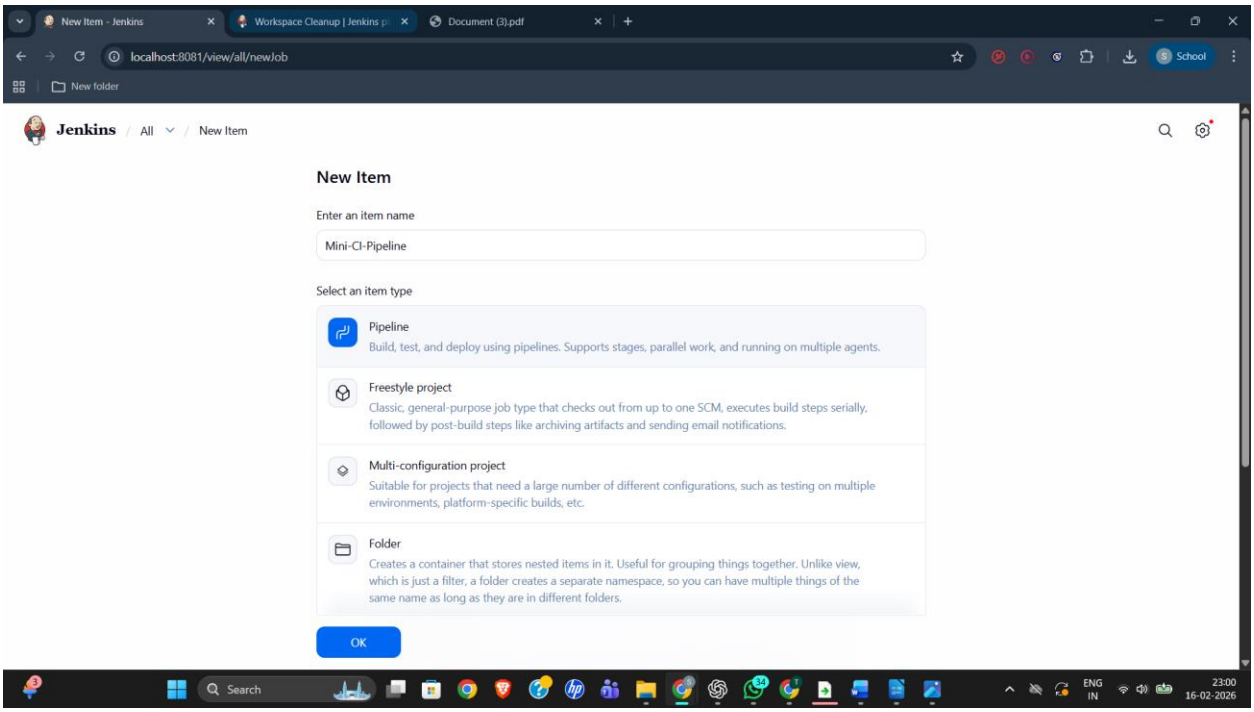
New Item - Jenkins
Workspace Cleanup | Jenkins pl
Document (3).pdf
localhost:8081/view/all/newJob
School
New folder
Jenkins / All / New Item
New Item
Enter an item name
Mini-CI-Pipeline
Select an item type
Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
OK
Search
ENG IN
23:00
16-02-2026

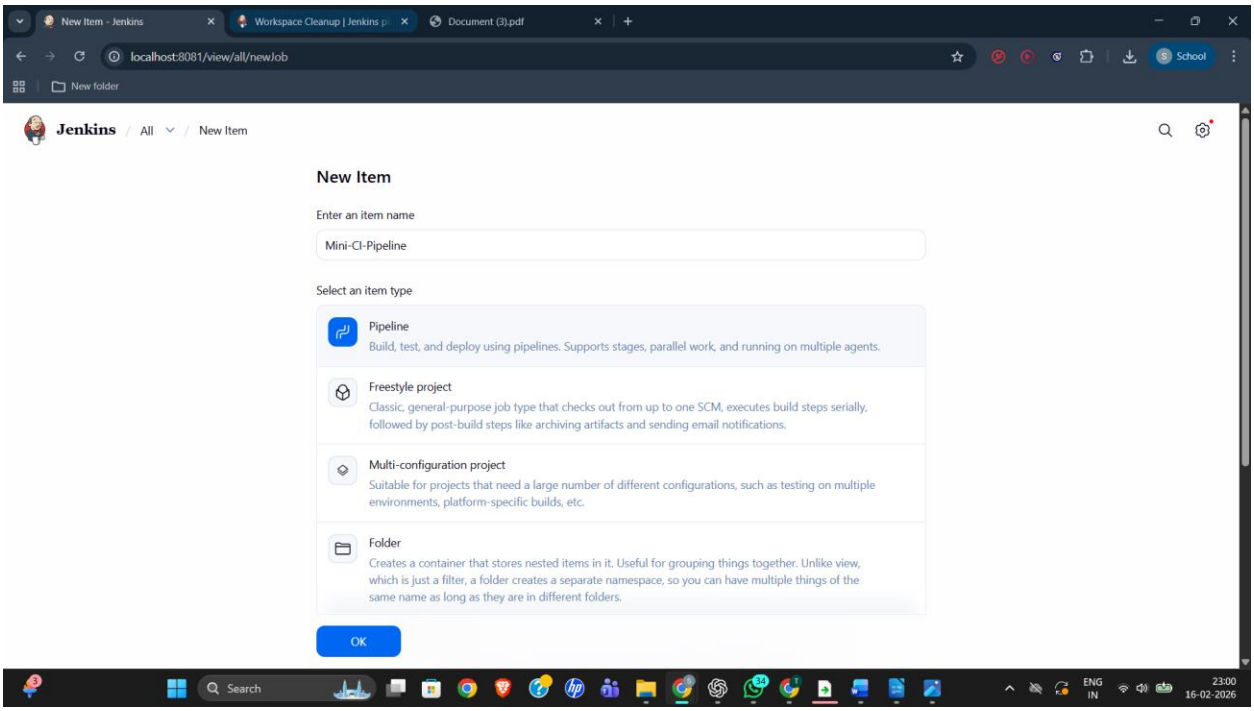
New Item - Jenkins
Workspace Cleanup | Jenkins p
Document (3).pdf
localhost:8081/view/all/newJob
New folder
Jenkins / All / New Item
New Item
Enter an item name
Mini-CI-Pipeline
Select an item type
Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
OK
Search
ENG IN
23:00 16-02-2026

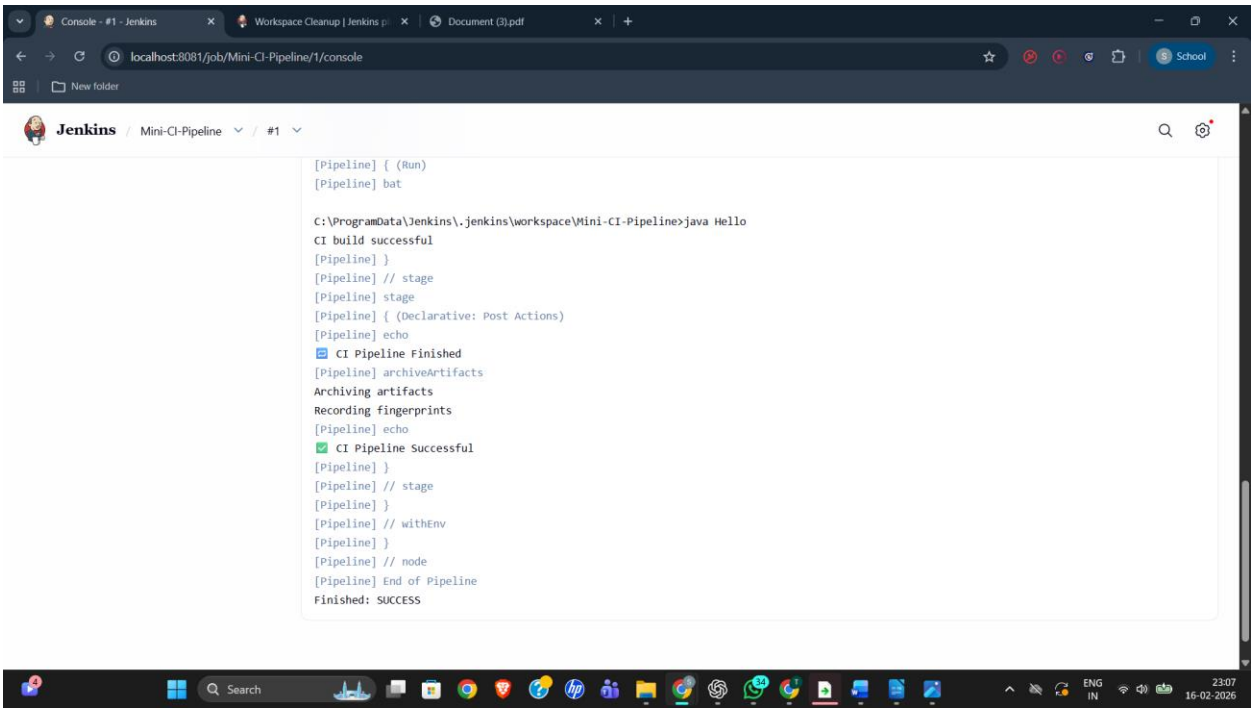
Console - #1 - Jenkins
Workspace Cleanup | Jenkins p
Document (3).pdf
localhost:8081/job/Mini-CI-Pipeline/1/console
New folder
Jenkins / Mini-CI-Pipeline / #1
[Pipeline] { (Run)
[Pipeline] bat
C:\ProgramData\Jenkins\.jenkins\workspace\Mini-CI-Pipeline>java Hello
CI build successful
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] echo
CI Pipeline Finished
[Pipeline] archiveArtifacts
Archiving artifacts
Recording fingerprints
[Pipeline] echo
CI Pipeline Successful
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
Search
ENG IN
23:07 16-02-2026