
COMP4211 - Machine Learning

Fall 2024, HKUST

Problem Set

Name: Shawn Darren S. Chua Student ID: 20946705

Problem 1.

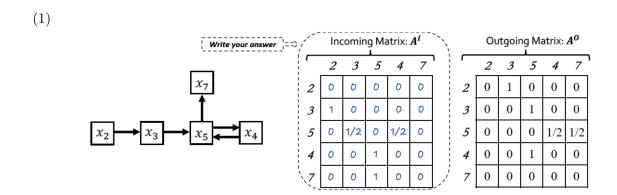

- (2) $h^{l-1^{\top}} \in \mathbb{R}^d$ and $h^{l-1^{\top}} \mathbf{W}^I \in \mathbb{R}^d$, so $\mathbf{W}^I \in \mathbb{R}^{d \times d}$ $h^{l-1^{\top}} \in \mathbb{R}^d$ and $h^{l-1^{\top}} \mathbf{W}^O \in \mathbb{R}^d$, so $\mathbf{W}^O \in \mathbb{R}^{d \times d}$ Thus $\mathbf{W}^I, \mathbf{W}^O$ both have d^2 parameters.
- (3) $a_i^l \in \mathbb{R}^{2d \times 1}$ and $\mathbf{W}_z a_i^l \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_z \in \mathbb{R}^{d \times 2d}$ $a_i^l \in \mathbb{R}^{2d \times 1}$ and $\mathbf{W}_r a_i^l \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_r \in \mathbb{R}^{d \times 2d}$ $a_i^l \in \mathbb{R}^{2d \times 1}$ and $\mathbf{W}_h a_i^l \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_h \in \mathbb{R}^{d \times 2d}$ Thus $\mathbf{W}_z, \mathbf{W}_r, \mathbf{W}_h$ all have $2d^2$ parameters. $h_i^{l-1} \in \mathbb{R}^{d \times 1}$ and $\mathbf{U}_z h_i^{l-1} \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_z \in \mathbb{R}^{d \times d}$ $h_i^{l-1} \in \mathbb{R}^{d \times 1}$ and $\mathbf{U}_r h_i^{l-1} \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_r \in \mathbb{R}^{d \times d}$ $r_i^l \odot h_i^{l-1} \in \mathbb{R}^{d \times 1}$ and $\mathbf{U}_h \left(r_i^l \odot h_i^{l-1} \right) \in \mathbb{R}^{d \times 1}$, so $\mathbf{W}_h \in \mathbb{R}^{d \times d}$ Thus $\mathbf{U}_z, \mathbf{U}_r, \mathbf{U}_h$ all have d^2 parameters.

(4)

(5) \mathbf{W}^{I} , \mathbf{W}^{O} have a total of $2d^{2}$ parameters.

 $\mathbf{b}^I, \mathbf{b}^O \in \mathbb{R}^d$ have a total of 2d parameters.

 $\mathbf{W}_z, \mathbf{W}_r, \mathbf{W}_h$ have a total of $6d^2$ parameters.

 $\mathbf{U}_z, \mathbf{U}_r, \mathbf{U}_h$ have a total of $3d^2$ parameters.

 $\mathbf{W}_{q1}, \mathbf{W}_{q2}$ have the same shapes as $\mathbf{W}_{k1}, \mathbf{W}_{k2}$, so they have a total of $6d^2$ parameters.

Summing these up, we get $2d^2 + 2d + 6d^2 + 3d^2 + 6d^2 = 17d^2 + 2d = 170200$ parameters.

Problem 2.

- (a)
- (b)