


How the Machine Works

TWO MECHANISMS, ONE BLACK MARKET


FIG. 1-3

FIGURE 1

Anatomy of a transit station (中转站)

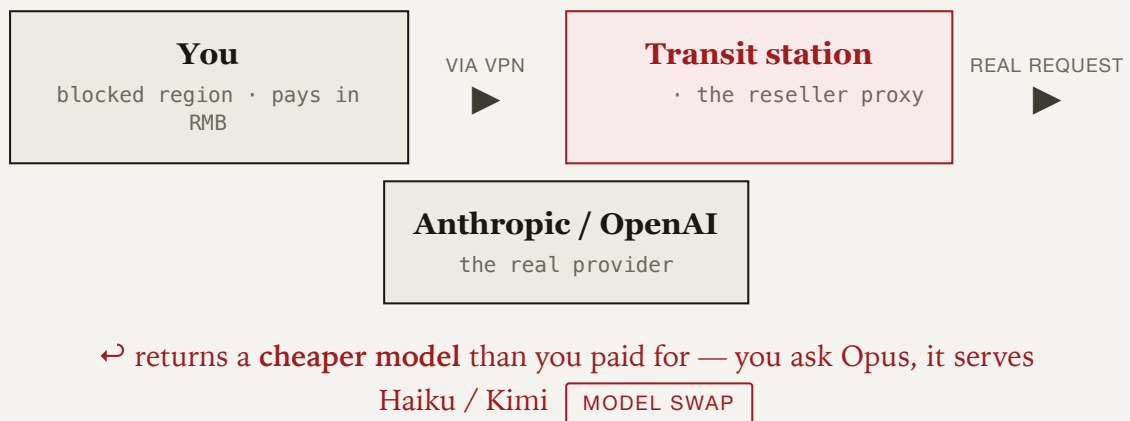

↑ THE STATION IS FED BY A FRAUD SUPPLY CHAIN ↑

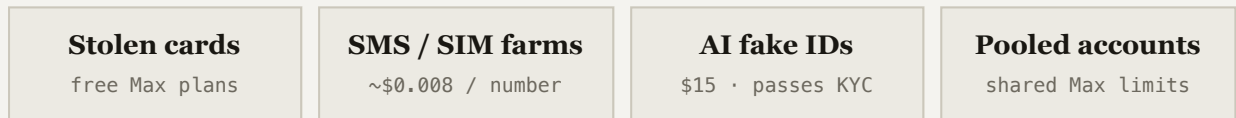


↓ AND IT SKIMS THE REAL GOLD ↓

Your prompts + the model's reasoning are logged and **resold to Chinese labs as training data** (distillation). The token discount is the loss-leader; your data is the product.

Modular by design: take down one SMS or ID supplier and the station keeps running. That's why the supply side is practically un-killable.

FIGURE 2

How a worm steals your tokens

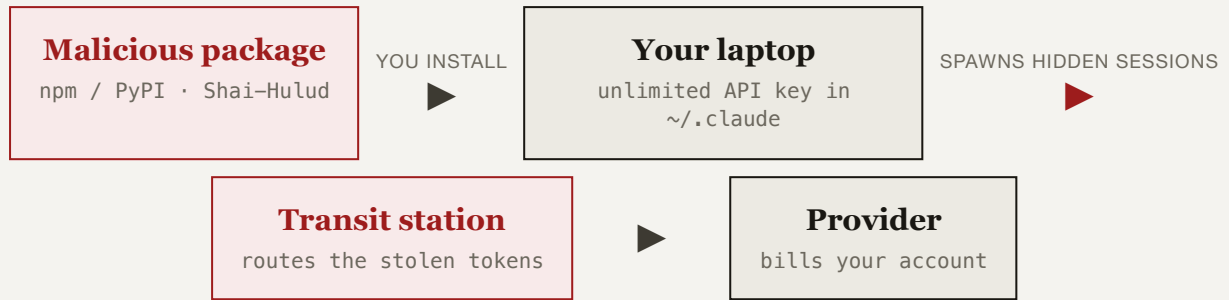

The worm sips your quota a little at a time to stay invisible. All **you** see is **WEEKLY LIMIT HIT** — millions of hidden requests a day, on machines whose owners have no idea.

Root cause: an unlimited, long-lived bearer credential sitting on a machine the malware now controls.

FIGURE 3

Where ProofOfModel cuts each loop

CUTS FIGURE 1

Local trust proxy

Sits between you and the station. Fingerprints the endpoint + checks its on-chain reputation before trusting it — and **blocks the model swap** before your request ever leaves the laptop. Also flags "this is a transit station, not the provider."

CUTS FIGURE 2

Prepaid Gateway (on Monad)

The real key lives off your machine, so the worm can't steal it. All it finds is a **capped, expiring, revocable** session — every use is an on-chain debit you can see. Theft becomes bounded and visible, not silent and unlimited.