PalindromeMessage

api_key

Explore

PalindromeMessage REST API

PalindromeMessage Api for creating and managing messages


Terms of service
Contact the developer
MIT License


messages: Message API Show/Hide List Operations Expand Operations Raw /v1/messages Retrieves all the messages GET **Implementation Notes** getAllMessages **Response Class** Model Model Schema { "id": 0, "messageText": "", "isPalindrome": false } Response Content Type */* 😂 Response Messages **HTTP Status** Reason Response Model Code 200 Try it out!


Implementation Notes
The newly created message Id will be sent in the location response header

Response Class
Model Model Schema

Response Content Type */* •

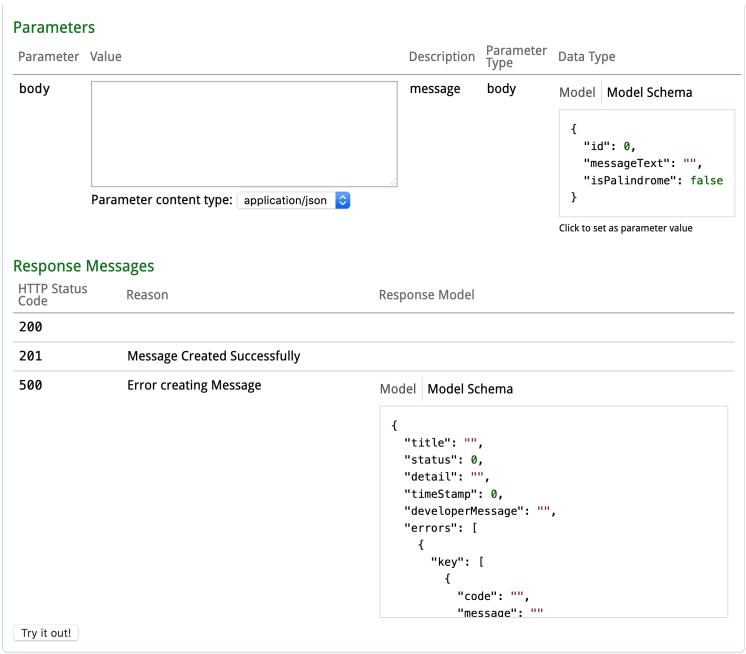

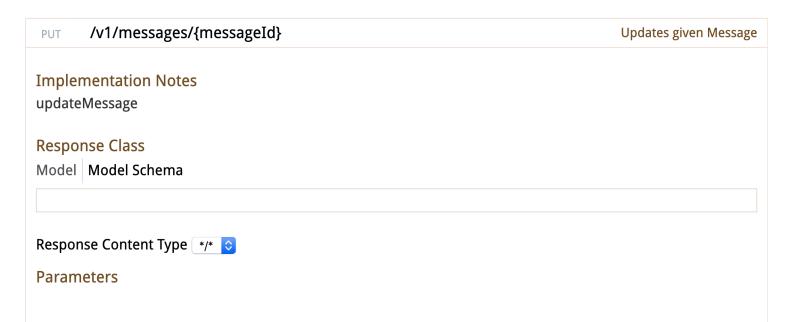

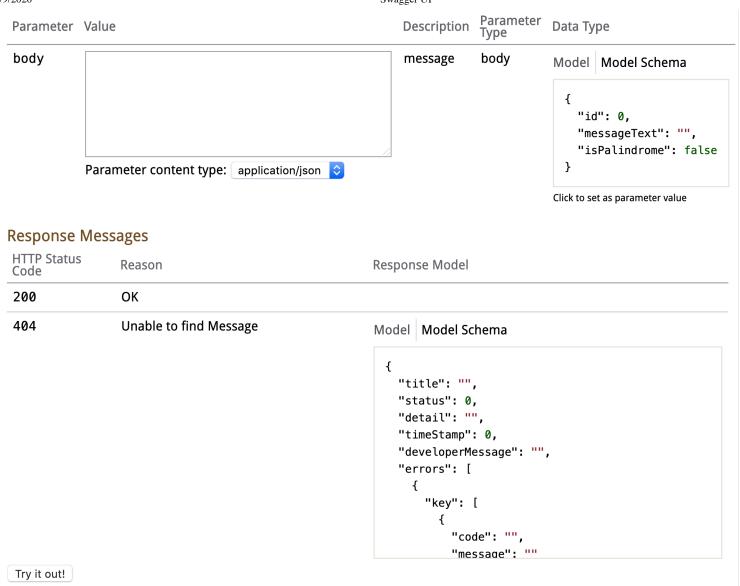

```
Implementation Notes
getMessage

Response Class
Model Model Schema

{
    "id": 0,
    "messageText": "",
    "isPalindrome": false
}

Response Content Type */* ©

Parameters
```

```
Parameter
              Value
                                                                Description
Parameter
                                                                                                Data Type
                                                                                   Type
messageId
                                                                messageId
                                                                                   path
              (required)
                                                                                                integer
Response Messages
HTTP Status
                 Reason
                                                        Response Model
Code
200
                 OK
404
                 Unable to find Message
                                                        Model Model Schema
                                                            "title": "",
                                                            "status": 0,
                                                            "detail": "",
                                                            "timeStamp": 0,
                                                            "developerMessage": "",
                                                            "errors": [
                                                              {
                                                                 "key": [
                                                                    "code": "",
                                                                     "message": ""
 Try it out!
```

```
/v1/messages/{messageId}
                                                                                       Deletes given Message
DELETE
Implementation Notes
deleteMessage
Parameters
                                                                               Parameter
 Parameter
              Value
                                                             Description
                                                                                           Data Type
                                                                               Type
 messageId
              (required)
                                                             messageId
                                                                               path
                                                                                           integer
Response Messages
 HTTP Status
                 Reason
                                                      Response Model
 Code
 200
                 OK
```

```
HTTP Status
                 Reason
                                                         Response Model
Code
404
                 Unable to find Message
                                                         Model Schema
                                                             "title": "",
                                                             "status": 0,
                                                             "detail": "",
                                                             "timeStamp": 0,
                                                             "developerMessage": "",
                                                             "errors": [
                                                                 "key": [
                                                                   {
                                                                     "code": "",
"message": ""
Try it out!
```

[BASE URL: http://localhost:8080/api-docs, API VERSION: 1.0]