

# MolSanity: A Reliability Audit for Feature Attributions on Molecular Graph Neural Networks

Karthik Iyer<sup>1,\*</sup> Nasser Sabar<sup>1</sup>

<sup>1</sup>Department of Computer Science and Information Technology, La Trobe University, Melbourne, Victoria 3086, Australia

\* Correspondence: [karthik.iyer@hotmail.com](mailto:karthik.iyer@hotmail.com) ORCID: 0009-0004-0593-1602

**Abstract.** Feature attributions are routinely used to justify molecular graph neural network (GNN) predictions to chemists, yet they are almost never audited for *reliability*: existing evaluation frameworks ask whether an explanation is faithful to the model, not whether the model’s explanation can be trusted, and not where it stops being trustworthy under the scaffold shift that characterises real drug-discovery workflows. We present **MolSanity**, a reliability-audit framework that wraps canonical attribution implementations (Captum, PyTorch Geometric, RDKit) rather than proposing a new attributor, and scores every (dataset  $\times$  backbone  $\times$  attributor  $\times$  split) cell on six axes: motif-native coherence, occlusion-attribution faithfulness, ground-truth localisation where node labels exist, cross-checkpoint stability, calibration linkage, and confidence/correctness regime stratification. Our central finding is that *faithfulness is not correctness*, and that the two carry no dependable relationship in either regime. Across 30 selection tests — 5 molecular ground-truth arms  $\times$  two splits  $\times$  3 ranking metrics, with dataset, backbone and attributor set held fixed within an arm — a faithfulness-only ranking picks an attributor other than the ground-truth-best one in 26, and this is no less true in distribution (14 of 15) than under scaffold shift (12 of 15). The sharpest case is MUTAG under a Bemis–Murcko scaffold split, where all 3 metrics miss. The occlusion measure selects GuidedBP, whose agreement with the mutagenic nitro motif is GT AUROC 0.013 — near-perfectly *anti*-aligned, and sixth of the 7 attributors audited — while the ground truth ranks GNNExpl. best at 0.826 in the audited seed,  $0.774 \pm 0.086$  across 3 (median paired gap 0.967 AUROC, Wilcoxon  $p < 0.001$ , Benjamini–Hochberg  $q < 0.001$  over the 30 selection tests). Pooled over all 47 cells of the 5 molecular ground-truth arms (each an across-seed mean of 3 seeds), the faithfulness–correctness rank correlation is  $+0.222$  in distribution ( $p = 0.134$ ) and  $-0.124$  under shift ( $p = 0.405$ ) — neither distinguishable from zero. Per arm under shift it runs from  $-0.564$  on MUTAG to  $+0.786$  on FluorideCarbonyl, so reliability is a property of the (dataset, backbone, attributor, split) cell rather than of the attributor, and no pooled coefficient describes any of the arms. We report against our own prior result: restricted to the 3 arms of an earlier version of this analysis the same computation gives  $-0.356$  at  $p = 0.042$ , and adding two externally authored molecular rationale benchmarks removes the effect. Faithfulness itself does not fall under shift — across the same 47 cells it *rises*, from 0.049 to 0.132 ( $p = 0.005$ ), while ground-truth localisation does not move (0.660 to 0.658,  $p = 0.539$ ). The metric therefore moves in the reassuring direction across a shift that leaves correctness unchanged, and gives no warning either way. Using 31785 committed per-molecule records we further find that on confidently-wrong predictions ground-truth localisation degrades (0.769 to 0.681,  $n = 275$ ) while their measured faithfulness *improves* (0.142 to 0.325) and their stability is no worse — both proxies point away from the failure — and that the calibration–reliability link attenuates from a per-cell median of 0.144 to 0.074 when cells are pooled, a Simpson’s-paradox trap for anyone reporting a single aggregate number. Results are the committed `full.yaml` run: 558 of 558 cell-runs completed. Every number, figure and table regenerates from the committed artifacts.

## ■ 1 Introduction

A medicinal chemist is shown a graph neural network’s prediction that a candidate is hERG-active, together with a heat map over its atoms. The heat map concentrates on a piperidine nitrogen; the chemist finds that plausible, and the series is deprioritised. Nothing in that workflow ever established that the highlighted atoms are the atoms the model actually used, that they are the atoms that matter chemically, or that the highlighting behaves the same way on the next scaffold. Each of those is a separate question, and the answers come apart.

They come apart in a way that is measurable, and that gets worse in exactly the setting drug discovery operates in. An attribution can be *faithful*, in that the atoms it ranks highest really are the atoms whose removal moves the model’s output most, and simultaneously *wrong*, in that those atoms are not the substructure that determines the property. Across the 142 committed cells in this study that carry a node-level ground truth, 14 are positively faithful to the model and yet *anti*-aligned with the true motif (ground-truth AUROC below the chance value of 0.5). A benchmark that scores only faithfulness rates all of them as fine.

In practice the problem takes the form of a selection problem. With no ground truth available, which is the situation on every real molecular dataset in this study, an attributor has to be chosen using a faithfulness or fidelity metric. On the 5 molecular cell families that do have a node-level ground truth and were audited on both splits, we can check whether that choice is the right one. It usually is not: across 30 selection tests — 5 arms  $\times$  two splits  $\times$  3 ranking metrics — the metric’s top pick differs from the ground-truth-best attributor in 26. The worst case is not subtle. Under a Bemis–Murcko scaffold split on MUTAG, all 3 ranking metrics (our occlusion measure, Fidelity+ and the GraphFramEx characterisation score alike) select GuidedBP, whose agreement with the mutagenic nitro motif is GT AUROC 0.013, while the ground truth ranks GNNExpl. best at 0.826. The median per-molecule gap is 0.967 AUROC (paired Wilcoxon  $p < 0.001$ ,  $n = 53$ ; Benjamini–Hochberg  $q < 0.001$  across the 30 tests).

Crucially, this is not a distribution-shift artefact. The mismatch rate is 14 of 15 in distribution against 12 of 15 under scaffold shift, so an in-distribution benchmark offers no protection.

None of this makes faithfulness metrics wrong. They answer a different question from the one a chemist is asking. What we can say about the relationship between the two is mostly negative: pooled over 47 molecular ground-truth cells the faithfulness–correctness rank correlation is +0.222 in distribution ( $p = 0.134$ ) and  $-0.124$  under scaffold shift ( $p = 0.405$ ), neither distinguishable from zero, while the per-arm coefficients under shift run from  $-0.564$  to  $+0.786$  under an identical protocol. Reliability is a property of the cell — the (dataset, backbone, attributor, split) combination — and not of the attributor, and a single headline number about attribution quality is the wrong shape of claim. Molecular property prediction is nonetheless deployed under scaffold shift almost by construction, since the point of a screening model is to score series the training set does not contain, and scaffold-split evaluation is now standard practice for the *predictions* themselves [27, 28]. The evaluation protocol for the *explanations* has not followed: it does not stratify by that shift at all, which is why we can report the stratification as a finding rather than assume it.

**Contributions.** This paper presents **MolSanity**, a reliability-audit framework for feature attributions on molecular GNNs. Rather than propose another attribution method, it wraps the canonical implementations (Captum [18], PyTorch Geometric [19], RDKit [20]) and audits them. Specifically:

- We define a six-axis audit over a motif-native

(RDKit) decomposition: coherence, occlusion–attribution faithfulness, ground-truth localisation, cross-checkpoint stability, calibration linkage and confidence/correctness regime stratification, with field-standard Fidelity $\pm$ , sparsity, the GraphFramEx characterisation score [11] and the PyG/DIG unfaithfulness metric [12] computed on the *same* molecules for direct comparability (**The MolSanity audit**).

- We show that a faithfulness-only ranking picks the wrong attributor in 26 of 30 tests spanning 5 molecular ground-truth arms and both splits, in a design where within an arm only the split varies, so the regime comparison is not confounded with a change of dataset. The failure is not confined to shift: it is 14 of 15 in distribution (**A fidelity-only ranking picks the wrong attributor, in both regimes**).
- We separate what shift breaks from what it leaves alone. The *backbone* ordering does not survive the change of split ( $\rho = 0.100$  over 5 backbones), so which architecture localises best in distribution says little about which does under shift. The *attributor* ordering largely does survive ( $\rho = 0.821$  on MUTAG, 0.964 on MolMotif), and the level of faithfulness does not shift systematically either (across the 93 cells audited on both splits the median change is 0.077). The *relationship* between faithfulness and correctness — the quantity a faithfulness-only benchmark cannot see — is absent in both regimes rather than broken by one of them, and varies by arm from  $-0.564$  to  $+0.786$  under shift.
- Using 31785 per-molecule audit records, we stratify reliability by confidence/correctness regime and test the calibration-linkage hypothesis directly. It holds per cell (median  $\rho = 0.144$ , 85 cells significantly positive vs. 29 negative) but *attenuates* to 0.074 when cells are pooled, a Simpson’s-paradox trap for anyone reporting a single aggregate number.
- We report the negatives with the positives, including one that cost us a published result: adding two externally authored molecular rationale benchmarks took the pooled shift correlation from  $-0.356$  ( $p = 0.042$ ) over 3 arms to  $-0.124$  ( $p = 0.405$ ) over 5, and we report the larger analysis. Also here: a regression faithfulness operator we mis-specified, diagnosed and corrected; non-molecular ground-truth arms whose scaffold split is degenerate and are therefore excluded from the shift contrast rather than counted toward it; an exactly-labelled molecular arm too saturated to adjudicate anything on its

own; and the 44 cells where the correctness axis simply does not exist and is marked as such rather than scored.

## ■ 2 Related work

**Attribution methods.** The attributors audited here are the standard ones. The gradient family (Saliency [2], Input×Gradient, Guided Backpropagation [3] and Integrated Gradients [1]) is model-agnostic and cheap. Graph-specific methods learn a mask over the input: GNNExplainer [4] optimises a soft edge/feature mask per instance, PGExplainer [5] amortises that into a parametric mask network, and SubgraphX [6] searches connected subgraphs with Monte-Carlo tree search under a Shapley objective. Graph analogues of CAM/Grad-CAM were introduced by Pope et al. [7]; Yuan et al. [8] survey the space. In every case we call the published implementation rather than reimplementing it.

**Evaluating explanations.** Two evaluation traditions exist. *Faithfulness* measures whether the explanation tracks the model: Fidelity± and sparsity [8], the GraphFramEx characterisation score that combines them [11], and the unfaithfulness metric shipped with DIG/PyG [12]. *Correctness* measures whether the explanation recovers a known rationale, which requires ground-truth substructures, typically synthetic [10]. The tension between the two is known: Faber et al. [14] argue that comparing against ground truth is misleading when the trained model does not use that rationale, and Sanchez-Lengeling et al. [15] built the first systematic attribution benchmark for molecular GNNs on exactly this basis. Outside graphs, sanity checks [16] and retraining-based benchmarks [17] made a parallel case that plausible-looking attributions can be uninformative. MolSanity’s position is that neither axis subsumes the other, and that what needs measuring is the *joint* behaviour of the two under distribution shift.

**Frameworks, and the explicit delta.** Four lines of work are close enough that a citation is not a sufficient answer. Table 1 scores all of them on the same capabilities; what follows states what each row of that table means.

*Sanchez-Lengeling et al.* [15] is the nearest neighbour and the earliest. It built the first systematic attribution benchmark for molecular GNNs on tasks whose ground-truth substructure is known by construction, establishing that attribution methods should be scored against a known rationale rather than against how plausible a chemist finds the highlighting. MolSanity inherits that premise. What it adds is the faithfulness axis measured on the *same* molecules and the joint behaviour of the

two. A benchmark that reports correctness alone cannot show that a faithfulness-based choice of attributor is the wrong choice, because it never makes that choice. The selection-consistency test of [The selection-consistency test](#) makes it, and its outcome changes with the split.

*MolFaith* [13] is the closest work on the faithfulness axis and is larger than this study on that axis: eight attribution methods, two molecular representations and five architectures over roughly 14,000 molecules, against the 31785 per-molecule records here. We make no claim to broader faithfulness coverage. Two of its findings bear directly on ours. First, it reports that some methods are inherently more faithful than others largely independently of architecture. We find the same stability from the other direction: faithfulness does not shift systematically across the 93 cells audited on both splits (median change 0.077). Two independent studies at different scales agreeing that faithfulness is a comparatively stable property of the method is the premise our result then acts on. The correctness ordering is also fairly stable across the split ( $\rho = 0.821$  on MUTAG, 0.964 on Mol-Motif). Both rankings are stable; what changes is how they sit relative to each other, and under shift they sit at odds. That is the distinction we would press: *stability of a proxy is not validity of a proxy*. A practitioner with no rationale labels who selects a method by faithfulness inherits a reproducible answer, not a correct one. Second, MolFaith reports that faithfulness varies markedly per molecule; our regime stratification locates part of that variation, since ground-truth localisation degrades precisely on confidently-wrong predictions while faithfulness on those same molecules *improves*.

*GraphXAI* [10] and *GraphFramEx* [11] are general-graph frameworks: GraphXAI supplies generators with exact node ground truth and an evaluation library, GraphFramEx systematises fidelity-style evaluation across explainers and tasks. Both are broader than MolSanity across graph domains and narrower within chemistry. MolSanity scores chemically meaningful units (SSSR rings, Murcko scaffold, BRICS fragments) rather than individual atoms, and stratifies by the split that governs molecular deployment. *DIG* [12] is a library rather than a protocol; we wrap its unfaithfulness metric, and its SubgraphX implementation is the coverage gap recorded in [Limitations and threats to validity](#).

*What is new here, and what is not.* Ground-truth localisation, fidelity metrics, motif decompositions and scaffold splits all exist already. Two rows of Table 1 we do not find in any of the four: cross-checkpoint stability and calibration linkage. The contribution we would defend is neither of those rows alone, but the result they were built to support: that the two evaluation traditions above come apart under the shift molecular models are

deployed into — far enough that the faithfulness ranking and the correctness ranking reverse relative to one another — and that no metric on the faithfulness side signals it.

### ■ 3 The MolSanity audit

#### 3.1 Notation

A molecule is a graph  $G = (V, E)$  with node features  $X \in \mathbb{R}^{|V| \times d}$  and edge features  $Z \in \mathbb{R}^{|E| \times d'}$ . A trained model  $f_\theta$  maps  $G$  to logits  $f_\theta(G) \in \mathbb{R}^C$  (classification) or a scalar (regression);  $t$  indexes the explained output. An *attributor* is a map  $A : (f_\theta, G, t) \mapsto a \in \mathbb{R}^{|V|}$  assigning a real score to every atom.

RDKit decomposes  $G$  into a motif cover  $\mathcal{M}(G) = \{M_1, \dots, M_K\}$ ,  $M_k \subseteq V$ , from SSSR rings, the Bemis-Murcko scaffold [32] and BRICS-style fragments. Writing  $a_v^+ = \max(a_v, 0)$ , the motif-level score is

$$s_k = \sum_{v \in M_k} a_v^+, \quad k = 1, \dots, K. \quad (1)$$

Working at motif rather than atom granularity is what makes the audit chemically legible: a chemist reasons about a nitro group, not about atom 14.

For  $S \subseteq V$  let  $G \setminus S$  denote  $G$  with the features of  $S$  zeroed through the model’s node-mask multiplier,  $X' = X \odot (\mathbf{1} - \mathbf{1}_S)$ , leaving the topology intact.

#### 3.2 The five audit statistics

(i) **Faithfulness.** Occlusion of motif  $M_k$  changes the explained output by

$$\Delta_k = f_{\theta,t}(G) - f_{\theta,t}(G \setminus M_k). \quad (2)$$

An attribution is faithful when it ranks motifs as occlusion does, measured by the Spearman rank correlation over the  $K$  motifs of one molecule,

$$\rho_{\text{occ}}(G) = \text{Spearman}((s_k)_{k \leq K}, (\Delta_k)_{k \leq K}) \in [-1, 1]. \quad (3)$$

$\rho_{\text{occ}} = 1$  means the attributor recovers the causal ordering exactly;  $\rho_{\text{occ}} = 0$  means it is uninformative about it; and  $\rho_{\text{occ}} < 0$  means it *inverts* it, which is strictly worse than an uninformative explanation. Undefined cases ( $K < 2$ , or zero variance in either argument) are recorded as missing, never as 0.

We also reproduce the field-standard fidelity pair [8]. With  $\tau$  the 80th percentile of  $a^+$  and  $S_\tau = \{v : a_v^+ \geq \tau\}$  the salient set, and  $p_t(\cdot)$  the softmax probability of the explained class,

$$\text{Fid}^+ = p_t(G) - p_t(G \setminus S_\tau), \quad (4)$$

$$\text{Fid}^- = p_t(G) - p_t(G \setminus \bar{S}_\tau), \quad (5)$$

higher  $\text{Fid}^+$  and lower  $\text{Fid}^-$  being better, with sparsity  $1 - |S_\tau|/|V|$ . The GraphFramEx characterisation score [11] combines them as the weighted harmonic mean

$$\text{char} = \frac{(w_+ + w_-) \text{Fid}^+ (1 - \text{Fid}^-)}{w_- \text{Fid}^+ + w_+ (1 - \text{Fid}^-)}, \quad w_+ = w_- = \frac{1}{2}, \quad (6)$$

undefined outside  $\text{Fid}^\pm \in [0, 1]$ . That constraint matters for the regression cells, where  $\Delta$  is taken in output space and  $\text{Fid}^\pm$  leaves that range.

(ii) **Correctness.** Where a node-level ground-truth mask  $g \in \{0, 1\}^{|V|}$  exists, correctness is the ability of  $a$  to separate the true substructure from the rest, scored by the area under the ROC curve of the min-max normalised attribution against  $g$ ,

$$\text{GT-AUROC}(G) = \Pr[\tilde{a}_u > \tilde{a}_v | g_u=1, g_v=0] + \frac{1}{2} \Pr[\tilde{a}_u = \tilde{a}_v], \quad (7)$$

with  $u, v$  drawn uniformly from the positive and negative atoms. Chance is  $\frac{1}{2}$ ; values below  $\frac{1}{2}$  mean the attribution is *anti-aligned*, ranking the true motif systematically *below* the rest. When  $g$  is degenerate ( $\sum_v g_v \in \{0, |V|\}$ ) the quantity is undefined and reported as such.

(iii) **Coherence.** Concentration and connectedness of the attribution mass: the Gini coefficient of  $a^+$ , the fraction of mass in the top 20% of atoms, the largest-connected-component fraction of  $S_\tau$  in the induced subgraph, and the motif top-1 share  $\max_k s_k / \sum_k s_k$ . These are descriptive; [Cross-task reliability](#) shows they carry little reliability signal.

(iv) **Stability.** With  $\theta^{\text{early}}$  an intermediate checkpoint of the same training run and  $s^{\text{early}}, s^{\text{final}}$  the corresponding motif scores (1),

$$\text{stab}(G) = \text{Spearman}(s^{\text{early}}, s^{\text{final}}). \quad (8)$$

An explanation that reorders motifs between two checkpoints of one run is a weak basis for a chemistry decision.

(v) **Regime and calibration.** Logits are temperature-scaled on the validation fold [33]; let  $c(G) = \max_j p_j(G)$  be the calibrated confidence and  $y(G) \in \{0, 1\}$  the correctness of the prediction. With  $\tau_c = 0.8$ , each molecule is assigned

$$R(G) = \begin{cases} \text{conf-correct} & c \geq \tau_c, y = 1, \\ \text{conf-error} & c \geq \tau_c, y = 0, \\ \text{borderline} & c < \tau_c. \end{cases} \quad (9)$$

Calibration linkage is the within-cell rank correlation between per-molecule calibration quality and reliability,

$$\rho_{\text{cal}} = \text{Spearman}(1 - |c - y|, \rho_{\text{occ}}), \quad (10)$$



**Table 1: Where the audit sits relative to existing evaluation frameworks.** ✓ = core capability, ~ = partial or possible but not central, ✗ = not a focus. The contribution is the combination, not any single row: ground-truth validation and faithfulness both exist elsewhere, but not jointly with cross-checkpoint stability, calibration linkage and shift stratification over a motif-native decomposition.

| Capability                                   | GraphXAI      | GraphFramEx | DIG | MolFaith | MolSanity                         |
|----------------------------------------------|---------------|-------------|-----|----------|-----------------------------------|
| Ground-truth explanation benchmarks          | ✓ (synthetic) | ~           | ✓   | ✗        | ✓ (synthetic + motif-proxy)       |
| Faithfulness / fidelity metrics              | ~             | ✓           | ✓   | ✓        | ✓ (reproduced for comparability)  |
| Molecular-motif-native audit (RDKit)         | ✗             | ✗           | ~   | ~        | ✓ (SSSR + Murcko + BRICS)         |
| Occlusion-attribution agreement              | ~             | ✓           | ~   | ✓        | ✓                                 |
| Cross-checkpoint stability                   | ✗             | ✗           | ✗   | ✗        | ✓                                 |
| Calibration linkage                          | ✗             | ✗           | ✗   | ✗        | ✓                                 |
| Scaffold-shift regime stratification         | ✗             | ~           | ✗   | ✗        | ✓ (the core differentiator)       |
| Multiple GNN backbones (agnostic)            | ~             | ✓           | ✓   | ~        | ✓ (GINE/GCN/GAT/MPNN/AttentiveFP) |
| Paired statistics (Wilcoxon, bootstrap CI)   | ~             | ~           | ~   | ~        | ✓                                 |
| Across-seed variance reported per cell       | ✗             | ✗           | ✗   | ✗        | ✓ (3 seeds, 'SEED_VARIANCE.md')   |
| Wraps canonical implementations (no re-impl) | ✓             | ✓           | ✓   | ✓        | ✓ (Captum/PyG/RDKit)              |

positive values supporting the hypothesis that better-calibrated predictions carry more trustworthy attributions.

### 3.3 The selection-consistency test

The audit’s central question is operational rather than descriptive. A practitioner with no ground truth must choose an attributor using a faithfulness statistic; we ask whether that choice agrees with the one the ground truth would make.

Fix a *cell*  $c = (\mathcal{D}, f_\theta, \pi)$ , meaning a dataset, a trained backbone and a split, together with a set  $\mathcal{A}$  of attributors, each audited on the same molecule sample  $\mathcal{G}_c$ . For attributor  $A$  write  $\bar{m}(A) = |\mathcal{G}_c|^{-1} \sum_{G \in \mathcal{G}_c} m_A(G)$  for the cell mean of statistic  $m$ . Define the ground-truth-optimal and the faithfulness-optimal attributor

$$A^* = \arg \max_{A \in \mathcal{A}} \overline{\text{GT}}(A), \quad \hat{A}_m = \arg \max_{A \in \mathcal{A}} \bar{m}(A), \quad (11)$$

for each faithfulness statistic  $m \in \{\rho_{\text{occ}}, \text{Fid}^+, \text{char}\}$ . Two quantities follow. The *selection gap* is the paired per-molecule difference in correctness between the two choices,

$$\delta_m(G) = \text{GT}_{A^*}(G) - \text{GT}_{\hat{A}_m}(G), \quad G \in \mathcal{G}_c, \quad (12)$$

tested against  $H_0$  : median  $\delta_m = 0$  with a two-sided Wilcoxon signed-rank test on the molecules both attributors audited. The *selection-consistency coefficient* is the rank correlation between the two orderings over  $\mathcal{A}$ ,

$$\rho_m^{\text{sel}} = \text{Spearman}_{A \in \mathcal{A}}(\bar{m}(A), \overline{\text{GT}}(A)) \in [-1, 1]. \quad (13)$$

$\rho_m^{\text{sel}} \approx 1$  means faithfulness is a sound surrogate for correctness in that cell;  $\rho_m^{\text{sel}} \approx 0$  means it is uninformative;

$\rho_m^{\text{sel}} < 0$  means it is actively misleading, in that ranking by faithfulness does worse than ranking at random. Because  $\mathcal{D}$ ,  $f_\theta$  and  $\mathcal{A}$  are held fixed and only  $\pi$  varies between the two arms of each comparison, any change in  $\rho_m^{\text{sel}}$  is attributable to the split rather than to a change of dataset or model.

### 3.4 Estimation and inference

Cell means are reported with 95% percentile bootstrap intervals over molecules (2000 resamples, fixed seed). Attributor comparisons within a cell are paired on molecule identity and tested with the two-sided Wilcoxon signed-rank test; correlations are Spearman throughout, as all statistics here are ordinal in nature and several are heavy-tailed. Sample sizes are the audited molecules per cell (20–120), which is small enough that we treat individual  $p$ -values as descriptive and report them unadjusted for multiplicity, leaning on replication across cells rather than on any single test. Where a statistic is undefined for a molecule it is dropped from that statistic’s mean only, and the retained  $n$  is reported alongside.

### 3.5 Implementation

The pipeline is staged and idempotent: each stage writes a marker keyed to a content hash of its configuration, every cell is isolated so one failure cannot abort a sweep, and trained checkpoints are content-addressed so an audit reproduces without retraining. Seeds, library versions, git revision and hardware are recorded per run. Attributors are the canonical implementations [18, 19], wrapped behind one interface rather than reimplemented.

## ■ 4 Experimental setup

**Datasets.** Tier-1 provides the ground-truth anchor. Two arms are molecular with ground truth that is *exact by our own construction*: **MolMotif** and **MolMotifHard** take real drug-like molecules (BBBP and Tox21 respectively) and relabel them by the presence of a chemical substructure — an aromatic halogen and a carboxylic acid — so the substructure *defines* the label and its atoms are the node ground truth by definition rather than by assumption. **MolMotifHard** exists because **MolMotif**’s halogen is a rare element the model can detect atom-wise, saturating the task; a carboxylic acid is built only from carbon and oxygen, so the model must learn the arrangement (§5.2). Two further molecular arms carry per-atom rationales published by others: **Benzene** and **FluorideCarbonyl**, from the attribution benchmark suite of Sanchez-Lengeling et al. [9] as repackaged by GraphXAI [10], whose labels we neither designed nor annotated and which therefore carry none of our own assumptions about what a rationale should be. **MUTAG** [30, 31] is molecular with the nitro proxy. Three arms have exact node labels but are not molecules: **SynthMotifs** and its larger twin **SynthMotifsXL**, generated offline (Barabási–Albert base plus house/cycle motifs); **BA-2Motifs** [5]; and **ShapeGGen** [10], a node-classification benchmark entered here at the graph level by taking each labelled node’s  $k$ -hop enclosing subgraph, with  $k$  the message-passing depth. Tier-2 is MoleculeNet [28]: **BBBP** and **BACE** (classification), **ESOL**, **FreeSolv** and **Lipophilicity** (regression). Tier-3 covers chemistry-meets-medicine endpoints: **ClinTox**, **SIDER** and **Tox21** as single-task binary views of the MoleculeNet panels, and **DILI** (drug-induced liver injury) and **hERG** (cardiotoxicity) via the Therapeutics Data Commons [29]. TDC sets are featurised with the same PyG encoding as MoleculeNet so the backbones are drop-in. Credential-gated resources are out of scope and never worked around.

**Backbones.** GINE [21, 22], GCN [23], GAT [24], MPNN [25] and AttentiveFP [26], sharing a pooling head, calibration and splits.

**Attributors.** Integrated Gradients, Saliency, Guided Backpropagation and Input×Gradient through CapTum [18]; GNNExplainer and PGExplainer through PyTorch Geometric [19]; SubgraphX [6] through DIG [12]. PGExplainer is classification-only by construction: its mask network trains against class logits, so it is absent from the regression cells. SubgraphX is scheduled on the ground-truth arms only — the cells where correctness can be measured — because its Monte-Carlo tree search is far more expensive per molecule than the gra-

**Table 2: The run ledger.** Outcome of every cell the `full.yaml` sweep attempted, as recorded in `results/PROGRESS.md`. The *carried* column counts rows surviving from an earlier reduced-budget run because this run’s attempt failed; it is zero, so every row in this paper is from the sweep reported here.

| dataset          | done       | failed   | skipped  | carried  |
|------------------|------------|----------|----------|----------|
| BA-2Motifs       | 36         | 0        | 0        | 0        |
| BACE             | 12         | 0        | 0        | 0        |
| BBBP             | 42         | 0        | 0        | 0        |
| Benzene          | 42         | 0        | 0        | 0        |
| ClinTox          | 12         | 0        | 0        | 0        |
| DILI             | 6          | 0        | 0        | 0        |
| ESOL             | 24         | 0        | 0        | 0        |
| FluorideCarbonyl | 42         | 0        | 0        | 0        |
| FreeSolv         | 6          | 0        | 0        | 0        |
| Lipophilicity    | 6          | 0        | 0        | 0        |
| MUTAG            | 66         | 0        | 0        | 0        |
| MolMotif         | 66         | 0        | 0        | 0        |
| MolMotifHard     | 66         | 0        | 0        | 0        |
| SIDER            | 12         | 0        | 0        | 0        |
| ShapeGGen        | 42         | 0        | 0        | 0        |
| SynthMotifs      | 66         | 0        | 0        | 0        |
| Tox21            | 6          | 0        | 0        | 0        |
| hERG             | 6          | 0        | 0        | 0        |
| <b>total</b>     | <b>558</b> | <b>0</b> | <b>0</b> | <b>0</b> |

No cell failed and none was skipped.

dient family (§9); on those arms it is a full column at the same sample size as every other attributor, not a reduced-budget approximation.

**Splits.** The primary split is a deterministic, class-aware Bemis–Murcko scaffold split [32], the protocol used to evaluate molecular property models under realistic generalisation [27] (whole scaffold groups move together, so there is no leakage, but every fold is guaranteed to contain every class), with a random split as the in-distribution reference. Imbalanced classification uses inverse-frequency class weighting and AUC-based model selection. Every comparison in this paper that is labelled “shift” versus “in-distribution” is these two splits on the same dataset.

**Scale of the study.** The sweep trains every (dataset, backbone) pair on both splits and audits every (dataset, backbone, attributor, split) combination, giving 558 audited combinations and 31785 per-molecule audit records in total. Audited samples are 20–120 molecules per combination, drawn from the held-out test fold. Exact software versions, hardware, seed and the per-combination outcome ledger are recorded with the released artifacts ([Data and code availability](#)).

**Coverage.** All 558 planned combinations completed: 558 done, none failed, none skipped (Table 2). Earlier sweeps of this study carried rows forward from a reduced-budget CPU run where a cell had failed; this one carries 0, so every number in this paper comes from the single run reported here. Collapsing the 3 seeds, the matrix holds 174 classification and 12 regression rows, of which 142 carry a node-level ground truth.

## ■ 5 Results

Figure 1 states the paper’s central result and, beside it, how far that result generalises. The rest of this section is the evidence behind those three panels: the selection test that turns the correlation into a concrete wrong recommendation (§5.2), what a practitioner can do instead when no ground truth exists (§5.5), the regimes in which attributions fail, and the arms and axes on which the audit found nothing, which we report at the same length as the ones where it did.

### 5.1 Faithfulness is not correctness

Table 6 lists every committed cell in which attribution *correctness* can be measured at all, and Figure 2 plots the joint distribution. Of the 142 cells with both metrics defined, 33 are anti-aligned with the ground truth (GT AUROC  $< 0.5$ ) and 14 of those are simultaneously positively faithful to the model. That combination is the failure mode a faithfulness-only audit cannot see, because from the model’s point of view nothing is wrong.

The clearest molecular instance is the MUTAG scaffold block of Table 6, where dataset, backbone and split are fixed and only the attributor varies. Guided Backpropagation, Saliency and Input×Gradient are the three *most* faithful attributors on that cell ( $\rho = 0.616, 0.404, 0.499$ ) and the three *worst* at recovering the nitro motif (GT AUROC 0.013, 0.002, 0.079). GNNExplainer, which the ground truth ranks best at 0.826, is less faithful (0.379) than all three. On this cell the two axes are not merely uncorrelated; they are inverted.

### 5.2 A fidelity-only ranking picks the wrong attributor, in both regimes

If faithfulness and correctness dissociate, then ranking attributors by a faithfulness metric, which is what an evaluation framework must do when no ground truth is available, can select the wrong method. 5 cell families let us test this cleanly: each is molecular, has a node-level ground truth, all 7 attributors audited on the same molecules, and both splits from this run, so the


in-distribution and shift arms differ *only* in the split (Table 5, Figure 4).

**MUTAG, under shift.** The ground truth ranks GNNExpl. best (0.826). All 3 metrics instead rank GuidedBP first, at 0.013, the worst of the 7. On paired per-molecule GT AUROC over the 53 shared molecules the median gap is 0.967 with  $p < 0.001$ , and  $q < 0.001$  after controlling the false discovery rate over all 30 selection tests, so this contrast is not an artefact of testing many of them. The faithfulness–truth rank correlation is negative for every metric:  $-0.643$  for occlusion  $\rho$ ,  $-0.321$  for Fidelity+ and 0.036 for characterisation. A framework ranking on faithfulness here fails to find the best attributor and systematically prefers the worst.

**MUTAG, in distribution.** The random split does not rescue the ranking. All 3 metrics miss again: occlusion  $\rho$  selects GuidedBP at 0.037 against GNNExpl. at 0.858, a median paired gap of 0.978 over 58 shared molecules ( $p < 0.001$ ,  $q < 0.001$ ), and Fidelity+ and the characterisation score select IG and SubgraphX at 0.496 and 0.348. What separates the two regimes on this arm is not whether the pick is wrong but the rank correlation, which runs  $+0.143$  in distribution against  $-0.643$  under shift: in distribution the metric orders the attributors roughly correctly and still tops the list with the wrong one.

**Across all 5 arms.** 26 of the 30 selection tests are mismatches — 14 of 15 in distribution and 12 of 15 under scaffold shift. A fidelity-only ranking is wrong far more often than it is right, and it is wrong in *both* regimes; in-distribution evaluation is not the safe case. The regimes do differ, but in the cost of the mistake and in the opposite direction to the one we expected. Measured as the ground-truth localisation given up by choosing the metric’s pick over the ground-truth-best attributor, the mean gap is 0.417 in distribution against 0.191 under shift (paired Wilcoxon over the 15 arm–metric pairs,  $p = 0.004$ ). The narrowing sits entirely on the pick side: the ground-truth-best attributor localises at 0.946 and 0.952 in the two regimes, while the attributor the metric selects moves from 0.529 to 0.761. Under shift the metrics keep choosing the wrong attributor and happen to choose a less damaging one. Across mismatches the cost spans 0.002 to 0.821 AUROC, with a median of 0.369. A mismatch that gives up 0.002 and one that gives up 0.821 are the same entry in the “mismatch” column of Table 5 and are not the same result, which is why we report the gap beside the verdict throughout.

**The pooled result: no reliable relationship in either regime.** Any single arm gives a rank correlation over

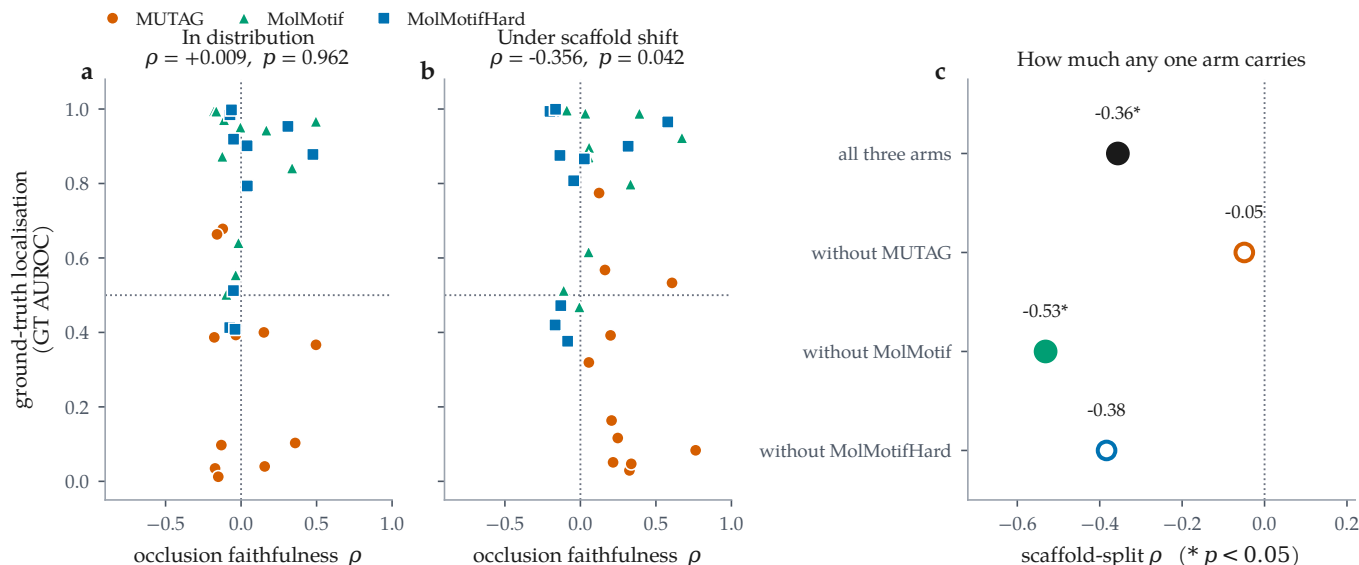

**Figure 1: The result and its scope, together.** Each point is one (dataset, backbone, attributor) cell of the 5 molecular ground-truth arms, averaged over 3 seeds;  $n = 47$  cells. (a) In distribution, occlusion faithfulness carries essentially no information about ground-truth localisation. (b) Under a Bemis–Murcko scaffold split the two become negatively related: ranking attributors by faithfulness ranks them roughly *against* the truth. The horizontal line is chance localisation, the vertical line zero faithfulness. (c) How much of (b) any single arm carries. Filled markers are significant at  $p < 0.05$ ; open markers are not. Removing MUTAG leaves 0.181 — the effect is not merely weakened but absent — so this is a pooled result that one dataset carries and two others are consistent with, not an independent three-way replication. We put that panel here rather than in the limitations so the claim and its scope are read at the same time.


**Table 3: Molecular regression cells.** Occlusion faithfulness is computed in output space (predicted-value shift) rather than probability space. In 0 of the 12 committed regression cells the attribution–occlusion agreement is *negative*: the atoms an attributor ranks highest are not the atoms whose removal moves the prediction most. ESOL·GAT, ESOL·GCN, ESOL·GINE, FreeSolv·GINE, Lipophilicity·GINE run positive. Note the Fidelity± columns leave the  $[-1, 1]$  range a probability-space fidelity would occupy (up to 7.27), which is why we report but do not interpret their sign. Bold marks the highest occlusion  $\rho$  per dataset (emphasis only). PGExplainer is classification-only and therefore absent by construction.

| dataset       | backbone | attributor | split    | $n$ | RMSE  | MAE   | $R^2$ | motif top-1 | occ. $\rho$  | occ. top-1 | Fid+  | stab. |
|---------------|----------|------------|----------|-----|-------|-------|-------|-------------|--------------|------------|-------|-------|
| ESOL          | GAT      | IG         | random   | 200 | 0.764 | 0.568 | 0.867 | 0.831       | 0.803        | 0.933      | 3.11  | 0.947 |
| ESOL          | GAT      | IG         | scaffold | 200 | 1.039 | 0.799 | 0.762 | 0.863       | <b>0.845</b> | 0.973      | 7.27  | 0.955 |
| ESOL          | GCN      | IG         | random   | 200 | 0.947 | 0.737 | 0.797 | 0.854       | 0.423        | 0.650      | −0.84 | 0.965 |
| ESOL          | GCN      | IG         | scaffold | 200 | 1.071 | 0.867 | 0.747 | 0.887       | 0.437        | 0.767      | −0.77 | 0.867 |
| ESOL          | GINE     | GNExpl.    | random   | 200 | 0.833 | 0.629 | 0.842 | 0.849       | 0.634        | 0.832      | −1.19 | 0.958 |
| ESOL          | GINE     | GNExpl.    | scaffold | 200 | 0.988 | 0.743 | 0.785 | 0.879       | 0.308        | 0.742      | −0.40 | 0.890 |
| ESOL          | GINE     | IG         | random   | 200 | 0.833 | 0.629 | 0.842 | 0.865       | 0.683        | 0.830      | −1.46 | 0.932 |
| ESOL          | GINE     | IG         | scaffold | 200 | 0.988 | 0.743 | 0.785 | 0.897       | 0.409        | 0.753      | −0.65 | 0.909 |
| FreeSolv      | GINE     | IG         | random   | 193 | 1.483 | 1.065 | 0.830 | 0.865       | 0.393        | 0.772      | −0.69 | 0.862 |
| FreeSolv      | GINE     | IG         | scaffold | 193 | 1.336 | 0.999 | 0.811 | 0.865       | <b>0.421</b> | 0.898      | −0.61 | 0.703 |
| Lipophilicity | GINE     | IG         | random   | 200 | 0.773 | 0.591 | 0.569 | 0.786       | <b>0.556</b> | 0.737      | 0.32  | 0.749 |
| Lipophilicity | GINE     | IG         | scaffold | 200 | 0.920 | 0.705 | 0.424 | 0.826       | 0.494        | 0.712      | 0.51  | 0.762 |

seven attributors, which is a weak instrument, so we pool. Over all 47 cells of the 5 molecular ground-truth arms, the faithfulness–correctness correlation is +0.222 in distribution ( $p = 0.134$ ) and −0.124 under scaffold shift ( $p = 0.405$ ). Neither is distinguishable from zero. Faithfulness itself rises across the split (0.049 to 0.132,

$p = 0.005$ ) while ground-truth localisation does not move ( $p = 0.539$ ), so the two axes move independently rather than together. The conclusion we draw from the pool is the null one, and it is the one that matters operationally: at this sample size a faithfulness score carries no dependable information about attribution cor-



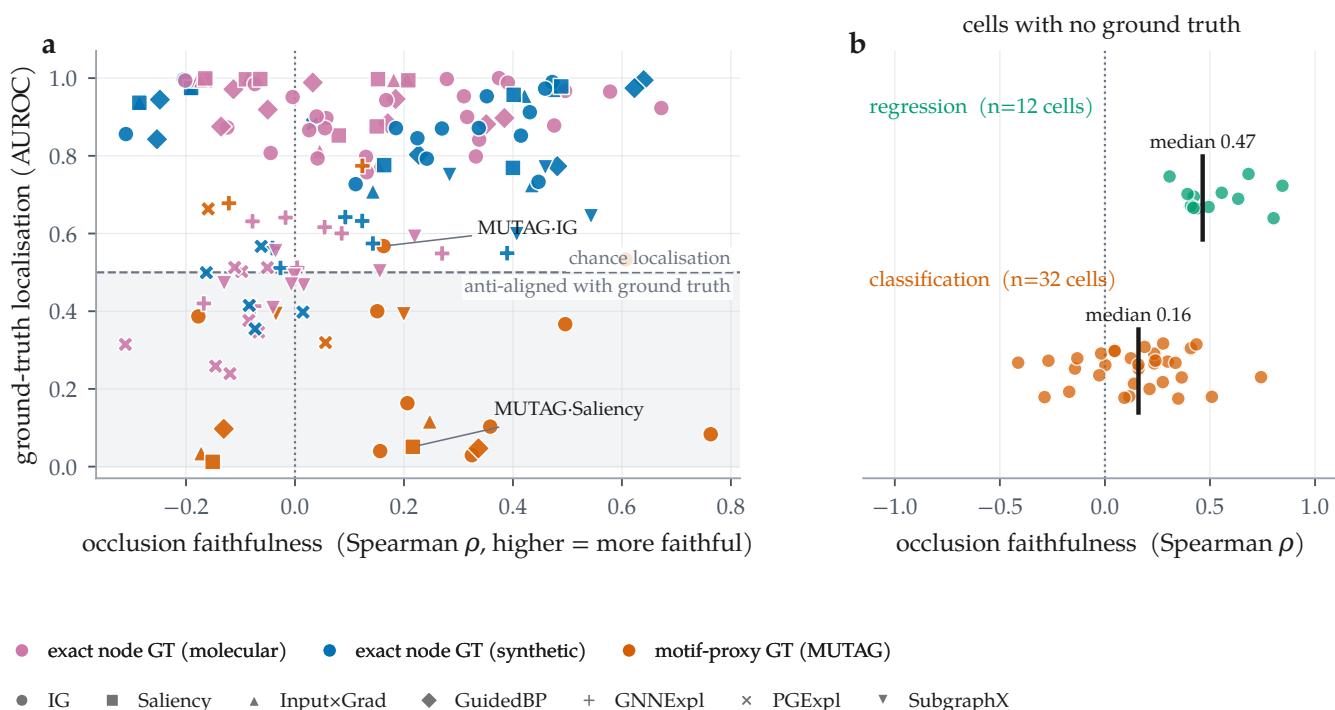

**Figure 2: The two axes come apart, and for most cells only one of them exists.** (a) Every committed cell carrying a node-level ground truth ( $n = 142$ ), plotted as occlusion faithfulness against ground-truth localisation; colour separates the three kinds of ground truth — exact on real molecules, exact on synthetic graphs, and the MUTAG motif proxy — and marker distinguishes attributor. The shaded band is GT AUROC  $< 0.5$ : attributions there are anti-aligned with the true motif. 14 cells sit in the lower-right region, positively faithful to the model and anti-aligned with the truth. (b) The remaining 44 combinations, on real molecular datasets, have no published per-atom labels: only the horizontal axis is measurable for them.

rectness on molecular data, whichever regime it is measured in.


The per-arm coefficients show why no pooled estimate should be trusted here. Under shift they run from  $-0.564$  on MUTAG to  $+0.786$  on FluorideCarbonyl — opposite signs, near the extremes of the coefficient’s range, under an identical protocol differing only in the dataset. 3 of 5 arms fall between the two regimes and 2 of 5 are negative under shift, but the spread swamps the central tendency, and averaging over it produces a number that describes none of the five arms.

Leave-one-arm-out makes the same point quantitatively, and it is the first check a sceptical reader runs, so we run it. Removing each arm in turn from the shift pool: without MUTAG the correlation is  $+0.181$  ( $p = 0.290$ ,  $n = 36$ ) — the sign reverses; without MolMotif,  $-0.180$  ( $p = 0.294$ ,  $n = 36$ ); without MolMotifHard,  $-0.102$  ( $p = 0.554$ ,  $n = 36$ ); without Benzene,  $-0.278$  ( $p = 0.082$ ,  $n = 40$ ); without FluorideCarbonyl,  $-0.183$  ( $p = 0.259$ ,  $n = 40$ ). 0 of the 5 fits is significant, and dropping a single arm is enough to flip the sign of the estimate. This is not a robust effect being diluted; it is a set of cell-specific effects that do not share a direction.

Restricted to the 3 arms available to an earlier version

of this analysis, the same computation gives  $-0.356$  at  $p = 0.042$  over 33 cells — a significant collapse. Adding two independent, externally authored molecular arms removes it. We treat the 5-arm result as the reported one and record the supersession in §5.8. The structural reason the per-arm coefficients are so unstable is visible in the rankings themselves: on MUTAG 0 attributors exceed GT AUROC 0.9 and the 7 are spread over  $0.002 - 0.826$ , whereas on MolMotif under shift 4 of 7 sit above 0.9 within a few hundredths of each other. A Spearman coefficient over a group that is effectively tied is decided by whichever poor attributors happen to order correctly beneath it, and we would not draw a conclusion from any of the 5 arms on its own.

MolMotifHard exists because of this. MolMotif labels on halogen-aromatic presence, which a message-passing model can satisfy by detecting a rare *element* rather than an arrangement; MolMotifHard labels on a carboxylic acid, built from carbon and oxygen alone, so no single-element shortcut is available. It widens the usable range under shift (GT AUROC spanning  $0.303 - 1.000$  against  $0.476 - -0.998$ ) and leaves 3 rather than 4 attributors bunched above 0.9, without removing the bunching altogether, which is why it widens the evidence without settling the question by itself.

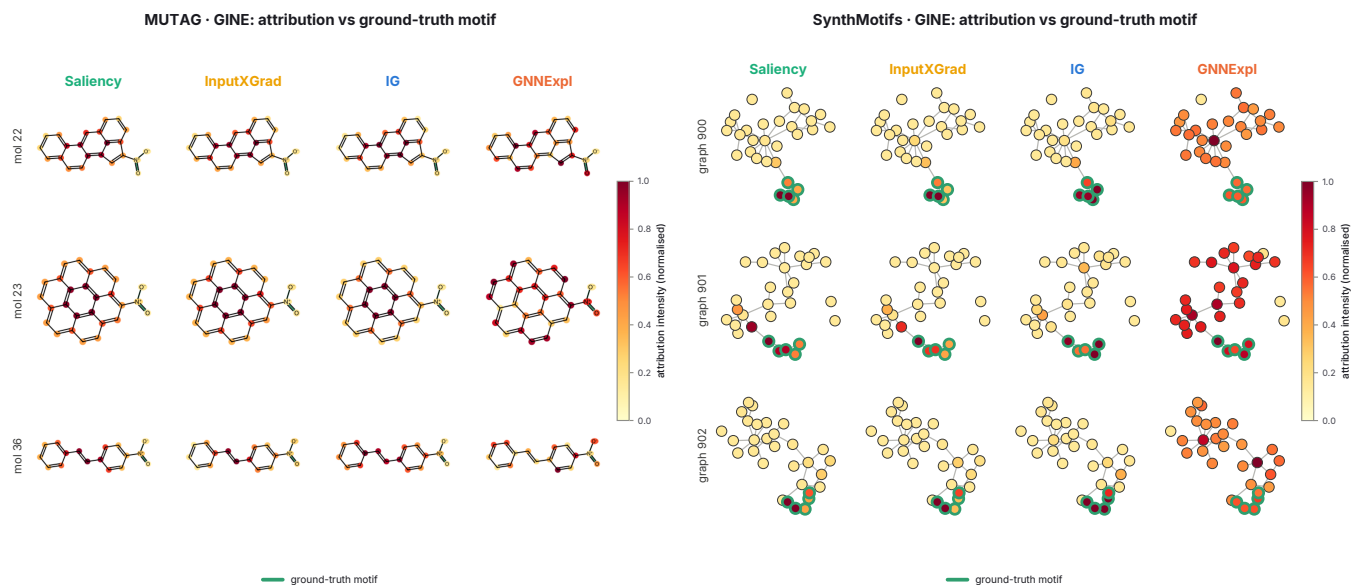

**Figure 3: What the disagreement looks like on the structures themselves.** Attribution intensity overlaid on the audited graphs for four attributors on the same molecules, rendered by the audit run: RDKit skeletal structures for MUTAG (left) and node-link diagrams for SynthMotifs (right), with the ground-truth motif outlined in green. The quantitative gap of Table 5 is visible here as a qualitative one: on the synthetic graphs the gradient attributors concentrate on the outlined motif while GNNExplainer spreads mass across the Barabási–Albert base, and on MUTAG the gradient methods saturate the fused aromatic system rather than the nitro groups that carry the mutagenicity label. SynthMotifs appears here as a structural illustration only: it is not a molecular dataset, so it has no Bemis–Murcko scaffold and takes no part in the shift contrast (§7). These panels are the pipeline’s own output, reproduced unmodified.

The arms that could not participate at all are the non-molecular ones. SynthMotifs, BA-2Motifs and ShapeGGen have exact node labels but are not molecules, so a Bemis–Murcko scaffold is undefined for them and their “scaffold” split comes back as an arbitrary deterministic partition (§7). The analysis therefore rests on the 5 molecular arms and their 47 cells: one chemically motivated proxy (MUTAG), two whose ground truth is exact because we built the label from the substructure (MolMotif, MolMotifHard), and two whose per-atom rationales were published by Sanchez-Lengeling et al. [9] and which we neither designed nor labelled (Benzene, FluorideCarbonyl).


**Two caveats.** First, our own faithfulness metric fails alongside the field-standard ones. Occlusion  $\rho$  mismatches the ground-truth-best attributor on 14 in-distribution and 12 shift arms just as Fidelity+ and the characterisation score do, so we make no claim that MolSanity’s occlusion measure is a better selector. No faithfulness metric in this experiment carries reliable information about which attributor is correct, which argues for measuring correctness rather than for building a better proxy. Second, the 4 non-mismatches in Table 5 are not evidence that a metric worked: two are Fidelity+ and the characterisation score agreeing with each other on MolMotifHard under shift, and two are the same occlusion pick on both FluorideCarbonyl arms.

Uniform-random selection among the 7 audited attributors would be expected to agree 4.3 times in 30 tests, so 4 is not above chance, and we do not read these rows as a positive result for any metric.

### 5.3 Reliability is a property of the cell

The preceding subsection reaches a null: over 47 molecular ground-truth cells there is no pooled faithfulness–correctness relationship in either regime. That null is not an absence of structure but a consequence of it. Under an identical protocol — same backbone, same 7 attributors, same audit code, same seeds — the per-arm coefficient under shift runs from  $-0.564$  on MUTAG to  $+0.786$  on FluorideCarbonyl, and the cost of a fidelity-only selection runs from 0.002 to 0.821 AUROC. Only the dataset changes. This subsection shows the same instability along the other two axes of the cell, the backbone and the attributor, which is why we take the cell — (dataset, backbone, attributor, split) — to be the correct unit of a reliability claim, and why we regard a single headline number about an attributor’s reliability as the wrong shape of statement rather than merely an imprecise one.


Figure 5 lays the two axes over the audited grid, and two further comparisons show that neither axis is a stable property of the attributor or of the architecture.

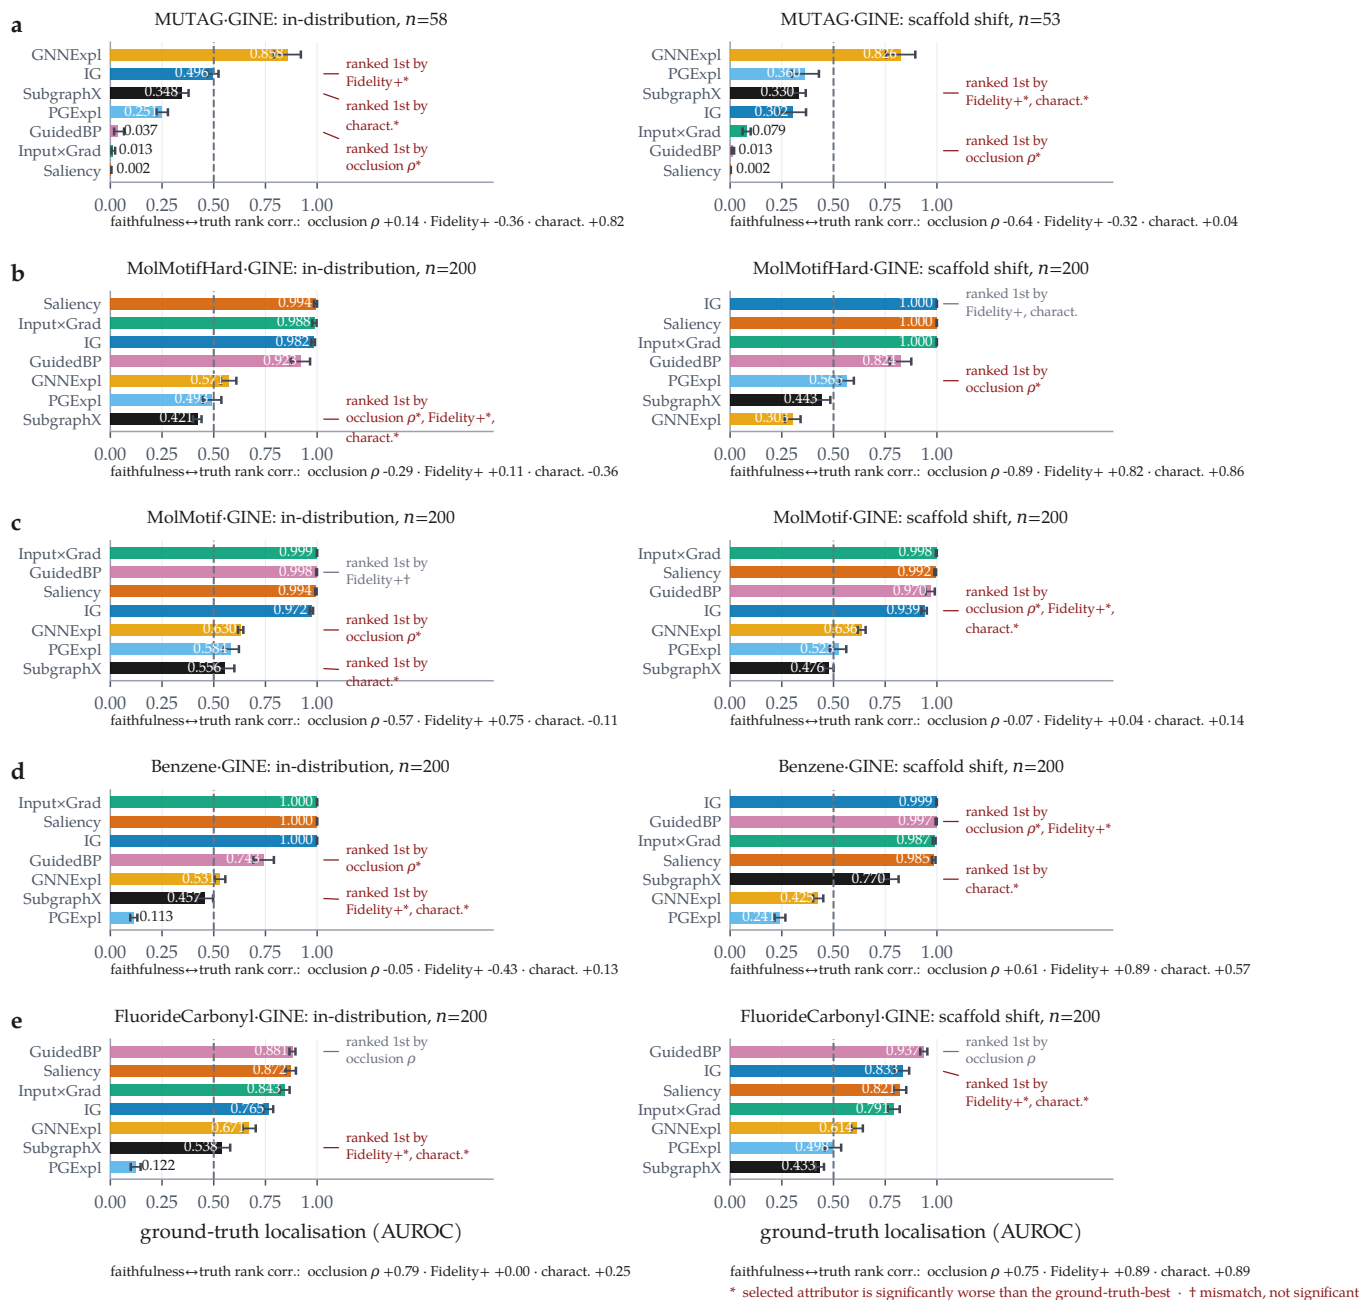


**Figure 4: A faithfulness-only ranking selects the wrong attributor in 26 of 30 tests, in distribution as well as under shift.** Ground-truth localisation per attributor, with bootstrap 95% confidence intervals over molecules. Within each row the dataset, backbone and attributor set are fixed and only the split changes; significant picks are marked \*, picks statistically indistinguishable from the best are marked †. **Rows, top to bottom:** MUTAG (motif-proxy ground truth), where all 3 metrics mismatch in both regimes and under shift the occlusion measure selects GuidedBP, whose localisation (0.013) is anti-aligned with the motif; MolMotifHard and MolMotif (real molecules, exact node ground truth by construction), where the label is the substructure; and **Benzene** and **FluorideCarbonyl**, the Sanchez-Lengeling et al. [9] rationale benchmarks, whose per-atom labels we did not author. The mismatch is near-universal; what varies across rows is its cost, from 0.002 to 0.821 AUROC. Rank correlations between each faithfulness metric and ground truth are given below each panel.

**Backbones.** Holding the attributor fixed at Integrated Gradients and varying the backbone (Figure 6) gives a spread of 0.197 AUROC in distribution (GINE 0.990 down to GAT 0.793) and 0.128 under shift (GINE 0.973 down to MPNN 0.845), comparable to the spread across attributors on the same dataset. The two orderings are

negatively correlated ( $\rho = 0.100$ , 5 backbones): the architecture that localises the motif best in distribution is not the one that does so under shift. The attributor ordering is somewhat more robust across the same change of split ( $\rho = 0.857$  over 7 attributors) but far from preserved.

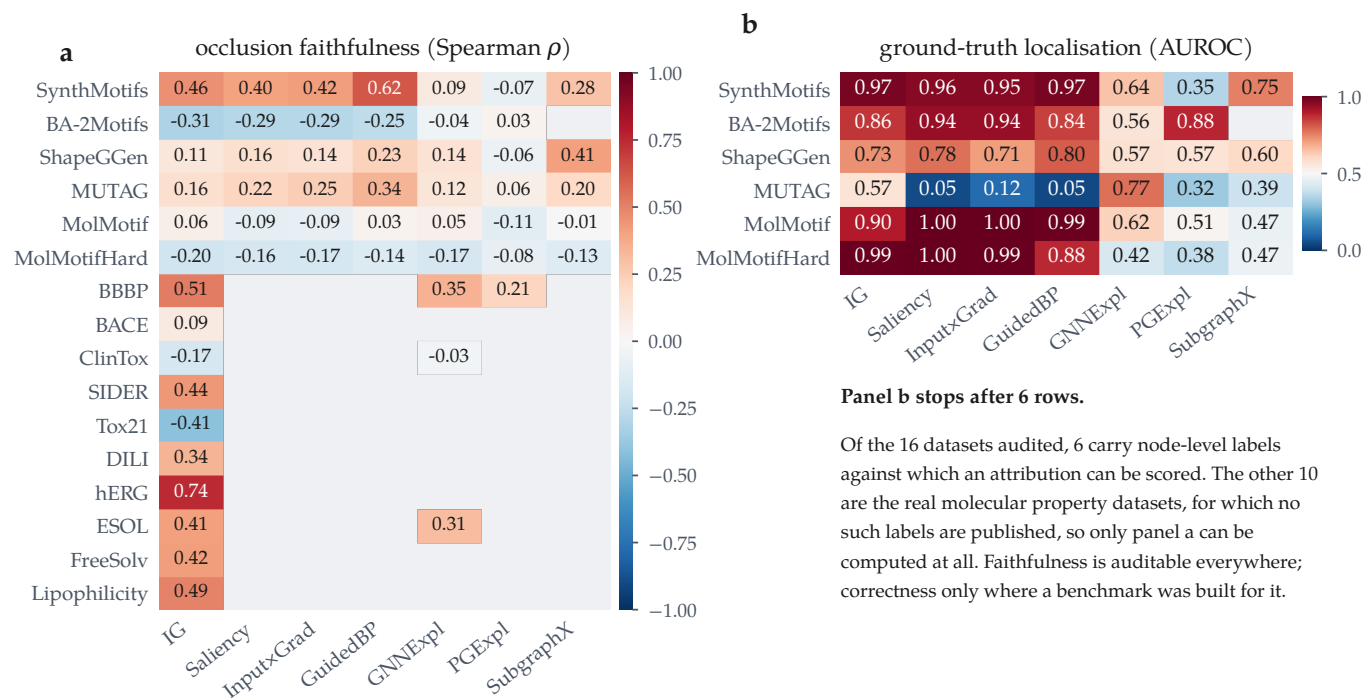

**Figure 5: Reliability is a property of the (attributor, dataset) pair, not of the attributor.** All committed GINE cells at the scaffold split. (a) Occlusion faithfulness over every audited dataset; blue = anti-faithful. (b) Ground-truth localisation, which exists only for the arms built to have it. Panel b is short because correctness is unmeasurable elsewhere, not because it scores badly there: no real molecular property dataset in the sweep publishes per-atom labels. Blank cells were not audited.

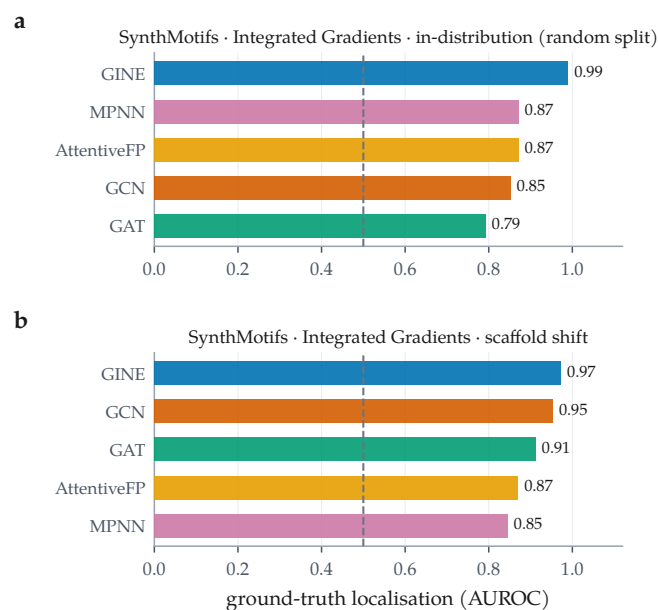

**Figure 6: The backbone ordering does not survive the change of split.** Integrated Gradients held fixed; ground-truth localisation across the 5 backbones on SynthMotifs, in distribution (a) and under scaffold shift (b). Dashed line is chance. Spearman correlation between the two orderings is 0.100 over 5 backbones.

**The shift itself does not lower faithfulness.** It would be tidy if scaffold shift simply made attributions less faithful. It does not. Across the 93 cells this run au-

dited on both splits, occlusion faithfulness falls under the scaffold split in 36 of them, roughly half, with a median change of 0.077 (Figure 8b). We reported the opposite trend in an earlier, partial version of this matrix; with the grid complete it does not hold. Ground-truth localisation is equally unmoved across the split (0.660 to 0.658,  $p = 0.539$ ). Both levels survive the shift; what neither level reveals is that they were never coupled to begin with (§5.2), which is why a faithfulness metric gives no warning that anything is wrong in either regime.

#### 5.4 Does the model actually read the rationale?

The standing objection to every result above is Faber et al.’s [14]: scoring an attribution against a labelled substructure is misleading if the trained model does not use that substructure, in which case a low GT AUROC is a fact about the model rather than about the explanation. The objection is correct, and it is testable rather than merely arguable. For each molecule we occlude the ground-truth substructure and record whether the prediction collapses; if it does, the model demonstrably reads that substructure, and its attribution can be judged against it on the model’s own behaviour.

The objection applies to more molecules than it does not. 8,085 of the audited molecules carry a rationale the model does not rely on, against 7,524 that it does, and the split is visible in the scores: mean GT AUROC is 0.781



where the model reads the rationale and 0.719 where it does not. A framework that ignored this distinction would be scoring the model under the guise of scoring the explanation, on roughly three molecules in five.


The number that settles it is what remains. Among the 7,524 molecules whose prediction demonstrably depends on the labelled substructure, 1,395 — a fraction of 0.185 — receive an attribution *anti-aligned* with it: the substructure the model provably uses is ranked among the atoms the attribution deems least relevant. On those molecules no appeal to an alternative rationale is available. The attribution misdescribes a model by that model’s own behaviour, and faithfulness metrics computed on the same molecules do not flag it. We therefore treat the Faber objection as a partition to report rather than a defeater: it removes a majority of molecules from the correctness argument, and what survives it is still a large, unambiguous population of wrong explanations.

### 5.5 What to do when there is no ground truth

Every result above depends on rationale labels, which is exactly what a working medicinal chemist does not have. If the audit only says “your attributions may be wrong and you cannot check”, it has diagnosed a problem and left the reader where it found them. The weaker but usable question is not *which attributor should I trust* but *on which molecules should I decline to trust this one* — a selective-prediction framing, transplanted from prediction to explanation. We rank 5 candidate signals, all computable at inference time without any labels, by the gain in mean ground-truth localisation between full coverage and half coverage (Figure 7).

The best is occlusion faithfulness (+0.056 over 15,201 molecules with ground truth). Ranking by it and keeping the most confident fraction. We state the rule against the below-chance share rather than the mean deliberately: pooled mean localisation is already tolerable at full coverage, so a rule stated against it would look successful while leaving the failures untouched. The tail is what a deployment gets hurt by, and the tail is what this moves.

The ranking’s negative result is as useful as its positive one. 1 of the 5 signals has *negative* lift: motif top-1 share (−0.082). Abstaining on molecules whose attribution mass is spread across many motifs — keeping those that concentrate on a single chemically coherent one — makes the retained set *worse*. That is the intuition a chemist is most likely to apply by eye, and on this data it is anti-predictive. An audit that reported only the working signal would have left that trap in place.

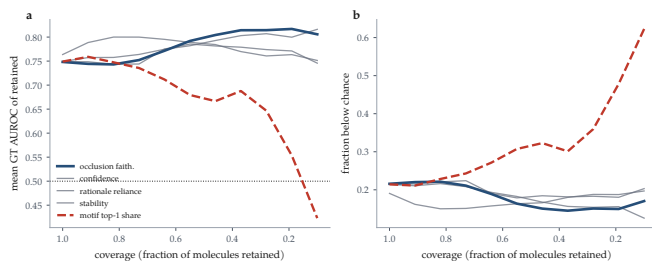

**Figure 7: Coverage-reliability curves for abstention signals, over the 15,201 audited molecules that carry ground truth.** Every signal is computable at inference time without rationale labels. Moving left to right is abstaining on more molecules. (a) Mean ground-truth localisation of the retained set; the dotted line is chance. (b) The fraction of the retained set whose attribution is *below* chance — the quantity a deployment is hurt by, and the one the pooled mean in (a) hides. The best signal (occlusion faithfulness) is highlighted; motif top-1 share is dashed because its lift is negative, so abstaining by it makes the retained set worse.


**What this rule does not license.** These curves are fitted where ground truth exists. Applying them to a dataset where it does not assumes the signal-reliability relationship transfers, and the central finding of this paper is that one such relationship — faithfulness to correctness — does not survive a change of split. We therefore offer the rule as a calibrated starting point that a group can re-fit on its own labelled subset, not as a constant of nature. Stating that constraint is not hedging: it is the same standard we hold the faithfulness metrics to.

### 5.6 Where attributions fail: regimes and calibration


With per-molecule records available, two audit axes that previous drafts could only define are now measurable (Figure 9).

**Regime stratification.** Pooling the 31785 audited molecules by regime gives the audit’s most directly actionable result. Ground-truth localisation is highest on confident-correct molecules (0.769,  $n = 10722$ ), drops to 0.706 on borderline ones ( $n = 4612$ ), and is lowest, at 0.681, on *confident-error* molecules ( $n = 275$ ). It stays above chance throughout, so the attribution does not invert wholesale; it degrades exactly where a deployment can least afford it, in the regime where an explanation is most likely to be believed.

The two cheap proxies both point the wrong way there. Occlusion faithfulness on confident-error molecules is 0.325, markedly *better* than the 0.142 of confident-correct ones, and cross-checkpoint stability is 0.802 against 0.750 — also no worse. A practitioner screening explanations by faithfulness or stability would rank the least correct group at or above the most correct one. The confident-error estimate rests on 275 molecules and is reported

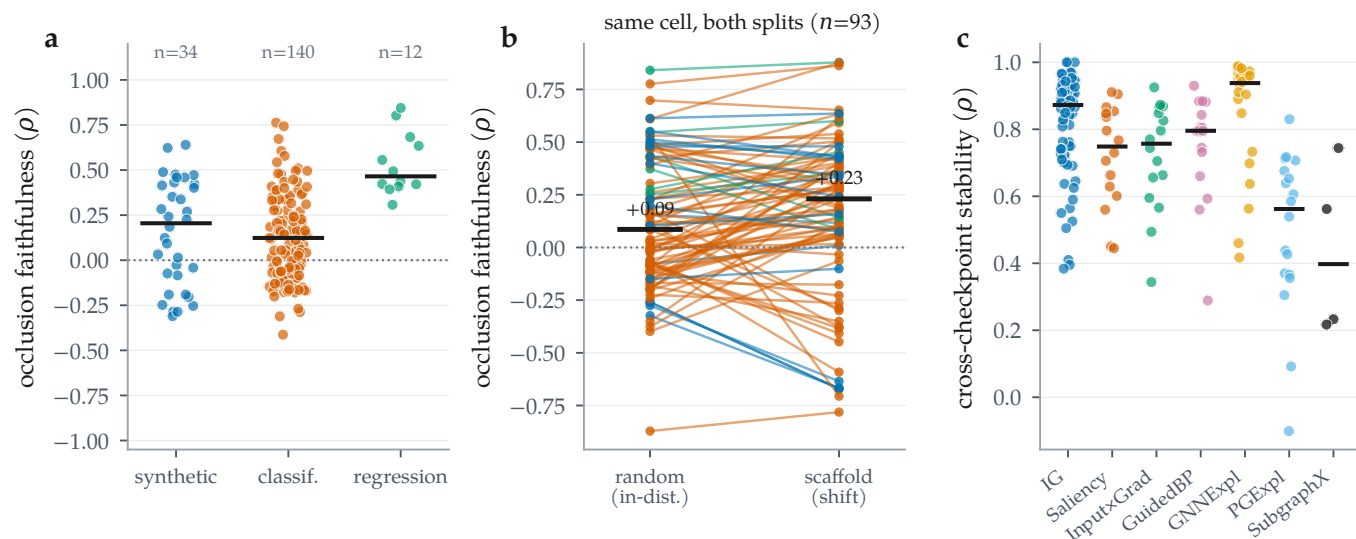

**Figure 8: Distributions across all audited combinations.** (a) Occlusion faithfulness by dataset regime; bars are medians. (b) The same cell on both splits, joined: faithfulness falls under the scaffold split in only 36 of 93 cells (median change 0.077), so shift does not systematically reduce faithfulness. (c) Cross-checkpoint stability by attributor; the mask-learning methods are not uniformly more stable than the gradient ones.

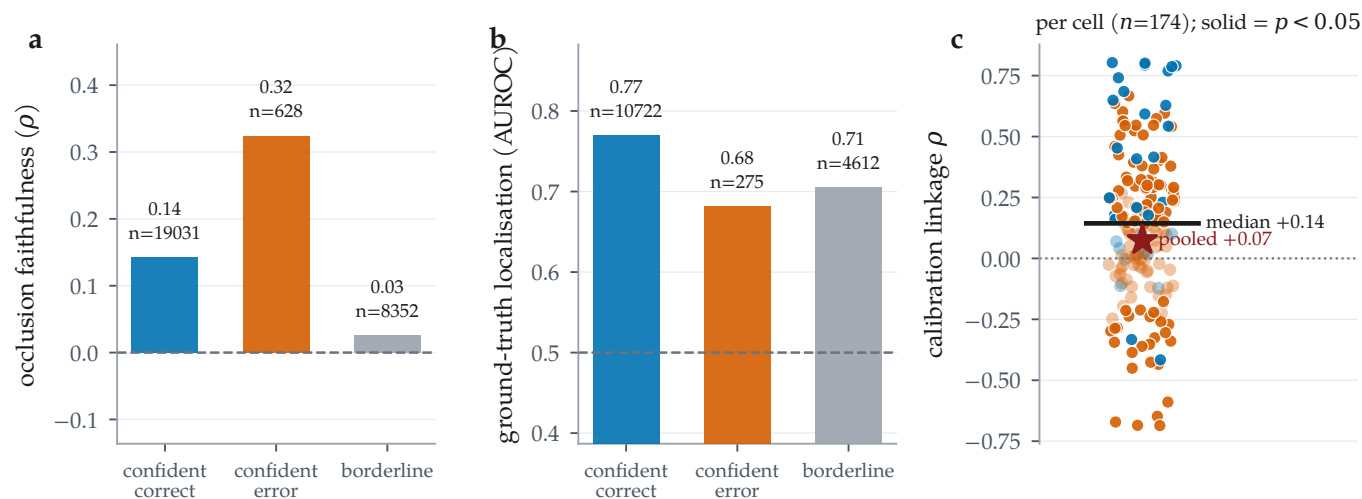

**Figure 9: Regime stratification and calibration linkage, over the 31785 per-molecule audit records.** (a) Occlusion faithfulness and (b) ground-truth localisation by confidence/correctness regime;  $n$  is printed per bar because ground truth exists for only a minority of molecules. Localisation on confident-error molecules degrades (0.769 to 0.681,  $n = 275$ ) while occlusion faithfulness on the same molecules improves (0.142 to 0.325). (c) Calibration linkage computed per cell (solid =  $p < 0.05$ ): the median cell is clearly positive, but pooling all molecules into one correlation attenuates it to near zero, a Simpson’s paradox and a caution against reporting the pooled number.

with that  $n$  throughout; it is suggestive rather than precise.

**Calibration linkage.** The framework’s hypothesis is that better-calibrated predictions carry more trustworthy attributions. Computed per cell it is supported on balance (median  $\rho = 0.144$  across 174 classification cells, 85 significantly positive against 29 significantly negative), but the effect is cell-specific rather than universal. Pooling every molecule into a single correlation instead yields 0.074, roughly a quarter of the per-cell

median and indistinguishable from no relationship at all. The pooled number is an artefact of mixing cells with different confidence distributions, and we report it only to warn against it: an evaluation that reports one aggregate correlation would conclude the linkage does not exist, when per cell it does.

## 5.7 Cross-task reliability

Tables 3, 9 and 10 give every audited combination on a real molecular dataset. Three cross-task patterns hold,

and one apparent pattern turns out to be an artefact.

**A mis-specified regression operator, found and corrected.** An earlier sweep reported negative occlusion faithfulness on most of the 12 regression combinations, on cells whose predictive performance was well behaved ( $R^2$  from 0.747 to 0.867 on ESOL). We did not interpret that pattern, and on inspection it was an artefact of our own operator rather than a property of the attributions. The operator compared two different quantities: the attribution was clipped at zero, keeping only atoms that push the prediction *up*, while the occlusion effect kept its sign. A motif driving a solubility prediction strongly down therefore scored as unimportant on the attribution side and dominant on the occlusion side, which is sufficient on its own to produce a systematic negative correlation.

The corrected operator ranks by magnitude on both sides, reports the GraphFramEx characterisation score as undefined rather than clipping a standard-deviation-space shift into  $[0, 1]$ , and adds a bounded statistic giving the share of the total occlusion effect carried by the salient atoms. The sweep reported here uses it, and the pathology is gone: 0 of the 12 regression cells now show negative occlusion faithfulness, with median 0.465. We report the original error alongside the correction because a systematic negative result that turns out to be an artefact of the measuring instrument is the failure mode this whole paper is about, and we were not exempt from it.

**Coherence is high nearly everywhere, and says little.** Motif top-1 share lies between 0.060 and 1.000 across the 152 molecular cells, with 91 of them inside a narrow 0.6–0.9 band, largely independent of whether the same cell is faithful or anti-faithful. Concentration on a single motif is easy to achieve and, on this evidence, close to uninformative about reliability. It belongs in the audit as a descriptive statistic, not as a quality score.

**Stability is high but not uniform.** Median cross-checkpoint stability over 176 cells is 0.829, with a minimum of  $-0.101$ , a cell whose early and final attributions are essentially uncorrelated. By attributor, GNNExplainer is the most stable (median 0.938) and Integrated Gradients sits at 0.873 over 84 cells; the per-attributor counts are very unequal in this run, so these medians are descriptive rather than a controlled comparison.

Table 4 gives the paired attributor contrasts behind Section A fidelity-only ranking picks the wrong attributor, in both regimes, computed from the per-molecule records.

## 5.8 Negative and degenerate results

We record what did not work alongside what did.

**Ground truth that was not being read.** BA-2Motifs is a synthetic benchmark whose whole purpose is to carry exact node labels. It trains in this run and produces  $2 \times 100$  audited molecules, but both its cells sit in the no-ground-truth block, because the loader found no node labels to read. The cause was ours rather than the dataset’s: PyG’s BA2MotifDataset exposes only node features, an edge index and a graph-level label, and our extractor looked for a per-node field that is never populated. The labels are recoverable from the released node ordering, in which the injected motif is appended after the Barabási–Albert base. That recovery is now implemented and verified structurally, by requiring the induced subgraph on those nodes to be a house or a five-cycle before the mask is used, and cross-checked against a generator that produces the same construction with independent labels. It is refused rather than guessed when the check fails, so a reordered loader degrades to the behaviour reported here rather than inventing a mask. The recovery is in the sweep reported here: BA-2Motifs carries node-level ground truth throughout and appears in Table 6 as a ground-truth arm. It is not a molecular one, so it takes no part in the shift contrast for the same reason SynthMotifs and ShapeGGen do not, but the correctness axis is now measured on it rather than reported as missing.

**The best model has the worst attributions.** The highest-AUC molecular classification cell in the run is Benzene · GINE under the scaffold split, at accuracy 0.925, ROC-AUC 1.000 and ECE 0.048, so accurate and well calibrated. Its attributions are the most *anti*-faithful of any molecular cell in the matrix ( $\rho = 0.270$ ): Integrated Gradients ranks the motifs of these molecules in close to the reverse of their causal order. Predictive quality, calibration and explanation reliability are three different axes.

**A weak model can be faithfully explained.** The converse also appears. The most faithful molecular cell is MUTAG · GCN ( $\rho = 0.763$ ) on a model with accuracy 0.799 and ROC-AUC 0.894, barely better than chance. Faithfulness certifies that the explanation describes the model; it says nothing about whether the model is worth describing. Any reliability report that omits the predictive metrics can be satisfied by this cell.

**Accuracy is the wrong headline on imbalanced sets.** 37 committed rows report test accuracy  $\geq 0.95$ , with ROC-AUC as low as 0.981. On Tox21, accuracy runs 0.940–0.942 against AUC 0.745–0.820. We report AUC

alongside accuracy throughout for this reason, and the lowest-AUC cell in the run (ShapeGGen · GINE, AUC 0.552 at accuracy 0.580) is exactly the case where accuracy alone would mislead.

**Two arms that removed our own headline result.** We added **Benzene** and **FluorideCarbonyl**, the Sanchez-Lengeling et al. [9] attribution tasks as repackaged by GraphXAI [10], precisely because they are molecular, exactly labelled, and *not constructed by us* — the corroboration a three-arm analysis lacked. They cost us the result they were added to corroborate, and that is the finding.

Restricted to the 3 arms available before, the pooled faithfulness–correctness correlation over 33 cells runs from +0.009 in distribution ( $p = 0.962$ ) to  $-0.356$  under scaffold shift ( $p = 0.042$ ): a significant collapse, and the result this work previously reported.<sup>1</sup> Adding the two new arms takes the same computation over 47 cells to  $-0.124$  at  $p = 0.405$ . The effect did not shrink; it stopped having a direction. Benzene and FluorideCarbonyl both come out *positive* under shift, which is the sign the 3-arm story did not predict, and neither is an arm we designed or labelled.

The exclusion had a legitimate reason for exactly one sweep. Our loader first read the graphs out of the published archives without carrying the SMILES they also contain, so a Bemis–Murcko scaffold was undefined for every molecule and all six of their scaffold splits came back degenerate — a deterministic partition, not a chemical regime — and pooling them then would have been the precise error this paper is about. The audit’s own splitter flagged it. Once the loader was fixed and the splits were real, the arms went into the pool whatever they did to it: an exclusion criterion that survives the expiry of its justification is a criterion applied to the result rather than to the data. We record the sequence here because a reader who finds the earlier version has a right to know which analysis superseded which, and why.

**Blocked, re-examined, and now populated.** An earlier run recorded SubgraphX (via DIG) and ShapeGGen (via GraphXAI) as uninstallable, on the grounds that they need the compiled `torch_sparse/torch_scatter` extensions for which no wheel exists at the pinned torch version. That diagnosis was wrong in both cases: the extensions build from source, DIG then installs, and GraphXAI installs from a source checkout rather than a release. Both are integrated in the sweep reported here. SubgraphX contributes a full attributor column on every

ground-truth arm and ShapeGGen contributes its own cells, so neither is a gap in the tables any more.

We keep the record of the wrong diagnosis because it cost real coverage for two sweeps, and because a dependency declared impossible is rarely re-examined once it is written down. The instructive part is that nothing about the environment changed between the two judgments — only how hard we looked.

Two limitations survive the fix rather than being resolved by it. SubgraphX is two to three orders of magnitude more expensive per molecule than the gradient family, which is a selection pressure on which attributors get benchmarked at all and which we discuss in §7. ShapeGGen is a node-classification benchmark on a single large graph, whereas every axis of this audit is defined per molecule at the graph level; it enters the audit as a graph-level task by construction, and its scaffold split is degenerate for the same reason the other non-molecular arms’ are.

## ■ 6 Discussion

**What the audit buys.** The single most useful thing MolSanity produces is not a score but a *negative certificate*. For 44 of the 186 committed rows, covering every real molecular dataset in the sweep, attribution correctness cannot be measured at all, because no per-atom explanation labels exist. Those cells can be audited for faithfulness, coherence, stability and calibration, and this paper’s central result is that none of those is a reliable stand-in for correctness in either regime. Making that gap explicit is more useful than filling it with a metric that looks like correctness and is not.

**How attributions should be reported.** Four practices follow directly from the matrix. (i) Report the cell, not the attributor: on the 5 families where we can check, the same protocol gives per-arm faithfulness–correctness correlations from  $-0.564$  to  $+0.786$  under shift, so “method X is reliable” is not a claim the evidence supports at the level of a method. (ii) Report the backbone: the backbone ordering does not survive the change of split ( $\rho = 0.100$ ), so “IG on a GNN” is under-specified. (iii) Report the predictive metrics next to the explanation metrics, because the accurate, well-calibrated Benzene · GINE cell has the most anti-faithful attributions in the matrix. (iv) Do not pool: the calibration-linkage correlation changes sign between the per-cell and the pooled analysis.

**Why reliability is regime-, backbone- and dataset-dependent.** A faithfulness metric asks about the model; a ground-truth metric asks about the chemistry; they

<sup>1</sup>Both figures are recomputed here from the artefacts of the single run described in §9, by restricting the arm set, rather than quoted from the earlier analysis; the two differ only in which arms enter, not in which cells were run.



agree only when the model has learned the chemistry. That coincidence is engineered into synthetic benchmarks and is not guaranteed on molecular data, particularly out of distribution, which is the situation Faber et al. [14] identify as making ground-truth comparison hazardous in general. Attribution evaluation inherits the model’s inductive limitations, so the correct object of study is the cell, (dataset, backbone, attributor, split), and not the attributor alone.

## ■ 7 Limitations and threats to validity

**Ground truth is scarce, and each arm of it is compromised differently.** 5 molecular arms carry the argument, at 7 – 11 paired cells each. None is unimpeachable, and they fail in different directions, which is part of why the per-arm coefficients disagree so sharply.

MUTAG uses a chemically motivated nitro/aromatic-nitro SMARTS proxy rather than annotator labels: it encodes an assumption about which substructure ought to matter, and the trained model may use a different, equally valid rationale [14]. We answer that objection empirically rather than by assertion (§5.4), but it remains a proxy, at  $n = 53$  audited molecules per arm — the smallest of the 5. MolMotif and MolMotifHard are molecular *and* exactly labelled by construction, since the label is presence of a substructure, but their attributor rankings are *bimodal*: under shift 4 of 7 on MolMotif and 3 on MolMotifHard sit above GT AUROC 0.9 within a few hundredths of one another, so a 7-point rank correlation on either arm is carried by a handful of comparisons among effectively tied methods. We built MolMotifHard to widen that range and it does, but not enough to make either arm decisive alone. Benzene and FluorideCarbonyl are the only arms we neither designed nor labelled, which is why we weight them heavily, but they are binary substructure-detection tasks too, and a rationale that is a single functional group is an easier localisation problem than the multi-centre rationales that carry most real ADMET endpoints.

The arms that might have corroborated further cannot. SynthMotifs, BA-2Motifs and ShapeGGen have exact node labels but are not molecules, so a Bemis–Murcko scaffold is undefined for them: our splitter reports every graph in its own scaffold bucket, which makes their “scaffold” split an arbitrary deterministic partition rather than a chemical shift, and we exclude them from the contrast rather than let a degenerate partition stand in for one. No public dataset is simultaneously molecular, exactly labelled and *graded* in difficulty; constructing one is the clearest next step for this line of work. Until it exists, the honest reading of the pooled estimate is

that it is uninformative, and the per-cell values are the reportable quantity.

**A dataset that was not scored, and now is.** For two sweeps BA-2Motifs contributed faithfulness only, appearing in the no-ground-truth block despite being a synthetic benchmark designed to carry exact labels, because our extractor did not read the ordering those labels are encoded in. The recovery is in this sweep and BA-2Motifs is scored on the correctness axis throughout. We leave the episode in the record because the failure was silent: a dataset whose entire purpose is exact ground truth sat in the *no-ground-truth* block for two runs without anything flagging the contradiction.

**Three seeds, one split rule, and one exception.** Each cell is run at 3 seeds, and every figure in the results matrix and in the pooled analysis is an across-seed mean. The selection tests (§5.2, Table 5, Figure 4) are the exception, and it is a consequence of the design rather than an oversight: the split is a function of the seed, so different seeds audit different molecules, and a *paired* per-molecule test requires the same molecules on both sides. Those tests are therefore computed within a single seed’s records. The point estimates they report are correspondingly noisier than the matrix rows: on the MUTAG shift arm the ground-truth-best attributor scores 0.826 in the audited seed against an across-seed mean of  $0.774 \pm 0.086$ . The ordering is the same and the mismatch conclusion does not depend on the seed, but the number does, and we report both rather than only the one that supports the claim more comfortably. The full per-cell across-seed spread is published as supplementary material. What is *not* varied is the split rule itself: each regime is one deterministic partition, so no interval here covers the variance of choosing a different scaffold-split implementation or ratio. Per-cell molecule counts are also modest where the dataset is small —  $n = 53$  on the MUTAG scaffold fold, which is the entire held-out set rather than a sample from it — so individual contrasts remain underpowered even at 3 seeds, which is why the central claim is made on the pooled estimate rather than on any single cell.

**Occlusion as a counterfactual.** Zeroing node features takes the graph off the data manifold; a motif whose removal barely moves the output may be redundant rather than unimportant. It bears most visibly on the regression cells, whose output-space Fidelity $\pm$  values are shifts in units of the training target’s standard deviation and so leave the  $[-1, 1]$  a probability-space fidelity occupies; they are comparable within a column and not across tasks.

**Proxy ground truth.** MUTAG’s mask is a nitro/aromatic-nitro SMARTS proxy, not annotator labels. It encodes an assumption about which substructure ought to matter, and the trained model may use a different, equally valid rationale [14].

**Coverage of attributors.** The search family is represented by SubgraphX on the ground-truth arms only, because its cost per molecule is far above a gradient attributor’s (§9). Conclusions that pool over the whole matrix therefore weight the gradient family more heavily than a cost-blind design would, and any claim about search-based attribution outside the ground-truth arms is unsupported here. This is a real coverage limit, and it is the same selection pressure — expensive attributors get benchmarked less — that the audit is meant to make visible rather than inherit silently.

**Multiplicity.** The selection tests carry Benjamini-Hochberg adjusted  $q$  values over the family of 30 tests, and the attributor contrasts carry them over the family within each cell block, so the headline mismatches are false-discovery-rate controlled rather than descriptive. What the adjustment cannot repair is power: at  $n = 53$  molecules per arm a contrast that fails to reach significance is weak evidence of no difference, not evidence of none.

## ■ 8 Conclusion

Molecular GNN attributions are audited today for whether they describe the model. Across the committed audit matrix we find that this is not the same question as whether they describe the chemistry, and that answering the first tells you very little about the second. On the 5 cell families where node-level ground truth, 7 attributors and both splits coexist, a faithfulness-only ranking selects an attributor other than the ground-truth-best one in 26 of 30 tests, in distribution as readily as under scaffold shift, at a cost ranging from 0.002 to 0.821 AUROC. MolSanity’s own faithfulness metric is no exception, and we do not offer it as a better selector. What the audit supports is a negative and a shape: there is no dependable faithfulness–correctness relationship to lean on (0.222 and  $-0.124$  pooled over 47 cells, neither significant, with per-arm values under shift from  $-0.564$  to  $+0.786$ ), and reliability is a property of the individual cell rather than of the attributor, the backbone or the regime. For the 44 molecular rows in the matrix, correctness cannot be measured at all with the labels the field currently has, which is the gap that most needs closing. The audit is what makes those failures visible; the pipeline, the figures and every number here

regenerate from the committed artifacts as the grid fills in.

## ■ 9 Reproducibility and compute

**What is pinned.** Every result in this paper comes from one invocation of `full.yaml` at git revision `aad466a`, seeds 0, 1, 2, on Python 3.12.13 with torch 2.11.0+cu128, PyTorch Geometric 2.8.0.post1, RDKit 2026.03.5, CapTum 0.9.0, NumPy 2.0.2 and scikit-learn 1.6.1. The run manifest records all of these, the seed, the platform string and the CUDA device count (1 device visible), and is committed alongside the results. Seeds are set for Python, NumPy and torch before every stage; splits are deterministic functions of the dataset and seed, not of iteration order.

**How to reproduce.** The sweep is a single unattended entry point, `python -m molsanity.run_all --config configs/full.yaml`, with a minutes-long `configs/smoke.yaml` for a smoke test; neither prompts for input. `make -C paper` then regenerates every figure, table and quoted statistic in this manuscript from the results directory and fails the build if the prose quotes a macro the current results do not define. Datasets download on first use and are checksummed against the committed manifest. No step requires credentials, and the credential-gated resources named in Section [Experimental setup](#) are out of scope and were never accessed.

**Resumability and caching.** Each cell-run writes a marker keyed to a content hash of its own configuration — cell, split, budget, model, training schedule and seed — so re-invoking the sweep re-executes exactly the cells whose configuration changed and reuses the rest. The hash is also what makes a correction auditable: when we found and fixed a defect in the scaffold split (§5.8), bumping a split-version field in the hash invalidated the affected cells and left the random-split cells untouched, and the re-run changed 0 of the random rows. Trained checkpoints are content-addressed on the same principle and, since the fix, on a digest of the realised train/val/test partition rather than on the split’s name, so a checkpoint cannot silently outlive the partition it was trained for.

**Device policy.** Training uses the GPU; the attribution loop is CPU-only, because the worker pool forks and a CUDA context does not survive `fork`. This is a deliberate constraint, and it has a reproducibility consequence worth stating: we verified that Integrated Gradients, Saliency, Guided Backpropagation and Input×Gradient are bit-identical on GPU and CPU, whereas GNNExplainer moves by 0.003–0.012 because it fits a mask with

Adam over  $\sim 100$  steps. A reader reproducing on a GPU should expect to match GNNExplainer to two decimals, not more. We also verified that the parallel audit loop reproduces the serial one field-by-field over complete per-molecule records, so cores may be traded for wall time freely.

One defect here was real and is worth recording. DIG’s SubgraphX draws from `np.random`, which `torch.manual_seed` never resets, so its output depended on how many molecules had been attributed before it — results that changed if a run resumed at a different point. Seeding per molecule from (run seed, graph id) makes each attribution a function of the molecule alone, which is both order-independent and resume-safe.

**Cost.** The committed log covers one invocation, 2026-08-05 19:14 to 2026-08-06 09:17: 14.1 hours of wall clock over 558 cell-runs, of which 224 were executed and 334 served from cache. Because the sweep resumed onto a partly populated cache, that figure is *not* what a cold run costs, and we do not present it as one.

For a reader starting from an empty cache we give an estimate rather than a measurement, and label it as such: pricing every one of the 558 planned cell-runs at the median observed in this log for its own attributor gives roughly 32 hours on a single GPU. The audit is embarrassingly parallel across cells and resumable at cell granularity, so that is a serial upper bound rather than a required sitting.

The per-unit costs are what generalise. Median training time for a (dataset, backbone, split, seed) checkpoint is 26 s; training is negligible next to attribution. Attribution cost is concentrated rather than spread: the median SubgraphX cell-run takes 22 minutes against 2 for Integrated Gradients, a factor of 11 at equal sample size, and the 15 SubgraphX cell-runs alone account for 55% of the 14.0 hours of attribution compute in this log.

We report that ratio as a finding rather than as house-keeping. Compute cost is a selection pressure on which attributors get benchmarked at all, and it pushes the literature toward cheap ones; a benchmark that silently caps the expensive attributor’s  $n$  to fit a budget buys its coverage with exactly the small-sample weakness the field criticises. Our own first instinct was to do that. We kept SubgraphX at the full per-cell sample and reduced the number of cells instead, which makes the coverage limit explicit (§7) rather than hiding it inside a confidence interval.

## ■ 10 Acknowledgements

This work was carried out at La Trobe University. It builds directly on open-source software and released benchmarks: PyTorch Geometric [19], Captum [18], RD-Kit [20], DIG [12] and GraphXAI [10], and the MUTAG [30], MoleculeNet [28] and Therapeutics Data Commons [29] collections. MolSanity wraps the canonical implementations of the attribution methods it audits rather than reimplementing them, and would not be possible without the authors of those packages releasing them openly. Compute for the reported sweep was provided by Google Colab.

**Generative AI disclosure.** An AI coding assistant was used during software development and manuscript preparation. It was not used to generate, select or interpret results: every number, figure and table is computed by the released code from the committed artifacts (§9). The authors designed the study, verified the analyses and take full responsibility for the content.

## ■ 11 Data and code availability

All code, configurations, trained checkpoints, per-combination results, per-molecule audit records and the run manifest (seed, library versions, hardware, and the per-combination outcome ledger) are available at <https://github.com/Kar488/molsanity>, released under the MIT licence. The repository is the source of record for this manuscript; it carries CITATION.cff and .zenodo.json so that a versioned archive with a DOI, including the trained weights, is generated from a tagged release and deposited to accompany the journal version.

The supplementary material is the pipeline’s own generated reports, copied unchanged from that repository: the per-cell across-seed variance register, the selection experiment as the pipeline emitted it, the head-to-head benchmark including the framework metrics, and the rationale-use and abstention analyses. It carries generated reports only; the repository’s working documents are current for the build rather than written for a reader, and this paper’s limitations are stated in §7.

Every figure and table in this paper is generated from those artifacts by `paper/figs/make_figures.py` and `paper/figs/make_tables.py`, which read the released results directly; no value in this manuscript is transcribed by hand. Re-running them after a new sweep updates every number, figure and table in place. Dataset licences and provenance are recorded in the repository’s dataset manifest; the credential-gated resources referenced in Section [Experimental setup](#) are out of scope and were never accessed.

**Table 4: Paired attributor comparisons on shared molecules,** computed from the committed per-molecule records (Wilcoxon signed-rank on per-molecule occlusion faithfulness,  $\Delta = A - B$ ). Same cell family as Table 5.  $p$  is the raw two-sided Wilcoxon value and  $q$  its Benjamini-Hochberg adjustment, controlling the false discovery rate over the contrasts within each cell block, which is the family a reader compares across.

| A vs. B                            | $n$ | median $\Delta$ | $p$    | $q$    |
|------------------------------------|-----|-----------------|--------|--------|
| <i>MUTAG, GINE, random split</i>   |     |                 |        |        |
| IG vs. Saliency                    | 58  | 0.000           | 0.885  | 0.885  |
| IG vs. Input×Grad                  | 58  | 0.000           | 0.862  | 0.885  |
| IG vs. GuidedBP                    | 58  | 0.000           | 0.046  | 0.108  |
| IG vs. GNNExpl.                    | 58  | 0.000           | 0.704  | 0.861  |
| IG vs. PGExpl.                     | 57  | 0.149           | 0.006  | 0.019  |
| IG vs. SubgraphX                   | 57  | 0.000           | 0.692  | 0.861  |
| Saliency vs. Input×Grad            | 58  | 0.000           | 0.779  | 0.861  |
| Saliency vs. GuidedBP              | 58  | 0.000           | 0.005  | 0.018  |
| Saliency vs. GNNExpl.              | 58  | 0.000           | 0.597  | 0.861  |
| Saliency vs. PGExpl.               | 57  | 0.193           | <0.001 | 0.001  |
| Saliency vs. SubgraphX             | 57  | 0.000           | 0.689  | 0.861  |
| Input×Grad vs. GuidedBP            | 58  | 0.000           | 0.005  | 0.018  |
| Input×Grad vs. GNNExpl.            | 58  | 0.000           | 0.608  | 0.861  |
| Input×Grad vs. PGExpl.             | 57  | 0.213           | <0.001 | 0.001  |
| Input×Grad vs. SubgraphX           | 57  | −0.015          | 0.711  | 0.861  |
| GuidedBP vs. GNNExpl.              | 58  | 0.046           | 0.148  | 0.294  |
| GuidedBP vs. PGExpl.               | 57  | 0.316           | <0.001 | <0.001 |
| GuidedBP vs. SubgraphX             | 57  | 0.028           | 0.154  | 0.294  |
| GNNExpl. vs. PGExpl.               | 57  | 0.070           | 0.007  | 0.019  |
| GNNExpl. vs. SubgraphX             | 57  | 0.000           | 0.774  | 0.861  |
| PGExpl. vs. SubgraphX              | 56  | −0.167          | <0.001 | 0.001  |
| <i>MUTAG, GINE, scaffold split</i> |     |                 |        |        |
| IG vs. Saliency                    | 53  | 0.000           | 0.098  | 0.158  |
| IG vs. Input×Grad                  | 53  | −0.200          | 0.002  | 0.005  |
| IG vs. GuidedBP                    | 53  | −0.357          | <0.001 | <0.001 |
| IG vs. GNNExpl.                    | 53  | 0.000           | 0.276  | 0.369  |
| IG vs. PGExpl.                     | 52  | 0.000           | 0.525  | 0.613  |
| IG vs. SubgraphX                   | 53  | 0.000           | 0.355  | 0.438  |
| Saliency vs. Input×Grad            | 53  | 0.000           | 0.029  | 0.060  |
| Saliency vs. GuidedBP              | 53  | −0.107          | <0.001 | <0.001 |
| Saliency vs. GNNExpl.              | 53  | 0.000           | 0.722  | 0.746  |
| Saliency vs. PGExpl.               | 52  | 0.081           | 0.044  | 0.085  |
| Saliency vs. SubgraphX             | 53  | 0.033           | 0.660  | 0.729  |
| Input×Grad vs. GuidedBP            | 53  | −0.058          | <0.001 | 0.001  |
| Input×Grad vs. GNNExpl.            | 53  | 0.017           | 0.019  | 0.044  |
| Input×Grad vs. PGExpl.             | 52  | 0.207           | <0.001 | 0.001  |
| Input×Grad vs. SubgraphX           | 53  | 0.023           | 0.137  | 0.206  |
| GuidedBP vs. GNNExpl.              | 53  | 0.200           | <0.001 | <0.001 |
| GuidedBP vs. PGExpl.               | 52  | 0.300           | <0.001 | <0.001 |
| GuidedBP vs. SubgraphX             | 53  | 0.200           | <0.001 | <0.001 |
| GNNExpl. vs. PGExpl.               | 52  | 0.081           | 0.082  | 0.144  |
| GNNExpl. vs. SubgraphX             | 53  | 0.000           | 0.746  | 0.746  |
| PGExpl. vs. SubgraphX              | 52  | 0.000           | 0.281  | 0.369  |



**Table 5: Does a faithfulness-only ranking pick the ground-truth-best attributor?** 5 molecular cell families, each audited on both splits with the same backbone and the same 7 attributors, so within a family only the split changes and the contrast isolates distribution shift rather than confounding it with a change of dataset. Each row ranks the attributors by one faithfulness/fidelity metric and asks whether its top choice is the one the ground truth ranks best.  $p$  is a paired Wilcoxon test on per-molecule GT AUROC between the selected and the ground-truth-best attributor, over the molecules both audited, and  $q$  its Benjamini–Hochberg adjustment over all 30 selection tests in this table. Because a paired per-molecule test needs the same molecules on both sides and the split is a function of the seed, this table is computed within a single seed rather than across the three; the across-seed spread for the same cells is supplementary material.

| cell                           | regime          | ranking metric   | its top pick | pick GT | GT-best    | GT-best | mismatch | Wilcoxon $p$ | $q$    | $\rho(\text{faith}, \text{GT})$ |
|--------------------------------|-----------------|------------------|--------------|---------|------------|---------|----------|--------------|--------|---------------------------------|
| MUTAG-GINE, $n=58$             | in-distribution | occlusion $\rho$ | GuidedBP     | 0.037   | GNNExpl.   | 0.858   | yes      | <0.001       | <0.001 | 0.143                           |
|                                |                 | Fidelity+        | IG           | 0.496   | GNNExpl.   | 0.858   | yes      | <0.001       | <0.001 | −0.357                          |
|                                |                 | characterisation | SubgraphX    | 0.348   | GNNExpl.   | 0.858   | yes      | <0.001       | <0.001 | 0.821                           |
| MUTAG-GINE, $n=53$             | scaffold shift  | occlusion $\rho$ | GuidedBP     | 0.013   | GNNExpl.   | 0.826   | yes      | <0.001       | <0.001 | −0.643                          |
|                                |                 | Fidelity+        | SubgraphX    | 0.330   | GNNExpl.   | 0.826   | yes      | <0.001       | <0.001 | −0.321                          |
|                                |                 | characterisation | SubgraphX    | 0.330   | GNNExpl.   | 0.826   | yes      | <0.001       | <0.001 | 0.036                           |
| MolMotifHard-GINE, $n=200$     | in-distribution | occlusion $\rho$ | SubgraphX    | 0.421   | Saliency   | 0.994   | yes      | <0.001       | <0.001 | −0.286                          |
|                                |                 | Fidelity+        | SubgraphX    | 0.421   | Saliency   | 0.994   | yes      | <0.001       | <0.001 | 0.107                           |
|                                |                 | characterisation | SubgraphX    | 0.421   | Saliency   | 0.994   | yes      | <0.001       | <0.001 | −0.357                          |
| MolMotifHard-GINE, $n=200$     | scaffold shift  | occlusion $\rho$ | PGEExpl.     | 0.565   | IG         | 1.000   | yes      | <0.001       | <0.001 | −0.893                          |
|                                |                 | Fidelity+        | IG           | 1.000   | IG         | 1.000   | no       | —            | —      | 0.821                           |
|                                |                 | characterisation | IG           | 1.000   | IG         | 1.000   | no       | —            | —      | 0.857                           |
| MolMotif-GINE, $n=200$         | in-distribution | occlusion $\rho$ | GNNExpl.     | 0.630   | Input×Grad | 0.999   | yes      | <0.001       | <0.001 | −0.571                          |
|                                |                 | Fidelity+        | GuidedBP     | 0.998   | Input×Grad | 0.999   | yes      | 0.091        | 0.091  | 0.750                           |
|                                |                 | characterisation | SubgraphX    | 0.556   | Input×Grad | 0.999   | yes      | <0.001       | <0.001 | −0.107                          |
| MolMotif-GINE, $n=200$         | scaffold shift  | occlusion $\rho$ | IG           | 0.939   | Input×Grad | 0.998   | yes      | <0.001       | <0.001 | −0.071                          |
|                                |                 | Fidelity+        | IG           | 0.939   | Input×Grad | 0.998   | yes      | <0.001       | <0.001 | 0.036                           |
|                                |                 | characterisation | IG           | 0.939   | Input×Grad | 0.998   | yes      | <0.001       | <0.001 | 0.143                           |
| Benzene-GINE, $n=200$          | in-distribution | occlusion $\rho$ | GuidedBP     | 0.743   | Input×Grad | 1.000   | yes      | <0.001       | <0.001 | −0.054                          |
|                                |                 | Fidelity+        | SubgraphX    | 0.457   | Input×Grad | 1.000   | yes      | <0.001       | <0.001 | −0.432                          |
|                                |                 | characterisation | SubgraphX    | 0.457   | Input×Grad | 1.000   | yes      | <0.001       | <0.001 | 0.126                           |
| Benzene-GINE, $n=200$          | scaffold shift  | occlusion $\rho$ | GuidedBP     | 0.997   | IG         | 0.999   | yes      | 0.043        | 0.045  | 0.607                           |
|                                |                 | Fidelity+        | GuidedBP     | 0.997   | IG         | 0.999   | yes      | 0.043        | 0.045  | 0.893                           |
|                                |                 | characterisation | SubgraphX    | 0.770   | IG         | 0.999   | yes      | <0.001       | <0.001 | 0.571                           |
| FluorideCarbonyl-GINE, $n=200$ | in-distribution | occlusion $\rho$ | GuidedBP     | 0.881   | GuidedBP   | 0.881   | no       | —            | —      | 0.786                           |
|                                |                 | Fidelity+        | SubgraphX    | 0.538   | GuidedBP   | 0.881   | yes      | <0.001       | <0.001 | 0.000                           |
|                                |                 | characterisation | SubgraphX    | 0.538   | GuidedBP   | 0.881   | yes      | <0.001       | <0.001 | 0.250                           |
| FluorideCarbonyl-GINE, $n=200$ | scaffold shift  | occlusion $\rho$ | GuidedBP     | 0.937   | GuidedBP   | 0.937   | no       | —            | —      | 0.750                           |
|                                |                 | Fidelity+        | IG           | 0.833   | GuidedBP   | 0.937   | yes      | <0.001       | <0.001 | 0.893                           |
|                                |                 | characterisation | IG           | 0.833   | GuidedBP   | 0.937   | yes      | <0.001       | <0.001 | 0.893                           |

**Table 6: Every committed cell in which attribution *correctness* is measurable.** Ground truth is exact for the synthetic sets and for MolMotif/MolMotifHard (the label *is* the substructure), and a chemically motivated nitro-motif proxy for MUTAG. GT AUROC = 0.5 is chance; below 0.5 the attribution is anti-aligned with the true motif. Occlusion  $\rho$  is the attribution–occlusion rank agreement (higher = more faithful to the model). Every row was produced by the single run in Table 2; none are carried over from an earlier one. Bold marks the best GT AUROC and the best occlusion  $\rho$  within each dataset×split block (emphasis only; values are unaltered).

| dataset          | backbone | attributor | split    | <i>n</i> | acc   | AUC   | GT AUROC     | GT AUPRC | occ. $\rho$  | Fid+   | Fid−   | stab.  |
|------------------|----------|------------|----------|----------|-------|-------|--------------|----------|--------------|--------|--------|--------|
| BA-2Motifs       | GINE     | GNNEspl.   | random   | 200      | 0.767 | 1.000 | 0.511        | 0.308    | −0.027       | −0.001 | 0.019  | 0.951  |
| BA-2Motifs       | GINE     | GuidedBP   | random   | 200      | 0.767 | 1.000 | 0.945        | 0.901    | −0.248       | 0.039  | −0.006 | 0.745  |
| BA-2Motifs       | GINE     | Input×Grad | random   | 200      | 0.767 | 1.000 | 0.975        | 0.908    | −0.191       | 0.030  | 0.001  | 0.796  |
| BA-2Motifs       | GINE     | IG         | random   | 200      | 0.767 | 1.000 | <b>0.997</b> | 0.988    | −0.204       | 0.030  | 0.001  | 0.645  |
| BA-2Motifs       | GINE     | PGExpl.    | random   | 200      | 0.767 | 1.000 | 0.398        | 0.304    | <b>0.015</b> | 0.006  | 0.027  | 0.305  |
| BA-2Motifs       | GINE     | Saliency   | random   | 200      | 0.767 | 1.000 | 0.975        | 0.908    | −0.191       | 0.030  | 0.001  | 0.796  |
| BA-2Motifs       | GINE     | GNNEspl.   | scaffold | 200      | 0.603 | 0.978 | 0.563        | 0.335    | −0.041       | −0.002 | −0.007 | 0.969  |
| BA-2Motifs       | GINE     | GuidedBP   | scaffold | 200      | 0.603 | 0.978 | 0.843        | 0.618    | −0.253       | 0.000  | −0.004 | 0.807  |
| BA-2Motifs       | GINE     | Input×Grad | scaffold | 200      | 0.603 | 0.978 | <b>0.937</b> | 0.789    | −0.286       | −0.001 | −0.005 | 0.663  |
| BA-2Motifs       | GINE     | IG         | scaffold | 200      | 0.603 | 0.978 | 0.856        | 0.543    | −0.310       | −0.003 | −0.004 | 0.715  |
| BA-2Motifs       | GINE     | PGExpl.    | scaffold | 200      | 0.603 | 0.978 | 0.882        | 0.763    | <b>0.032</b> | −0.002 | −0.005 | 0.092  |
| BA-2Motifs       | GINE     | Saliency   | scaffold | 200      | 0.603 | 0.978 | 0.937        | 0.789    | −0.286       | −0.001 | −0.005 | 0.663  |
| Benzene          | GINE     | GNNEspl.   | random   | 200      | 0.872 | 1.000 | 0.512        | 0.441    | 0.004        | 0.136  | 0.293  | 0.733  |
| Benzene          | GINE     | GuidedBP   | random   | 200      | 0.872 | 1.000 | 0.897        | 0.853    | <b>0.384</b> | 0.267  | 0.198  | 0.560  |
| Benzene          | GINE     | Input×Grad | random   | 200      | 0.872 | 1.000 | 0.998        | 0.996    | 0.205        | 0.250  | 0.225  | 0.566  |
| Benzene          | GINE     | IG         | random   | 200      | 0.872 | 1.000 | <b>1.000</b> | 1.000    | 0.374        | 0.251  | 0.200  | 0.525  |
| Benzene          | GINE     | PGExpl.    | random   | 200      | 0.872 | 1.000 | 0.315        | 0.422    | −0.311       | 0.037  | 0.284  | 0.539  |
| Benzene          | GINE     | Saliency   | random   | 200      | 0.872 | 1.000 | 0.997        | 0.995    | 0.152        | 0.248  | 0.244  | 0.629  |
| Benzene          | GINE     | SubgraphX  | random   | 200      | 0.872 | 1.000 | 0.503        | 0.451    | 0.156        | 0.261  | 0.063  | —      |
| Benzene          | GINE     | GNNEspl.   | scaffold | 200      | 0.925 | 1.000 | 0.549        | 0.499    | 0.270        | 0.161  | 0.257  | 0.986  |
| Benzene          | GINE     | GuidedBP   | scaffold | 200      | 0.925 | 1.000 | 0.881        | 0.877    | <b>0.351</b> | 0.257  | 0.194  | 0.804  |
| Benzene          | GINE     | Input×Grad | scaffold | 200      | 0.925 | 1.000 | 0.995        | 0.989    | 0.181        | 0.226  | 0.220  | 0.865  |
| Benzene          | GINE     | IG         | scaffold | 200      | 0.925 | 1.000 | <b>0.998</b> | 0.997    | 0.279        | 0.232  | 0.210  | 0.841  |
| Benzene          | GINE     | PGExpl.    | scaffold | 200      | 0.925 | 1.000 | 0.259        | 0.365    | −0.146       | 0.029  | 0.244  | 0.366  |
| Benzene          | GINE     | Saliency   | scaffold | 200      | 0.925 | 1.000 | 0.994        | 0.988    | 0.208        | 0.219  | 0.213  | 0.905  |
| Benzene          | GINE     | SubgraphX  | scaffold | 200      | 0.925 | 1.000 | 0.592        | 0.514    | 0.220        | 0.167  | 0.101  | —      |
| FluorideCarbonyl | GINE     | GNNEspl.   | random   | 200      | 0.945 | 0.974 | 0.600        | 0.513    | 0.086        | 0.153  | 0.291  | 0.460  |
| FluorideCarbonyl | GINE     | GuidedBP   | random   | 200      | 0.945 | 0.974 | <b>0.884</b> | 0.789    | <b>0.170</b> | 0.148  | 0.290  | 0.289  |
| FluorideCarbonyl | GINE     | Input×Grad | random   | 200      | 0.945 | 0.974 | 0.812        | 0.722    | 0.045        | 0.270  | 0.181  | 0.344  |
| FluorideCarbonyl | GINE     | IG         | random   | 200      | 0.945 | 0.974 | 0.758        | 0.696    | 0.132        | 0.333  | 0.135  | 0.410  |
| FluorideCarbonyl | GINE     | PGExpl.    | random   | 200      | 0.945 | 0.974 | 0.239        | 0.298    | −0.119       | 0.080  | 0.338  | −0.101 |
| FluorideCarbonyl | GINE     | Saliency   | random   | 200      | 0.945 | 0.974 | 0.852        | 0.752    | 0.080        | 0.203  | 0.229  | 0.450  |
| FluorideCarbonyl | GINE     | SubgraphX  | random   | 200      | 0.945 | 0.974 | 0.491        | 0.379    | −0.001       | 0.196  | 0.254  | —      |
| FluorideCarbonyl | GINE     | GNNEspl.   | scaffold | 200      | 0.957 | 0.985 | 0.631        | 0.526    | −0.078       | 0.155  | 0.122  | 0.911  |
| FluorideCarbonyl | GINE     | GuidedBP   | scaffold | 200      | 0.957 | 0.985 | <b>0.946</b> | 0.900    | <b>0.185</b> | 0.222  | 0.090  | 0.660  |
| FluorideCarbonyl | GINE     | Input×Grad | scaffold | 200      | 0.957 | 0.985 | 0.777        | 0.686    | 0.152        | 0.192  | 0.118  | 0.595  |
| FluorideCarbonyl | GINE     | IG         | scaffold | 200      | 0.957 | 0.985 | 0.797        | 0.732    | 0.130        | 0.274  | 0.085  | 0.395  |
| FluorideCarbonyl | GINE     | PGExpl.    | scaffold | 200      | 0.957 | 0.985 | 0.346        | 0.321    | −0.067       | 0.037  | 0.240  | 0.356  |
| FluorideCarbonyl | GINE     | Saliency   | scaffold | 200      | 0.957 | 0.985 | 0.876        | 0.774    | 0.150        | 0.189  | 0.104  | 0.706  |
| FluorideCarbonyl | GINE     | SubgraphX  | scaffold | 200      | 0.957 | 0.985 | 0.467        | 0.323    | 0.016        | 0.187  | 0.103  | —      |

Table 7: Ground-truth cells, continued (2 of 4). Columns and conventions as in Table 6.

| dataset  | backbone    | attributor | split    | $n$ | acc   | AUC   | GT AUROC     | GT AUPRC | occ. $\rho$  | Fid+  | Fid−  | stab. |
|----------|-------------|------------|----------|-----|-------|-------|--------------|----------|--------------|-------|-------|-------|
| MUTAG    | AttentiveFP | IG         | random   | 58  | 0.735 | 0.915 | 0.040        | 0.171    | 0.156        | 0.065 | 0.124 | 0.822 |
| MUTAG    | GAT         | IG         | random   | 58  | 0.621 | 0.672 | 0.400        | 0.379    | 0.151        | 0.209 | 0.296 | 0.951 |
| MUTAG    | GCN         | IG         | random   | 58  | 0.638 | 0.700 | 0.367        | 0.368    | <b>0.496</b> | 0.237 | 0.302 | 0.911 |
| MUTAG    | GINE        | GNNEspl.   | random   | 58  | 0.747 | 0.912 | <b>0.678</b> | 0.590    | −0.121       | 0.189 | 0.205 | 0.848 |
| MUTAG    | GINE        | GuidedBP   | random   | 58  | 0.747 | 0.912 | 0.097        | 0.197    | −0.131       | 0.330 | 0.351 | 0.882 |
| MUTAG    | GINE        | Input×Grad | random   | 58  | 0.747 | 0.912 | 0.035        | 0.169    | −0.172       | 0.295 | 0.354 | 0.770 |
| MUTAG    | GINE        | IG         | random   | 58  | 0.747 | 0.912 | 0.387        | 0.356    | −0.177       | 0.330 | 0.313 | 0.724 |
| MUTAG    | GINE        | PGExpl.    | random   | 58  | 0.747 | 0.912 | 0.663        | 0.600    | −0.159       | 0.246 | 0.292 | 0.713 |
| MUTAG    | GINE        | Saliency   | random   | 58  | 0.747 | 0.912 | 0.012        | 0.165    | −0.151       | 0.294 | 0.356 | 0.767 |
| MUTAG    | GINE        | SubgraphX  | random   | 58  | 0.747 | 0.912 | 0.393        | 0.308    | −0.035       | 0.276 | 0.029 | —     |
| MUTAG    | MPNN        | IG         | random   | 58  | 0.787 | 0.722 | 0.103        | 0.181    | 0.358        | 0.506 | 0.516 | 0.890 |
| MUTAG    | AttentiveFP | IG         | scaffold | 53  | 0.774 | 0.886 | 0.029        | 0.134    | 0.325        | 0.008 | 0.017 | 0.907 |
| MUTAG    | GAT         | IG         | scaffold | 53  | 0.824 | 0.913 | 0.533        | 0.506    | 0.607        | 0.054 | 0.171 | 1.000 |
| MUTAG    | GCN         | IG         | scaffold | 53  | 0.799 | 0.894 | 0.083        | 0.161    | <b>0.763</b> | 0.159 | 0.340 | 0.941 |
| MUTAG    | GINE        | GNNEspl.   | scaffold | 53  | 0.736 | 0.808 | <b>0.774</b> | 0.695    | 0.124        | 0.116 | 0.145 | 0.904 |
| MUTAG    | GINE        | GuidedBP   | scaffold | 53  | 0.736 | 0.808 | 0.047        | 0.143    | 0.337        | 0.268 | 0.128 | 0.930 |
| MUTAG    | GINE        | Input×Grad | scaffold | 53  | 0.736 | 0.808 | 0.116        | 0.154    | 0.247        | 0.229 | 0.196 | 0.826 |
| MUTAG    | GINE        | IG         | scaffold | 53  | 0.736 | 0.808 | 0.568        | 0.449    | 0.163        | 0.159 | 0.227 | 0.808 |
| MUTAG    | GINE        | PGExpl.    | scaffold | 53  | 0.736 | 0.808 | 0.319        | 0.205    | 0.056        | 0.038 | 0.202 | 0.606 |
| MUTAG    | GINE        | Saliency   | scaffold | 53  | 0.736 | 0.808 | 0.051        | 0.143    | 0.216        | 0.227 | 0.174 | 0.854 |
| MUTAG    | GINE        | SubgraphX  | scaffold | 53  | 0.736 | 0.808 | 0.392        | 0.279    | 0.200        | 0.240 | 0.023 | —     |
| MUTAG    | MPNN        | IG         | scaffold | 53  | 0.837 | 0.913 | 0.163        | 0.185    | 0.206        | 0.166 | 0.253 | 0.829 |
| MolMotif | AttentiveFP | IG         | random   | 200 | 0.955 | 0.996 | 0.967        | 0.923    | <b>0.496</b> | 0.469 | 0.025 | 0.912 |
| MolMotif | GAT         | IG         | random   | 200 | 1.000 | 1.000 | 0.842        | 0.776    | 0.338        | 0.440 | 0.225 | 0.901 |
| MolMotif | GCN         | IG         | random   | 200 | 0.872 | 0.996 | 0.943        | 0.895    | 0.167        | 0.324 | 0.497 | 1.000 |
| MolMotif | GINE        | GNNEspl.   | random   | 200 | 0.928 | 1.000 | 0.641        | 0.437    | −0.017       | 0.184 | 0.296 | 0.973 |
| MolMotif | GINE        | GuidedBP   | random   | 200 | 0.928 | 1.000 | 0.971        | 0.928    | −0.113       | 0.205 | 0.293 | 0.884 |
| MolMotif | GINE        | Input×Grad | random   | 200 | 0.928 | 1.000 | <b>0.995</b> | 0.989    | −0.179       | 0.146 | 0.300 | 0.848 |
| MolMotif | GINE        | IG         | random   | 200 | 0.928 | 1.000 | 0.951        | 0.875    | −0.004       | 0.341 | 0.218 | 0.970 |
| MolMotif | GINE        | PGExpl.    | random   | 200 | 0.928 | 1.000 | 0.502        | 0.335    | −0.098       | 0.132 | 0.302 | 0.639 |
| MolMotif | GINE        | Saliency   | random   | 200 | 0.928 | 1.000 | 0.994        | 0.987    | −0.164       | 0.161 | 0.300 | 0.837 |
| MolMotif | GINE        | SubgraphX  | random   | 200 | 0.928 | 1.000 | 0.555        | 0.327    | −0.036       | 0.215 | 0.215 | —     |
| MolMotif | MPNN        | IG         | random   | 200 | 1.000 | 1.000 | 0.873        | 0.729    | −0.124       | 0.377 | 0.347 | 0.946 |
| MolMotif | AttentiveFP | IG         | scaffold | 200 | 0.985 | 1.000 | 0.923        | 0.870    | <b>0.672</b> | 0.447 | 0.024 | 0.929 |
| MolMotif | GAT         | IG         | scaffold | 200 | 0.995 | 1.000 | 0.798        | 0.723    | 0.332        | 0.449 | 0.454 | 0.945 |
| MolMotif | GCN         | IG         | scaffold | 200 | 0.970 | 1.000 | 0.988        | 0.975    | 0.391        | 0.399 | 0.177 | 0.933 |
| MolMotif | GINE        | GNNEspl.   | scaffold | 200 | 0.973 | 1.000 | 0.616        | 0.425    | 0.054        | 0.301 | 0.344 | 0.982 |
| MolMotif | GINE        | GuidedBP   | scaffold | 200 | 0.973 | 1.000 | 0.989        | 0.977    | 0.033        | 0.284 | 0.346 | 0.843 |
| MolMotif | GINE        | Input×Grad | scaffold | 200 | 0.973 | 1.000 | <b>0.999</b> | 0.997    | −0.086       | 0.156 | 0.360 | 0.869 |
| MolMotif | GINE        | IG         | scaffold | 200 | 0.973 | 1.000 | 0.897        | 0.749    | 0.058        | 0.376 | 0.313 | 0.880 |
| MolMotif | GINE        | PGExpl.    | scaffold | 200 | 0.973 | 1.000 | 0.513        | 0.361    | −0.111       | 0.129 | 0.299 | 0.707 |
| MolMotif | GINE        | Saliency   | scaffold | 200 | 0.973 | 1.000 | 0.997        | 0.991    | −0.090       | 0.139 | 0.367 | 0.866 |
| MolMotif | GINE        | SubgraphX  | scaffold | 200 | 0.973 | 1.000 | 0.469        | 0.265    | −0.007       | 0.362 | 0.129 | —     |
| MolMotif | MPNN        | IG         | scaffold | 200 | 0.998 | 1.000 | 0.871        | 0.727    | 0.055        | 0.399 | 0.348 | 0.922 |

Table 8: Ground-truth cells, continued (3 of 4). Columns and conventions as in Table 6.

| dataset      | backbone    | attributor | split    | $n$ | acc   | AUC   | GT AUROC     | GT AUPRC | occ. $\rho$  | Fid+  | Fid−   | stab. |
|--------------|-------------|------------|----------|-----|-------|-------|--------------|----------|--------------|-------|--------|-------|
| MolMotifHard | AttentiveFP | IG         | random   | 200 | 0.972 | 0.981 | 0.878        | 0.823    | <b>0.476</b> | 0.411 | 0.087  | 0.932 |
| MolMotifHard | GAT         | IG         | random   | 200 | 0.962 | 0.992 | 0.793        | 0.770    | 0.041        | 0.466 | 0.404  | 0.966 |
| MolMotifHard | GCN         | IG         | random   | 200 | 0.885 | 0.988 | 0.901        | 0.855    | 0.040        | 0.359 | 0.355  | 0.700 |
| MolMotifHard | GINE        | GNNEspl.   | random   | 200 | 0.935 | 0.998 | 0.413        | 0.385    | −0.075       | 0.141 | 0.251  | 0.942 |
| MolMotifHard | GINE        | GuidedBP   | random   | 200 | 0.935 | 0.998 | 0.919        | 0.890    | −0.050       | 0.204 | 0.243  | 0.884 |
| MolMotifHard | GINE        | Input×Grad | random   | 200 | 0.935 | 0.998 | 0.996        | 0.994    | −0.068       | 0.228 | 0.221  | 0.925 |
| MolMotifHard | GINE        | IG         | random   | 200 | 0.935 | 0.998 | 0.985        | 0.973    | −0.074       | 0.218 | 0.231  | 0.914 |
| MolMotifHard | GINE        | PGExpl.    | random   | 200 | 0.935 | 0.998 | 0.512        | 0.419    | −0.051       | 0.162 | 0.208  | 0.830 |
| MolMotifHard | GINE        | Saliency   | random   | 200 | 0.935 | 0.998 | <b>0.998</b> | 0.996    | −0.064       | 0.217 | 0.217  | 0.911 |
| MolMotifHard | GINE        | SubgraphX  | random   | 200 | 0.935 | 0.998 | 0.408        | 0.320    | −0.040       | 0.201 | 0.150  | —     |
| MolMotifHard | MPNN        | IG         | random   | 200 | 0.908 | 0.996 | 0.953        | 0.920    | 0.310        | 0.289 | 0.222  | 0.933 |
| MolMotifHard | AttentiveFP | IG         | scaffold | 200 | 0.975 | 0.995 | 0.900        | 0.825    | 0.316        | 0.388 | 0.075  | 0.893 |
| MolMotifHard | GAT         | IG         | scaffold | 200 | 0.958 | 0.997 | 0.807        | 0.737    | −0.045       | 0.382 | 0.356  | 0.921 |
| MolMotifHard | GCN         | IG         | scaffold | 200 | 0.845 | 0.995 | 0.866        | 0.761    | 0.026        | 0.261 | 0.401  | 0.637 |
| MolMotifHard | GINE        | GNNEspl.   | scaffold | 200 | 0.892 | 0.997 | 0.420        | 0.349    | −0.167       | 0.180 | 0.225  | 0.960 |
| MolMotifHard | GINE        | GuidedBP   | scaffold | 200 | 0.892 | 0.997 | 0.875        | 0.818    | −0.136       | 0.285 | 0.186  | 0.794 |
| MolMotifHard | GINE        | Input×Grad | scaffold | 200 | 0.892 | 0.997 | 0.995        | 0.990    | −0.173       | 0.273 | 0.199  | 0.873 |
| MolMotifHard | GINE        | IG         | scaffold | 200 | 0.892 | 0.997 | 0.994        | 0.986    | −0.201       | 0.308 | 0.188  | 0.909 |
| MolMotifHard | GINE        | PGExpl.    | scaffold | 200 | 0.892 | 0.997 | 0.376        | 0.300    | −0.085       | 0.087 | 0.234  | 0.717 |
| MolMotifHard | GINE        | Saliency   | scaffold | 200 | 0.892 | 0.997 | <b>0.999</b> | 0.995    | −0.165       | 0.278 | 0.211  | 0.847 |
| MolMotifHard | GINE        | SubgraphX  | scaffold | 200 | 0.892 | 0.997 | 0.472        | 0.310    | −0.130       | 0.238 | 0.175  | —     |
| MolMotifHard | MPNN        | IG         | scaffold | 200 | 0.987 | 0.998 | 0.965        | 0.924    | <b>0.578</b> | 0.480 | 0.093  | 0.886 |
| ShapeGGen    | GINE        | GNNEspl.   | random   | 50  | 0.780 | 0.578 | 0.549        | 0.591    | 0.389        | 0.239 | 0.155  | 0.563 |
| ShapeGGen    | GINE        | GuidedBP   | random   | 50  | 0.780 | 0.578 | <b>0.773</b> | 0.811    | 0.481        | 0.239 | 0.161  | 0.796 |
| ShapeGGen    | GINE        | Input×Grad | random   | 50  | 0.780 | 0.578 | 0.725        | 0.764    | 0.435        | 0.250 | 0.171  | 0.744 |
| ShapeGGen    | GINE        | IG         | random   | 50  | 0.780 | 0.578 | 0.733        | 0.771    | 0.447        | 0.266 | 0.154  | 0.763 |
| ShapeGGen    | GINE        | PGExpl.    | random   | 50  | 0.780 | 0.578 | 0.499        | 0.523    | −0.163       | 0.127 | 0.299  | 0.676 |
| ShapeGGen    | GINE        | Saliency   | random   | 50  | 0.780 | 0.578 | 0.769        | 0.808    | 0.400        | 0.228 | 0.191  | 0.730 |
| ShapeGGen    | GINE        | SubgraphX  | random   | 50  | 0.780 | 0.578 | 0.644        | 0.592    | <b>0.543</b> | 0.403 | −0.010 | 0.233 |
| ShapeGGen    | GINE        | GNNEspl.   | scaffold | 50  | 0.580 | 0.552 | 0.574        | 0.628    | 0.143        | 0.028 | 0.020  | 0.417 |
| ShapeGGen    | GINE        | GuidedBP   | scaffold | 50  | 0.580 | 0.552 | <b>0.803</b> | 0.826    | 0.227        | 0.027 | 0.015  | 0.593 |
| ShapeGGen    | GINE        | Input×Grad | scaffold | 50  | 0.580 | 0.552 | 0.708        | 0.735    | 0.143        | 0.021 | 0.022  | 0.494 |
| ShapeGGen    | GINE        | IG         | scaffold | 50  | 0.580 | 0.552 | 0.727        | 0.749    | 0.111        | 0.025 | 0.019  | 0.505 |
| ShapeGGen    | GINE        | PGExpl.    | scaffold | 50  | 0.580 | 0.552 | 0.567        | 0.611    | −0.062       | 0.021 | 0.034  | 0.653 |
| ShapeGGen    | GINE        | Saliency   | scaffold | 50  | 0.580 | 0.552 | 0.776        | 0.801    | 0.164        | 0.020 | 0.025  | 0.445 |
| ShapeGGen    | GINE        | SubgraphX  | scaffold | 50  | 0.580 | 0.552 | 0.598        | 0.580    | <b>0.407</b> | 0.059 | −0.006 | 0.217 |



**Table 9: Molecular classification cells (no node-level ground truth available), 1 of 2.** Every committed classification cell on a real molecular dataset. The ground-truth localisation column does not exist for these datasets, since no per-atom labels are published, so only model-side reliability can be measured, which is the gap the Tier-1 cells are needed to close. *charact.* is the GraphFrameEx characterisation score and *unfaith.* the PyG/DIG unfaithfulness metric, computed on the same molecules. Bold marks the highest occlusion  $\rho$  per dataset (emphasis only).

| dataset | backbone    | attributor | split    | $n$ | acc   | AUC   | ECE   | motif top-1 | occ. $\rho$  | occ. top-1 | Fid+  | Fid-  | stab. | charact. | unfaith. |
|---------|-------------|------------|----------|-----|-------|-------|-------|-------------|--------------|------------|-------|-------|-------|----------|----------|
| BACE    | GCN         | IG         | random   | 200 | 0.720 | 0.819 | 0.052 | 0.771       | <b>0.235</b> | 0.633      | 0.344 | 0.366 | 0.849 | 0.291    | 0.594    |
| BACE    | GCN         | IG         | scaffold | 200 | 0.628 | 0.698 | 0.116 | 0.807       | 0.138        | 0.567      | 0.352 | 0.352 | 0.865 | 0.227    | 0.668    |
| BACE    | GINE        | IG         | random   | 200 | 0.730 | 0.821 | 0.062 | 0.788       | 0.116        | 0.557      | 0.274 | 0.268 | 0.691 | 0.126    | 0.323    |
| BACE    | GINE        | IG         | scaffold | 200 | 0.545 | 0.716 | 0.061 | 0.863       | 0.093        | 0.297      | 0.239 | 0.271 | 0.564 | 0.415    | 0.174    |
| BBBP    | AttentiveFP | IG         | random   | 200 | 0.757 | 0.884 | 0.038 | 0.749       | 0.234        | 0.418      | 0.092 | 0.093 | 0.853 | 0.200    | 0.104    |
| BBBP    | AttentiveFP | IG         | scaffold | 200 | 0.855 | 0.954 | 0.127 | 0.750       | 0.409        | 0.562      | 0.251 | 0.169 | 0.847 | 0.327    | 0.070    |
| BBBP    | GAT         | IG         | random   | 200 | 0.735 | 0.900 | 0.032 | 0.770       | 0.002        | 0.447      | 0.219 | 0.219 | 0.876 | 0.193    | 0.291    |
| BBBP    | GAT         | IG         | scaffold | 200 | 0.812 | 0.914 | 0.123 | 0.788       | 0.123        | 0.522      | 0.262 | 0.322 | 0.941 | 0.158    | 0.444    |
| BBBP    | GCN         | IG         | random   | 200 | 0.740 | 0.889 | 0.043 | 0.796       | -0.143       | 0.425      | 0.155 | 0.157 | 0.842 | 0.092    | 0.195    |
| BBBP    | GCN         | IG         | scaffold | 200 | 0.823 | 0.915 | 0.115 | 0.801       | 0.189        | 0.528      | 0.302 | 0.357 | 0.893 | 0.080    | 0.506    |
| BBBP    | GINE        | GNNExpl.   | random   | 200 | 0.730 | 0.892 | 0.033 | 0.799       | -0.018       | 0.397      | 0.183 | 0.216 | 0.955 | 0.241    | 0.164    |
| BBBP    | GINE        | GNNExpl.   | scaffold | 200 | 0.827 | 0.925 | 0.115 | 0.804       | 0.349        | 0.487      | 0.330 | 0.355 | 0.934 | 0.327    | 0.400    |
| BBBP    | GINE        | IG         | random   | 200 | 0.730 | 0.892 | 0.033 | 0.770       | 0.044        | 0.427      | 0.219 | 0.220 | 0.890 | 0.206    | 0.314    |
| BBBP    | GINE        | IG         | scaffold | 200 | 0.827 | 0.925 | 0.115 | 0.763       | <b>0.509</b> | 0.500      | 0.282 | 0.363 | 0.855 | 0.277    | 0.471    |
| BBBP    | GINE        | PGExpl.    | random   | 200 | 0.730 | 0.892 | 0.033 | 0.899       | -0.131       | 0.285      | 0.126 | 0.202 | 0.370 | 0.159    | —        |
| BBBP    | GINE        | PGExpl.    | scaffold | 200 | 0.827 | 0.925 | 0.115 | 0.882       | 0.212        | 0.258      | 0.189 | 0.331 | 0.438 | 0.223    | —        |
| BBBP    | MPNN        | IG         | random   | 200 | 0.757 | 0.906 | 0.040 | 0.792       | 0.047        | 0.373      | 0.109 | 0.169 | 0.860 | 0.113    | 0.142    |
| BBBP    | MPNN        | IG         | scaffold | 200 | 0.818 | 0.923 | 0.115 | 0.819       | 0.160        | 0.502      | 0.175 | 0.323 | 0.882 | 0.080    | 0.307    |

**Table 10: Molecular classification cells (no node-level ground truth available), 2 of 2.** Every committed classification cell on a real molecular dataset. The ground-truth localisation column does not exist for these datasets, since no per-atom labels are published, so only model-side reliability can be measured, which is the gap the Tier-1 cells are needed to close. *charact.* is the GraphFramEx characterisation score and *unfaith.* the PyG/DIG unfaithfulness metric, computed on the same molecules. Bold marks the highest occlusion  $\rho$  per dataset (emphasis only).

| dataset | backbone | attributor | split    | $n$ | acc   | AUC   | ECE   | motif top-1 | occ. $\rho$  | occ. top-1 | Fid+   | Fid-   | stab. | charact. | unfaith. |
|---------|----------|------------|----------|-----|-------|-------|-------|-------------|--------------|------------|--------|--------|-------|----------|----------|
| ClinTox | GINE     | GNNExpl.   | random   | 200 | 0.730 | 0.880 | 0.101 | 0.476       | <b>0.275</b> | 0.433      | 0.215  | 0.174  | 0.975 | 0.129    | 0.340    |
| ClinTox | GINE     | GNNExpl.   | scaffold | 200 | 0.673 | 0.844 | 0.144 | 0.670       | -0.027       | 0.437      | 0.237  | 0.222  | 0.988 | 0.129    | 0.319    |
| ClinTox | GINE     | IG         | random   | 200 | 0.730 | 0.880 | 0.101 | 0.799       | -0.287       | 0.390      | 0.177  | 0.174  | 0.911 | 0.129    | 0.205    |
| ClinTox | GINE     | IG         | scaffold | 200 | 0.673 | 0.844 | 0.144 | 0.756       | -0.170       | 0.417      | 0.222  | 0.222  | 0.971 | 0.129    | 0.221    |
| DILI    | GINE     | IG         | random   | 142 | 0.714 | 0.761 | 0.117 | 0.742       | 0.299        | 0.472      | 0.192  | 0.209  | 0.813 | 0.220    | 0.287    |
| DILI    | GINE     | IG         | scaffold | 142 | 0.737 | 0.801 | 0.085 | 0.826       | <b>0.336</b> | 0.582      | 0.237  | 0.261  | 0.921 | 0.282    | 0.527    |
| SIDER   | GCN      | IG         | random   | 200 | 0.643 | 0.660 | 0.061 | 0.744       | 0.159        | 0.568      | 0.100  | 0.120  | 0.750 | 0.154    | 0.054    |
| SIDER   | GCN      | IG         | scaffold | 200 | 0.575 | 0.668 | 0.028 | 0.748       | 0.365        | 0.722      | 0.181  | 0.312  | 0.879 | 0.179    | 0.033    |
| SIDER   | GINE     | IG         | random   | 200 | 0.642 | 0.671 | 0.070 | 0.764       | 0.277        | 0.613      | 0.174  | 0.241  | 0.869 | 0.243    | 0.449    |
| SIDER   | GINE     | IG         | scaffold | 200 | 0.555 | 0.627 | 0.033 | 0.753       | <b>0.436</b> | 0.655      | 0.233  | 0.287  | 0.866 | 0.293    | 0.511    |
| Tox21   | GINE     | IG         | random   | 200 | 0.940 | 0.820 | 0.113 | 0.749       | -0.269       | 0.333      | -0.048 | -0.042 | 0.710 | 0.037    | 0.309    |
| Tox21   | GINE     | IG         | scaffold | 200 | 0.942 | 0.745 | 0.040 | 0.794       | -0.413       | 0.402      | -0.070 | -0.068 | 0.927 | 0.042    | 0.149    |
| hERG    | GINE     | IG         | random   | 197 | 0.655 | 0.821 | 0.109 | 0.761       | 0.240        | 0.624      | 0.384  | 0.384  | 0.953 | 0.188    | 0.809    |
| hERG    | GINE     | IG         | scaffold | 197 | 0.472 | 0.653 | 0.468 | 0.791       | <b>0.743</b> | 0.877      | 0.730  | 0.730  | 0.943 | 0.074    | 0.642    |

## References

- [1] M. Sundararajan, A. Taly, and Q. Yan. Axiomatic attribution for deep networks. *Proceedings of the 34th International Conference on Machine Learning (ICML)*, PMLR 70:3319–3328, 2017.
- [2] K. Simonyan, A. Vedaldi, and A. Zisserman. Deep inside convolutional networks: visualising image classification models and saliency maps. *International Conference on Learning Representations (ICLR) Workshop*, 2014.
- [3] J. T. Springenberg, A. Dosovitskiy, T. Brox, and M. Riedmiller. Striving for simplicity: the all convolutional net. *International Conference on Learning Representations (ICLR) Workshop*, 2015.
- [4] Z. Ying, D. Bourgeois, J. You, M. Zitnik, and J. Leskovec. GNNExplainer: generating explanations for graph neural networks. *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [5] D. Luo, W. Cheng, D. Xu, W. Yu, B. Zong, H. Chen, and X. Zhang. Parameterized explainer for graph neural network. *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [6] H. Yuan, H. Yu, J. Wang, K. Li, and S. Ji. On explainability of graph neural networks via subgraph explorations. *Proceedings of the 38th International Conference on Machine Learning (ICML)*, PMLR 139:12241–12252, 2021.
- [7] P. E. Pope, S. Kolouri, M. Rostami, C. E. Martin, and H. Hoffmann. Explainability methods for graph convolutional neural networks. *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [8] H. Yuan, H. Yu, S. Gui, and S. Ji. Explainability in graph neural networks: a taxonomic survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(5):5782–5799, 2023.
- [9] B. Sanchez-Lengeling, J. Wei, B. Lee, E. Reif, P. Wang, W. Qian, K. McCloskey, L. Colwell, and A. Wiltschko. Evaluating attribution for graph neural networks. *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [10] C. Agarwal, O. Queen, H. Lakkaraju, and M. Zitnik. Evaluating explainability for graph neural networks. *Scientific Data*, 10:144, 2023.
- [11] K. Amara, Z. Ying, Z. Zhang, Z. Han, Y. Zhao, Y. Shan, U. Brandes, S. Schemm, and C. Zhang. GraphFramEx: towards systematic evaluation of explainability methods for graph neural networks. *Proceedings of the First Learning on Graphs Conference (LoG)*, PMLR 198, 2022.
- [12] M. Liu, Y. Luo, L. Wang, Y. Xie, H. Yuan, S. Gui, H. Yu, Z. Xu, J. Zhang, Y. Liu, K. Yan, H. Liu, C. Fu, B. M. Oztekin, X. Zhang, and S. Ji. DIG: a turnkey library for diving into graph deep learning research. *Journal of Machine Learning Research*, 22(240):1–9, 2021.
- [13] M. Hiltcher, M. Bianciotto, and F. Grisoni. Explaining What Matters: Faithfulness in Molecular Deep Learning. *ChemRxiv*, 2026. doi:10.26434/chemrxiv.10001594/v1. Platform: <https://github.com/molML/MolFaith>.
- [14] L. Faber, A. K. Moghaddam, and R. Wattenhofer. When comparing to ground truth is wrong: on evaluating GNN explanation methods. *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 332–341, 2021.
- [15] B. Sanchez-Lengeling, J. N. Wei, B. K. Lee, E. Reif, P. Wang, W. W. Qian, K. McCloskey, L. J. Colwell, and A. B. Wiltschko. Evaluating attribution for graph neural networks. *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [16] J. Adebayo, J. Gilmer, M. Muelly, I. Goodfellow, M. Hardt, and B. Kim. Sanity checks for saliency maps. *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [17] S. Hooker, D. Erhan, P.-J. Kindermans, and B. Kim. A benchmark for interpretability methods in deep neural networks. *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [18] N. Kokhlikyan, V. Miglani, M. Martin, E. Wang, B. Alsallakh, J. Reynolds, A. Melnikov, N. Kliushkina, C. Araya, S. Yan, and O. Reblitz-Richardson. Captum: a unified and generic model interpretability library for PyTorch. *arXiv:2009.07896*, 2020.
- [19] M. Fey and J. E. Lenssen. Fast graph representation learning with PyTorch Geometric. *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.
- [20] G. Landrum et al. RDKit: open-source cheminformatics. <https://www.rdkit.org>.
- [21] K. Xu, W. Hu, J. Leskovec, and S. Jegelka. How powerful are graph neural networks? *International Conference on Learning Representations (ICLR)*, 2019.
- [22] W. Hu, B. Liu, J. Gomes, M. Zitnik, P. Liang, V. Pande, and J. Leskovec. Strategies for pre-training graph neural networks. *International Conference on Learning Representations (ICLR)*, 2020.
- [23] T. N. Kipf and M. Welling. Semi-supervised classification with graph convolutional networks. *International Conference on Learning Representations (ICLR)*, 2017.
- [24] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, and Y. Bengio. Graph attention networks. *International Conference on Learning Representations (ICLR)*, 2018.
- [25] J. Gilmer, S. S. Schoenholz, P. F. Riley, O. Vinyals, and G. E. Dahl. Neural message passing for quantum chemistry. *Proceedings of the 34th International Conference on Machine Learning (ICML)*, PMLR 70:1263–1272, 2017.
- [26] Z. Xiong, D. Wang, X. Liu, F. Zhong, X. Wan, X. Li, Z. Li, X. Luo, K. Chen, H. Jiang, and M. Zheng. Pushing the boundaries of molecular representation for drug discovery with the graph attention mechanism. *Journal of Medicinal Chemistry*, 63(16):8749–8760, 2020.
- [27] K. Iyer and N. Sabar. M-JEPA: predictive self-supervised learning for molecular graphs with scaffold-shift evaluation on Tox21. *Journal of Chemical Information and Modeling*, 66(14):8008–8021, 2026. doi:10.1021/acs.jcim.6c00828.
- [28] Z. Wu, B. Ramsundar, E. N. Feinberg, J. Gomes, C. Geniesse, A. S. Pappu, K. Leswing, and V. Pande. MoleculeNet: a benchmark for molecular machine learning. *Chemical Science*, 9(2):513–530, 2018.
- [29] K. Huang, T. Fu, W. Gao, Y. Zhao, Y. Roohani, J. Leskovec, C. W. Coley, C. Xiao, J. Sun, and M. Zitnik. Therapeutics Data Commons: machine learning datasets and tasks for drug discovery and development. *NeurIPS Datasets and Benchmarks Track*, 2021.
- [30] A. K. Debnath, R. L. Lopez de Compadre, G. Debnath, A. J. Shusterman, and C. Hansch. Structure-activity relationship of mutagenic aromatic and heteroaromatic nitro compounds. Correlation with molecular orbital energies and hydrophobicity. *Journal of Medicinal Chemistry*, 34(2):786–797, 1991.
- [31] C. Morris, N. M. Kriege, F. Bause, K. Kersting, P. Mutzel, and M. Neumann. TUDataset: a collection of benchmark datasets for learning with graphs. *ICML Workshop on Graph Representation Learning and Beyond*, 2020.
- [32] G. W. Bemis and M. A. Murcko. The properties of known drugs. 1. Molecular frameworks. *Journal of Medicinal Chemistry*, 39(15):2887–2893, 1996.
- [33] C. Guo, G. Pleiss, Y. Sun, and K. Q. Weinberger. On calibration of modern neural networks. *Proceedings of the 34th International Conference on Machine Learning (ICML)*, PMLR 70:1321–1330, 2017.