
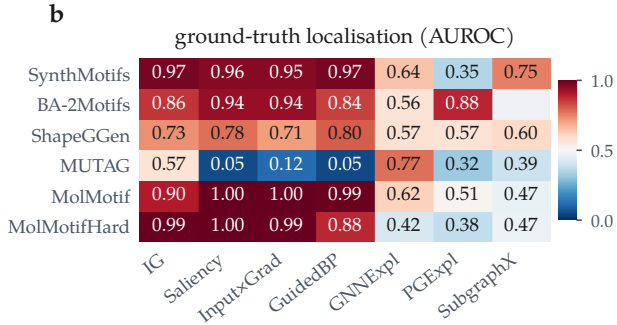


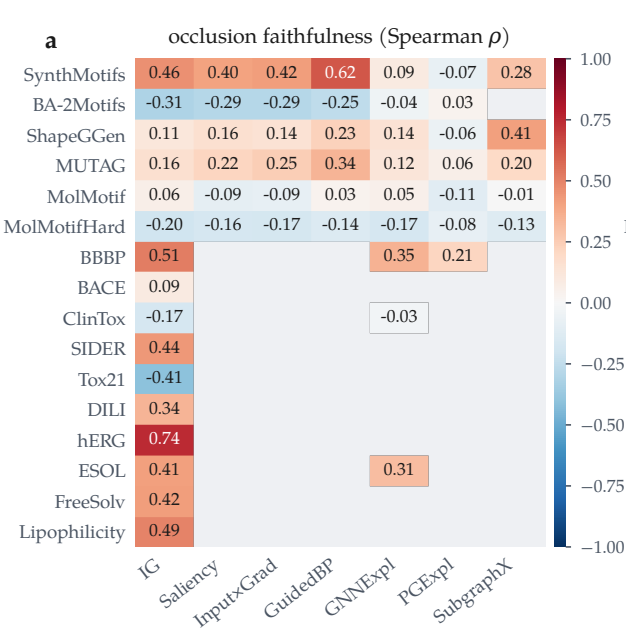

Panel b stops after 6 rows.

Of the 16 datasets audited, 6 carry node-level labels against which an attribution can be scored. The other 10 are the real molecular property datasets, for which no such labels are published, so only panel a can be computed at all. Faithfulness is auditable everywhere; correctness only where a benchmark was built for it.