

DEPLOYING APPLICATIONS USING RUNTIME MANAGER

* Create account on mulesoft

>> click on top left three line > click on runtime manager



Choose Environment

Design


Sandbox

Design is used to development process

Sandbox is used for production

Deploy using local server:

Click on server > Add server > give name and copy the command

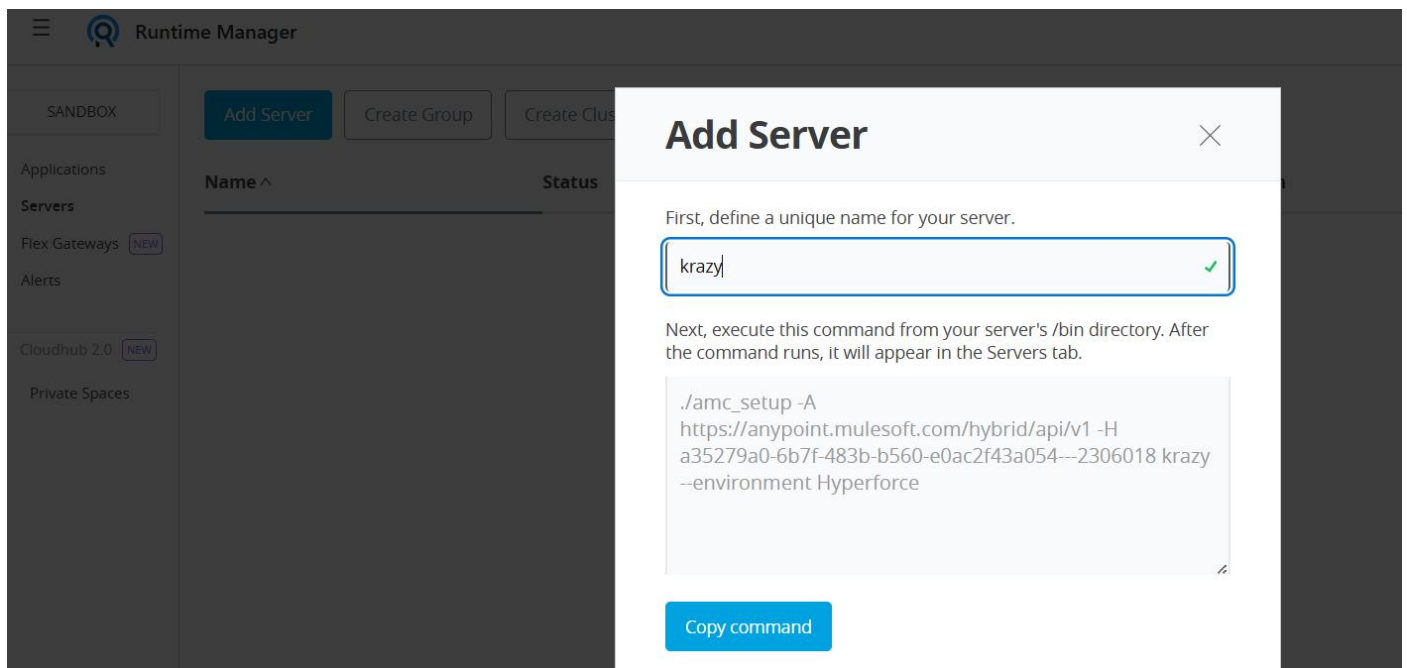

Go to mule standalone > bin > type cmd on search and paste this command (start amc_setup)

```
Sending Sign request to Anypoint Management Center
Mule Agent configured successfully
Mule Agent configuration saved successfully

C:\Users\krazy\Downloads\softwares\mule distribution-standalone-4.9.4\mule-enterprise-standalone-4.9.4\bin>
```

To start, type mule in cmd.

```
Mule is up and kicking (every 5000ms)
*****
* - - + DOMAIN + - - * - - + STATUS + - - *
*****
* default * DEPLOYED *
*****

WARN 2025-05-14 21:59:27,591 [WebSocketInboundExecutor] [processor: ; event: ] com.mulesoft.agent.external.handlers.ad
nistration.ComponentRequestHandler: Ignored reference in configuration: '' does not exist in component 'mule.agent.ubp
container.service'
WARN 2025-05-14 21:59:27,602 [WebSocketInboundExecutor] [processor: ; event: ] com.mulesoft.agent.external.handlers.ad
nistration.ComponentRequestHandler: Ignored reference in configuration: 'enabled' does not allow dynamic configuration
for component 'mule.agent.ubp.container.service'
INFO 2025-05-14 21:59:27,780 [WebSocketInboundExecutor] [processor: ; event: ] com.mulesoft.agent.services.administrat
on.components.ComponentManager: Re-enabling component: mule.agent.ubp.container.service
```

We can see it in runtime manager

Servers	Name ^	Status	Type
Flex Gateways NEW	krazy	● Running	☰ Gateway
Alerts			

It is a hybrid model. Runtime manager is cloud and deployment server is local.

SANDBOX

Applications

Servers

Flex Gateways NEW

Alerts

Cloudhub 2.0 NEW

Private Spaces

Deploy Application

Application Name

Name

Deployment Target

Shared Space US East (Ohio) CloudHub 2.0

▼ CloudHub 2.0 NEW

Shared Space US East (Ohio)

▼ Hybrid

☰ krazy

ⓘ Only running targets may be used.

Application

No file h

To deploy application:

Go to application > give name > select deployment target > upload jar file > deploy