

## Lecture 2: Stacks, Queues, Vectors, Lists, Sequences

Pure Knowledge Has  
Infinite Organizing Power

1

## Wholeness Statement

Knowledge of data structures allows us to pick the most appropriate data structure for any computer task, thereby maximizing efficiency. Pure knowledge has infinite organizing power, and administers the whole universe with minimum effort.

Stacks, Queues, Vectors, & Lists

2

## What is a type?

- ◆  $x + y$
- ◆ `z.foo()`

Stacks, Queues, Vectors, & Lists

3

3

## Algorithms and Data Structures

- ◆ Closely linked
  - Algorithm (operation)
    - a step by step procedure for performing and completing some task in a finite amount of time
  - Data structure
    - an efficient way of organizing data for storage and access by an algorithm
- ◆ An ADT provides services to other algorithms
  - E.g., operations (algorithms) are embedded in the data structure (ADT)

Stacks, Queues, Vectors, & Lists

4

4

## Abstract Data Types (ADTs)

- ◆ An ADT is an abstraction of a data structure
- ◆ An ADT specifies:
  - Data stored
  - Operations on the data
  - Error conditions associated with operations
- ◆ Today we are going to look at several examples:
  - Stack
  - Queue
  - Vector
  - List
  - Sequence

Stacks, Queues, Vectors, & Lists

5

5

## Stacks



6

## Outline and Reading

- ◆ The Stack ADT (§2.1.1)
- ◆ Applications of Stacks (§2.1.1)
- ◆ Array-based implementation (§2.1.1)
- ◆ Growable array-based Stack (tomorrow)

Stacks, Queues, Vectors, & Lists

7

7

## The Stack ADT

- ◆ The **Stack** ADT stores arbitrary objects
- ◆ Insertions and deletions follow the last-in first-out (LIFO) scheme
  - Like a spring-loaded plate dispenser
- ◆ Main stack operations:
  - void **push**(object): inserts an element
  - object **pop**(): removes and returns the last inserted element
- ◆ Auxiliary stack operations:
  - object **top**(): returns the last inserted element without removing it
  - integer **size**(): returns the number of elements stored
  - boolean **isEmpty**(): indicates whether no elements are stored

Stacks, Queues, Vectors, & Lists

8

8

## Exceptions

- ◆ Operations on the ADT may cause an error condition, called an exception
- ◆ Exceptions are said to be “thrown” when an operation cannot be executed
- ◆ Operations **pop** and **top** cannot be performed if the stack is empty
  - Attempting a **pop** or **top** on an empty stack causes an **EmptyStackException** to be thrown

Stacks, Queues, Vectors, & Lists

9

9

## Applications of Stacks

- ◆ Direct applications
  - Page-visited history in a Web browser
  - Undo sequence in a text editor
  - Chain of method calls in the Java Virtual Machine
  - Evaluate an expression
- ◆ Indirect applications
  - Auxiliary data structure for algorithms
  - Component of other data structures


Stacks, Queues, Vectors, & Lists

10

10

## Runtime Stack in the JVM

- ◆ The Java Virtual Machine (JVM) keeps track of the chain of active methods with a stack
- ◆ When a method is called, the JVM pushes onto the stack a frame containing
  - Local variables and return value
  - Program counter, keeping track of the statement being executed
- ◆ When a method ends, its frame is popped from the stack and control is passed to the method on top of the stack
- ◆ These are called stack frames or activation records



Stacks, Queues, Vectors, & Lists

11

11

## Array-based Stack

- ◆ A simple way of implementing the Stack ADT uses an array
- ◆ Elements are added from left to right
- ◆ A variable keeps track of the index of the top element

```

Algorithm size()
    return t + 1

Algorithm pop()
    if isEmpty() then
        throw EmptyStackException
    else
        t ← t - 1
        return S[t + 1]
    
```



Stacks, Queues, Vectors, & Lists

12

12

## Array-based Stack (cont.)

- ◆ The array storing the stack elements may become full
- ◆ A push operation will then throw a `StackFullException`
  - Limitation of the array-based implementation
  - Not intrinsic to the Stack ADT

```

Algorithm push(o)
  if  $t = S.length - 1$  then
    throw StackFullException
  else
     $t \leftarrow t + 1$ 
     $S[t] \leftarrow o$ 
    
```



Stacks, Queues, Vectors, & Lists

13

13

## Performance and Limitations

- ◆ **Performance**
  - Let  $n$  be the number of elements in the stack
  - The space used is  $O(n)$
  - Each operation runs in time  $O(1)$
- ◆ **Limitations**
  - The maximum size of the stack must be defined at creation and cannot be changed
  - Trying to push a new element onto a full stack causes an implementation-specific exception

Stacks, Queues, Vectors, & Lists

14

14

## Main Point


1. Stacks are data structures that allow very specific and orderly insertion, access, and removal of their individual elements, i.e., only the top element can be inserted, accessed, or removed. The infinite dynamism of the unified field is responsible for the orderly changes that occur continuously throughout creation.

Stacks, Queues, Vectors, & Lists

15

15

## Queues



16

## Outline and Reading

- ◆ The Queue ADT (§2.1.2)
- ◆ Implementation with a circular array (§2.1.2)
- ◆ Queue interface in Java
- ◆ Growable array-based queue (tomorrow)

Stacks, Queues, Vectors, & Lists

17

17

## The Queue ADT

- ◆ The **Queue** ADT stores arbitrary objects
- ◆ Insertions and deletions follow the first-in first-out (FIFO) scheme
- ◆ Insertions are at the rear of the queue and removals are at the front of the queue
- ◆ Main queue operations:
  - void `enqueue(object)`: inserts an element at the end of the queue
  - object `dequeue()`: removes and returns the element at the front of the queue
- ◆ Auxiliary queue operations:
  - object `front()`: returns the element at the front without removing it
  - integer `size()`: returns the number of elements stored
  - boolean `isEmpty()`: indicates whether no elements are stored
- ◆ **Exceptions**
  - Attempting the execution of `dequeue` or `front` on an empty queue throws an `EmptyQueueException`

Stacks, Queues, Vectors, & Lists

18

18

## Applications of Queues

- ◆ Direct applications
  - Waiting lists, bureaucracy
  - Access to shared resources (e.g., printer)
  - Multiprogramming (OS)
- ◆ Indirect applications
  - Auxiliary data structure for algorithms
  - Component of other data structures

Stacks, Queues, Vectors, & Lists

19

19

## Queue ADT Implementation

- ◆ Can be based on either an array or a linked list
- ◆ Linked List
  - Implementation is straightforward
- ◆ Array
  - Need to maintain pointers to index of front and rear elements
  - Need to wrap around to the front after repeated enqueue and dequeue operations
  - May have to enlarge the array


Stacks, Queues, Vectors, & Lists

20

20

## Array-based Queue

- ◆ Use an array of size  $N$  in a circular fashion
- ◆ Two variables keep track of the front and rear
  - $f$  index of the front element
  - $r$  index immediately past the rear element
- ◆ Array location  $r$  is kept empty

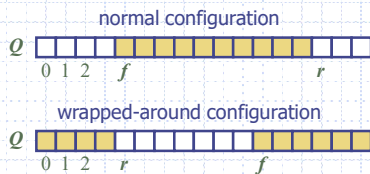

Stacks, Queues, Vectors, & Lists

21


21

## Queue Operations

- ◆ We use the modulo operator (remainder of division)

**Algorithm *size()***  
`return  $(N + r - f) \bmod N$`

**Algorithm *isEmpty()***  
`return  $(f = r)$`



Stacks, Queues, Vectors, & Lists

22

22

## Queue Operations (cont.)

- ◆ Operation enqueue throws an exception if the array is full
- ◆ This exception is implementation-dependent ( $N=17$ )

**Algorithm *enqueue(o)***  
`if  $size() = N - 1$  then  
 throw FullQueueException  
else  
 $Q[r] \leftarrow o$   
 $r \leftarrow (r + 1) \bmod N$`



Stacks, Queues, Vectors, & Lists


23

23

## Queue Operations (cont.)

- ◆ Operation dequeue throws an exception if the queue is empty
- ◆ This exception is specified in the queue ADT

**Algorithm *dequeue()***  
`if isEmpty() then  
 throw EmptyQueueException  
else  
 $o \leftarrow Q[f]$   
 $f \leftarrow (f + 1) \bmod N$   
return  $o$`



Stacks, Queues, Vectors, & Lists

24

24



## A Queue Interface in Java

- ◆ Java interface corresponding to our Queue ADT
- ◆ Requires the definition of exception classes
- ◆ No corresponding built-in Java class

```
public interface Queue {  
    public int size();  
    public boolean isEmpty();  
    public Object front()  
        throws EmptyQueueException;  
    public void enqueue(Object o)  
        throws FullQueueException;  
    public Object dequeue()  
        throws EmptyQueueException;  
}
```

Stacks, Queues, Vectors, & Lists

25

25

## Main Point


2. The Queue ADT is a special ADT that supports orderly insertion, access, and removal. Queues achieve their efficiency and effectiveness by concentrating on a single point of insertion (end) and a single point of removal and access (front). Similarly, nature is orderly, e.g., an apple seed when planted properly will yield only an apple tree.

Stacks, Queues, Vectors, & Lists

26

26

## Vectors

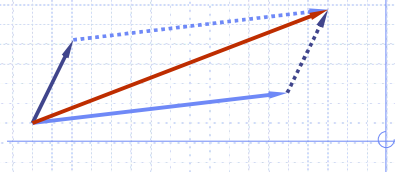

27

## Outline and Reading

- ◆ The Vector ADT (§2.2.1)
- ◆ Array-based implementation (§2.2.1)

Stacks, Queues, Vectors, & Lists

28

28

## The Vector ADT

- ◆ A Vector stores a sequence of elements
- ◆ Element access is based on the concept of Rank
  - Rank is the number of elements that precede an element in the sequence
- ◆ An element can be accessed, inserted, or removed by specifying its rank
- ◆ An exception is thrown if an incorrect rank is specified (e.g., a negative rank)

Stacks, Queues, Vectors, & Lists

29

29

## Main Vector operations:

- object **elemAtRank**(r):
  - returns the element at rank r without removing it
- object **replaceAtRank**(r, o):
  - replace the element at rank r with o and return the old element
- void **insertAtRank**(r, o):
  - insert a new element o to have rank r
- object **removeAtRank**(r):
  - removes and returns the element at rank r
- ◆ Additional operations **size()** and **isEmpty()**

Stacks, Queues, Vectors, & Lists

30

30

## Applications of Vectors

- ◆ Direct applications
  - Sorted collection of objects (elementary database)
- ◆ Indirect applications
  - Auxiliary data structure for algorithms
  - Component of other data structures


Stacks, Queues, Vectors, & Lists

31

31

## Array-based Vector

- ◆ Use an array  $V$  of size  $N$
- ◆ A variable  $n$  keeps track of the size of the vector (number of elements stored)
- ◆ Operation **elemAtRank**( $r$ ) is implemented in  $O(1)$  time by returning  $V[r]$




Stacks, Queues, Vectors, & Lists

32

32

## Insertion

- ◆ In operation **insertAtRank**( $r, o$ ), we need to make room for the new element by shifting forward the  $n - r$  elements  $V[r], \dots, V[n - 1]$
- ◆ In the worst case ( $r = 0$ ), this takes  $O(n)$  time

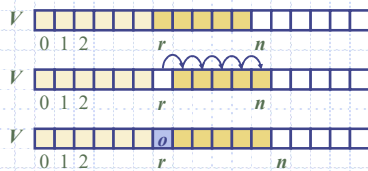


Stacks, Queues, Vectors, & Lists

33

33

## Deletion

- ◆ In operation **removeAtRank**( $r$ ), we need to fill the hole left by the removed element by shifting backward the  $n - r - 1$  elements  $V[r + 1], \dots, V[n - 1]$
- ◆ In the worst case ( $r = 0$ ), this takes  $O(n)$  time

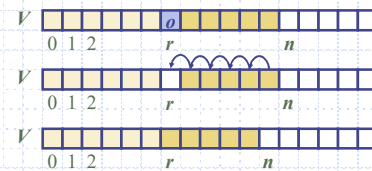

Stacks, Queues, Vectors, & Lists

34

34

## Performance

- ◆ In the array based implementation of a Vector
  - The space used by the data structure is  $O(n)$
  - **size**, **isEmpty**, **elemAtRank** and **replaceAtRank** run in  $O(1)$  time
  - **insertAtRank** and **removeAtRank** run in  $O(n)$  time
- ◆ If we use the array in a circular fashion, **insertAtRank**(0) and **removeAtRank**(0) run in  $O(1)$  time
- ◆ In an **insertAtRank** operation, when the array is full, instead of throwing an exception, we can replace the array with a larger one

Stacks, Queues, Vectors, & Lists

35

35

## Main Point

3. **Rank** is the number of elements that precede an element in a linear sequence; this is a very simple idea, yet is the powerful basis of the random access operations of the Vector ADT. Pure consciousness is the simplest state of awareness, yet is the source of all activity in the universe.

Stacks, Queues, Vectors, & Lists

36

36

## List ADT



Stacks, Queues, Vectors, & Lists

37

37

## Outline and Reading

- ◆ Singly linked list
- ◆ Position ADT and List ADT (§2.2.2)
- ◆ Doubly linked list (§ 2.2.2)

Stacks, Queues, Vectors, & Lists

38

38

## Linked List

- ◆ Motivation:
  - need to handle varying amounts of data
  - eliminate the need to resize the array
  - grows and shrinks exactly when necessary
  - efficient handling of insertion or removal from the middle of the data structure
  - random access is often unnecessary
- ◆ Built-in list data structures
  - Lisp, Scheme, ML, Haskell



Stacks, Queues, Vectors, & Lists

39

39

## Singly Linked List

- ◆ A singly linked list is a concrete data structure consisting of a sequence of nodes
- ◆ Each node stores
  - element
  - link to the next node



Stacks, Queues, Vectors, & Lists

40

40

- ◆ Are there any ADT's that could be implemented efficiently with a linked list?


Stacks, Queues, Vectors, & Lists

41

41

## Stack with a Singly Linked List

- ◆ We can implement a stack with a singly linked list
- ◆ The top element is stored at the first node of the list
- ◆ The space used is  $O(n)$  and each operation of the Stack ADT takes  $O(1)$  time

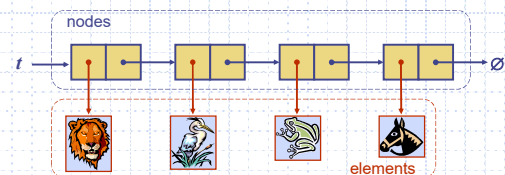


Stacks, Queues, Vectors, & Lists

42

42

## Queue with a Singly Linked List

- ◆ We can implement a queue with a singly linked list
  - The front element is stored at the first node
  - The rear element is stored at the last node
- ◆ The space used is  $O(n)$  and each operation of the Queue ADT takes  $O(1)$  time

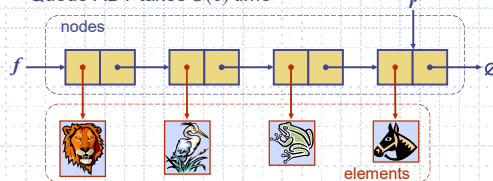

Stacks, Queues, Vectors, & Lists

43

43

## What about the Vector ADT?

Stacks, Queues, Vectors, & Lists

44

44

## Key Idea

- ◆ Elements are accessed by Position
- ◆ Position is an ADT that models a particular place or location in a data structure
- ◆ We will use this abstraction in several data structures (today in the List ADT)
- ◆ We can think of List ADT as being like a Java Interface that is implemented in different ways

Stacks, Queues, Vectors, & Lists

45

45

## Position ADT

- ◆ The **Position** ADT models the notion of place within a data structure where a single object is stored
- ◆ It gives a unified view of diverse ways of storing data, such as
  - a cell of an array
  - a node of a linked list or tree
- ◆ Just one method:
  - object **element()**: returns the element stored at the position

Stacks, Queues, Vectors, & Lists

46

46

## List ADT

- ◆ The **List** ADT models a sequence of positions storing arbitrary objects
- ◆ It establishes a before/after relation between positions
- ◆ Generic methods:
  - **size()**, **isEmpty()**
- ◆ Query methods:
  - **isFirst(p)**, **isLast(p)**

### Accessor methods:

- **first()**, **last()**
- **before(p)**, **after(p)**

### Update methods:

- **replaceElement(p, e)**, **swapElements(p, q)**
- **insertBefore(p, e)**, **insertAfter(p, e)**
- **insertFirst(e)**, **insertLast(e)**
- **remove(p)**


Stacks, Queues, Vectors, & Lists

47

47

## Doubly Linked List

- ◆ A doubly linked list provides a natural implementation of the List ADT
- ◆ Nodes implement Position and store:
  - element
  - link to the previous node
  - link to the next node
- ◆ Special header and trailer nodes

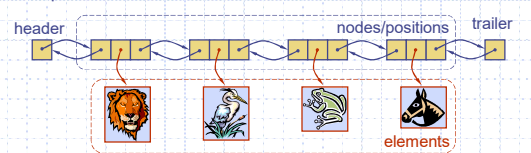


Stacks, Queues, Vectors, & Lists


48

48




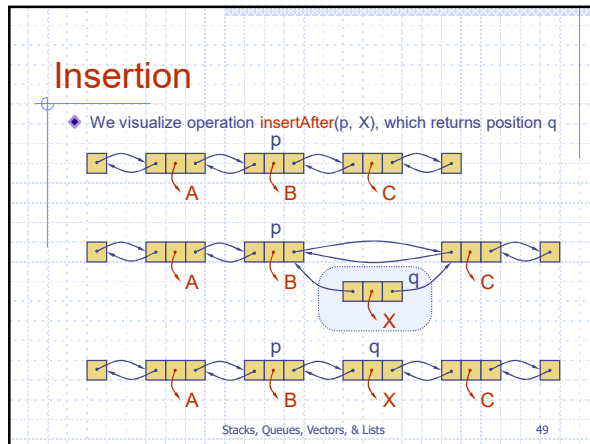


49

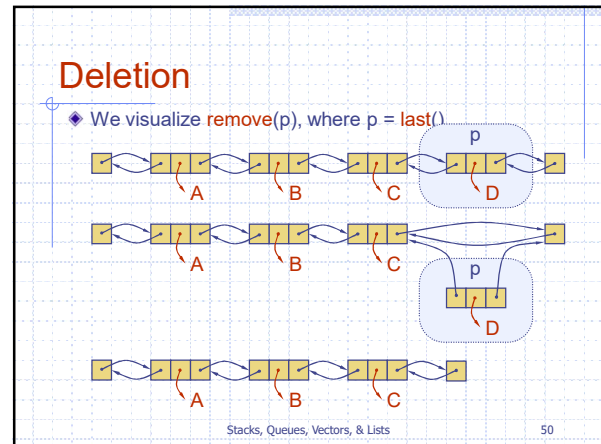


50

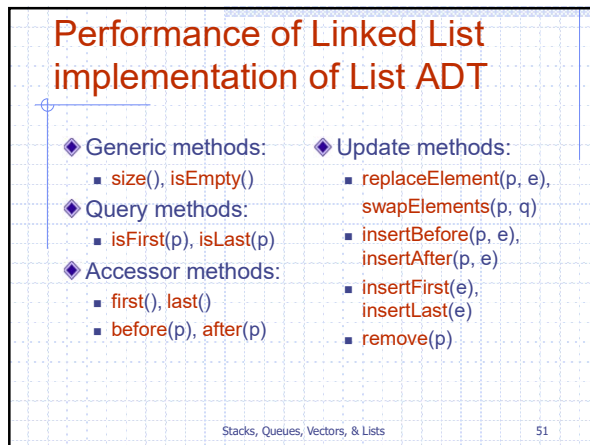


51

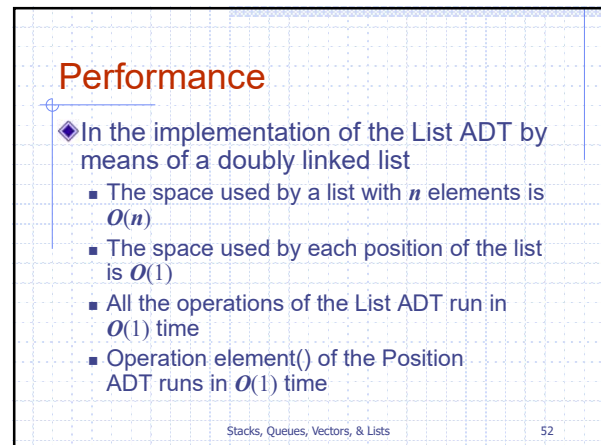

52

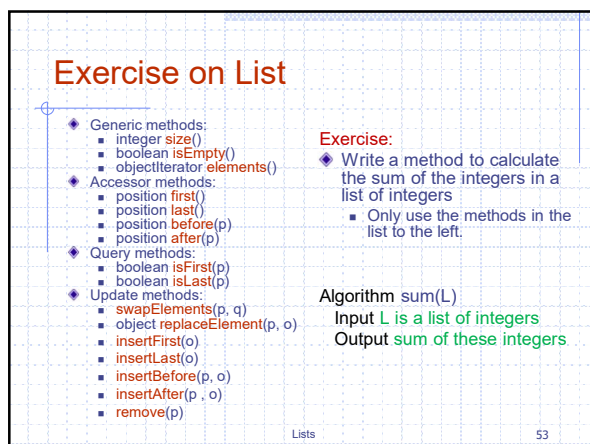

53

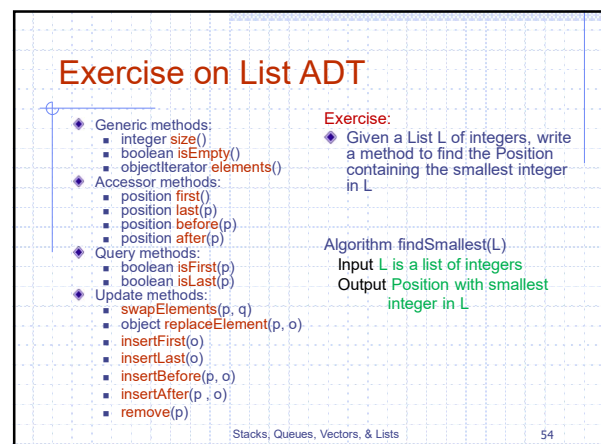

54

## Main Point

- The algorithm designer needs to consider how a sequence of objects is going to be used because linked lists are much more efficient than arrays (vectors) when many insertions or deletions need to be made to random parts of a sequence (or list).

*Science of Consciousness:* Nature always functions with maximum efficiency and minimum effort; these qualities of pure intelligence are infused into our mind and body through regular practice of the TM technique as demonstrated by more than 500 scientific studies showing the benefits.

Stacks, Queues, Vectors, & Lists

55

55

## Sequence ADT

Sequences

56

56

## Outline and Reading

- Sequence ADT (§ 2.2.3)
- Implementations of the sequence ADT (§ 2.2.3)
- Iterators (2.2.3)

Sequences

57

57

## Sequence ADT

- The **Sequence ADT** is the union of the Vector and List ADTs
- Elements accessed by
  - Rank, or
  - Position
- Generic methods:
  - size(), isEmpty()
- Vector-based methods:
  - elemAtRank(r), replaceAtRank(r, o), insertAtRank(r, o), removeAtRank(r)
- List-based methods:
  - first(), last(), before(p), after(p), replaceElement(p, o), swapElements(p, q), insertBefore(p, o), insertAfter(p, o), insertFirst(o), insertLast(o), remove(p)
- Bridge methods:
  - atRank(r), rankOf(p)

Sequences

58

58

## Applications of Sequences

- The Sequence ADT is a basic, general-purpose, data structure for storing an ordered collection of elements
- Direct applications:
  - Generic replacement for stack, queue, vector, or list
  - small database (e.g., address book)
- Indirect applications:
  - Building block of more complex data structures


Sequences

59

59

## Array-based Implementation

- We use a circular array storing positions
- A position object stores:
  - Element
  - Rank
- Indices  $f$  and  $l$  keep track of first and last positions

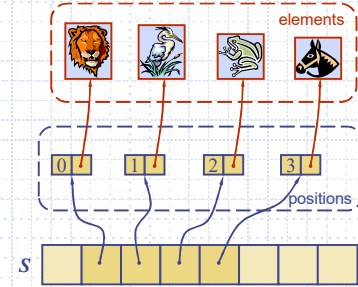

Sequences

60

60

## Sequence Implementations

Operation	Array	List
size, isEmpty		
atRank(r), elemAtRank(r)		
replaceAtRank(r, o)		
insertAtRank(r, o), removeAtRank(r, o)		

Sequences

61

61

## Sequence Implementations

Operation	Array	List
size, isEmpty	1	1
atRank(r), elemAtRank(r)	1	$r$
replaceAtRank(r, o)	1	$r$
insertAtRank(r, o), removeAtRank(r)	$n$	$r$

Sequences

62

62

## Sequence Implementations

Operation	Array	List
rankOf(p)		
first(), last()		
before(p), after(p)		
replaceElement(p, o), swapElements(p, q)		
insertFirst(o), insertLast(o)		
insertAfter(p, o), insertBefore(p, o)		
remove(p)		

Sequences

63

63

## Sequence Implementations

Operation	Array	List
rankOf(p)	1	$n$
first(), last()	1	1
before(p), after(p)	1	1
replaceElement(p, o), swapElements(p, q)	1	1
insertFirst(o), insertLast(o)	1	1
insertAfter(p, o), insertBefore(p, o)	$n$	1
remove(p)	$n$	1

Sequences

64

64

## Exercise on Sequence ADT

- Generic methods:
  - integer size()
  - boolean isEmpty()
  - objectIterator elements()
- Accessor methods:
  - position first()
  - position last()
  - position before(p)
  - position after(p)
- Query methods:
  - boolean isFirst(p)
  - boolean isLast(p)
- Update methods:
  - swapElements(p, q)
  - object replaceElement(p, o)
  - insertFirst(o)
  - insertLast(o)
  - insertBefore(p, o)
  - insertAfter(p, o)
  - remove(p)

### Exercise:

- Given a Sequence S, write a method to remove the element that occurs at the middle of S
  - Specifically, remove the element as follows:
    - when the number of elements is odd, remove the element e such that the same number of elements occur before and after e in S
    - or when number of elements is even, remove element e such that there is one more element that occurs after e than before
  - Return the element e that was removed; implement this without using a counter of any kind or any of the Vector operations
  - Analyze the complexity of your solution

Algorithm removeMiddle(S)

Stacks, Queues, Vectors, & Lists

65

65

## List-Based vs. Array-Based Sequence

Algorithm	List-Based	Array-Based
findMiddle(S)		
if S.isEmpty() then	1	1
return null	1	1
p <- S.first()	1	1
q <- S.last()	1	1
while p ≠ q ∧ S.after(p) ≠ q do	$n$	$n$
q <- S.before(q)	$n$	$n$
p <- S.after(p)	$n$	$n$
return p	1	1
removeMiddle(S)		
p <- findMiddle(S)	$n$	$n$
if p = null then throw NoMidExcpn	1	1
e <- p.element()	1	1
S.remove(p)	1	$n$
return e	1	1

Stacks, Queues, Vectors, & Lists

66

66

## Array-Based Sequence Version

Algorithm	findMiddle(S)	List	Array
if S.isEmpty() then	1	1	
throw NoMidExcpth	1	1	
mid <- (S.size() - 1) / 2	1	1	
p <- S.atRank(mid)	n	1	
return p	1	1	

Algorithm	removeMiddle(S)	List	Array
p <- findMiddle(S)	n	1	
e <- p.element()	1	1	
S.remove(p)	1	n	
return e	1	1	

Stacks, Queues, Vectors, & Lists

67

67

## Iterators

- ◆ An iterator abstracts the process of scanning through a collection of elements
- ◆ An iterator is typically associated with another data structure
- ◆ Methods of the *ObjectIterator* ADT:
  - boolean **hasNext()**
  - object **nextObject()**
  - **reset()**
- ◆ We can augment the Stack, Queue, Vector, List and Sequence ADTs with method:
  - ObjectIterator **elements()**
- ◆ Extends the concept of Position by adding a traversal capability
- ◆ Two notions of iterator:
  - snapshot: freezes the contents of the data structure at a given time
  - dynamic: follows changes to the data structure
- ◆ Implementation with an array or singly linked list

Sequences

68

68

## Main Point

5. The Sequence ADT captures the abstract notion of a mathematical sequence; it specifies the operations that any list or vector should support. The specifications of the Sequence ADT can be satisfied based on different implementation strategies with different concrete implementations. Likewise, pure awareness is an abstraction of individual awareness; each individual provides a specific, concrete realization of unbounded, unmoving pure awareness.

Sequences

69

69

## Connecting the Parts of Knowledge with the Wholeness of Knowledge

1. The Sequence ADT may be used as an all-purpose class for storing collections of objects with only *sequential access* to its elements.
2. The underlying implementation of an ADT determines its efficiency depending on how that data structure is going to be used in practice.

70

70

3. **Transcendental Consciousness** is the unbounded, silent field of pure order and efficiency.
4. **Impulses within Transcendental Consciousness:** Within this field, the laws of nature continuously organize and govern all activities and processes in creation.
5. **Wholeness moving within itself:** In Unity Consciousness, when the home of all knowledge has become fully integrated in all phases of life, life is spontaneously lived in accord with natural law for maximum achievement with minimum effort.

71

71