No.	Case	Comment
1		➢ It was previously requested on 2026-01-31, and no changes have been made. ➢ Rate of Change in Percentage to Static Pressure: From fixed value 25% to be variable depending on Static pressure Value

Static Pressure (Pa)	Static Pressure (in.wg)	Static Pressure (kPa)	Static Pressure (psi)	Static Pressure (bar)	Percentage
25	0.10	0.03	0.0036	0.00025	50.0%
50	0.20	0.05	0.0073	0.00050	35.0%
100	0.40	0.10	0.0145	0.00100	25.0%
150	0.60	0.15	0.0218	0.00150	20.0%
200	0.80	0.20	0.0290	0.00200	17.5%
250	1.00	0.25	0.0363	0.00250	15.0%
300	1.20	0.30	0.0435	0.00300	12.5%
350	1.40	0.35	0.0508	0.00350	10.0%
400	1.60	0.40	0.0580	0.00400	10.0%
450	1.80	0.45	0.0653	0.00450	7.5%
500	2.00	0.50	0.0725	0.00500	7.5%
550	2.20	0.55	0.0798	0.00550	7.5%
600	2.40	0.60	0.0870	0.00600	5.0%
650	2.60	0.65	0.0943	0.00650	5.0%
700	2.80	0.70	0.1015	0.00700	5.0%
750	3.00	0.75	0.1088	0.00750	5.0%
800	3.20	0.80	0.1160	0.00800	5.0%
850	3.40	0.85	0.1233	0.00850	5.0%
900	3.60	0.90	0.1305	0.00900	5.0%
950	3.80	0.95	0.1378	0.00950	5.0%
1000	4.00	1.00	0.1450	0.01000	5.0%
1050	4.20	1.05	0.1523	0.01050	5.0%
1100	4.40	1.10	0.1595	0.01100	5.0%
1150	4.60	1.15	0.1668	0.01150	5.0%
1200	4.80	1.20	0.1740	0.01200	5.0%
1250	5.00	1.25	0.1813	0.01250	5.0%
1300	5.20	1.30	0.1885	0.01300	5.0%
1350	5.40	1.35	0.1958	0.01350	5.0%
1400	5.60	1.40	0.2031	0.01400	5.0%
1450	5.80	1.45	0.2103	0.01450	5.0%
1500	6.00	1.50	0.2176	0.01500	5.0%

<table>
<tr><td>2</td><td>

Fan Data

- Impeller Type : Axial
- Blades Symbol : M ====> AM

</td><td>

- Blade Symbol Should be have 2 digit , first for blades material : (A→ Aluminum) or (P→PAG) , then Blade Shape: (M,V,G) or (V,F) .
- Example: M=> AM

</td></tr>
<tr><td>3</td><td>

Performance Data

- Fan Unit No. [As Per Schedule]	:	EX-01
- Design Air Flow [CFM]	:	10,000
- Design Static Pressure [Pa]	:	364
- Design Fan Input Power [kW]	:	3.12
- Design Motor Input Power [kW]	:	3.52
- Design Fan Static Efficiency [%]	:	54.0%
- Design Fan Total Efficiency [%]	:	63.5%
- Temperature [C°]	:	20
- Density [kg/m3]	:	1.200
- Fan Speed [RPM]	:	1,440
- Sound Pressure @ 3 m [dBA]	:	73.0
- Sound Power @ 3 m [dBA]	:	93.5

Fan Data

- Impeller Type	:	Axial
- Blades Symbol	:	M
- Blades Material	:	Aluminum
- Blades Angle [degree]	:	25.0
- Configurations (Hub-Blades)	:	9-9

Motor Data

Selected Safety Factor: 15% 3.52*1.15=4.048 kw
Motor input Power *(100%+S.F)=Motor Powe

- Motor Model	:	AGM3EL 112 M 4a
- Motor Power [kW]	:	4.0
- No. of Poles	:	4
- Voltage [V]/Phase/Frequency [Hz]	:	380/3/50
- Motor Efficiency [%]	:	88.6%
- Insulation Class	:	F

Standard Motor should be: 5.5 kw not 4 kw

</td><td>

- Wrong Value for Motor Power [kw] in Motor Data.
- Equation:
  - Motor Power [kw] = Motor Input Power [kw] x Power Safety Factor .
  - (i.e.) 3.52 x 1.15=4.048 so standard motor should be 5.5 kw not 4 kw.
  - **Check** if safety factor equation or not.

</td></tr>
<tr><td>4</td><td>

Motor Data

- Motor Model : AGM3EL 112 M 4a
- Motor Power [kW] : 4.0 ===> should be two digital
  ex: 0.2 ===> 0.18 increase No of Digits

Motor Data

- Motor Model : AGM 63 M 4b
- Motor Power [kW] : 0.2 Should be 0.18 not 0.2

</td><td>

- Increasae number of digits to 2 in Motor power (kw).

</td></tr>
</table>

5	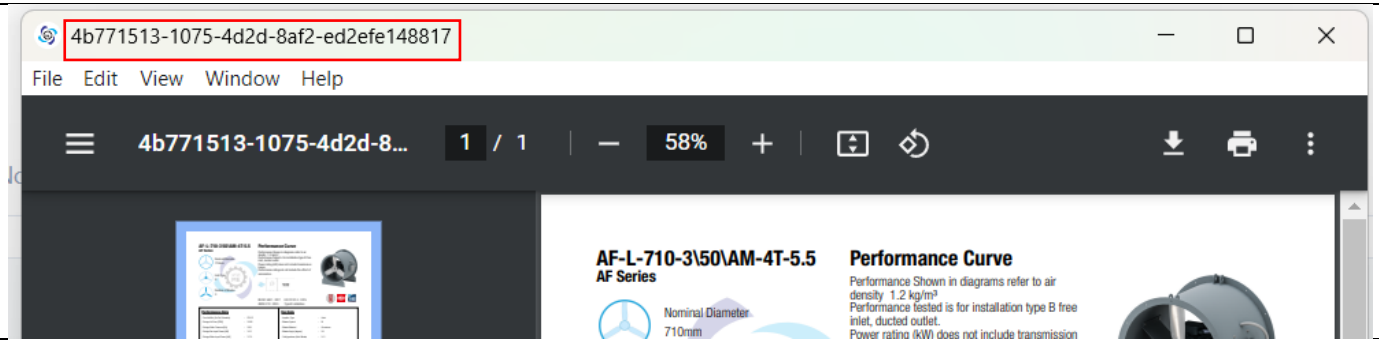	➢ File Name : ▪ I want Name be like Custom Fan Unit No. (i.e.) a822f753-0c8b-4bc2-81cf-f095a0b1a0c7 -> EF-04
6	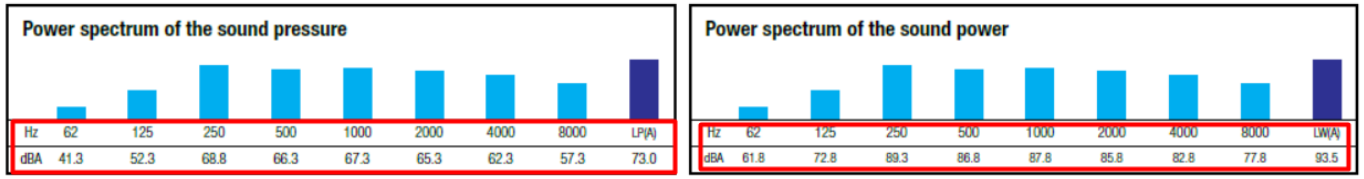 Increase size of Numbers	➢ Tables of LP(A) & LW(A) as number and text-→ Small Font Size , so should increase font size
7	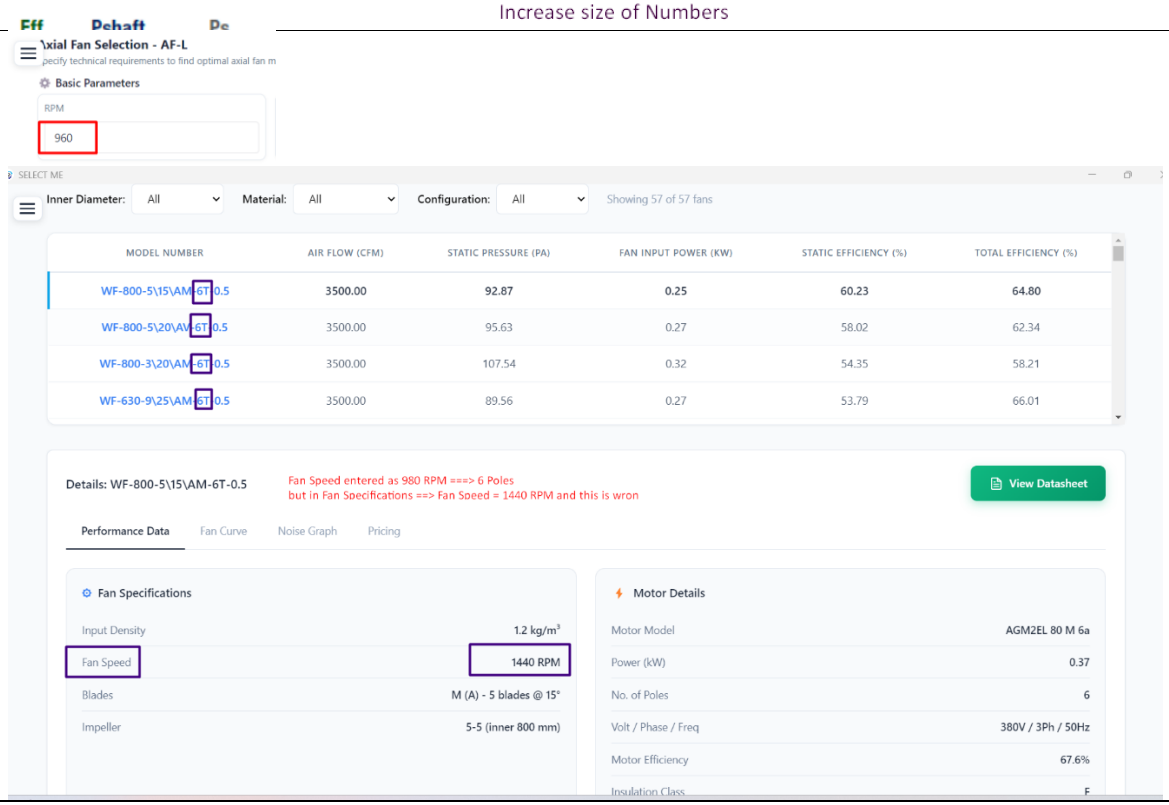	➢ When selecting any speed value in the Basic Parameters tab other than 1440 RPM, the fan speed displayed in the Performance Data tab becomes incorrect. ➢ (example) Basic Parameters Tab → 960 Performance Data Tab → 1440 (Wrong) Fan Model→ 6 Poles

8

Performance Data

Effst = Q (m3/s) * Pst (Pa) / Fan input power (w)
Efftot = Q (m3/s) * Ptot (Pa) / Fan input power (

- Fan Unit No. [As Per Schedule]	:	EX-01
- Design Air Flow [CFM]	:	10,000
- Design Static Pressure [Pa]	:	364
- Design Fan Input Power [kW]	:	3.12
- Design Motor Input Power [kW]	:	3.52
- Design Fan Static Efficiency [%]	Wrong :	54.0% ===> 55.06%
- Design Fan Total Efficiency [%]	Wrong :	63.5%
- Temperature [C°]	:	20
- Density [kg/m3]	:	1.200
- Fan Speed [RPM]	:	1,440
- Sound Pressure @ 3 m [dBA]	:	73.0
- Sound Power @ 3 m [dBA]	:	93.5

Fan Data

- Impeller Type	:	Axial
- Blades Symbol	:	M
- Blades Material	:	Aluminum
- Blades Angle [degree]	:	25.0
- Configurations (Hub-Blades)	:	9-9

Motor Data

- Motor Model	:	AGM3EL 112 M 4a
- Motor Power [kW]	:	4.0
- No. of Poles	:	4
- Voltage [V]/Phase/Frequency [Hz]	:	380/3/50
- Motor Efficiency [%]	:	88.6%
- Insulation Class	:	F

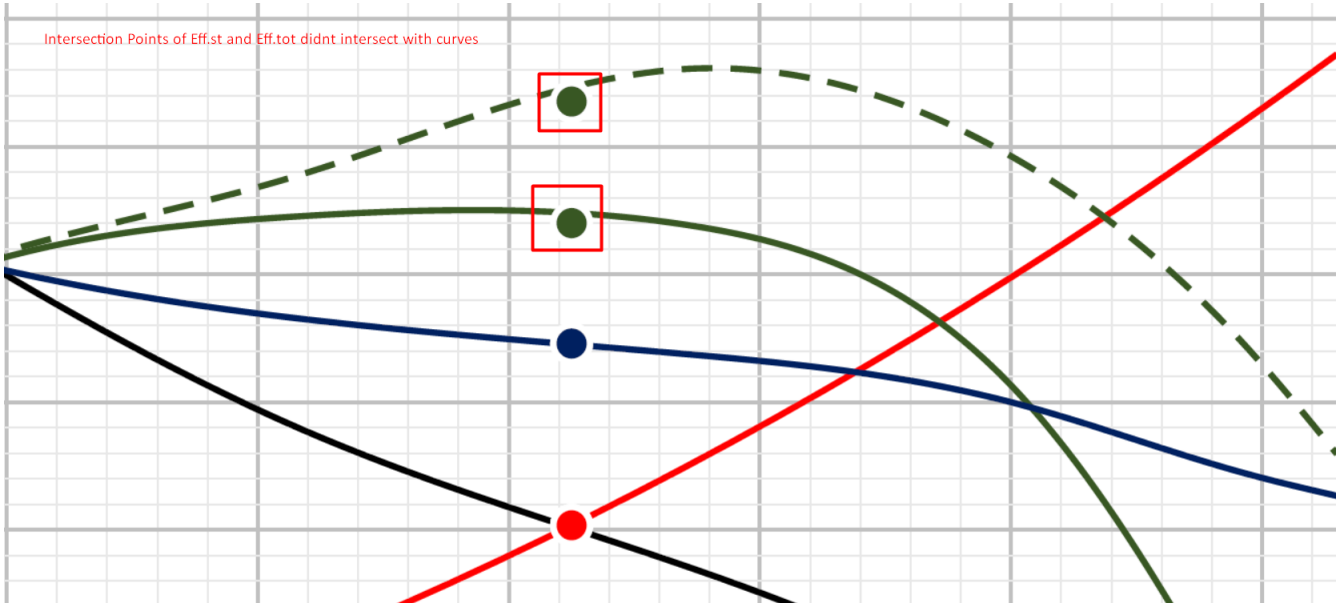

- Wrong Value for Following:
  1. Design Fan Static Efficiency.
  2. Design Fan Total Efficiency.
- Laws:
  1. Static Efficiency = Air Flow (m3/s) x Static Pressure (pa) / Fan input Power (w)
  2. Total Efficiency = Air Flow (m3/s) x Total Pressure (pa) / Fan input Power (w)
- Example:
  - Design Fan Static Efficiency Should be 55.06% not 54%.
  - Design Fan Static Efficiency Should be 63.3% not 63.5%.
  - The green intersection points for Static Efficiency and Total Efficiency do not align with their respective curves (Flow vs. Static Pressure and Flow vs. Fan Input Power) because the values used are incorrect.

9	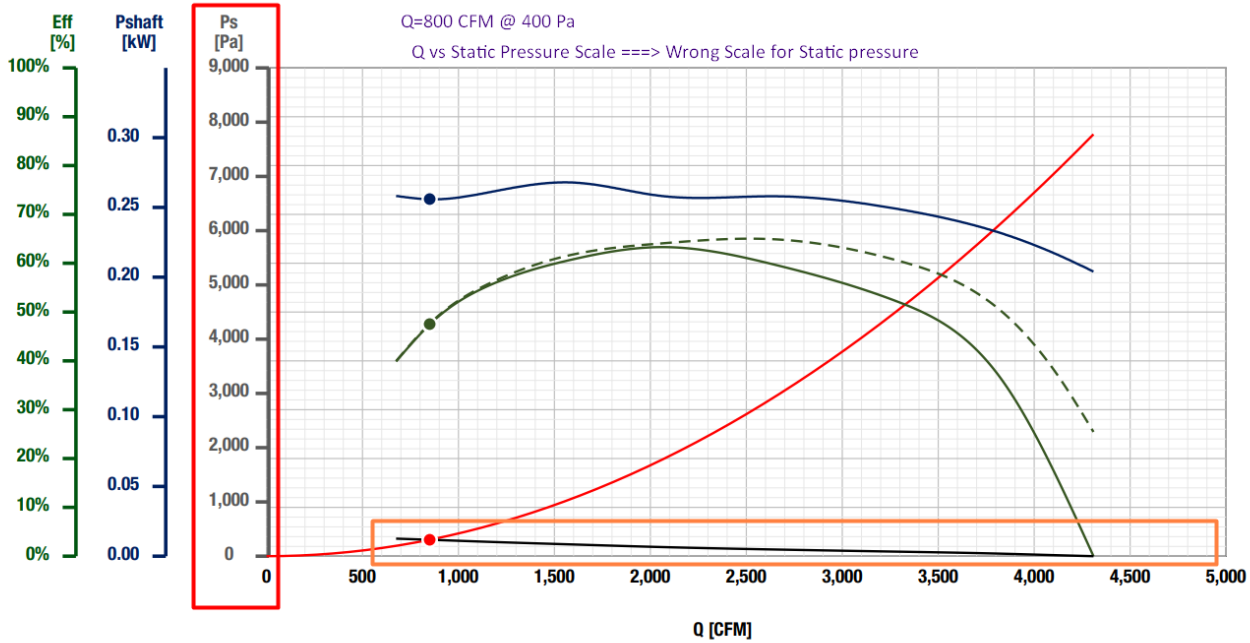 	➢ The static pressure scale on the Flow vs. Static Pressure curve is incorrect for some curves when the airflow value is small.

10	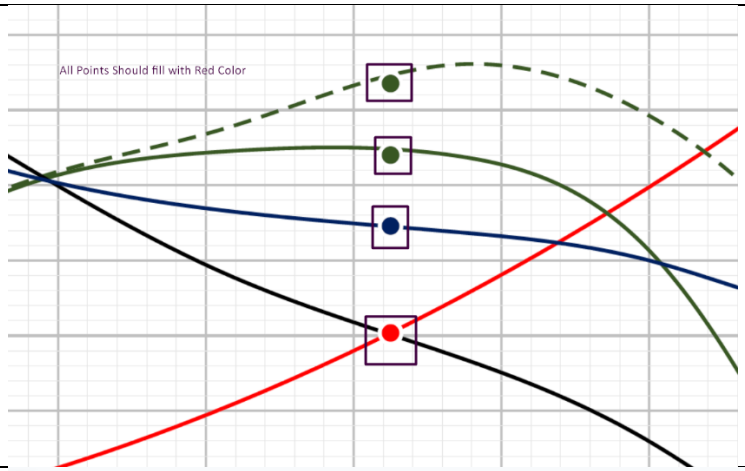	➢ All Selection points Should be with Red Color in Data sheet and Fan Curve Tab.
11	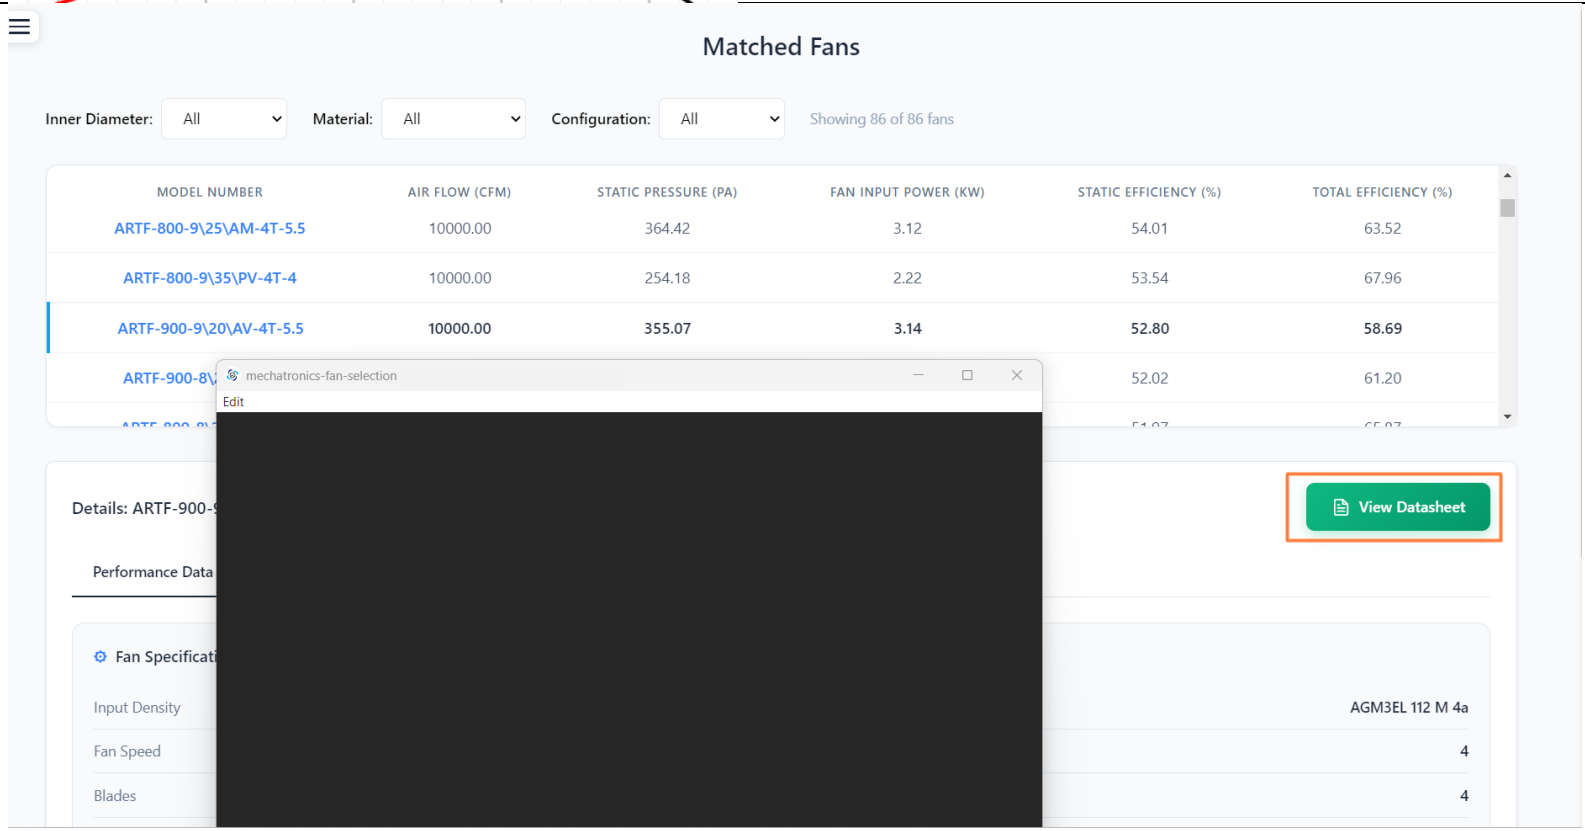	➢ Occasionally, a bug occurs in the exported data sheets (PDF).

12

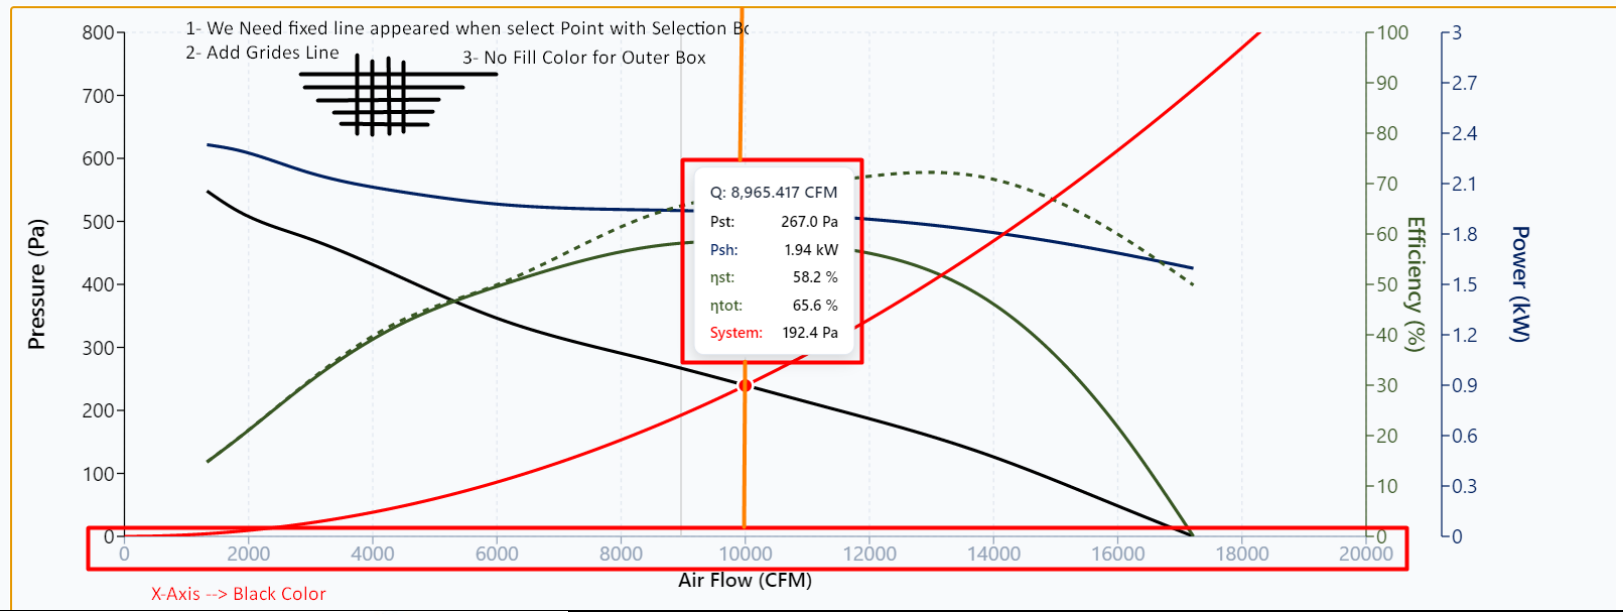

Fan Curve Tab – UI/Chart Requirements

1- **X-Axis Fill**

a. Fill the X-axis line with **black** color.

2- **Data Point Selection**

a. When a point is selected, display a **box filled with its corresponding data** (values).

b. The line itself must remain fixed (no shift or distortion).

3- **Gridlines**

a. Add both **horizontal** and **vertical** gridlines to the chart.

4- **Outer Box Fill**

a. The outer box (chart area border/background) must have **no fill** (transparent).

b. *(Note: Currently orange – remove this fill.)*

Change 2 icons :
one Removed and Second Replaced

➢ Change ISO Logo , and remove AMCA Member Logo

Pricing

No.	Case	Comment
1		➢ **Axial Casing Pricing:** ➢ When exporting an Excel sheet from the software, populating it with actual pricing, and then importing it back, the Total Cost w/ VAT is calculated incorrectly—there is no clear reference for how this value is derived.

Model	Size (mm)	Weight (kg) w/o Scrap	Scrap %	Weight w/ Scrap	Circumference (m)	Laser Time (min)	Bending Line	Rolling	Painting Ø	Profit %
ABSF-C	450.00	63.00	40.00	88.200	12.60	30.00	24.00	6.00	540.00	20.00
ABSF-C	500.00	75.00	40.00	105.000	12.60	30.00	24.00	6.00	600.00	20.00
ABSF-C	560.00	95.00	45.00	137.750	12.60	30.00	24.00	6.00	672.00	20.00

Accessory 1 Desc	Accessory 1 Price	Accessory 2 Desc	Accessory 2 Price	Total Cost w/ VAT	Actions
-	—	-	—	872.10	
-	—	-	—	967.70	
-	—	-	—	1,089.99	

Model	Size (mm)	Casing Weight (kg) w/o Scrap	Scrap Percentage (%)	Casing Weight (kg) with Scrap	Casing Circumference (m)/Welding	Laser Time (min)	Bending Line	Rolling	Painting/ Diameter	Profit	Total Price with VAT	Total Price with VAT c/w Scrap Cost	Total Price with VAT	Total Price with VAT c/w Scrap Cost
ABSF-C	450	63	40%	88.2	12.6	30	24	6	540	20%	9,675.35	9,143.88	9,675.35	9,143.88
ABSF-C	500	75	40%	105	12.6	30	24	6	600	20%	10,636.13	10,003.43	10,636.13	10,003.43
ABSF-C	560	95	45%	137.75	12.6	30	24	6	672	20%	12,452.87	11,551.27	12,452.87	11,551.27

No.	Case	Comment
2		➢ **Axial Blades Pricing:** ➢ When exporting an Excel sheet from the software, populating it with actual pricing, and then importing it back, the Total Cost w/ VAT is calculated incorrectly—there is no clear reference for how this value is derived.

Symbol	Material	Type	Length (mm)	Weight (kg)	Mold Cost	Machining	Transport	Packing	Steel Balls	Total Cost w/ VAT	Actions
AG	Aluminum	Variable	400	0.6	661200	11.02	1	0	3.99	7900.92	
AM	Aluminum	Variable	495	1.6	530100	22.42	1	0	3.99	8026.87	

Axial Blades

Symbol	Material	Blade Type	Length (mm)	Blade Weight (kg)	Mold Cost with VAT	Machining Cost with VAT	Transportation Cost	Packing Cost	Steel Balls Cost	Total Price with VAT
AM	Aluminum	Variable	495	1.6	530,100	22.42	1	0	3.99	748.25

3

Symbol	Material	Hub Type	Size (mm)	Weight (kg)	Mold Cost	Machining	Transport	Packing	Total Cost w/ VAT	Actions
12	Aluminum	Variable	280	2.7	416099.9999999999	76.38	1.666666666666667	0	25237.79	

Axial Hubs

Sr.	Symbol	Material	Hub Type	Size (mm)	Hub Weight (kg)	Mold Cost with VAT	Machining Cost with VAT	Transportation Cost	Packing Cost		Total Price with VAT
5	12	Aluminum	Variable	280	2.7	416,100	76	1.7	0		1,097.71

- **Axial Hubs Pricing:**
- When exporting an Excel sheet from the software, populating it with actual pricing, and then importing it back, the Total Cost w/ VAT is calculated incorrectly—there is no clear reference for how this value is derived

4

Impeller Pricing

Sleeves

Manage pricing for blades, hubs, and frames

5 Blades | 6 Hubs | 13 Frames

Material	Frame Size (mm)	Size (mm)	Weight (kg)	Mold Cost	Machining	Transport	Packing	Total Cost w/ VAT	Actions
Aluminum	56	9	0.575	193800	86.35499999999999	1	0	16619.27	

Axial Aluminum sleeve

Sr.		Material	Frame Size (mm)	Size (mm)	Weight (kg)	Mold Cost with VAT	Machining Cost with VAT	Transportation Cost	Packing Cost	Total Price with VAT		Total Price with VAT
1		Aluminum	56	9	0.58	193,800	86	1	0			333

- **Axial Sleeves Pricing:**
- **Frames ➔ Sleeves**
- When exporting an Excel sheet from the software, populating it with actual pricing, and then importing it back, the Total Cost w/ VAT is calculated incorrectly—there is no clear reference for how this value is derived

5

157 Motors Found

Need Motor Price with VAT _Factor (L.E)

Wrong Eq. _Value:
-> 76.11*1.14=86.765 L.E

Other Price ($) w/o VAT	Other Price with VAT & Factor (L.E)	Current (A) with S.F (25%)(Cable)	Cable Size (mm2)(Cable)	Price w/o VAT Per Meter (Cable)	Price With VAT Per Meter (Cable)
56.372549	-	0.5	3x1.5 RM	76.11	2,516.20 L.E

157 Motors Found

Wrong Eq. _Value:
it should be
5.25*1.14=5.985 L.E

Wrong Eq. _Value:
2.1*1.14=2.394

No.(Cable Lugs)	U.P Price w/o VAT (Cable Lugs)	U.P Price with VAT (Cable Lugs)	T.P Price with VAT (Cable Lugs)	No.(Cable Heat Shrink)	U.P Price w/o VAT (Cable Heat Shrink)	U.P Price with VAT (Cable Heat
6	5.25	29.92 L.E	179.52 L.E	6	2.1	11.97 L.E

157 Motors Found

Wrong eq _Value:
69.3*1.14=79.002 L.E

Meter (Flexible Connector)	Size (mm) (Flexible Connector)	U.P Price w/o VAT (Flexible Connector)	U.P Price with VAT (Flexible Connector)	T.P Price with VAT (Flexible Connector)	No. (Gland)	U.P Price w/o VA
0.8	3/4"	69.3	395.01 L.E	316.01 L.E	2	25.2

- **Motors Pricing:**
- When exporting an Excel sheet from the software, populating it with actual pricing, and then importing it back, the Total Cost w/ VAT is calculated incorrectly—there is no clear reference for how this value is derived

157 Motors Found

Wrong Equation _Value:
25.2*1.14=28.728 L.E

Wrong Equation _Value:
10.184*1.14=11.60976 L.E

No. (Gland)	U.P Price w/o VAT (Gland)	U.P Price with VAT (Gland)	T.P Price with VAT (Gland)	No. (Brass Bar)	U.P Price w/o VAT (Brass Bar)	U.P Price with VAT (Brass Bar)	T.P Price with VAT (Brass Bar)
2	25.2	143.64 L.E	287.28 L.E	3	10.184211	336.69 L.E	1,010.07 L.E

Wrong Value _Equation:
446.25*1.14=508.725 L.E

Size (mm) (Electrical Box)	U.P Price w/o VAT (Electrical Box)	U.P Price with VAT(Electrical Box)	Price With VAT Per Meter (Total)	Power (HP)
110 x 110 x 55	446.25	2,543.63 L.E	6,924.53 L.E	0.12

	A	B	C	AJ	AK	AL	AM	AO	AP	AQ	AS	AT	AU	AW	AX	AY
1				B3		B5 ,B14, B35, B34		Cable			Cable Lugs			Cable Heat Shrink		
2	Material	Model	Power (kW)	Price ($) w/o VAT	Price with VAT & Factor (L.E)	Price ($) w/o VAT	Price with VAT & Factor (L.E)	Current (A) with S.F (25%)	Cable Size (mm2)	Price With VAT Per Meter	No.	U.P Price with VAT	T.P Price with VAT	No.	U.P Price with VAT	T.P Price with VAT
3	Aluminium	AGM 56 M 4b	0.09	56	3,265	56	3,265	0.5	3x1.5 RM	87	6.0	6.0	35.9	6.0	2.4	14.4

	A	B	C	BA	BB	BC	BD	BF	BG	BH	BJ	BK	BL
1				Flexible Connector				Gland			Brass Bar		
2	Material	Model	Power (kW)	Meter	Size (mm)	U.P Price with VAT	T.P Price with VAT	No.	U.P Price with VAT	T.P Price with VAT	No.	U.P Price with VAT	T.P Price with VAT
3	Aluminium	AGM 56 M 4b	0.09	0.8	3/4"	79.0	63.2	2.0	28.7	57.5	3.0	11.6	34.8

	A	B	C	BN	BO	BQ	BS	BT
1				Electrical Box		Total		
2	Material	Model	Power (kW)	Size (mm)	U.P Price with VAT	Price With VAT Per Meter		Power (HP)
3	Aluminium	AGM 56 M 4b	0.09	110 x 110 x 55	508.7	801.3		0.12

6	Performance Data Fan Curve Noise Graph **Pricing** Total Direct Cost (L.E) **Pricing Information** Electrical Motor Cost — B3 Price with VAT & Factor — **216.82** L.E Electrical Component Cost — Price With VAT Per Meter (Total) — **6,924.53** L.E Axial Impeller Cost — Blade: M (A), Hub: 9, Frame: 100 mm — **59,427.35** L.E Axial Casing Cost — Model: AF-L, Size: 900 mm — **1,390.17** L.E Other Accessories Cost — Price with VAT (Fan: AF-L, Size: 900 mm) — **1,024.45** L.E **Note:** Pricing values are fetched from the selected motor (AGM3EL 100 H 4b). Using 'B3 Price' for standard fan type.	➢ Summation for All Direct Cost