

Chapter 12

Streams
and File I/O

Learning Objectives

- I/O Streams
 - File I/O
 - Character I/O
- Tools for Stream I/O
 - File names as input
 - Formatting output, flag settings
- Stream Hierarchies
 - Preview of inheritance
- Random Access to Files

Introduction

- Streams
 - Special objects
 - Deliver program input and output
- File I/O
 - Uses inheritance
 - Not covered until chapter 14
 - File I/O very useful, so covered here

Streams

- A flow of characters
- Input stream
 - Flow into program
 - Can come from the keyboard
 - Can come from a file
- Output stream
 - Flow out of program
 - Can go to the screen
 - Can go to a file



Streams Usage


- We've used streams already
 - cin
 - Input stream object connected to keyboard
 - cout
 - Output stream object connected to screen
- Can define other streams
 - To or from files
 - Used similarly as cin, cout

Streams Usage Like cin, cout

- Consider:
 - Given program defines stream `inStream` that comes from some file:
`int theNumber;`
`inStream >> theNumber;`
 - Reads value from stream, assigned to *theNumber*
 - Program defines stream `outStream` that goes to some file
`outStream << "theNumber is " << theNumber;`
 - Writes value to stream, which goes to file

Files

- We'll use text files
- Reading from file
 - When program takes input
- Writing to file
 - When program sends output
- Start at beginning of file to end
 - Other methods available
 - We'll discuss this simple text file access here

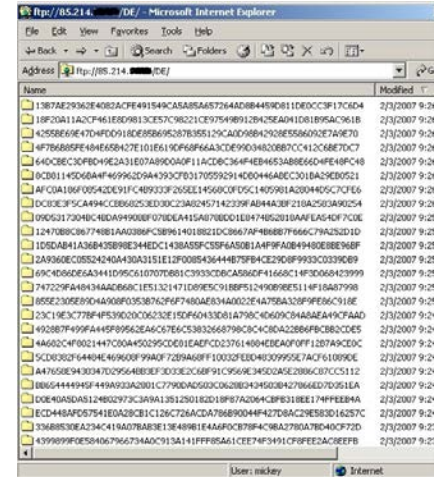

File Connection

- Must first *connect file to stream object*
- For input:
 - File → `ifstream` object
- For output:
 - File → `ofstream` object
- Classes `ifstream` and `ofstream`
 - Defined in library `<fstream>`
 - Named in `std` namespace

File I/O Libraries

- To allow both file input and output in your program:

```
#include <fstream>  
using namespace std;
```

OR

```
#include <fstream>  
using std::ifstream;  
using std::ofstream;
```

Declaring Streams

- Stream must be declared like any other class variable:

```
ifstream inStream;
```

```
ofstream outStream;
```

- Must then "connect" to file:

```
inStream.open("infile.txt");
```

- Called "opening the file"
- Uses member function *open*
- Can specify complete pathname

Streams Usage

- Once declared → use normally!
 `int oneNumber, anotherNumber;`
 `inStream >> oneNumber >> anotherNumber;`
- Output stream similar:
 `ofstream outStream;`
 `outStream.open("outfile.txt");`
 `outStream << "oneNumber = " << oneNumber`
 `<< " anotherNumber = "`
 `<< anotherNumber;`
 - Sends items to output file

File Names

- Programs and files
- Files have **two names** to our programs
 - External file name
 - Also called "physical file name"
 - Like "infile.txt"
 - Sometimes considered "real file name"
 - Used only once in program (to open)
 - Stream name
 - Also called "logical file name"
 - **Program uses this name for all file activity**

Closing Files

- Files should be closed
 - When program completed getting input or sending output
 - Disconnects stream from file
 - In action:

```
inStream.close();  
outStream.close();
```

 - Note no arguments
- Files automatically close when program ends (*if your program ends normally*)

File Flush

- Output often "buffered"
 - Temporarily stored before written to file
 - Written in "groups"
- Occasionally might need to force writing:
`ostream.flush();`
 - Member function *flush*, for all output streams
 - All buffered output is **physically written**
- Closing file automatically calls `flush()`

File Example:

Display 12.1 Simple File Input/Output (1 of 2)

Display 12.1 Simple File Input/Output

```
1  //Reads three numbers from the file infile.txt, sums the numbers,
2  //and writes the sum to the file outfile.txt.
3  #include <fstream>
4  using std::ifstream;
5  using std::ofstream;
6  using std::endl;

7  int main()
8  {
9      ifstream inStream;
10     ofstream outStream;

11     inStream.open("infile.txt");
12     outStream.open("outfile.txt");

13     int first, second, third;
14     inStream >> first >> second >> third;
15     outStream << "The sum of the first 3\n"
16                 << "numbers in infile.txt\n"
17                 << "is " << (first + second + third)
18                 << endl;
```

A better version of this program is given in Display 12.3.

File Example:

Display 12.1 Simple File Input/Output (1 of 2)

```
19      inStream.close();
20      outStream.close();

21      return 0;
22  }
```

SAMPLE DIALOGUE

*There is no output to the screen
and no input from the keyboard.*

infile.txt

(Not changed by program)

1
2
3
4

outfile.txt

(After program is run)

The sum of the first 3
numbers in infile.txt
is 6

Appending to a File

- Standard open operation begins with **empty file**
 - Even if file exists → contents lost
- Open for append:

```
ofstream outStream;  
outStream.open("important.txt", ios::app);
```

 - If file doesn't exist → creates it
 - If file exists → appends to end
 - 2nd argument is class *ios* defined constant
 - In <iostream> library, std namespace

Alternative Syntax for File Opens

- Can specify filename at declaration
 - Passed as argument to constructor
- `ifstream inStream;`
`inStream.open("infile.txt");`

EQUIVALENT TO:

```
ifstream inStream("infile.txt");
```

Checking File Open Success

- File opens could fail
 - If input file doesn't exist
 - No write permissions to output file
 - Unexpected results
- Member function fail()
 - Place call to fail() to check stream operation success

```
inStream.open("stuff.txt");  
if (inStream.fail())  
{  
    cout << "File open failed.\n";  
    exit(1);  
}
```

Character I/O with Files

- All cin and cout character I/O same for files!
- Member functions work same (Chapter 9):
 - get, getline
 - put, putback,
 - peek, ignore

Checking End of File

- Use loop to process file until end
 - Typical approach
- Two ways to test for end of file

- Member function `eof()`

```
inStream.get(next);  
while (!inStream.eof())  
{  
    cout << next;  
    inStream.get(next);  
}
```

- Reads each character until file ends
 - `eof()` member function returns bool

End of File Check with Read

- Second method
 - read operation returns bool value!
(inStream >> next)
 - Expression **returns true if read successful**
 - Returns false if attempt to read beyond end of file
 - In action:
double next, sum = 0;
while (inStream >> next)
 sum = sum + next;
cout << "the sum is " << sum << endl;

Tools: File Names as Input

- Stream open operation
 - Argument to open() is string type
 - Can be literal (used so far) or variable

```
char fileName[16];  
ifstream inStream;  
cout << "Enter file name: ";  
cin >> fileName;  
inStream.open(fileName);
```
 - Provides more flexibility

Formatting Output with Stream Functions

- Recall chapter 1 "magic formula":
 `cout.setf(ios::fixed);`
 `cout.setf(ios::showpoint);`
 `cout.precision(2);`
- Outputs numbers in "money" form (12.52)
- Can use on any output stream
 - File streams have same member functions as cout object

Output Member Functions

- Consider:
 `ostream.setf(ios::fixed);`
 `ostream.setf(ios::showpoint);`
 `ostream.precision(2);`
- Member function `precision(x)`
 - Decimals written with "x" digits after decimal point
- Member function `setf()`
 - Allows multitude of output flags to be set

Flags

- Recall: member function `setf()`
 - Sets condition of output flags
- All output streams have `setf()` member
- Flags are constants in class `ios`
 - In library `<iostream>`, `std` namespace

setf() Examples

- Common flag constants:
 - `ostream.setf(ios::fixed);`
 - Sets fixed-point notation (decimal)
 - `ostream.setf(ios::showPoint)`
 - Always include decimal point
 - `ostream.setf(ios::right);`
 - Sets right-justification
- Set multiple flags **with one call**:
`ostream.setf(ios::fixed | ios::showpoint |
ios::right);`

More Output Member Functions

- Consider:
 `ostream.width(5);`
- Member function `width(x)`
 - Sets width to "x" for outputted value
 - Only affects "next" value outputted
 - Must set width before each value in order to affect all
 - Typical to have "varying" widths
 - To form "columns"

Manipulators

- Manipulator defined:
"A function called in nontraditional way"
 - Can have arguments
 - Placed **after** *insertion operator*
 - Do same things as member functions!
 - In different way
- `setw()` and `setprecision()` are in library `<iomanip>`, `std` namespace

Manipulator Example: setw()

- setw() manipulator:
cout << "Start" << setw(4) << 10
<< setw(4) << 20 << setw(6) << 30;
– Results in:
Start 10 20 30
- Note: setw() affects **only** NEXT
outputted value
– Must include setw() manipulator **before each
outputted item to affect all**

Manipulator setprecision()

- setprecision() manipulator:

```
cout.setf(ios::fixed | ios::showpoint);
```

```
cout << "$" << setprecision(2) << 10.3 << " "  
      << "$" << 20.5 << endl;
```

- Results in:

\$10.30 \$20.50

Saving Flag Settings

- Flag settings "stay" until changed
- Precision and setf flags can be saved and restored
 - Function `precision()` returns current setting if called with no arguments
 - Member function `flags()` provides similar capability

Saving Flag Settings Example

- ```
void outputStuff(ofstream& outStream)
{
 int precisionSetting = outStream.precision();
 long flagSettings = outStream.flags();
 outStream.setf(ios::fixed | ios::showpoint);
 outStream.precision(2);

 // Do whatever you want here.
 outStream.precision(precisionSetting);
 outStream.flags(flagSettings);
}
```
- Function to **save & restore** "typical" settings
  - Call: `outputStuff(myStream);`

# Stream Hierarchies

- Class Relationships
  - "Derived from"
    - One class obtained from another class
    - Then features are "added"
  - Example:
  - *Input file* streams class is derived from class of *all* input streams
    - It then adds open and close member functions
  - i.e.: ifstream is derived from istream

# Class Inheritance "Real" Example

- Class of all convertibles is derived from class of all automobiles
  - Every convertible is an automobile
  - Convertible "adds features" to automobile

# Stream Class Inheritance

- Consider:
- If D is derived class of class B →
  - All objects of type D are also of type B
  - e.g., A convertible is also an automobile
- Regarding streams:
  - An ifstream object is also an istream object
  - Should use istream objects for parameters
    - More objects can be plugged in!

# Stream Class Inheritance Example

```
void twoSumVersion1(ifstream& sourceFile)//ifstream with an 'f'
{
 int n1, n2;
 sourceFile >> n1 >> n2;
 cout << n1 << " + " << n2 << " = " << (n1 + n2) << endl;
}
```

and

```
void twoSumVersion2(istream& sourceFile)//istream without an 'f'
{
 int n1, n2;
 sourceFile >> n1 >> n2;
 cout << n1 << " + " << n2 << " = " << (n1 + n2) << endl;
}
```

# Stream Class Inheritance

## Example Calls

- Considering previous functions:
- `twoSumVersion1(fileIn);`     `// Legal!`
- `twoSumVersion1(cin);` `// ILLEGAL!`
  - Because `cin` is *not* of type `ifstream`!
- `twoSumVersion2(fileIn);`     `// Legal!`
- `twoSumVersion2(cin);` `// Legal!`
  - More versatile
  - `istream` parameter accepts both objects

# Random Access to Files

- Sequential Access
  - Most commonly used
- Random Access
  - Rapid access to records
  - Perhaps very large database
  - Access "randomly" to any part of file
  - Use **fstream objects**
    - input and output

# Random Access Tools

- Opens same as ifstream or ofstream
  - Adds second argument
  - fstream rWStream;  
rWStream.open("stuff", ios::in | ios::out);
    - Opens with read and write capability
- Move about in file
  - rWStream.seekp(1000);
    - Positions **put-pointer** at 1000<sup>th</sup> byte
  - rWStream.seekg(1000);
    - Positions **get-pointer** at 1000<sup>th</sup> byte



# Random Access Sizes

- To move about → must know sizes
  - sizeof() operator determines **number of bytes** required for an object:  
sizeof(s) //Where s is string s = "Hello"  
sizeof(10)  
sizeof(double)  
sizeof(myObject)
  - Position put-pointer at 100<sup>th</sup> record of objects:  
  
rwStream.seekp(100\*sizeof(myObject) – 1);

# Summary 1

- Streams connect to files with open operation
- Member function fail() checks successes
- Stream member functions format output
  - e.g., width, setf, precision
  - Same usage for cout (screen) or files
- Stream types can be formal parameters
  - But must be call-by-reference

# Summary 2

- istream (no "f") parameters accept cin or ifstream objects as arguments
- ostream (no "f") parameters accept cout or ofstream objects as arguments
- Member function eof
  - Used to test for end of input file