

HKUSTx: ELEC1200.1x A System View of Communications: From Signals to Packets (Part 1)

KarenWest (/dashboard)

Courseware (/courses/HKUSTx/ELEC1200.1x/3T2014/courseware) Course Info (/courses/HKUSTx/ELEC1200.1x/3T2014/info)

Course Outline (/courses/HKUSTx/ELEC1200.1x/3T2014/05fb01b36df14eb99ab54545dabc47f6/)

Grading Scheme (/courses/HKUSTx/ELEC1200.1x/3T2014/6e2be4dac3e44b4d9f812e7b5a5d5a29/)

요 - 의 Instructors (/courses/HKUSTx/ELEC1200.1x/3T2014/674fdd6887fe4f4bb73b984df4a5675b/)


Resources (/courses/HKUSTx/ELEC1200.1x/3T2014/a6a8267fef364cccbccd0128d091f11c/)

Discussion (/courses/HKUSTx/ELEC1200.1x/3T2014/discussion/forum)

Progress (/courses/HKUSTx/ELEC1200.1x/3T2014/progress)

LAB 1 TASK 2 - FROM TEXT TO BIT SEQUENCE (1/1 point)

In this task, you will study the implementation of the block highlighted in green, which encodes a text message as a bit sequence.

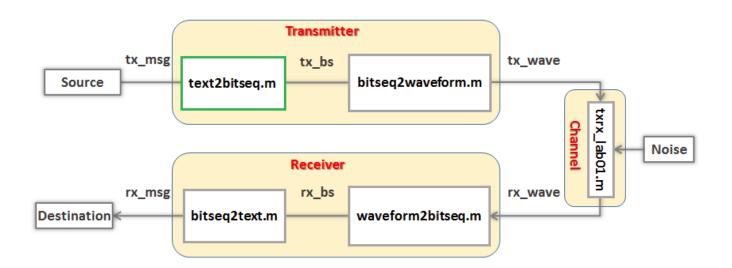

The code window below contains a MATLAB script similar to that of Task 1. The main difference is that the line (function)

[tx_bs = text2bitseq(tx_msg)] has been replaced by code that is intended to replicate this function. However, there is a mistake in this code. Your task is to find and correct this mistake.

```
1 tx_msg = 'Hello'; % message to transmit
  2 SPB = 10;
                       % bit time in samples per bit
 4% transmitter %
 5 %-----tx bs=text2bitseq(tx msg)-----
 6 tx_bs = [];
 7 \text{ for } c = 1:\text{length}(tx msg)
        character = tx_msg(c);
                                          % get the next character from the msg
 9
        byte = char2byte(character); % find the 8-bit ASCII
10
        tx_bs = [tx_bs byte]
11 end
                                                                                               09/27/2014 08:43 AM
0 	ext{f2} 	ilde{	ilde{b}}_{	ilde{s}^-----}	ext{tx_bs=text2bitseq(tx_msg)------}
```

```
14
```

Correct

```
%-----tx_bs=text2bitseq(tx_msg)-----
tx_bs = [];
for c = 1:length(tx_msg)
   character = tx_msg(c);
                                 % get the next character from the msg
   byte = char2byte(character); % find the 8-bit ASCII
   tx_bs = [tx_bs byte];
                                 % concatenate 8-bits to bit sequence
end
%-----tx_bs=text2bitseq(tx_msg)-----
```

Figure 1

Help


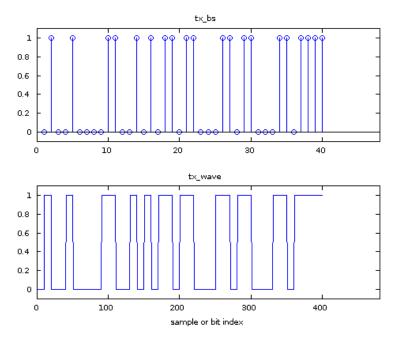


Figure 2

2 of 5 09/27/2014 08:43 AM



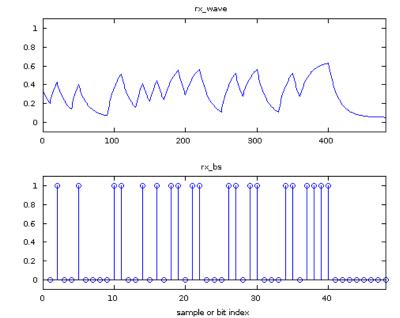

tx_bs =

0 1 0 0 1 0 0 0

tx_bs =

0 1 0 0 1 0 0 0 0 1 1 0 0 1 0

tx_bs =

Columns 1 through 16

0 1 0 0 1 0 0 0 0 1 1 0 0 1 0 1

Columns 17 through 24

0 1 1 0 1 1 0 0

tx_bs =

Columns 1 through 16

0 1 0 0 1 0 0 0 0 1 1 0 0 1 0 1

Columns 17 through 32

3 of 5

09/27/2014 08:43 AM

The sent message was: Hello The received message is: Hello

Check Reset Save Hide Answer You have used 1 of 10 submissions

INSTRUCTIONS

Help

Step 1: Run the code by clicking on the Run Code button.

Similar to Task 1, you will see the output of the MATLAB code: plots of four signals at different points of the system, the transmitted text message, and the received message. Unfortunately, the received message is not the same as the transmitted message, due to an error in the code.

Step 2: Correct the code implementing text2bitseq.m

In this step, you will correct the code implementing **text2bitseq.m**. Now, let's look at the code to see how it converts a text string to a bit sequence.

The first line of code defines an empty vector, which will eventually hold the bit sequence. The remaining code uses a "For Loop" to convert each character to its corresponding bit sequence and put them together to form the bit sequence. To learn more about how to build a For Loop in MATLAB, please review the unit For Loops in MATLAB (/courses/HKUSTx /ELEC1200.1x/3T2014/jump_to_id/88d27c5ab3c14525b68fd5b0294b8995). If you want to know how to use colon to create vectors, please review the Colon Operator (/courses/HKUSTx/ELEC1200.1x/3T2014/jump_to_id /2b70b7c042304172b2080c4e54415599).

The function length(tx msg) is a standard MATLAB built-in function which returns the length of the vector tx msg.

The next line extracts one character from the text message. To learn more about how to access specific elements of a vector, please review the video Accessing Elements of a Vector (/courses/HKUSTx/ELEC1200.1x/3T2014/jump_to_id 4 & 28c58e5fa7be547b7b6ebafbf540d50d0). 09/27/2014 08:43 AM

Lab 1 Task 2 - From text to bit sequence | 2.4... https://courses.edx.org/courses/HKUSTx/EL... The function **char2byte(character)** is written for this section. It converts a character into an 8-bit (1-byte) ASCII representation, which is represented by a 1 by 8 binary vector in MATLAB.

The final bit sequence should concatenate the 1 by 8 vectors for each character into one long vector. To learn more about how to create row and column vectors, please review the unit Creating Vectors via Concatenation (/courses/HKUSTx /ELEC1200.1x/3T2014/jump_to_id/3e7206adf1954b29894545c02eab01c8).

Help

Now, it's your turn to identify and modify the incorrect part.

Step 3: Submit your work

After you have completed the correction, click on the **Check** button to submit your answer.



About (https://www.edx.org/about-us) Jobs (https://www.edx.org/jobs) Press (https://www.edx.org/press) FAQ (https://www.edx.org/student-faq) Contact (https://www.edx.org/contact)



EdX is a non-profit created by founding partners Harvard and MIT whose mission is to bring the best of higher education to students of all ages anywhere in the world, wherever there is Internet access. EdX's free online MOOCs are interactive and subjects include computer science, public health, and artificial intelligence.



(http://www.meetup.com/YourMeetup)



(http://www.facebook.com/EdxOnline)



(https://twitter.com /YourPlatformTwitterAccount)



(https://plus.google.com /YourGooglePlusAccount/)



(http://youtube.com/user/edxonline) © 2014 edX, some rights reserved.

Terms of Service and Honor Code - Privacy Policy (https://www.edx.org/edx-privacy-policy)

5 of 5 09/27/2014 08:43 AM