

Participant Handbook

BUILDING THE WORLD'S TEMPERATURE

Global AI Hackathon

“What if AI could see heat and resolve it?”



Everything you need to go from “signed up” to “first heatmap” in under an hour and to build a strong, judge-ready project.



FORTYGUARD

TABLE OF CONTENTS

- Table of contents.....2
- 1. Welcome.....4
- 2. Key dates.....4
- 3. Rules at a glance.....4
- 4. Why build with FortyGuard.....5
- 5. Getting started (your first hour).....5
 - Step 1 — Create your free Dashboard account.....5
 - Step 2 — Generate a heatmap in the Dashboard.....5
 - Step 3 — Get your API key & trial credits.....6
 - Step 4 — Clone the Temperature API Quickstart and run your first call.....6
 - Step 5 — Skim the API docs.....6
 - Step 6 — Join the community.....6
- 6. Understanding the platform.....6
- 7. API usage guide.....7
 - 7.1 How to learn the API: theory vs. practice.....7
 - 7.2 Coverage & data range — read this first.....8
 - 7.3 Base URL & authentication.....8
 - 7.4 The asynchronous pattern.....8
 - 7.5 Endpoint overview.....9
 - 7.6 Core request fields (heatmap).....10
 - 7.7 Best practices.....10
- 8. Your learning environment: the Temperature API Quickstart.....11
 - 8.1 What’s inside.....11
 - 8.2 Five-minute setup.....12
 - 8.3 Use-case notebooks — working starting points.....13
- 9. Implementation examples.....14
 - 9.1 The fastest path — the quickstart client (Python).....14
- 10. Tracks & project ideas.....15
 - Track 1 — Resilient Cities & Infrastructure.....15
 - Track 2 — Future Buildings & Energy.....15
 - Track 3 — Industrial & Enterprise.....16
 - Track 4 — Government & Environment.....16
 - Track 5 — Model Designing.....16
 - Track 6 — Agentic Track (API + Agentic).....16
 - Track 7 — Data Analysis & Correlation.....17
- 11. Judging & submission.....17
 - Submission checklist.....18
- 12. Prizes.....18
- 13. Webinars & program support.....19

14. Support routing..... 19
15. Terms & Conditions.....20

1. WELCOME

Extreme urban heat is one of the fastest-growing climate risks and one of the least visible. FortyGuard tells you how hot it is on this street, next to this building, at 2 p.m. — at 20 meters spatial resolution, 2 meters elevation, human-relevant resolution, hour by hour. That difference is the whole opportunity.

Building the World’s Temperature AI brings developers, researchers, designers, and climate-tech builders together to turn that intelligence into working applications: tools that cool cities, protect people, and de-risk infrastructure. You bring the idea; this handbook gives you everything else — onboarding, a hands-on learning environment, working code, project ideas, and the judging criteria your project will be scored against.

2. KEY DATES

MILESTONE	DATE
Registration opens	Jun 20 - Aug 17 (11:59 PM GST)
Kickoff	Aug 18
Mentor Webinars	Released through the program and will be announced on Slack
Submission deadline	Aug 30 (11:59 PM GST)
Judging window	Sept 1 - Sept 14 (11:59 PM GST)
Winners announced	Sept 16

All deadlines are published on the official hackathon site and announced on Slack. The site and slack are the source of truth if anything here changes.

3. RULES AT A GLANCE

- Free to enter. Participation, Dashboard access, and trial API credentials cost nothing.
- Open globally. Anyone may participate, subject to the eligibility rules on the hackathon site. Note that all analysis runs on U.S. locations — see §7.2.
- Individuals or teams. Teams are 1–3 people and solo entries are welcome.
- Original work. Your project must be created during the hackathon period unless the rules state otherwise.
- Be a good participant. Follow the Code of Conduct: no abuse of the platform, no reverse-engineering of the models, no harassment.

4. WHY BUILD WITH FORTYGUARD

WHAT YOU GET	WHY IT MATTERS FOR YOUR BUILD
Hyperlocal resolution (~2 m)	Model heat where people actually stand — sidewalks, bus stops, courtyards — not a single city-wide number.
Historic, near-real-time & short-range forecast data	Analyze past heat patterns over multiple years, monitor current and 12hrs ahead conditions , hour by hour.
Large Temperature Models (LTMs)	Calibrated temperature fields built for operational use, fusing satellite signals, GIS layers, meteorology, and ground observations.
Heat Intelligence reports	Each location pairs temperature with contextual layers (geographic, environmental, urban dynamics) — the “why” behind the heat.
Simple, scalable API	A few HTTP calls return structured heat data you can drop into GIS, asset management, dashboards, or simulations.
300× more precise, 100× cheaper than satellite	Tasks that once took months and tens of thousands of dollars run in seconds for a fraction of the cost.

5. GETTING STARTED (YOUR FIRST HOUR)

Follow these steps in order. Steps 1–4 get you to your first heatmap; steps 5–6 set you up to build.

Step 1 — Create your free Dashboard account

Sign up at dashboard.fortyguard.com. The Temperature Dashboard is a browser app — no installation, best on desktop. Explore a heatmap visually before you touch the API; it makes the API responses intuitive.

Step 2 — Generate a heatmap in the Dashboard

- Draw a polygon over a U.S. area of interest (a neighborhood, campus, or industrial site).
- Pick a date and time window, then generate the map.

- Read the result with the time-series player, side-by-side comparison, and per-tile Heat Intelligence reports.

Step 3 — Get your API key & trial credits

Now that you're signed in to the Temperature Dashboard, you can get your API key right there. Open the Profile tab and generate your API key to start accessing data — it comes with your hackathon trial credits. Keep your key secret: store it in an environment variable, never hard-code it, and never commit it to a public repo.

Note: The API key generation will be available near the start of the build sprint. You will be notified on slack when you can generate your API keys

Step 4 — Clone the Temperature API Quickstart and run your first call

Every participant is given access to the Temperature API Quickstart repository (§8) — a ready-made Python + Jupyter environment. Clone it, paste your key into .env, and run notebook 00 (auth check) and notebook 01 (your first heatmap). No key yet? The use-case notebooks ship with cached API responses, so you can run them end-to-end before your credentials even arrive.

Step 5 — Skim the API docs

Bookmark docs-api.fortyguard.com. Use it as your theoretical reference for endpoint definitions and parameters while the quickstart gives you the practical, runnable side (§7.1). You can enter your API key right on the docs page to make live calls and track your credit consumption, so you don't burn your quota mid-build.

Step 6 — Join the community

Join the hackathon Slack for announcements, mentor office hours, and peer support. Most “how do I...” questions are answered there faster than by email.

60-MINUTE FIRST-RUN CHECKLIST

- | | |
|--|--|
| ☐ Dashboard account created | ☐ One heatmap generated visually |
| ☐ API key stored in .env / environment variable | ☐ Quickstart cloned, notebook 00 passes |
| ☐ Notebook 01 returns your first heatmap | ☐ Slack joined |

6. UNDERSTANDING THE PLATFORM

A quick mental model of how the pieces fit together. The Large Temperature Model (LTM) is the Intelligence Layer; the Dashboard and API are the two ways you reach it.

CONCEPT	WHAT IT IS
---------	------------

LTM — Large Temperature Models	Purpose-built AI models that predict ambient air temperature at human height and high spatial resolution by fusing satellite signals, GIS layers, meteorology, and in-situ observations.
Temperature Dashboard	The visual, browser-based product for drawing areas, generating heatmaps, comparing scenarios, and reading Heat Intelligence reports.
Temperature API	Programmatic access to the same intelligence — submit areas and times, receive structured temperature data for your own app.
Polygon (AOI)	The geographic area of interest you analyze, expressed as GeoJSON polygon coordinates — [longitude, latitude] order.
Granularity	The spatial detail of the output grid in meters (60, 80, or 100) — smaller values mean finer tiles and more compute/credits.
Activity ID	The task ticket is returned when you submit an analysis request; you poll it to collect the finished result (§7.4).
API credits	The currency consumed per request, based on the complexity and data needs of the call. Failed tasks are free — credits are only deducted when a task succeeds.

7. API USAGE GUIDE

7.1 How to learn the API: theory vs. practice

TWO RESOURCES, TWO JOBS

- The official API documentation (docs-api.fortyguard.com) is your theoretical reference — endpoint definitions, parameters, request and response schemas. Read it to understand what each endpoint can do.
 - 🔧 The Temperature API Quickstart repository (§8) is your practical environment — every participant gets access. It wraps every endpoint in a ready-made Python client, walks each one in a runnable notebook, and shows you real requests and real results. Run it to understand how each endpoint actually behaves — what you send, what comes back, and what the data looks like — before you start building your project.
- Recommended: run the quickstart first, keep the docs open beside it as reference.


7.2 Coverage & data range — read this first

▲ TWO CONSTRAINTS THAT SHAPE EVERY PROJECT

Coverage is U.S.-only. All endpoints operate over locations inside the United States. Polygons or points outside the U.S. return errors or empty results — don't spend credits on other countries. Wherever you are in the world, design your project around U.S. geographies (e.g. Phoenix, Houston, Miami, New York, San José).

Date range: 2021-01-01 to the present. Create Heatmap additionally supports forecasting up to 12 hours beyond the current time, so the latest accepted value is now + 12 hours. Anything earlier than 2021-01-01, or more than 12 hours in the future, is rejected. For Satellite Segmentation, Environmental Parameters, and Heat Intelligence, use a date/time matching the heatmap you generated for the same location and time.

7.3 Base URL & authentication

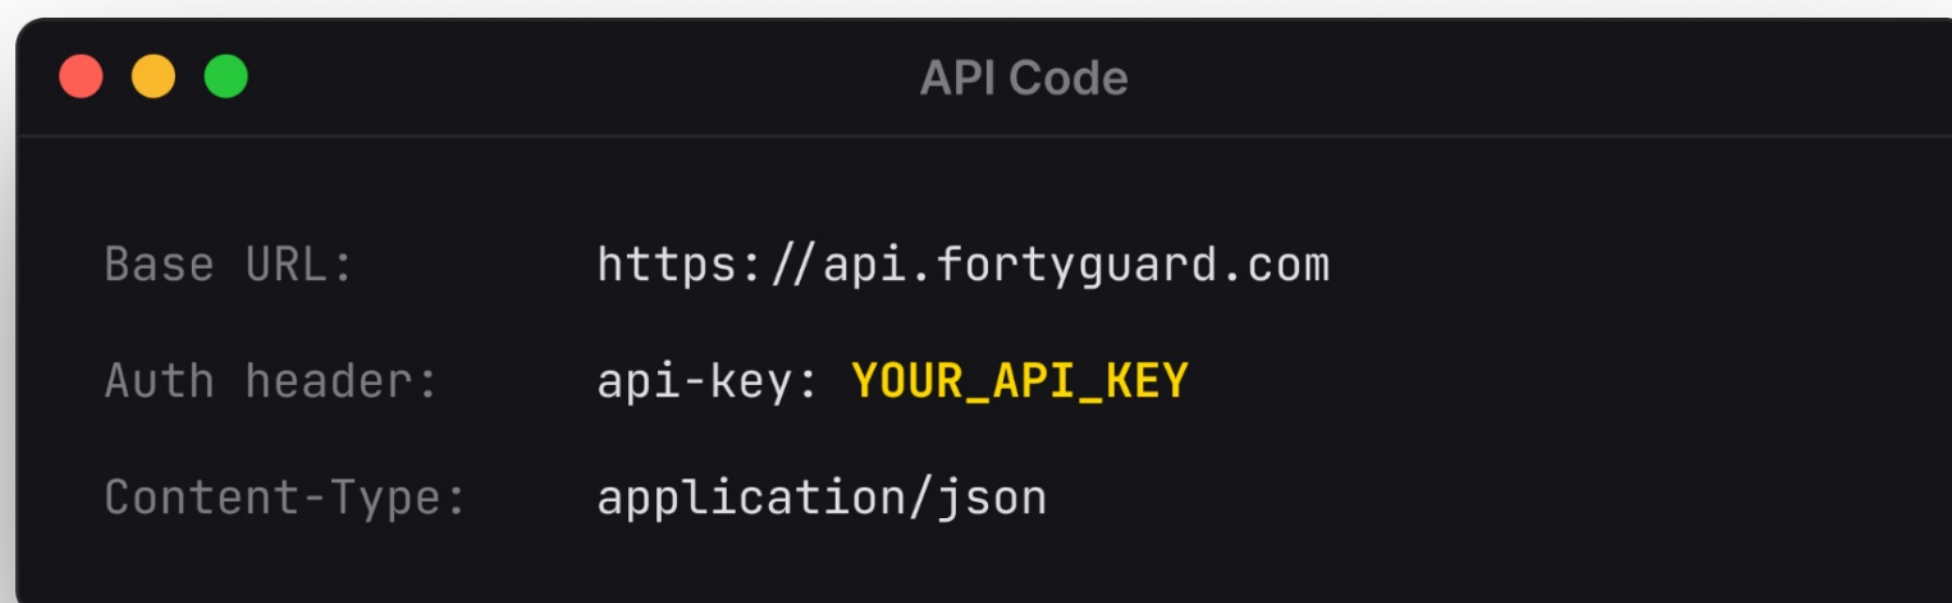

```
Base URL:      https://api.fortyguard.com
Auth header:   api-key: YOUR_API_KEY
Content-Type:  application/json
```

Store the key in an environment variable (the quickstart uses FORTYGUARD_API_KEY in a git-ignored .env file), never hard-code it, and never commit it.

7.4 The asynchronous pattern

Analysis endpoints are asynchronous because the model is doing real work (seconds to minutes). Every analysis call follows the same two-stage flow:

- Submit — POST your request (area/point + date_time + options). The response returns an activity_id.
- Poll — GET /v1/status/{activity_id} until the status is terminal: “succeeded” / “completed” means your result is in the response’s data.result; “failed” / “error” means the task failed (and cost nothing).

The quickstart’s Python client does the polling for you — one call, result back.

7.5 Endpoint overview

ENDPOINT	WHAT IT RETURNS	PLAN	QUICKSTART NOTEBOOK
POST /v1/heatmap	Tile-by-tile thermal map over a polygon AOI	All plans	01
POST /v1/env_params	Heat index, AQI, solar irradiance and more, at a point	All plans	02
POST /v1/satellite	Land-cover segmentation of a satellite tile (greenery, roads, buildings...)	Premium	03
POST /v1/streetview	Segmentation of a ground-level street view	Premium	04
POST /v1/heat_intelligence	Multi-dimensional heat analysis as a PDF report	Premium	05
POST /v1/system/fetch-api-key-usage	Your credit balance and billing-cycle usage	All plans	00
GET /v1/status/{activity_id}	Status / result of any submitted analysis task	All plans	—

7.6 Core request fields (heatmap)

FIELD	TYPE	MEANING
polygon_aoi	GeoJSON	Your area of interest as a GeoJSON FeatureCollection containing a Polygon. Coordinates are [longitude, latitude]; the first and last pair must match to close the ring.
date_time.start_date	string	Date to analyze, YYYY-MM-DD. Past dates/today/ +12hrs forecasting only.
date_time.start_time	string	Time of day, HH:MM (heat varies enormously by hour).
date_time.filter_type	int	Time window: 1 = single hour, 2 = range of hours (add end_time), 3 = entire day. 4 = range of days, 5 = single month
granularity	int	Output grid detail in meters: 60, 80, or 100. Smaller = finer tiles and higher credit cost.

7.7 Best practices

- Start small: validate your pipeline on a tiny polygon and a single timestamp before batching.
- Cache aggressively: store every result keyed by area + date/time so you never pay twice for the same query.
- Poll politely: back off between status checks (e.g. 3s → 6s → 12s) rather than hammering the endpoint.
- Handle failures: wrap calls in try/except, check HTTP status codes, and log the activity_id for debugging. Remember failed tasks are free — credits are only deducted on success.

- Mind the geography and the calendar: U.S. locations, dates from 2021-01-01 to now (+12h for heatmaps) - see §7.2.
- Pick the right time window: `filter_type` 3 (entire day) is ideal for daily max/mean analysis; `filter_type` 1 for a specific hour like 14:00 peak heat.
- Respect the area limit: heatmap AOIs are capped at roughly 130 km² (50 mi²). Larger polygons are rejected — split them or zoom in.


8. YOUR LEARNING ENVIRONMENT: THE TEMPERATURE API QUICKSTART

Participants are provided access to the Temperature API Quickstart — a Python + Jupyter sandbox built by FortyGuard so you can learn the endpoints hands-on before starting your project. Where the API docs give you the theory, the quickstart is the place to see each endpoint actually run: what a request looks like, what the response contains, and how the results behave on real U.S. locations. The access link is shared at registration and pinned on Slack.

8.1 What's inside

COMPONENT	WHAT IT GIVES YOU
fortyguard/ Python client	One method per endpoint (<code>client.create_heatmap(...)</code> , <code>client.environmental_parameters(...)</code> , ...). Handles authentication and the submit-then-poll pattern for you.
Endpoint notebooks 00–05	A runnable walkthrough of every endpoint in order: setup & auth check, heatmap, environmental parameters, satellite segmentation, street view segmentation, heat intelligence PDF.
Use-case notebooks	Three complete narrative workflows that combine your own CSV data with FortyGuard layers and end in a ranked, defensible action list (see §8.3).
Sample data & cached responses	Sample polygons, point lists, and pre-fetched API responses — so the use-case notebooks run end-to-end even without an API key (cached mode).
Troubleshooting guide	Common errors (auth, timeouts, payload mistakes) with fixes, in the README.

8.2 Five-minute setup

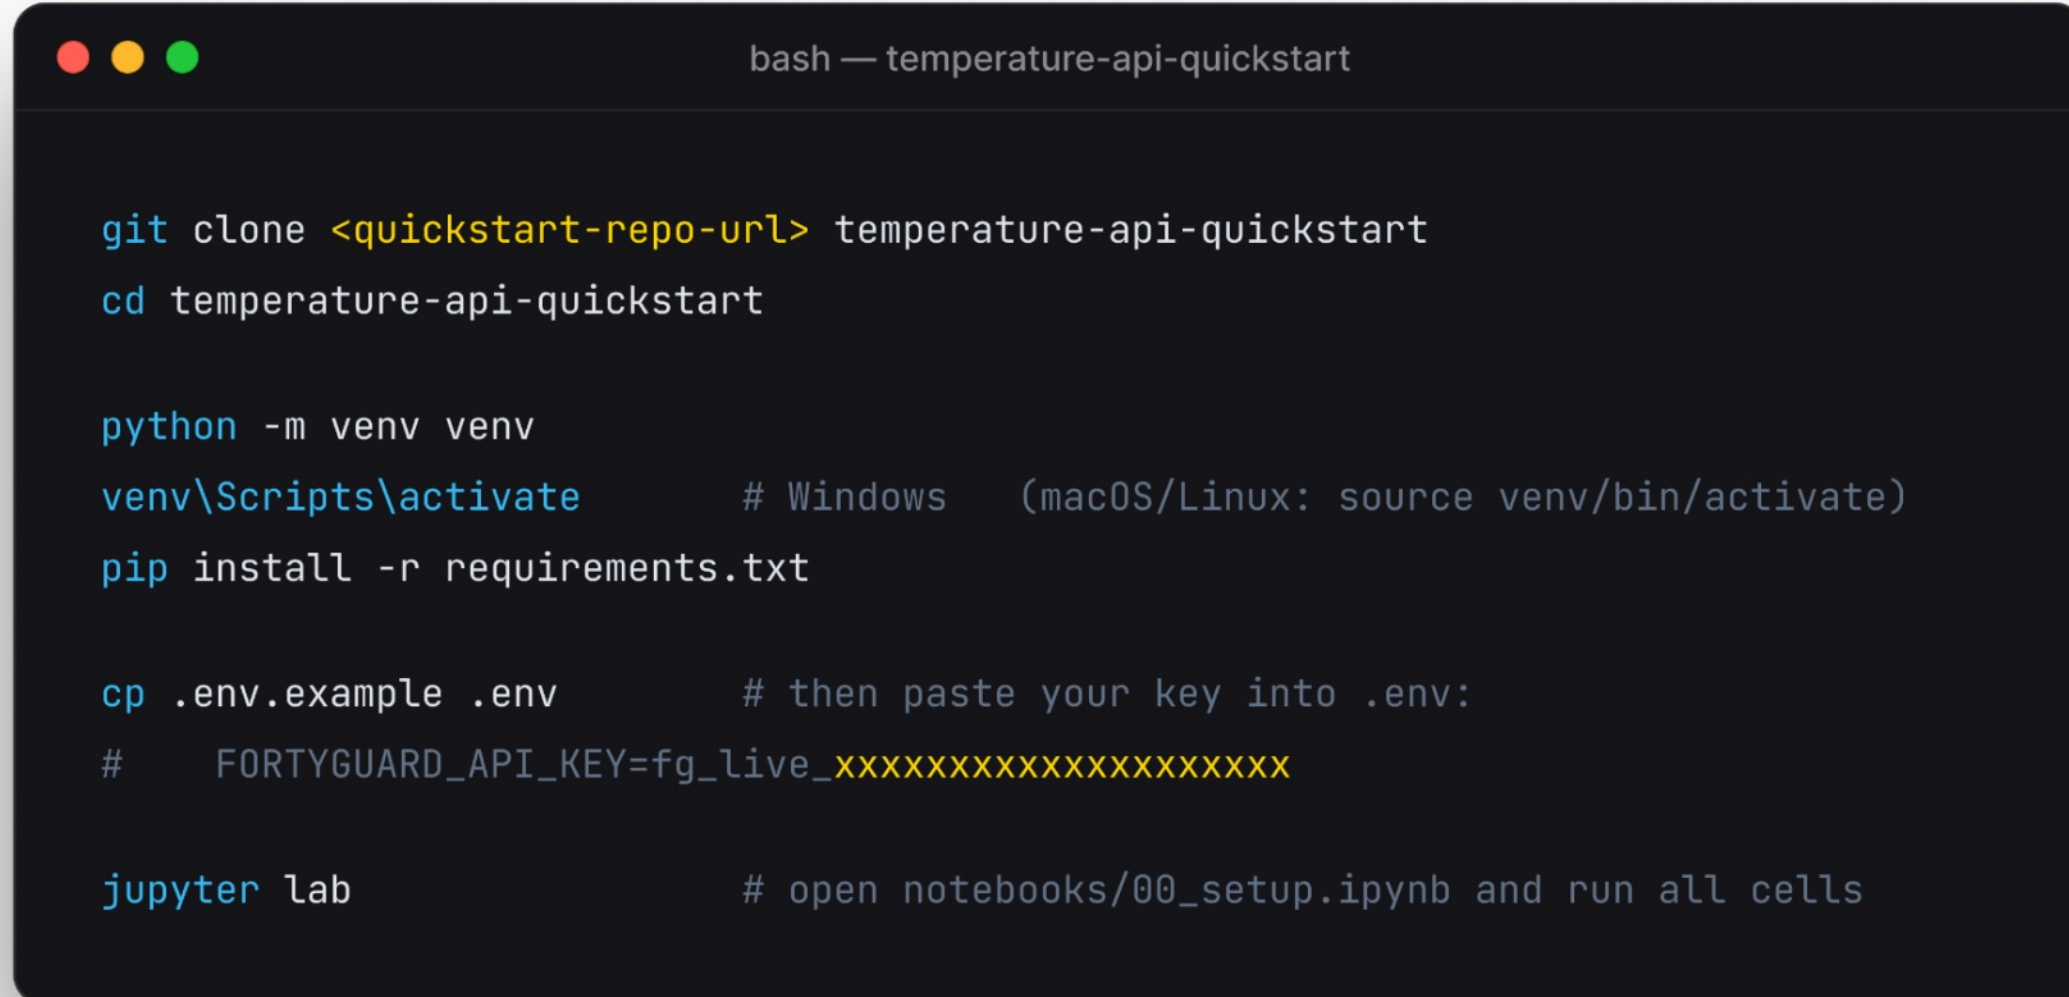A terminal window titled "bash — temperature-api-quickstart" with standard macOS window controls (red, yellow, green buttons). The terminal contains the following commands and comments:

```
git clone <quickstart-repo-url> temperature-api-quickstart
cd temperature-api-quickstart

python -m venv venv
venv\Scripts\activate      # Windows  (macOS/Linux: source venv/bin/activate)
pip install -r requirements.txt

cp .env.example .env      # then paste your key into .env:
#   FORTYGUARD_API_KEY=fg_live_XXXXXXXXXXXXXXXXXXXX

jupyter lab                # open notebooks/00_setup.ipynb and run all cells
```

```
git clone <quickstart-repo-url> temperature-api-quickstart
cd temperature-api-quickstart

python -m venv venv
venv\Scripts\activate      # Windows  (macOS/Linux: source venv/bin/activate)
pip install -r requirements.txt

cp .env.example .env      # then paste your key into .env:
#   FORTYGUARD_API_KEY=fg_live_XXXXXXXXXXXXXXXXXXXX

jupyter lab                # open notebooks/00_setup.ipynb and run all cells
```

If notebook 00’s last cell prints your plan and remaining credits, you’re wired up. Work through notebooks 01–05 in order, then pick a use-case workflow.

8.3 Use-case notebooks — working starting points

These are complete, end-to-end workflows. Each ships with sample input data — replace it with your own CSV using matching columns and everything downstream runs. The FortyGuard temperature data they use is real, at 2 meters above the ground and 20-meter spatial resolution. Each notebook is a directional example of how to use the endpoints, not a finished project. Hackathon submissions are expected to go well beyond them, built on your own data, region, problem, and approach.

USE CASE	YOUR DATA	OUTPUT
Urban planner — bus-stop cooling prioritization	Bus-stop points (CSV)	Ranked intervention list — which stops need shade first, and why
Public-parks heat-resilience audit	Park points (id, type, acres, lat/lon)	Per-park audit with threshold-triggered recommendations citing federal programs (EPA, USDA)
Real-estate portfolio heat risk	Property portfolio (CSV)	Client-deck slide pack + per-property action brief citing public programs (EPA, USDA, ASHRAE, OSHA)


NO API KEY YET? START ANYWAY.

Every use-case notebook ships in cached mode (CACHED=True) with bundled sample responses, so you can run the entire workflow and study real API results before your trial credentials arrive. Flip CACHED=False once you have a key to run live against any U.S. area you choose.

9. IMPLEMENTATION EXAMPLES

Copy-paste starting points, verified against the quickstart. Example coordinates are Lower Manhattan; any U.S. location works.

9.1 The fastest path — the quickstart client (Python)

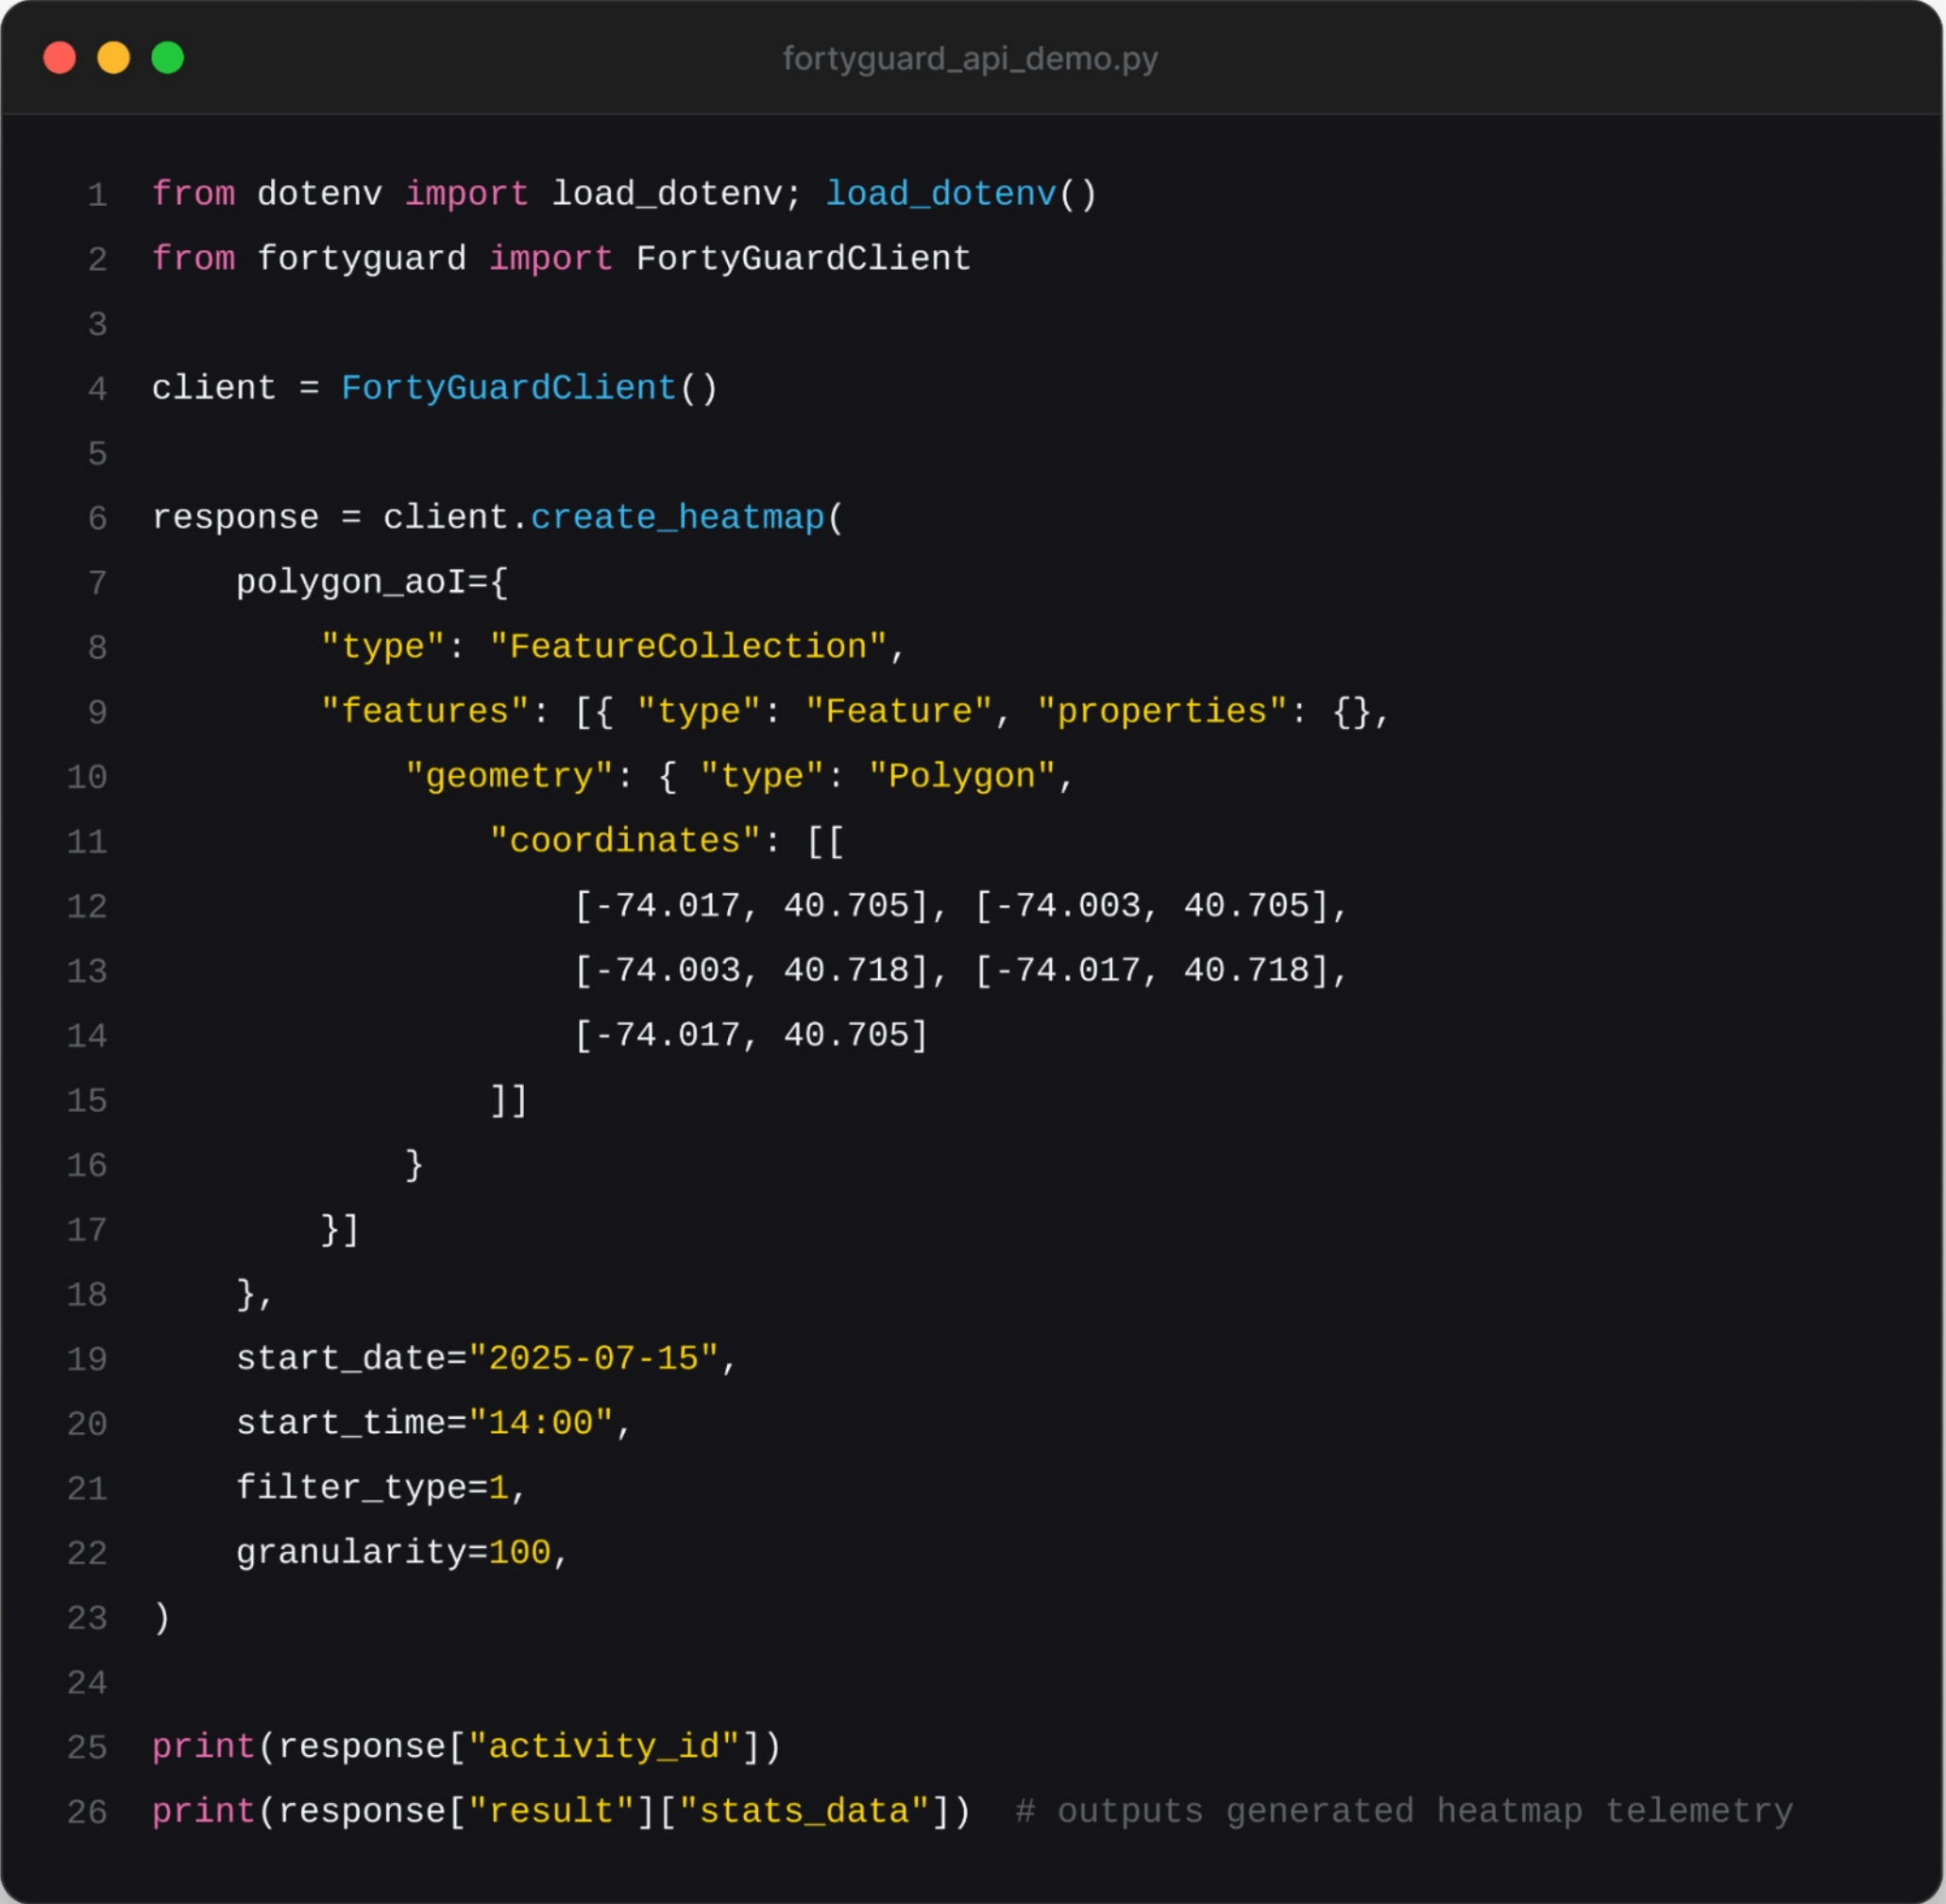

```
1 from dotenv import load_dotenv; load_dotenv()
2 from fortyguard import FortyGuardClient
3
4 client = FortyGuardClient()
5
6 response = client.create_heatmap(
7     polygon_aoi={
8         "type": "FeatureCollection",
9         "features": [{ "type": "Feature", "properties": {},
10             "geometry": { "type": "Polygon",
11                 "coordinates": [[
12                     [-74.017, 40.705], [-74.003, 40.705],
13                     [-74.003, 40.718], [-74.017, 40.718],
14                     [-74.017, 40.705]
15                 ]
16             }
17         }]
18     },
19     start_date="2025-07-15",
20     start_time="14:00",
21     filter_type=1,
22     granularity=100,
23 )
24
25 print(response["activity_id"])
26 print(response["result"]["stats_data"]) # outputs generated heatmap telemetry
```

```
from dotenv import load_dotenv; load_dotenv()
from fortyguard import FortyGuardClient
```



```

client = FortyGuardClient() # reads FORTYGUARD_API_KEY from .env

response = client.create_heatmap(
    polygon_aoi={
        "type": "FeatureCollection",
        "features": [{
            "type": "Feature", "properties": {},
            "geometry": {
                "type": "Polygon",
                "coordinates": [[ # [longitude, latitude]
                    [-74.017, 40.705], [-74.003, 40.705],
                    [-74.003, 40.718], [-74.017, 40.718],
                    [-74.017, 40.705], # first == last closes the ring
                ]],
            },
        }],
    },
    start_date="2025-07-15", # 2021-01-01 → now (+12h ahead for heatmaps)
    start_time="14:00", # peak-heat hour
    filter_type=1, # 1=single hour, 2=range, 3=entire day
    granularity=100, # meters: 60, 80, or 100
)

print(response["activity_id"])
print(response["result"]["stats_data"]) # summary statistics for the AOI

```

The client submits, polls GET /v1/status/{activity_id} for you, and returns the finished result. Pass wait=False to get the activity_id immediately and poll on your own schedule.

10. TRACKS & PROJECT IDEAS

Pick the track that matches your interest; use the ideas as launch points, not limits. The strongest projects pair a real heat problem with a measurable before/after outcome — the same logic FortyGuard uses with enterprise clients.

Track 1 — Resilient Cities & Infrastructure

Design the physical city around heat — route people along cooler paths, rank which public assets need shade first, and test interventions before a shovel hits the ground.

- A cool-route planner that, given start and end points, returns the lowest-heat-exposure walking path using hourly heatmaps.
- A bus-stop / playground heat-audit tool that ranks a city's public assets by peak-hour exposure to prioritize shade investment. (Working starting point: the quickstart's bus-stop prioritization notebook, §8.3.)
- A digital-twin overlay that simulates how adding tree canopy or reflective paving changes street-level temperature.

Track 2 — Future Buildings & Energy

Bring street-level heat into how buildings are sited, powered, and retrofitted — so cooling is sized to real thermal load and every upgrade can prove its payback.

- A facade-orientation advisor that scores building sites by solar/heat load to inform HVAC sizing and glazing choices.
- A demand-response signal that uses historical heat patterns to estimate neighborhood cooling load for a utility.
- A retrofit ROI calculator linking modeled temperature reduction to estimated energy savings.

Track 3 — Industrial & Enterprise

Turn hyperlocal heat into an operational and financial signal — screen where to build, protect cargo and crews in transit, and price exposure into underwriting.

- A data-center siting screener that flags candidate locations with elevated ambient heat (and higher cooling cost).
- A logistics route/temperature tool that protects heat-sensitive cargo and worker safety on last-mile routes.
- A parametric heat-risk score for insurers or real-estate portfolios, turning hyperlocal exposure into an underwriting input. (Working starting point: quickstart's real-estate portfolio notebook, §8.3.)

Track 4 — Government & Environment

Point public resources at the people heat hits hardest — target relief by vulnerability, warn outdoor workers before thresholds are crossed, and time agriculture to the microclimate.

- A heat-vulnerability map that combines temperature with demographics to target cooling centers and outreach. (Related starting point: quickstart's public-parks audit notebook, §8.3.)
- A worker-safety alerting service that warns outdoor crews when a site crosses a heat threshold.
- An agricultural micro-climate tool that guides planting and irrigation timing from historical heat patterns.

Track 5 — Model Designing

Build the models under the applications — train, validate, and package the algorithms that turn raw temperature into vulnerability scores, safety alerts, and microclimate forecasts others can deploy.

- A heat-vulnerability model that combines temperature with demographics to target cooling centers and outreach. (Related starting point: quickstart's public-parks audit notebook, §8.3.)
- A worker-safety alerting model that warns outdoor crews when a site crosses a heat threshold.
- An agricultural micro-climate model that guides planting and irrigation timing from historical heat patterns.

Track 6 — Agentic Track (API + Agentic)

Wrap FortyGuard's endpoints in autonomous agents that plan, call, and decide — turning a natural-language goal into a completed heat workflow with minimal human steering.

- A goal-driven heat agent that takes a plain-language brief ("find the hottest bus stops in Phoenix across last July and draft a shade-investment memo"), chooses and sequences the right endpoints, and returns a ranked, source-cited action plan.

- A monitoring agent that sweeps current-day conditions across a portfolio of U.S. sites, polls status tasks on its own schedule, and fires alerts or downstream actions when a location crosses a heat threshold.
- A tool-using research assistant that combines FortyGuard layers with public datasets to answer open-ended heat questions, showing its API calls and reasoning so the output is auditable. (Starting point: the submit-then-poll client in the quickstart, §8.1 — let the agent drive it.)

Track 7 — Data Analysis & Correlation

Move beyond mapping heat to explaining it — correlate hyperlocal temperature with the non-weather variables it drives or is driven by, and quantify the relationship.

- A correlation study linking temperature to non-weather outcomes — hospital admissions, energy load, transit ridership, crime, or retail foot traffic — to surfaces where heat measurably moves the needle.
- A heat-equity analysis that joins historical temperature patterns with demographic or socioeconomic layers to quantify unequal exposure across neighborhoods. (Related starting point: the public-parks audit notebook, §8.3.)
- A regression toolkit that ingests a user-supplied CSV of outcomes, aligns each row to FortyGuard temperature at its coordinates and timestamp, and reports the strength and significance of the relationship.

WHAT MAKES A PROJECT WIN

Real use of the platform (the API or Dashboard is central, not decorative); a clear problem and user; a measurable outcome (e.g. “-7°F (-4°C) on this route”); and a path to real-world deployment. Judges reward applied relevance over flashy demos.

11. JUDGING & SUBMISSION

Projects are scored on the four weighted criteria below. Judges' decisions are final.

CRITERION	WEIGHT	WHAT JUDGES LOOK FOR
Impact & relevance	40%	A real urban-heat problem with measurable benefit; commercially viable solutions a real client would adopt

Technical execution	35%	It works, the build is sound, data handled well; deployable, client-grade quality
Innovation	15%	Original approach or a fresh combination of ideas
Communication	10%	Clear, compelling demo and write-up

Submission checklist

- ☐ A live demo link — your working project
- ☐ A public (or judge-accessible) repository (share it with FortyGuard) with your code and a README explaining how to run it.
- ☐ A demo video (≈ 3 minutes) showing the project working.
- ☐ A written summary (max 500 words): the problem → who it's for → the FortyGuard endpoints/features used → the measured result.

Tip: structure your summary exactly as problem → user → FortyGuard usage → measured result. It mirrors the judging rubric, and the strongest summaries get showcased as case studies.

12. PRIZES

Final prize amounts and tiers are published on the hackathon site. The award categories:

TIER / AWARD	PRIZE
Cash — 1st / 2nd / 3rd	Cash prizes and Nvidia GPUs
Incubation	Post-hackathon incubation or acceleration with partner programs
Career	Internship opportunities with FortyGuard or a partner (for qualifying graduates)
Platform	Monthly/annual API-usage discounts
Hardware / compute	GPU hardware or cloud-credit deals
Everyone who completes the hackathon	Certificate of completion + a shareable “I built at the FortyGuard Hackathon” social asset

13. WEBINARS & PROGRAM SUPPORT

- Mentor webinars — Live and recorded. All sessions are announced in #announcements on Slack and the FortyGuard Hackathon’26 website.
 - Live Q&A — The FortyGuard team answers questions live.
- All sessions are announced on Slack and recorded for replay.*

14. SUPPORT ROUTING

RESOURCE	WHERE
Temperature Dashboard (free)	dashboard.fortyguard.com
API documentation (theory / reference)	docs-api.fortyguard.com/docs/introduction
Temperature API Quickstart (practice / runnable)	Access link shared at registration and pinned on Slack
API pricing & trial	fortyguard.com/api-pricing
Technology overview	fortyguard.com/our-technology
Community & live help	Hackathon Slack
Email support	support@fortyguard.com / hackathon@fortyguard.com

Fastest route: ask the assistant bot in Slack → post in #help-technical (API/dev) or #help-general (everything else) → email us if you're still stuck.

15. TERMS & CONDITIONS

- 1. Who can join:** Join solo or in a team of up to 3. Everyone on a team must register.
- 2. The event:** FortyGuard Hackathon'26 runs 18–30 August 2026 (11:59 PM GST), fully online. Submissions close 30 August 2026 (11:59 PM GST) — no late entries.
- 3. Using FortyGuard's data (please respect this):** We're giving you free access to our Temperature API and data for the hackathon. In return:
 - Use it only for your hackathon project — nothing else.
 - Keep your API key private — it's yours alone. Our data, API, and models stay ours. Access ends when the hackathon ends; anything beyond that needs a separate agreement with us.
- 4. Your project:** You own what you build. By submitting, you let us show and share your project and your team's name to run and promote the hackathon. Your work must be your own, use our Temperature data, and not copy anyone else's.
- 5. How to submit:** a live demo link, and a short (max 3-minute) video showing your project working. For your code, add **Hackathon-FG(hackathon@fortyguard.com)** as a collaborator on your GitHub repo so the judges have access to review it.
- 6. Judging:** Our tech team first shortlists submissions, then judges score them on Impact & Relevance (40%), Technical Execution (35%), Innovation (15%), and Communication (10%). Judges' decisions are final. Cheating or plagiarism means disqualification.
- 7. Prizes:** The top three teams each win one Nvidia GPU (three GPUs total — one per winning team, whatever your team size; your team decides how to share it; Team leader gets it if in dispute).
- 8. Be decent:** Be respectful, don't cheat, don't harass anyone. We can remove or disqualify anyone who breaks these rules.
- 9. Questions?** Technical: support@fortyguard.com · Everything else: hackathon@fortyguard.com