

## **EXP NO:8 Implement SVM/Decision tree classification techniques**

### **AIM:**

To Implement SVM/Decision tree classification techniques using R.

### **PROCEDURE:**

- Collect and load the dataset from sources like CSV files or databases.
- Clean and preprocess the data, including handling missing values and encoding categorical variables.
- Split the dataset into training and testing sets to evaluate model performance.
- Normalize or standardize the features, especially for SVM, to ensure consistent scaling.
- Choose the appropriate model: SVM for margin-based classification, Decision Tree for rule-based classification.
- Train the model on the training data using the 'fit' method.
- Make predictions on the testing data using the 'predict' method.
- Evaluate the model using metrics like accuracy, confusion matrix, precision, and recall.
- Visualize the results with plots, such as decision boundaries for SVM or tree structures for Decision Trees.
- Fine-tune the model by adjusting hyperparameters like `C` for SVM or `max\_depth` for Decision Trees.

### **CODE:**

#### **SVM.R:**


```
# Install and load the e1071 package (if not already installed)
install.packages("e1071")
library(e1071)
# Load the iris dataset
data(iris)
# Inspect the first few rows of the dataset
head(iris)
# Split the data into training (70%) and testing (30%) sets
set.seed(123) # For reproducibility
sample_indices <- sample(1:nrow(iris), 0.7 * nrow(iris))
train_data <- iris[sample_indices, ]
test_data <- iris[-sample_indices, ]
# Fit the SVM model
svm_model <- svm(Species ~ ., data = train_data, kernel = "radial")
# Print the summary of the model
summary(svm_model)
# Predict the test set
predictions <- predict(svm_model, newdata = test_data)
# Evaluate the model's performance
confusion_matrix <- table(Predicted = predictions, Actual = test_data$Species)
print(confusion_matrix)
# Calculate accuracy
accuracy <- sum(diag(confusion_matrix)) / sum(confusion_matrix)
cat("Accuracy:", accuracy * 100, "%\n")
```

## Decision Tree.R:

```
# Install and load the rpart package (if not already installed)
install.packages("rpart")
library(rpart)
# Load the iris dataset
data(iris)
# Split the data into training (70%) and testing (30%) sets
set.seed(123) # For reproducibility
sample_indices <- sample(1:nrow(iris), 0.7 * nrow(iris))
train_data <- iris[sample_indices, ]
test_data <- iris[-sample_indices, ]
# Fit the Decision Tree model
tree_model <- rpart(Species ~ ., data = train_data, method = "class")
# Print the summary of the model
summary(tree_model)
# Plot the Decision Tree
plot(tree_model)
text(tree_model, pretty = 0)
# Predict the test set
predictions <- predict(tree_model, newdata = test_data, type = "class")
# Evaluate the model's performance
confusion_matrix <- table(Predicted = predictions, Actual = test_data$Species)
print(confusion_matrix)
# Calculate accuracy
accuracy <- sum(diag(confusion_matrix)) / sum(confusion_matrix)
cat("Accuracy:", accuracy * 100, "%\n")
```

## OUTPUT:


## SVM in R:

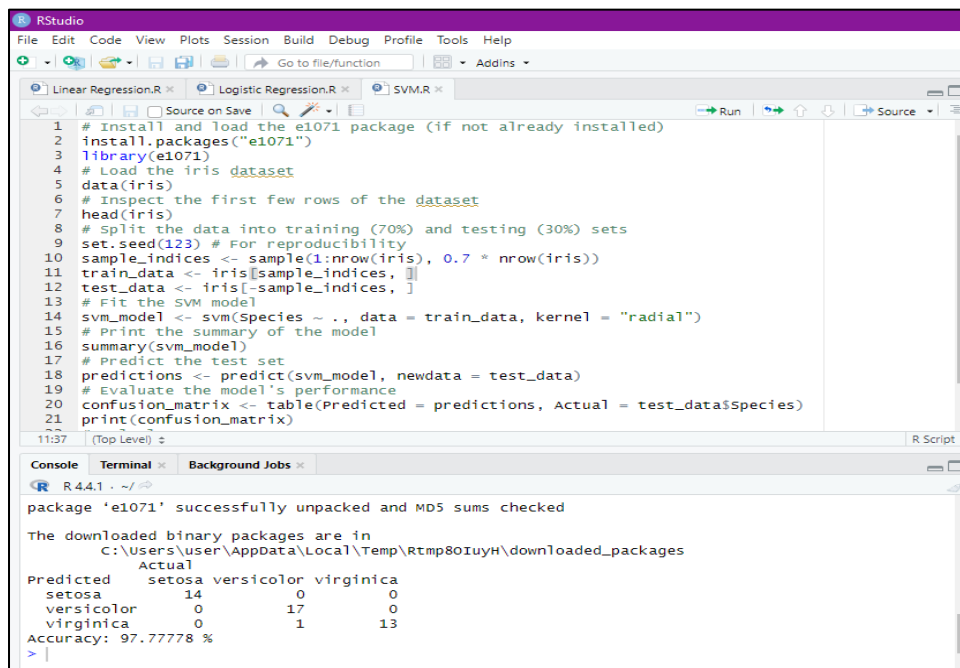The screenshot shows the RStudio interface. The script editor contains R code for installing the 'e1071' package, loading the 'iris' dataset, splitting it into training and testing sets, fitting an SVM model with a radial kernel, and evaluating its performance. The console shows the successful installation of 'e1071' and the resulting confusion matrix and accuracy. The confusion matrix shows that the model correctly classified 14 'setosa' flowers, 17 'versicolor' flowers, and 13 'virginica' flowers, with no misclassifications. The accuracy is 97.7778%.

```
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Linear Regression.R Logistic Regression.R SVM.R
1 # Install and load the e1071 package (if not already installed)
2 install.packages("e1071")
3 library(e1071)
4 # Load the iris dataset
5 data(iris)
6 # Inspect the first few rows of the dataset
7 head(iris)
8 # Split the data into training (70%) and testing (30%) sets
9 set.seed(123) # For reproducibility
10 sample_indices <- sample(1:nrow(iris), 0.7 * nrow(iris))
11 train_data <- iris[sample_indices, ]
12 test_data <- iris[-sample_indices, ]
13 # Fit the SVM model
14 svm_model <- svm(Species ~ ., data = train_data, kernel = "radial")
15 # Print the summary of the model
16 summary(svm_model)
17 # Predict the test set
18 predictions <- predict(svm_model, newdata = test_data)
19 # Evaluate the model's performance
20 confusion_matrix <- table(Predicted = predictions, Actual = test_data$Species)
21 print(confusion_matrix)
11:37 (Top Level) R Script

Console Terminal Background Jobs
R 4.4.1 ~ /
package 'e1071' successfully unpacked and MD5 sums checked
The downloaded binary packages are in
c:\Users\user\AppData\Local\Temp\Rtmp80IuyH\downloaded_packages
Actual
Predicted setosa versicolor virginica
setosa 14 0 0
versicolor 0 17 0
virginica 0 1 13
Accuracy: 97.7778 %
> |
```

## Decision tree:

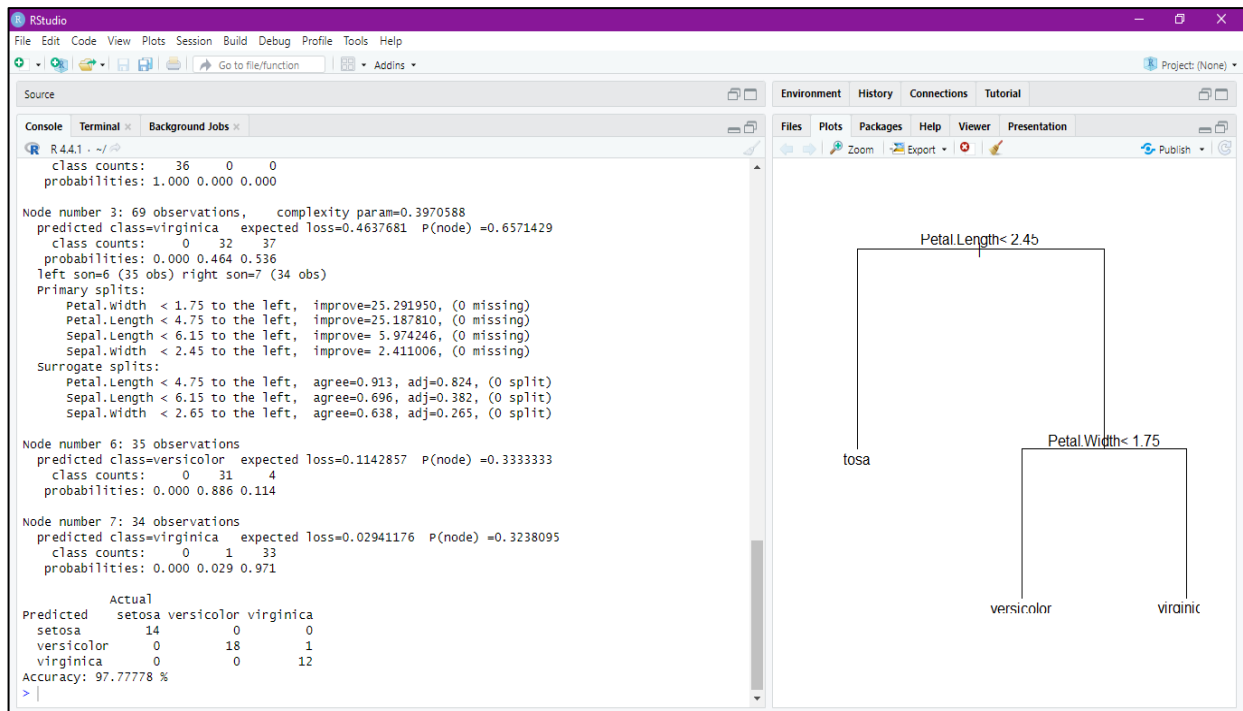

## RESULT:

Thus, Implement SVM and Decision tree classification techniques has been successfully executed.