

CAMPUS SNACKPASS - LLM PROMPTS

This document contains the prompts used during AI-assisted development of the Campus SnackPass frontend application.

Prompts

Prompt 1: I am building a web application called 'Campus SnackPass' to help college students order food without waiting in long queues. Please provide a well-structured HTML code for the app. It should include: a header with the app title 'SnackPass' and logo placeholder, a category filter section (All, Snacks, Drinks, Meals), a container grid to display food items (title, category, price and Add to Cart button), an order summary sidebar showing selected items, quantities, total price and a Confirm Order button, and a hidden token confirmation section that displays a unique order token once the order is placed.

Prompt 2: Based on the HTML structure for Campus SnackPass, write clean CSS code. Use a modern color palette suitable for a campus food app, CSS Grid and Flexbox for a responsive layout, and hover transitions for food cards, filter buttons and action buttons.

Prompt 3: Write JavaScript code to handle adding and removing food items in the Campus SnackPass webpage. Define a mock array of food items with id, name, category, price and image. Render the menu dynamically. Implement functions to add items to the cart, increase/decrease quantities and remove items.

Prompt 4: Provide JavaScript code to filter the food menu by category. Attach event listeners to category buttons, filter items without page reloads and highlight the active category button dynamically.

Prompt 5: Provide JavaScript code to calculate and display a live order summary. Calculate the subtotal based on item prices and quantities, update the summary whenever the cart changes and enable/disable the Confirm Order button depending on whether the cart contains items.

Prompt 6: Provide JavaScript code to confirm an order and generate a unique alphanumeric order token. Clear the cart, display a confirmation screen with the generated token, order details and collection status, and provide a New Order option to reset the application.

Prompt 7: Review the combined HTML, CSS and JavaScript code for Campus SnackPass. Check edge cases such as empty cart submissions and invalid filter selections. Refactor the code to follow clean coding standards with modular functions and clear inline documentation.

Source Code

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width,initial-scale=1">
```

```

<title>SnackPass</title>
  <style>
    *{margin:0;padding:0;box-sizing:border-box;font-family:Arial,sans-serif}
    body{background:#f4f6f8}
    header{background:#ff6b35;color:#fff;padding:16px;display:flex;align-
items:center;gap:12px}
      .logo{width:42px;height:42px;border-radius:
50%;background:#fff;color:#ff6b35;font-weight:bold;display:flex;align-
items:center;justify-content:center}
      .filters{padding:16px;display:flex;gap:10px;flex-wrap:wrap}
      .filters button{padding:8px 16px;border:none;border-radius:
20px;background:#fff;cursor:pointer}
      .filters button.active,.filters
button:hover{background:#ff6b35;color:#fff}
      .container{display:grid;grid-template-columns:3fr 1fr;gap:20px;padding:
20px}
        #menuGrid{display:grid;grid-template-columns:repeat(auto-
fit,minmax(220px,1fr));gap:16px}
        .card{background:#fff;padding:12px;border-radius:10px;box-shadow:0 2px
8px rgba(0,0,0,.1)}
        .card img{width:100%;height:140px;object-fit:cover;border-radius:8px}
        .card button,.sidebar button,#newOrderBtn{margin-top:10px;width:
100%;padding:10px;border:none;background:#ff6b35;color:#fff;border-radius:
8px;cursor:pointer}
        .card button:hover,.sidebar
button:hover,#newOrderBtn:hover{background:#e85a28}
        .sidebar{background:#fff;padding:16px;border-radius:10px;height:max-
content}
        .cartItem{border-bottom:1px solid #ddd;padding:8px 0}
        .qty button{width:28px;height:28px}
        .hidden{display:none}
        #confirmation{max-width:500px;margin:40px auto;background:#fff;padding:
20px;border-radius:10px;text-align:center}
        @media(max-width:800px){.container{grid-template-columns:1fr}}
  </style>
</head>
<body>
<header><div class="logo">S</div><h1>Snack Pass</h1></header>
<div class="filters">
<button class="filter active" data-cat="All">All</button>
<button class="filter" data-cat="Snacks">Snacks</button>
<button class="filter" data-cat="Drinks">Drinks</button>
<button class="filter" data-cat="Meals">Meals</button>
</div>
<div class="container" id="main">
<div id="menuGrid"></div>
<div class="sidebar">
<h2>Your Order</h2>
<div id="cartItems"><p>No items selected.</p></div>
<h3>Total: <span id="total">₹0</span></h3>
<button id="confirmBtn" disabled>Confirm Order</button>
</div>
</div>
<div id="confirmation" class="hidden"></div>

```

```

<script>
const foodItems=[
{id:1,name:"Veg Burger",category:"Snacks",price:80,image:"https://
via.placeholder.com/300x180?text=Burger"},
{id:2,name:"French Fries",category:"Snacks",price:60,image:"https://
via.placeholder.com/300x180?text=Fries"},
{id:3,name:"Cold Coffee",category:"Drinks",price:70,image:"https://
via.placeholder.com/300x180?text=Coffee"},
{id:4,name:"Lemon Juice",category:"Drinks",price:40,image:"https://
via.placeholder.com/300x180?text=Juice"},
{id:5,name:"Veg Fried Rice",category:"Meals",price:120,image:"https://
via.placeholder.com/300x180?text=Fried+Rice"},
{id:6,name:"Paneer Wrap",category:"Meals",price:110,image:"https://
via.placeholder.com/300x180?text=Wrap"}
];
let cart=[];
const
menu=document.getElementById("menuGrid"),cartBox=document.getElementById("cartItems"),total=document.getElementById("total"),confirmBtn=document.getElementById("confirmBtn");
function renderMenu(list){
menu.innerHTML="";
list.forEach(i=>{
menu.innerHTML+=`<div class="card">

<h3>${i.name}</h3>
<p>${i.category}</p>
<p><b>₹${i.price}</b></p>
<button onclick="addToCart(${i.id})">Add to Cart</button>
</div>`;
});
}
document.querySelectorAll(".filter").forEach(b=>{
b.onclick=()=>{
document.querySelectorAll(".filter").forEach(x=>x.classList.remove("active"));
b.classList.add("active");
const c=b.dataset.cat;
renderMenu(c=="All"?foodItems:foodItems.filter(x=>x.category===c));
};
});
function addToCart(id){
let item=cart.find(x=>x.id===id);
if(item)item.qty++;
else{
let f=foodItems.find(x=>x.id===id);
cart.push({...f,qty:1});
}
renderCart();
}
function inc(id){cart.find(x=>x.id===id).qty++;renderCart();}
function dec(id){
let i=cart.find(x=>x.id===id);
if(i.qty>1)i.qty--;
else cart=cart.filter(x=>x.id!==id);
}


```

```

renderCart();
}
function renderCart(){
if(cart.length===0){
cartBox.innerHTML=<p>No items selected.</p>;
total.textContent="₹0";
confirmBtn.disabled=true;
return;
}
let sum=0;
cartBox.innerHTML="";
cart.forEach(i=>{
sum+=i.price*i.qty;
cartBox.innerHTML+=`<div class="cartItem">
<b>${i.name}</b><br>₹${i.price}
<div class="qty">
<button onclick="dec(${i.id})">-</button>
${i.qty}
<button onclick="inc(${i.id})">+</button>
</div>
</div>`;
});
total.textContent="₹"+sum;
confirmBtn.disabled=false;
}
function token(){
return "SP-"+Math.random().toString(36).substring(2,6).toUpperCase()
+Math.floor(Math.random()*900+100);
}
confirmBtn.onclick=(()=>{
if(!cart.length)return alert("Cart is empty!");
let details=cart.map(i=>`<li>${i.name} × ${i.qty}</li>`).join("");
document.getElementById("main").classList.add("hidden");
const c=document.getElementById("confirmation");
c.classList.remove("hidden");
c.innerHTML=`<h2>🎉 Order Confirmed</h2>
<p><b>Token:</b> ${token()}</p>
<ul style="text-align:left;display:inline-block">${details}</ul>
<p>Status: Preparing</p>
<button id="newOrderBtn">New Order</button>`;
cart=[];renderCart();
document.getElementById("newOrderBtn").onclick=(()=>{
c.classList.add("hidden");
document.getElementById("main").classList.remove("hidden");
renderMenu(foodItems);
});
});
renderMenu(foodItems);
</script>
</body>
</html>

```

Webpage Images

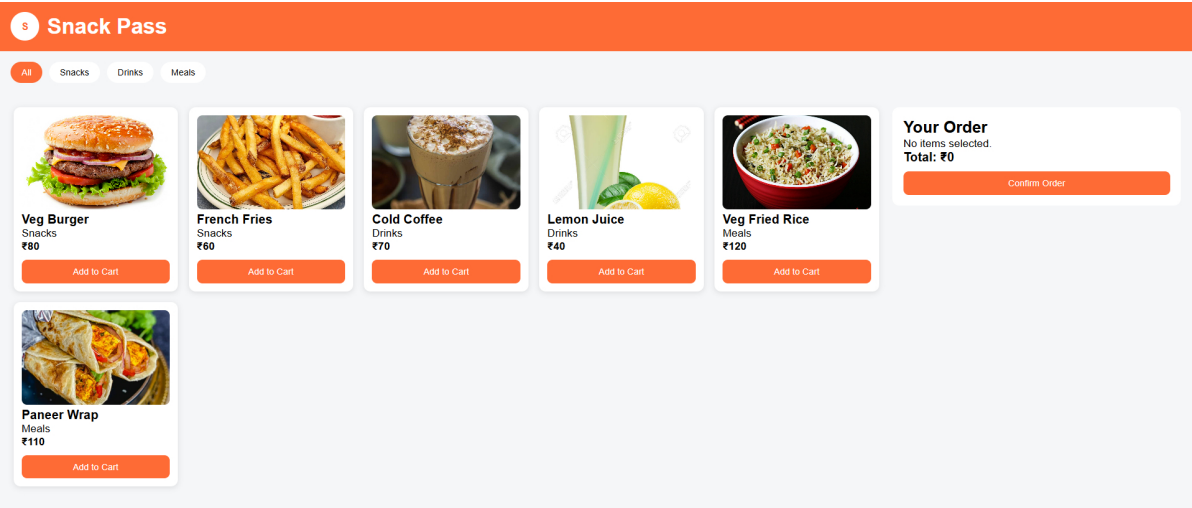

AFTER SELECTING:

