AI Driven Consultancy

POSTMAN FULL CRUD
(VERY CLEAR EXPLANATION)

Full CRUD Example Flow in Simple Language

1. POST Create user
2. GET See all users
3. GET By ID see one user
4. PUT Modify user
5. DELETE Remove user

Advanced Crud in Postman (*very important*)

1. Use Environment Variables

Create environment:

- baseUrl = https://jsonplaceholder.typicode.com
- userId = 101

Then URL becomes:

{{*baseUrl*}}/users/{{*userId*}}

- Cleaner
- Easy update
- Reusable

2. Store ID automatically after POST

In Tests tab for Create User:

```
let json = pm.response.json();
pm.environment.set("userId", json.id);
```

Now next requests use userId automatically.

3. Validate Response using Tests

In **GET** request Tests:

```
pm.test("Status is 200", function () {
  pm.response.to.have.status(200);
});
```

4. Chaining CRUD Requests (Automation)

1. POST Gets ID
2. GET By ID uses stored ID
3. PUT Update
4. DELETE Remove

This is called **Async Chaining / Collection Runner**.

STEP 1 - CREATE COLLECTION

1. Open Postman
2. Left side → Click **Collections**
3. Click **+ New Collection**
4. Name: **User CRUD API**
5. Save

Note: Now inside this collection we will add 4 requests.

STEP 2 - CREATE (*POST*)

Purpose: **Insert new user.**

1. Click **Add Request**
2. Name: **Create User**
3. Method: **POST**
4. URL: https://jsonplaceholder.typicode.com/posts

Body:

- Go to **Body**
- Choose **raw**
- Choose **JSON**

Request:

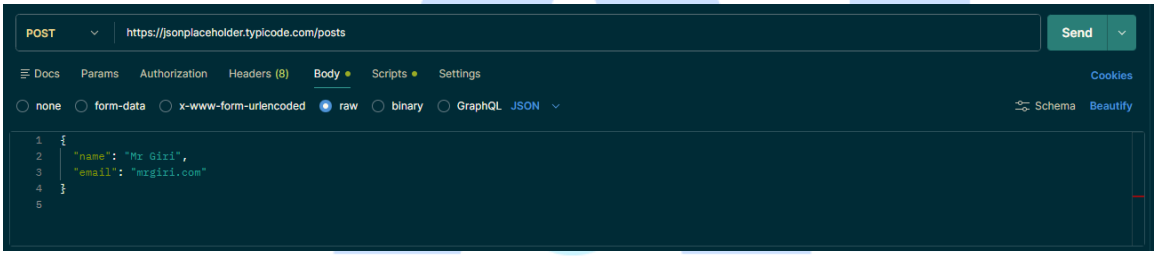

Click **Send**.

Response Example:

User Created Successfully

STEP 3 - READ ALL (*GET*)

Purpose: Fetch all users.

1. Add Request
2. Name: **Get All Users**
3. Method: **GET**
4. URL: https://jsonplaceholder.typicode.com/comments?postId=1

Request

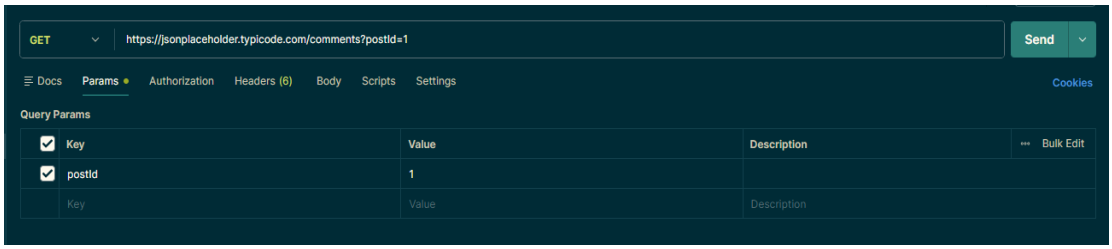

Click **Send**.

Response:

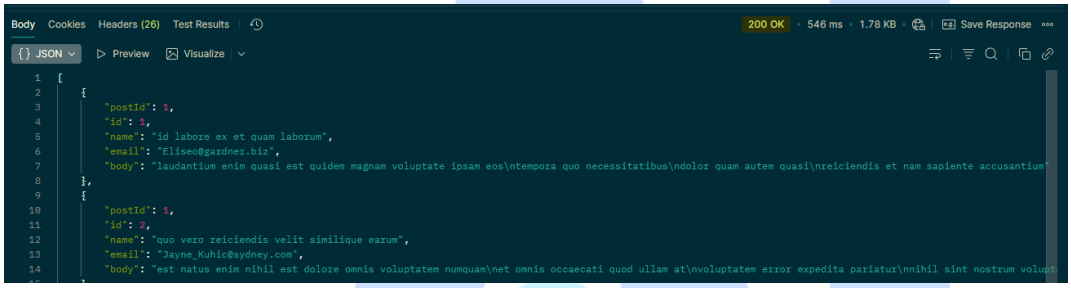

All users fetched.

STEP 4 - READ BY ID (GET)

Purpose: Fetch specific user.

1. Add Request
2. Name: **Get User by ID**
3. Method: **GET**
4. URL: https://jsonplaceholder.typicode.com/users/1

Request

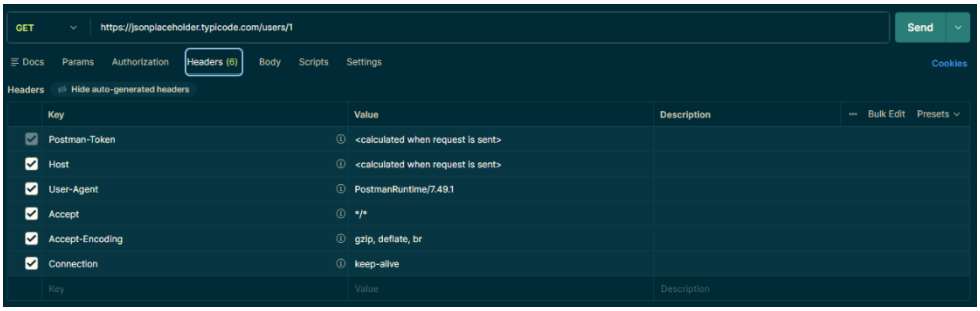

Click **Send.**

Response:


```
{
    "id": 1,
    "name": "Leanne Graham",
    "username": "Bret",
    "email": "Sincere@april.biz",
    "address": {
        "street": "Kulas Light",
        "suite": "Apt. 556",
        "city": "Gwenborough",
        "zipcode": "92998-3874",
        "geo": {
            "lat": "-37.3159",
            "lng": "81.1496"
        }
    },
    "phone": "1-770-736-8031 x56442",
    "website": "hildegard.org",
    "company": {
        "name": "Romaguera-Crona",
        "catchPhrase": "Multi-layered client-server neural-net",
        "bs": "harness real-time e-markets"
    }
}
```


Single user fetched.

STEP 5 - UPDATE (*PUT*)

Purpose: Edit a user.

1. Add Request
2. Name: **Update User**
3. Method: **PUT**
4. URL: https://jsonplaceholder.typicode.com/users/1

Body (raw → JSON):


```
{
  "user_profile": {
    "name": "Mr.Giri Hacker",
    "real_time_projects": [
      {
        "project_name": "Smart Placement Portal – Real-Time Enterprise Application",
        "description": "A full-stack enterprise portal designed to connect students with companies. Includes authentication, job postings, applications, analytics, and real-time chat.",
        "frontend": {
          "technology_stack": ["Angular", "TypeScript", "HTML5", "SCSS", "Angular Material"],
          "features": [
            "Reusable components & shared modules",
            "Lazy loading & route guards",
            "Reactive forms for job applications",
            "Admin dashboards with charts",
            "Real-time chat UI using WebSockets"
          ]
        },
        "backend": {
          "technology_stack": ["Node.js", "Express.js", "MongoDB", "JWT", "Socket.IO"],
          "features": [
            "Role-based authentication (Admin, Student, Company)",
            "Job posting & application management",
            "Notification & email module",
            "Real-time messaging backend",
            "Analytics APIs for admin dashboard"
          ]
        },
```


Click Send.

Response:

User updated.

STEP 6 - DELETE (DELETE)

Purpose: Remove a user.

1. Add Request
2. Name: **Delete User**
3. Method: **DELETE**
4. URL: https://jsonplaceholder.typicode.com/users/1

Click Send.

Request:

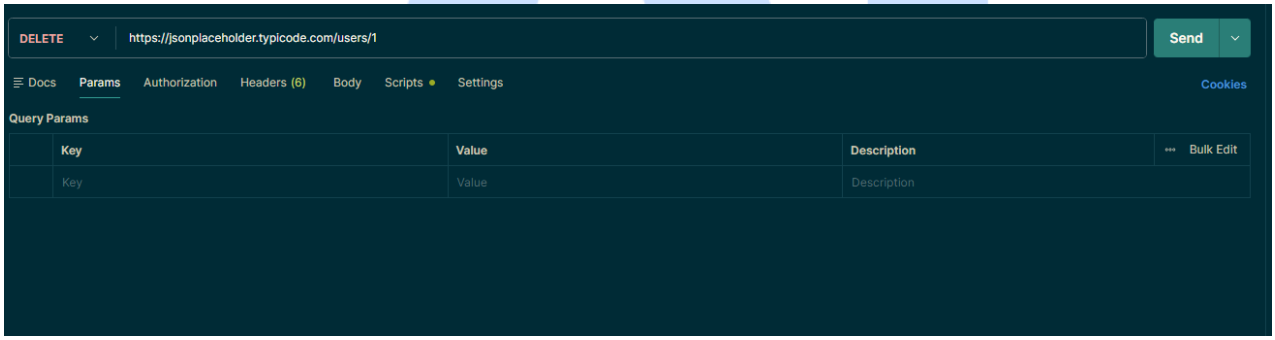

Response:

User deleted.