


ADS setup

1. Introduction

As labs are part of the clusters they need to conform to the general security guidelines. This model describes such configuration of a lab node

2. Diagram

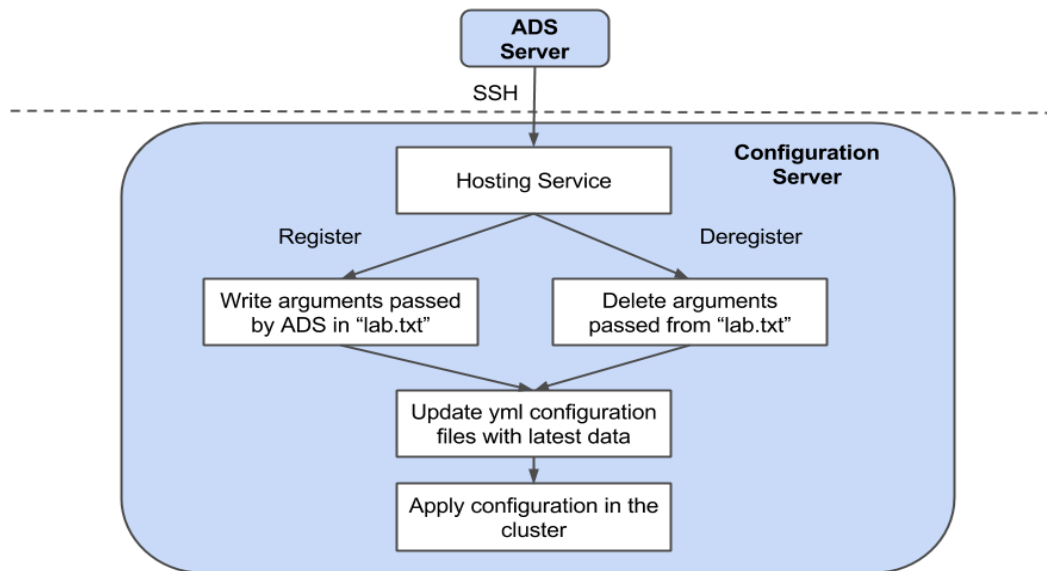

3. Implementation

- ADS Network-setup

```
---
- name: Set root password
  command: vzctl set 1009 --userpasswd root:{{container_root_password}}

- name: copy interface ifcfg-eth1 file
  template: src=ifcfg-eth1 dest=/vz/private/1009/etc/sysconfig/network-
scripts/

- name: Network restart
  command: vzctl exec 1009 service network restart
```

- ADS Private NetworkConfigures the network-interface in /etc/sysconfig/network-scripts/ifcfg-eth1 of ads-server with the following fields

```
DEVICE=eth1
BOOTPROTO=static
ONBOOT=yes
NM_CONTROLLED=no
IPADDR=10.100.1.9
GATEWAY=10.100.1.1
NETMASK={{net_mask}}
```