

WEEK 3

Aim

To design and develop a **Student Name Manager** using HTML, CSS, and JavaScript to dynamically add and delete student names from a list and display the total number of students.

Description:

This experiment involves creating a Student Name Manager web application that allows users to enter and manage student names dynamically. The application provides an input field and an **Add Student** button to add student names to the list. Each student is displayed with a **Delete** button, which allows the corresponding student to be removed from the list.

The total number of students is automatically updated whenever a student is added or deleted. HTML is used to create the webpage structure, CSS is used to provide styling and layout, and JavaScript is used to implement dynamic add, delete, and student-count functionality.

Program code:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Student Name Manager</title>
    <style>
      body{
        background: rgb(201, 242, 243);
      }

      .container{
        width: 500px;
        margin: 30px auto;
        background: rgb(255, 254, 254);
```

```
padding: 20px;
border-radius: 8px;
}

input{
width: 300px;
padding: 8px;
}

button{
padding: 9px 20px;
}

h3{
margin: 15px 0px;
}

ul{
list-style: none;
padding:0px
}

li{
background: rgb(216, 216, 248);
margin: 10px 0;
padding: 10px;
display: flex;
justify-content: space-between;
align-items: center;
border-radius: 5px;
}

.delete{
background: red;
color: rgb(255, 255, 255);
border-radius: 15px;
padding: 5px 10px;
}
</style>
```

```
</head>

<body>
  <div class="container">
    <h1>Student Name Manager</h1>

    <input type="text" id="studentName" placeholder="Enter student
name">
    <button onclick="addStudent()">Add Student</button>

    <h3>Total Students: <span id="count">0</span></h3>

    <ul id="studentList"></ul>
  </div>

<script>
  let students=[];

  function addStudent(){
    const input=document.getElementById("studentName");
    const name=input.value.trim();

    if(name===""){
      alert("student name cannot be empty!!!");
      return;
    }

    students.push(name);
    input.value="";
    displayStudents();
  }

  function displayStudents(){
    const list=document.getElementById("studentList");
    list.innerHTML="";

    students.forEach((student,index)=>{
      list.innerHTML+=
        `<li>
```


```

        ${index+1}. ${student}
        <button class="delete"
onclick="deleteStudent(${index})">remove</button>
        </li>`;
    });
    document.getElementById("count").textContent=students.length;
}

function deleteStudent(index){
    students.splice(index,1);
    displayStudents();
}
</script>
</body>
</html>

```

Output:

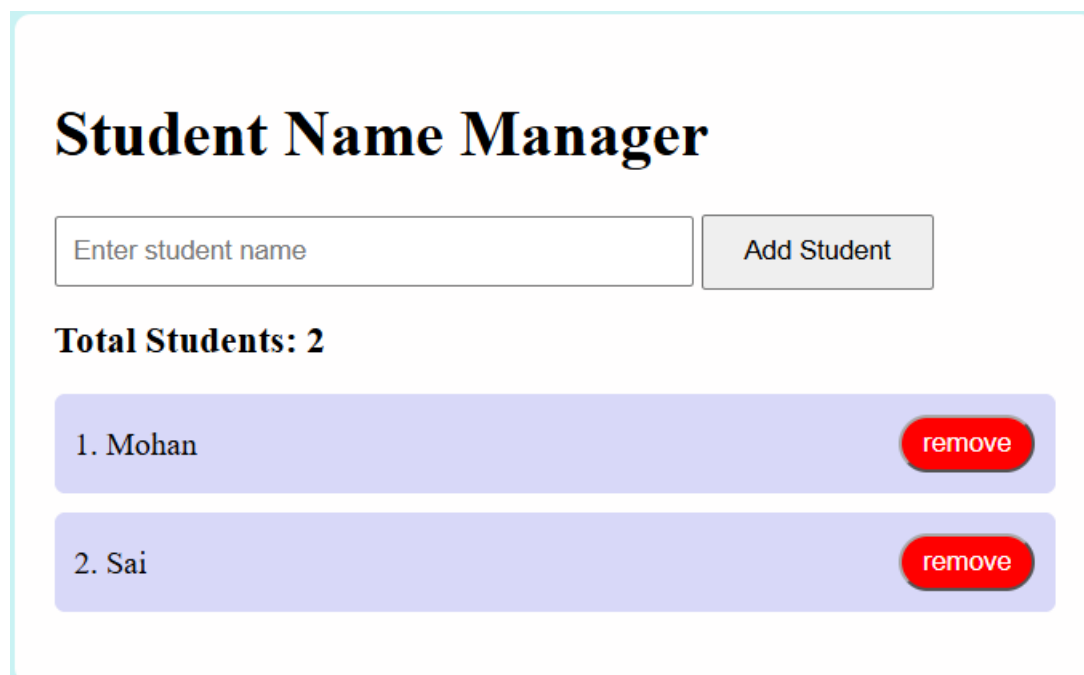

The screenshot shows a web application titled "Student Name Manager". It features a text input field with the placeholder "Enter student name" and an "Add Student" button. Below this, it displays "Total Students: 2". A list of two students is shown in light blue boxes: "1. Mohan" and "2. Sai". Each student entry has a red "remove" button next to it.

Result:

The Student Name Manager was successfully developed using HTML, CSS, and JavaScript. The application allows users to add and delete student names dynamically, while automatically updating and displaying the total number of students.