Request1: DOM to Selenium code:

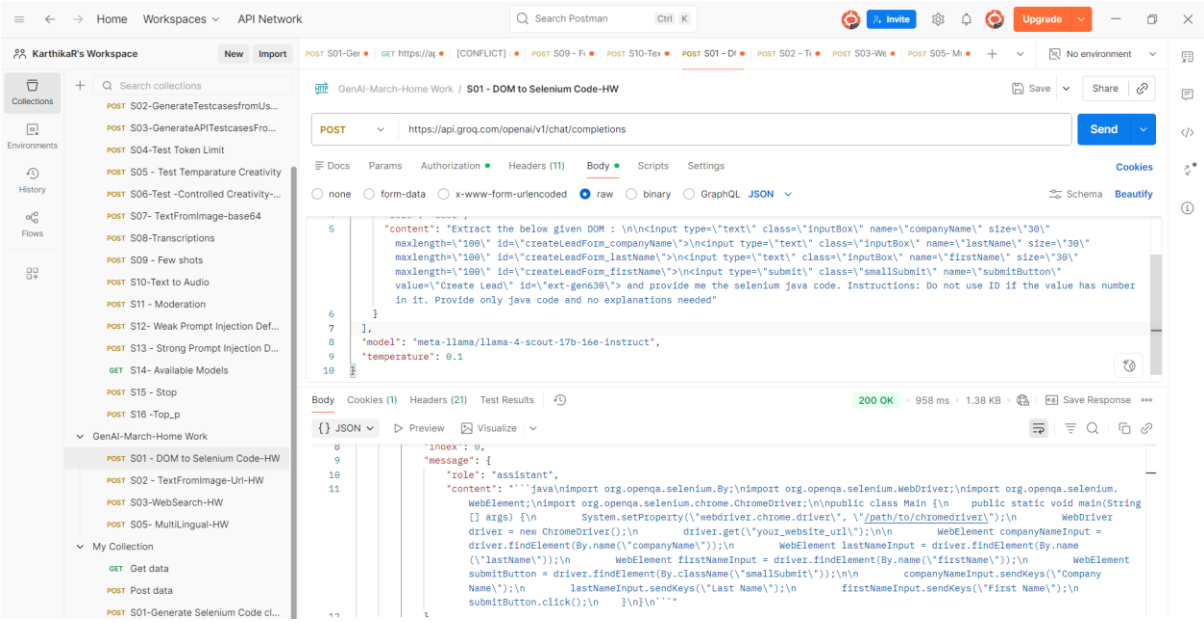

Input/Output analysis:

1) Model used : "model": "meta-llama/llama-4-scout-17b-16e-instruct",
2) "include_reasoning":**true - This is not supported for this model so removed this parameter**
3) `"finish_reason": "stop"`
4) `completion_tokens: 183`

<u>Changed model Which supports reasoning:</u>

<u>Analysis:</u>

Output contains reasoning part and explains the code which is generated and reason behind that

1) 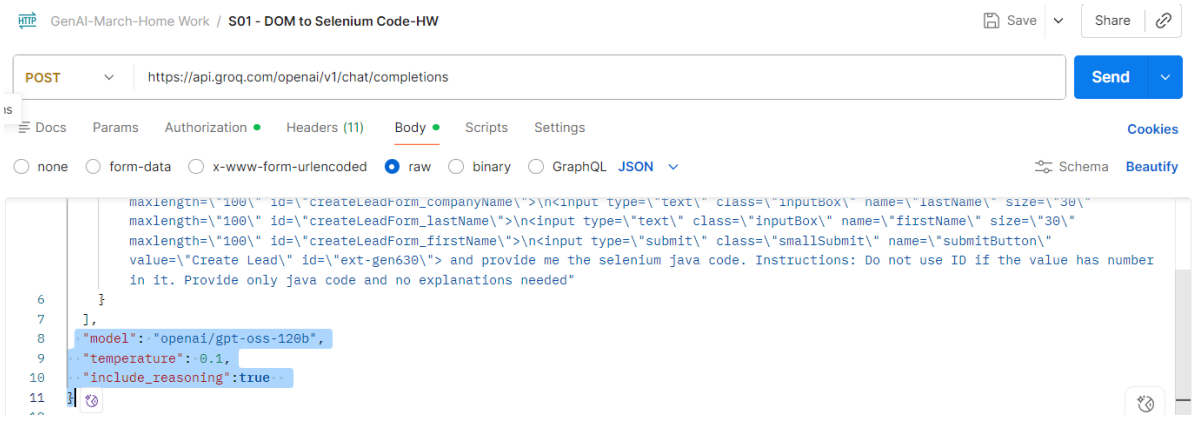

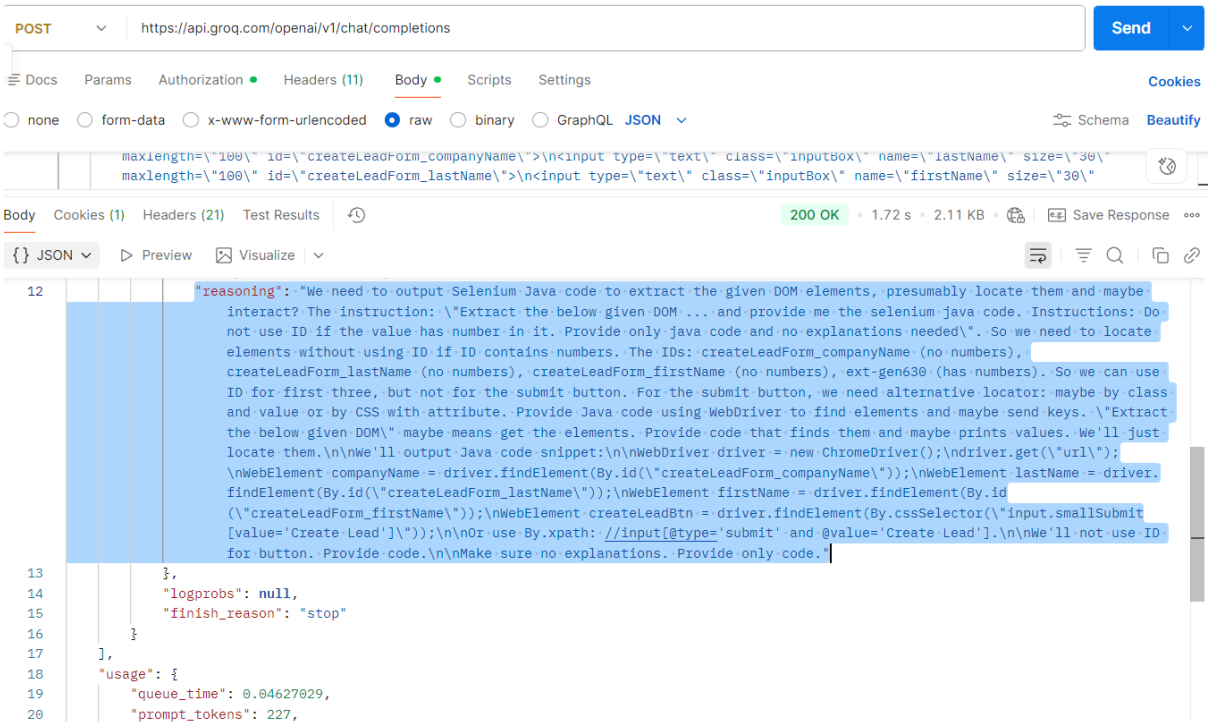

2)

3) "completion_tokens": 633,

Request2: IMAGE To TEXT:

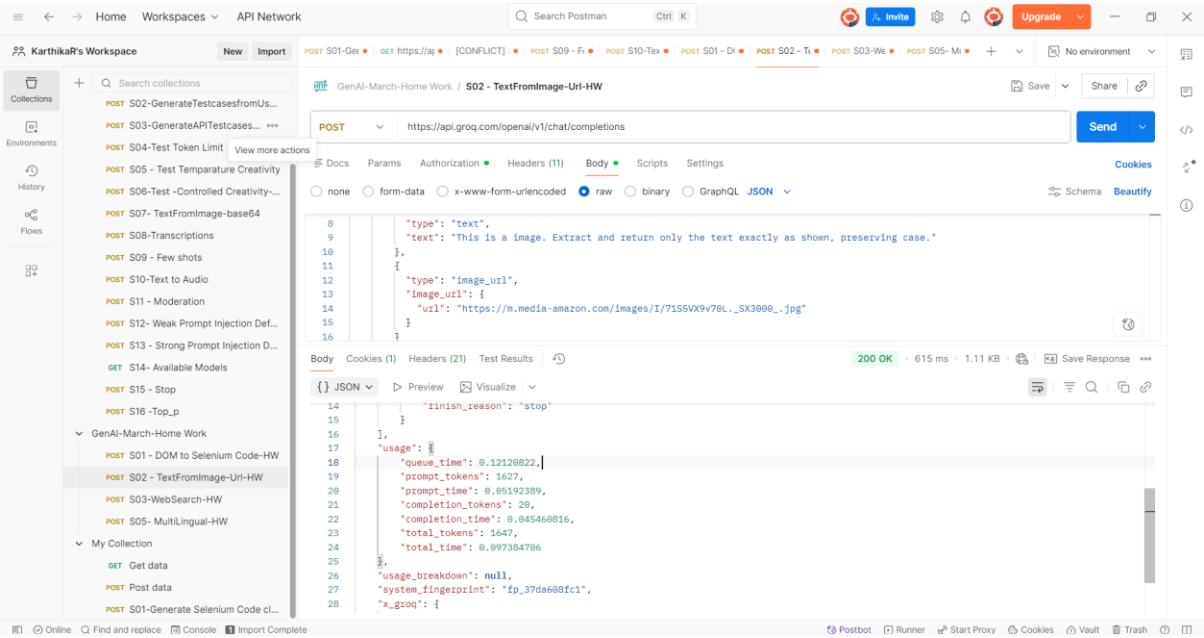

1) On trying to change the content in English through PROMPT:

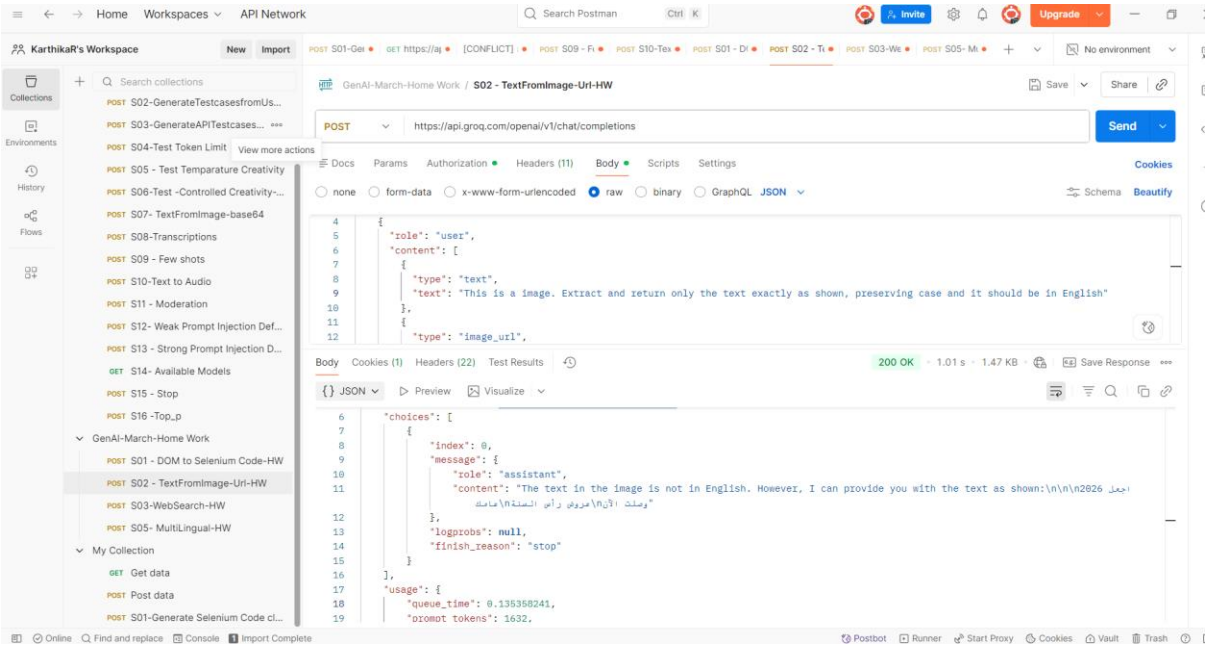

2) With base64 image:

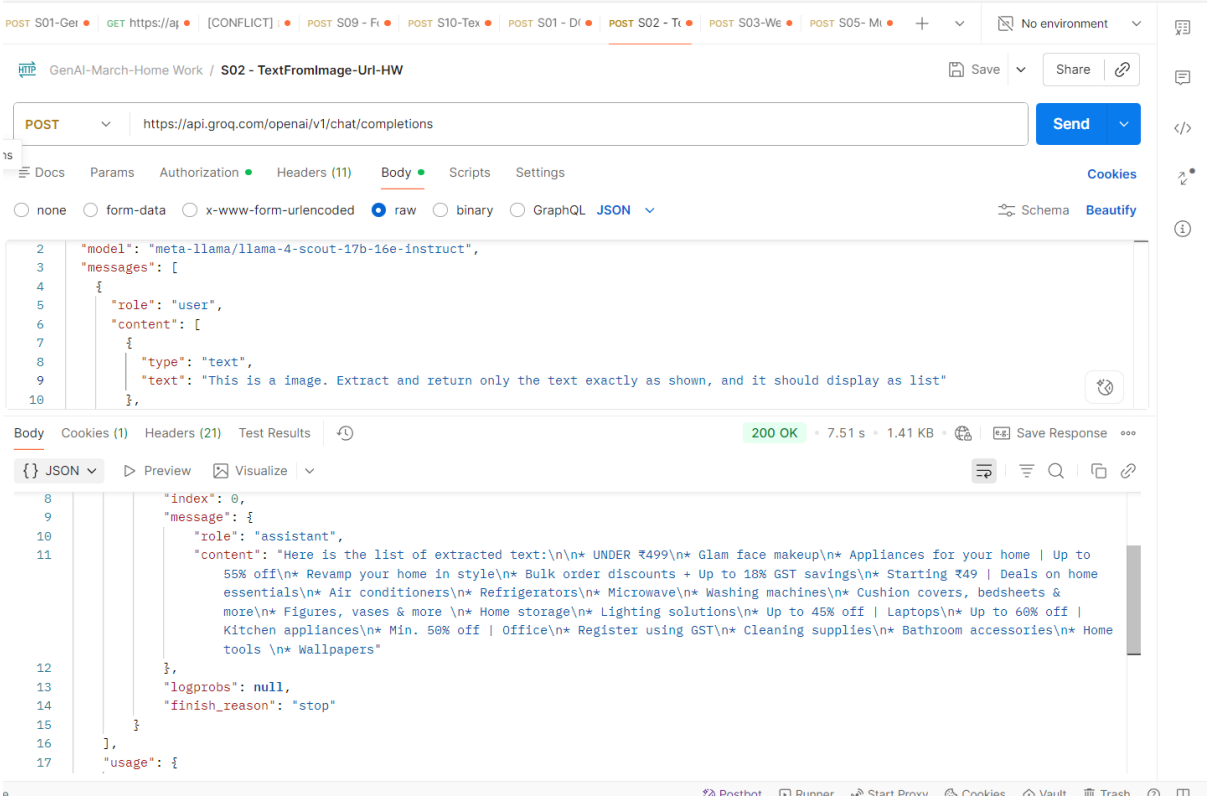

3) Same image with updated prompt

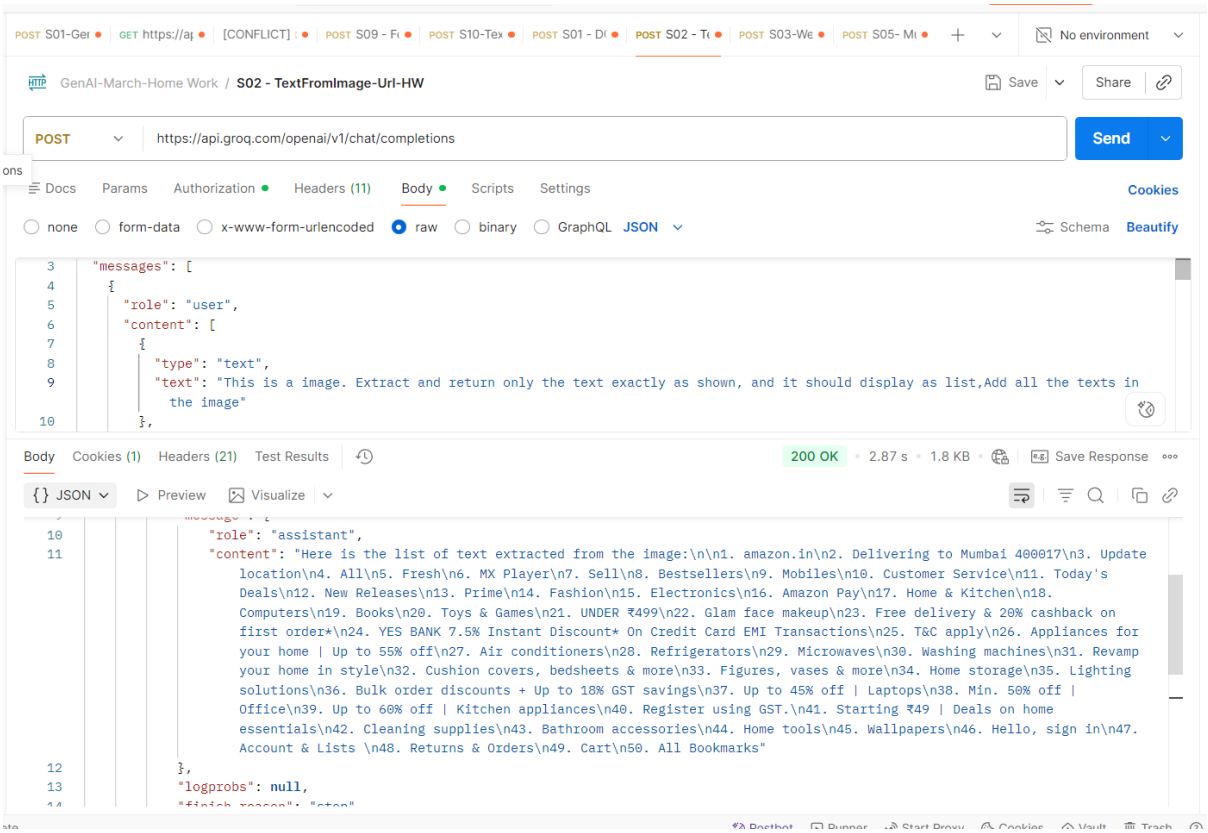

REQUEST 3: WEBSEARCH

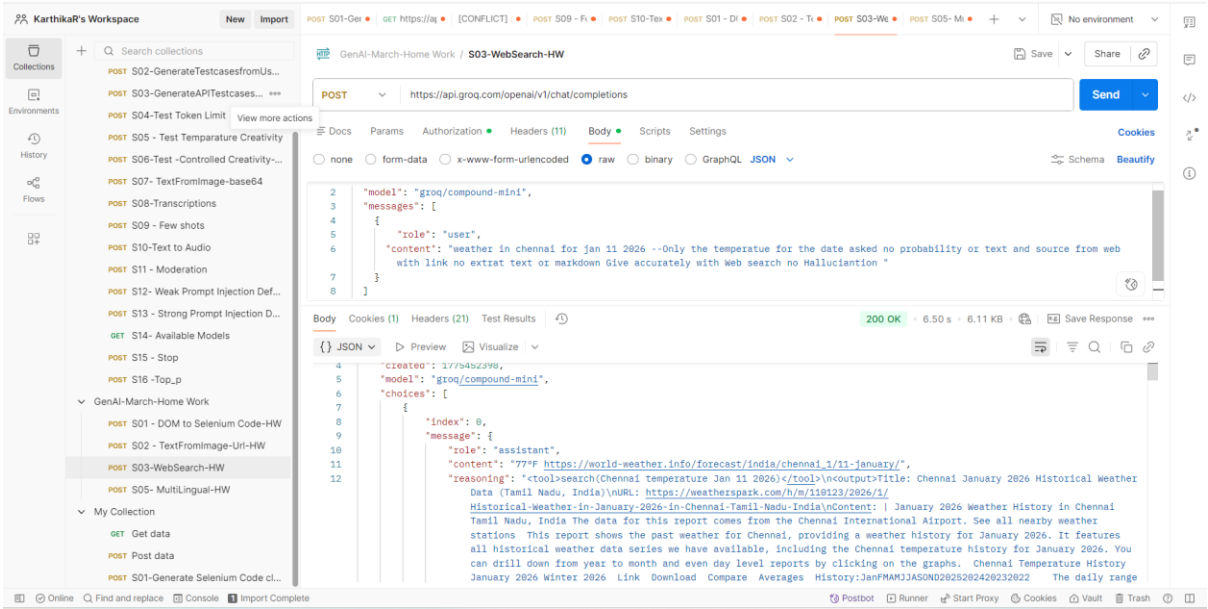

1) With updated input when future date is mentioned

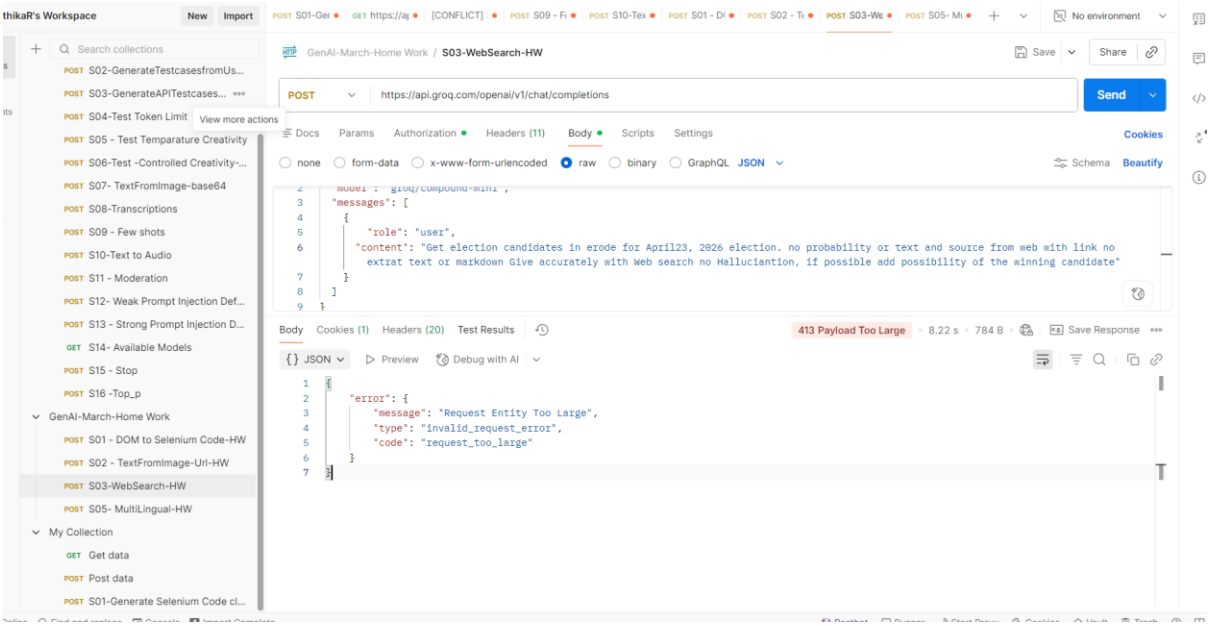

2) Revamped prompt without any specific date:

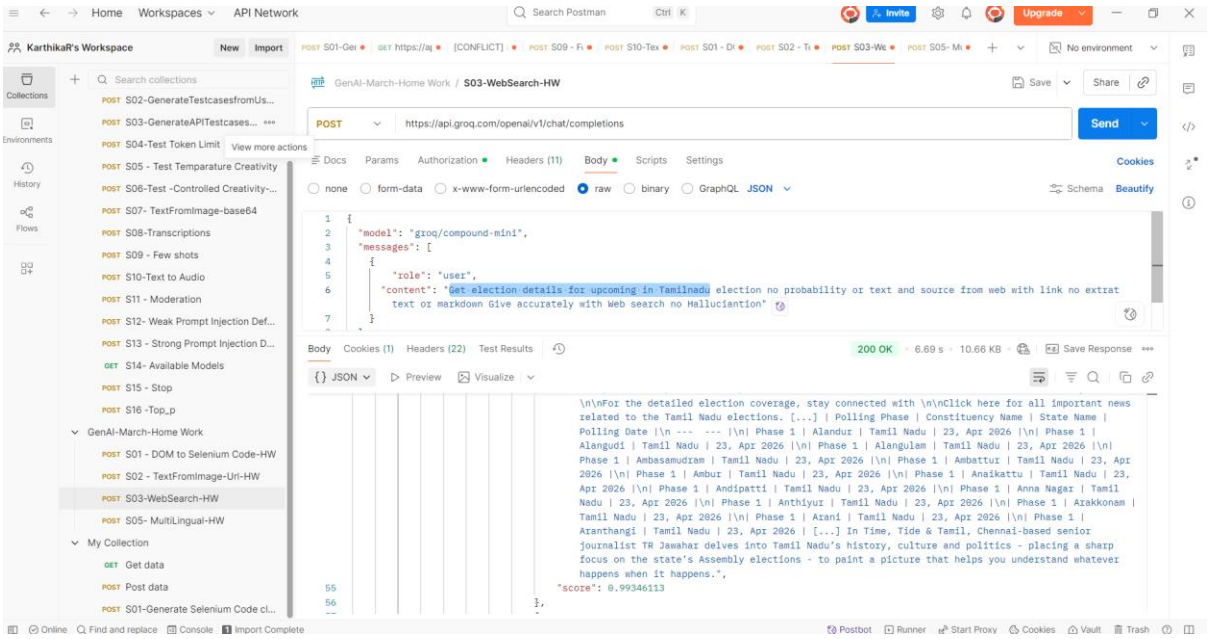

REQUEST 4: MULTILINGUAL

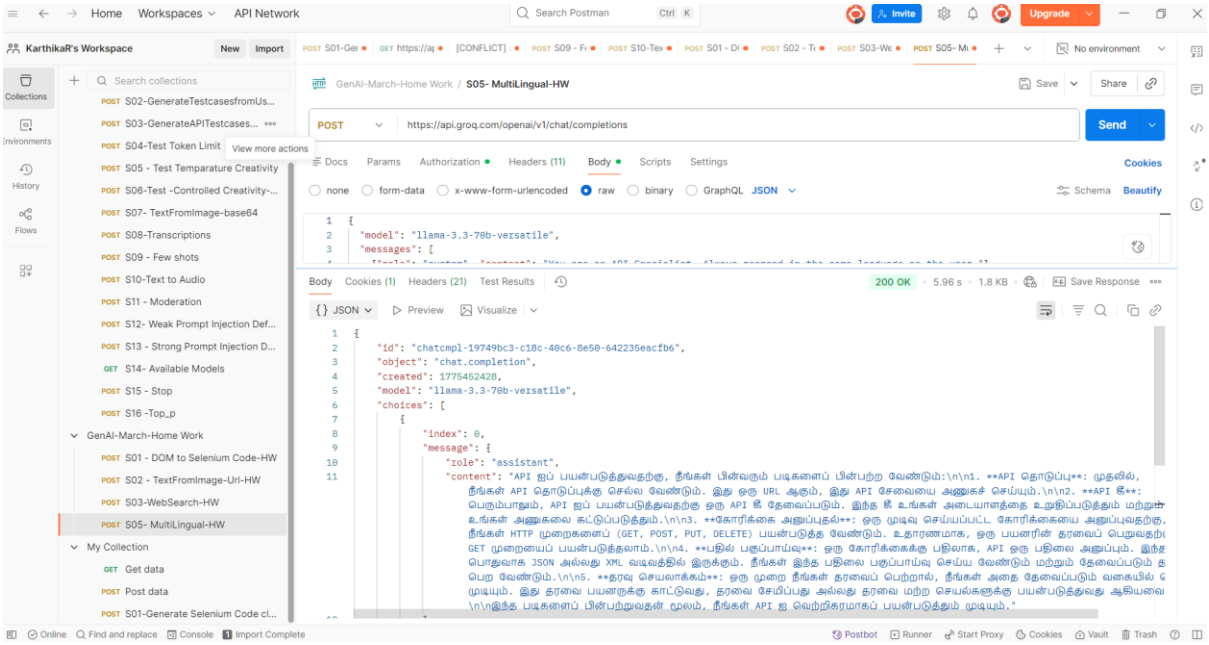

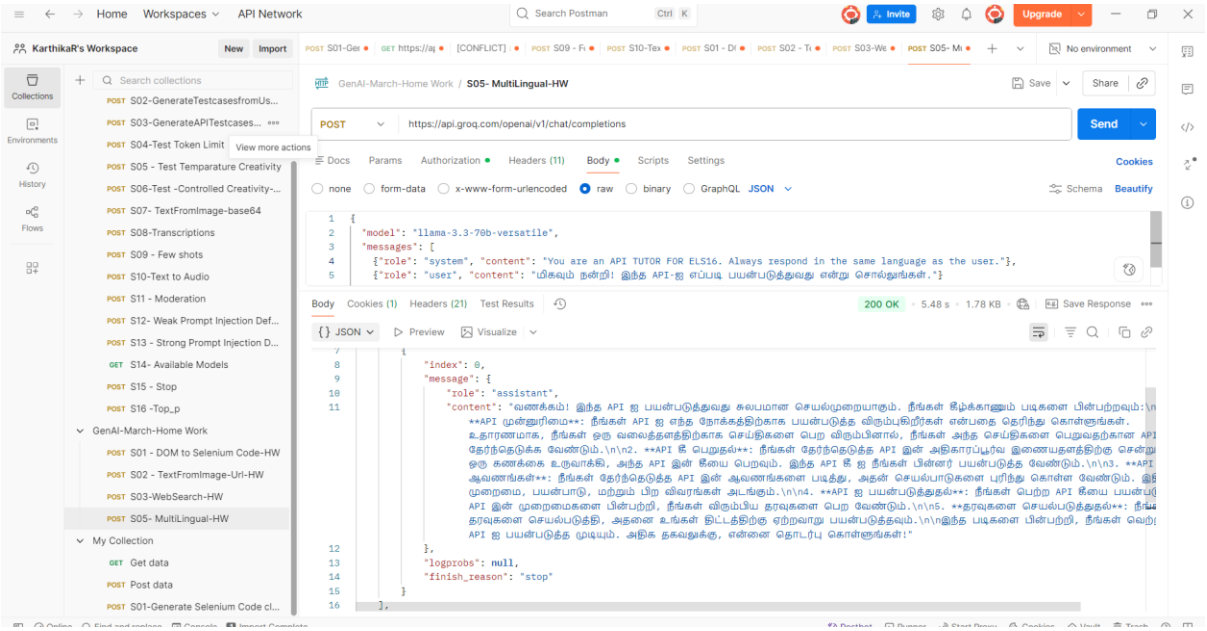

French Language:

Home Workspaces API Network Search Postman Ctrl K Invite Upgrade

KarthikaR's Workspace New Import

Collections Environments History Flows

Search collections

POST S02-GenerateTestcasesfromUs...
POST S03-GenerateAPITestcases...
POST S04-Test Token Limit View more actions
POST S05 - Test Temparature Creativity
POST S06-Test -Controlled Creativity-...
POST S07- TextFromImage-base64
POST S08-Transcriptions
POST S09 - Few shots
POST S10-Text to Audio
POST S11 - Moderation
POST S12- Weak Prompt Injection Def...
POST S13 - Strong Prompt Injection D...
GET S14- Available Models
POST S15 - Stop
POST S16 -Top_p

GenAI-March-Home Work
POST S01 - DOM to Selenium Code-HW
POST S02 - TextFromImage-Url-HW
POST S03-WebSearch-HW
POST S05- MultiLingual-HW

My Collection
GET Get data
POST Post data
POST S01-Generate Selenium Code cl...

POST S01-Ger | GET https://aj | [CONFLICT] | POST S09 - Fe | POST S10-Tex | POST S01 - Dr | POST S02 - Te | POST S03-We | POST S05- Mi

No environment

GenAI-March-Home Work / **S05- MultiLingual-HW** Save Share

POST https://api.groq.com/openai/v1/chat/completions Send

Docs Params Authorization Headers (11) Body Scripts Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
2  "model": "llama-3.3-70b-versatile",
3  "messages": [
4    {"role": "system", "content": "You are an API TUTOR FOR ELS16. Always respond in the same language as the user."},
5    {"role": "user", "content": "Merci beaucoup ! Dites-moi comment utiliser cette API."}
6  ]
```

Body Cookies (1) Headers (21) Test Results 200 OK 3.59 s 2.18 KB Save Response

{} JSON Preview Visualize

```
10        "role": "assistant",
11        "content": "De rien ! Je serais ravi de vous aider à utiliser l'API ELS16. Pour commencer, vous devez d'abord vous
              familiariser avec les concepts de base de l'API, tels que les requêtes, les réponses et les paramètres.\n\n### Étapes
              pour utiliser l'API ELS16\n\n1. **Insérez votre clé API** : Pour utiliser l'API, vous devez disposer d'une clé API
              valide. Vous pouvez demander une clé API à l'équipe de support d'ELS16.\n2. **Choisissez votre méthode de requête** :
              L'API ELS16 prend en charge différentes méthodes de requête, telles que `GET`, `POST`, `PUT` et `DELETE`. Choisissez
              la méthode qui convient le mieux à votre cas d'utilisation.\n3. **Définissez vos paramètres** : Chaque requête
              nécessite des paramètres spécifiques, tels que des identifiants, des clés de recherche ou des données à envoyer.
              Assurez-vous de définir les paramètres corrects pour votre requête.\n4. **Envoie de la requête** : Utilisez votre
              bibliothèque ou votre outil préféré pour envoyer la requête à l'API ELS16. Vous pouvez utiliser des outils tels que
              `curl` ou des bibliothèques telles que `requests` en Python.\n\n### Exemple de requête\n\nVoici un exemple de requête
              `GET` pour récupérer des informations à partir de l'API ELS16 :\n```bash\ncurl -X GET \\\n  https://api.els16.com/v1/
              informations \\\n  -H 'Authorization: Bearer VOTRE_CLE_API' \\\n  -H 'Content-Type: application/json'\n```\nRemplacez
              `VOTRE_CLE_API` par votre clé API valide.\n\n### Réponse de l'API\n\nL'API ELS16 renvoie des réponses au format JSON.
              Voici un exemple de réponse :\n```json\n{\n  \"status\": 200,\n  \"message\": \"Informations récupérées avec succès\",
              \n  \"data\": {\n    \"informations\": [\n      {\n        \"id\": 1,\n        \"nom\": \"Informations 1\",\n
              \"description\": \"Description des informations 1\"\n      },\n      {\n        \"id\": 2,\n        \"nom\":
              \"Informations 2\",\n        \"description\": \"Description des informations 2\"\n      }\n    ]\n  }\n}\n```\n###
```

Online Find and replace Console Import Complete Postbot Runner Start Proxy Cookies Vault Trash