

**SUMMERSET OAKLEIGH
52 GOLF ROAD, OAKLEIGH SOUTH, VIC**

SCHEDULE 1

MATERIALS, PRODUCTS & FINISHES SCHEDULE

CONTRACT ISSUE 'P'

Revision History

Revision	Description	Date
A	50% ISSUE	01.08.2025
B	75% ISSUE	15.08.2025
T1	TENDER ISSUE	05.09.2025
P1	CONTRACT ISSUE	10.10.2025

SCHEDULE 1

Summerset Oakleigh – RAC Building & ILA 32 Golf Road, Oakleigh South, Victoria

PROJECT NUMBER: 20230185

Author: EL, KS, TM, AC

MATERIALS, PRODUCTS & FINISHES SCHEDULE

GENERAL NOTES:

This schedule is to be read in conjunction with Project Specification.

This schedule nominates selected products and materials for the Project. Further Requirements of a general nature for some of these items are detailed in the Project Specification, under Part II Materials or Part III Execution, of the relevant trade section.

Other Requirements including quality assurance, reference standards, installation, workmanship and execution are detailed in the Project Specification.

Indicative location is to be taken as a guide only, refer to Drawings for location / extent. Advise discrepancies to Architect within Tender Period and seek clarification.

Items of alternative manufacture that are a tested and approved equivalent to the scheduled item may be submitted to the Architect for approval to substitute.

INDEX

SECTION NO. - TITLE	PAGE
02530 – SANITARY PLUMBING / SANITARYWARE & TAPWARE.....	1
02900 - SITE WORKS AND LANDSCAPING	16
03300 - CONCRETE	17
03450 – PRECAST CONCRETE PANELS.....	18
04210 – BRICKWORK.....	18
04220 – BLOCKWORK	18
05100 – STRUCTURAL STEEL	19
05300 - METAL ROOFING AND ROOF PLUMBING	19
05400 - EXTERNAL WALL CLADDINGS	22
05500 - METALWORK	23
06100 - CARPENTRY	31
06400 - JOINERY	35
07130 - WATERPROOFING AND TANKING	45
08200 - DOORS AND DOOR FRAMES	46
08800 - GLASS AND GLAZING	47
09220 – ACRYLIC OR CEMENT RENDER.....	48
09250 – SUSPENDED CEILINGS	48
09260 - PARTITIONS	50
09300 - TILING	52
09610 – APPLIED FINISHES TO CONCRETE FLOORS.....	56
09650 - RESILIENT FINISHES.....	58
09680 – CARPET / MODULAR CARPET & MISCELLANEOUS FLOOR ITEMS	60
09900 - PAINTING.....	63
12000 – FIXTURES, FITTINGS & EQUIPMENT	67
ELECTRICAL.....	82


02530 – SANITARY PLUMBING / SANITARYWARE & TAPWARE**Sanitaryware & Tapware**

Note: Confirm all Tapware selections with Superintendent prior to Ordering.

Code	Image	Fixture	Description / Detail	Indicative Location	Rev
P1		Toilet	Manufacturer: CAROMA Description: Liano Cleanflush easy height wall faced toilet suite with Liano Double flap toilet seat in white Code: 766450W	Main Building: Staff WC Resident/Visitor WC ILA Apartments: Bathrooms	
P2	 	Toilet with Contrasting Seat & Cover	Manufacturer: CAROMA Description: Liano Cleanflush easy height wall faced toilet suite with double flap toilet seat in Anthracite Grey Code: 766450AG – Dbl Flap Seat Seat : Caravelle Care Double Flap Toilet Seat, Anthracite Grey, with Germ Guard. Code: 254008AG	RACF: Resident Ensuities	


Sanitaryware & Tapware


Code	Image	Fixture	Description / Detail	Indicative Location	Rev
P3		Accessible Toilet	Supplier: Caroma Product: Care 800 Cleanflush wall faced toilet suite with backrest and Pedigree 11 care single flap seat in Anthracite Grey Code: 901900BAG Raised Care Buttons Seat: Anthracite grey Disabled WCs to be installed in accordance with AS 1428.1. (Contact Caroma customer service centre 131 416 for more information) Note: Pan to incorporate coved detail, this is to match radius of coved skirting, 35mm nom. Backrest Integrated into Handrail. To all accessible amenities Installed to comply to AS1428.1	Main Building: Resident/Visitor ACC WC ACC WC ACC Bed Ensuities	
P4		Accessible toilet	Manufacturer: CAROMA Description: Care 800 Cleanflush wall faced toilet suite with backrest and Pedigree 11 care single flap seat in White Code: 901900BW	Main Building: Staff ACC WC	
BA1 + TAP1 or TAP2 where accessible		Wall Hung Basin, Accessible, 920wide	Manufacturer: CAROMA Description: Opal 920 Wall Basin, with shroud Code: Right Hand Shelf - 632310W Left Hand Shelf - 632410W Shroud – 632601W Dimensions: 920W x 450D x 158H Note: Installation; Ensure Installed in accordance with AS1428		X
		TAP1 Tap, basin Mixer	Manufacturer: CAROMA Product: Opal Basin Mixer H/C Chrome LILF OPAL BASIN MIXER H/C CHROME – Lead Free Code: 99700C65AFMT01 Finish: Chrome		X
		TAP 2 Basin Mixer, Accessible lever	Manufacturer: CAROMA Product: Opal Care Extended Handle H/C CHROME LI Code: 99706CMTO1 Finish: Chrome	Main Building: Resident/Visitor ACC WC Staff ACC WC ACC Bed Ensuities	X
		BT1	Manufacturer: CAROMA Description: Urbane II Bottle Trap – 40mm Finish: Chrome Code: 687295C		


BA2 + TAP1 or TAP2 where accessib le		Wall Hung Basin 720mm wide	Manufacturer: CAROMA Description: Opal 720 Wall Basin, with shroud Code: Right Hand Shelf - 632110W Left Hand Shelf - 632210W Shroud – 632601W Dimensions: 720W x 450D x 158H	X	
		TAP1 Tap, basin Mixer	Manufacturer: CAROMA Product: Opal Basin Mixer H/C Chrome LILF OPAL BASIN MIXER H/C CHROME – Lead Free Code: 99700C65AFMT01 Finish: Chrome	X	
		TAP 2 Basin Mixer, Accessible lever	Manufacturer: CAROMA Product: Opal Care Extended Handle H/C CHROME LI Code: 99706CMT01 Finish: Chrome		
		BT1	Manufacturer: CAROMA Description: Urbane II Bottle Trap – 40mm Finish: Chrome Code: 687295C		
BA4		Salon Prep Sink	Manufacturer: CAROMA Product: Ceramic Lab sinks medium. Nominal size 375 x 375 x 265mm D. Provide with 50mm waste assemblies. Vitreous China, white only. Installation: Over counter in solid surface benchtop. Code: 674102W Finish: Ceramic white	Main Building: Salon - Prep Sink & Handwash	
		TAP3 Sink Mixer, – Gooseneck, Pull Out Spray	Manufacturer: CAROMA Product: Urbane II Pull Out Sink Mixer - Brushed Brass - Lead Free Code: 99672BB56AF Finish: Brushed Brass	Main Building: Salon - Prep Sink	
		TAP1 Tap, Basin Mixer	Manufacturer: CAROMA Product: Opal Basin Mixer H/C Chrome LILF OPAL BASIN MIXER H/C CHROME – Lead Free Code: 99700C65AFMT01 Finish: Chrome	Main Building: Salon - Handwash Bay	


BA5		Hand wash basin, Inset – Type B	Supplier/Manufacturer: CASF Product: Corian Healthcare 8550 Basin integrated into Corian benchtop. Colour: Glacier White Code: 8550 Size: 574 W x 409 D x 120mm H [Install benchtop at 865mm according to AHFG Guidelines] Waste: Standard waste (no plug): Note: Refer to special joinery details. Refer to tapware section for associated tapware TMV access panel behind sensor Tap / or joinery <i>Note: Basins provided for clinical handwashing must be designed to avoid the risk of splashing outside of the basin.</i> <i>Thus, in Australia we specify basins to meet the TYPE B Handwash recommended size by AUSHFG Guidelines.</i> <i>The propriety basins that currently meet this guideline are the CASF Corian healthcare basins, designed to be installed into CASF solid Surface benchtop, with seamless installation.</i> <i>The water discharge point of the handwashing basin taps should be a minimum of 255mm above the bottom of the basin and provided with regulated water pressure.</i> <i>Refer to AUSHFG for Type B basin guidelines.</i>	Main Building: Corridor Handwash Stations	
		TAP4 Tapware, Sensor	Manufacturer: Enware Item: Touch Free Wall Mounted Sensor on Off Demand Off Point of Use Thermostatic Wall Mixer with 250mm Spout with 8Lpm Laminar Flow Projection: 250mm WELS: 5 Star Code: (Mains Powered) ENM5072A-250		
BA6		Hand wash basin, wall Mounted – Type B	Manufacturer: CAROMA Description: Care 600 Wall Basin Code: 873100W Dimensions: 600 W x 445D x 385 H Note: Provide with Shroud Change to larger basin to meet TYPE B requirements ASFGH guidelines	Main Building: Cleaners Rooms Sluice Rooms Treatment Room Cleaners Commercial Laundry Chem Store Consult Treatment rooms	
		TAP5 Wall Sink Taps, Lever 150mm, Elbow mixer	Supplier: Enware Product: Wellbeing Leva Type 51 150mm Wall Mounted Mixing Set with SPC020 Spout (Laminar Flow) Finish: Chrome Code: WLC150W-ADJ		
		TAP6 Tapware, Sensor, Type 2	Supplier: Enware Item: Touch Free Wall Mounted Sensor On Off Demand Off Point of Use Thermostatic Wall Mixer with 250mm Spout with 8Lpm Laminar Flow Projection: 250mm WELS: 5 Star Code: (Mains Powered) ENM5072A-250		

BA7		Basin, Semi Recessed	Manufacturer: CAROMA Product: Urbane Semi Recessed Basin – 0 Tap hole Code: 878910W Size: 500mm L x 400mm W Note: Install on Vanity with Underbench Joinery or Bottle trap.	Main Building: Resident/Visitor WC Staff WC	
BA7		Wall Hung Basin 720mm wide	Manufacturer: CAROMA Description: Opal 720 Wall Basin, with shroud Code: Right Hand Shelf - 632110W Left Hand Shelf - 632210W Shroud – 632601W Dimensions: 720W x 450D x 158H		
		TAP1 Tap, Basin Mixer	Manufacturer: CAROMA Product: Opal Basin Mixer H/C Chrome LILF OPAL BASIN MIXER H/C CHROME – Lead Free Code: 99700C65AFMT01 Finish: Chrome		
		BT1	Manufacturer: CAROMA Description: Urbane II Bottle Trap – 40mm Finish: Brushed Nickel Code: 687294BN		
BA8-A		Hair Washing Basin with lounge	Supplier: Comfortel Product: Harrier Connect Wash Lounge with Massage – Tan II Black Basin Standard with Basin Stand Tap Set Colour: Eura Shampoo Basin Tapset in Gun Metal Stainless Steel Dimensions: 82 x 72 x 94 cm	Main Building: Salon	
BA8-B		Hair Washing Basin without lounge	Supplier: Comfortel Product: Basin Stand with Standard Basin Black Basin Standard with Basin Stand Tap Set Colour: Eura Shampoo Basin Tapset in Gun Metal Stainless Steel Dimensions: 330mm x 510mm x 650mm Basin Height: 900mm	Main Building: Salon	

BA8-C		Hair wash, Mobile basin	Mobile hair Wash Basin as required Note: speak to client to check if they require additional mobile hair wash basin for wheelchair users or memory care users that need to wash 'front-facing' at different height.	MAIN BUILDING: Spa / Salon	
BA9		Basin, Rectangular	Manufacturer: CAROMA Description: Cube 500 Under Counter Basin - OTH Finish: White Code: 683455W Dimensions: 528mm x 348mm Note: Supplied with Overflow	ILA Apartments (Standard + Premiums) Bathrooms Powder	
		TAP1 Tap, Basin Mixer	Manufacturer: CAROMA Product: Opal Basin Mixer H/C Chrome LILF OPAL BASIN MIXER H/C CHROME – Lead Free Code: 99700C65AFMT01 Finish: Chrome	ILA Apartments Bathrooms Powder	
		TAP8	Manufacturer: CAROMA Description: Liano II 175mm Wall Basin Mixer – 2 x Round Cover Plates Finish: Gunmetal (LF) Code: 96344GM6AF [SSG TO CONFIRM GUNMETAL FINISH]	ILA Premium – Level 2 Only Bathroom Powder	
SHW1		Hand Shower, For Rail Shower	Manufacturer: CAROMA Product: Care Support Shower Kit (1.5 m Hose) with Grabrail slider (Restricted hose length as noted to avoid reach to WC) Finish: PVD Code: Chrome 91121C4E Notes: Slider Suits 32mm Grabrails – Ref 05500 Metal work Fixtures section Note: 1.5m length hose custom order	Main Building: All Residential ensuites Staff Shower Staff ACC WC ILA: All Residential Ensuites	
		TAP7 Shower Mixer, wide lever	Manufacturer: CAROMA Description: Opal Bath/Shower Mixer Trim Kit H/C Chrome Code: 99701CMTO1 Finish: Chrome		

		Hose Restrictor Bracket	Manufacturer: Con-Serv Description: Shower Hose Restrictor Brackets HR 015 C – Chrome	Showers IN Ensuites with WC's	
GR1		Grab Rail, Straight, 300	Supplier: Con-Serv Item: 300mm Straight Grab Rail – 32mm Material: 304 Stainless Steel 32mm x 1.2mm Finish: Satin stainless steel Polished Stainless Steel Code: HS 300 BS Brushed Stainless Dimensions: 300mm Fixings: 50mm Infection Control fixings. Installation: To comply with AS1428.1.	TBC	
GR2		Accessible Grab Rail	Manufacturer: Con-Serv Description: HS Toilet Rail In Stainless Steel Dimensions: 600 (vertical) x 960mm (horizontal) and 300mmL Straight Rail Code: HS 966 PS LH (Left Hand) HS 966 PS RH (Right Hand) HS 300 BS (Straight) Install according to AS1428.2 guidelines	Main Building: Staff ACC WC Resident/Visitor ACC WC ACC WC ACC Bed Ensuites	
GR3		Grab Rail, Shower Accessible, Inverted T	Supplier: Con-Serv Item: Inverted T Shower Grab Rail Material: Stainless Steel 32mm x 1.2mm Dimensions: 700mm Horizontal x 1100mm Vertical Code: HS 071 BS LH (Left hand) Code: HS 071 BS RH (Right Hand) Refer drawings for orientation Installation: To comply with AS1428.1. <u>Note:</u> Check drawings for left or right hand orientations prior to ordering – include aeration device Note: Slider head, Hose, Hose restrictor & Elbow fittings not included.	Main Building: All Residential Ensuites ACC Bed Ensuite Staff ACC WC ILA: All Residential Ensuites	

GR4		Grab Rail, Drop Down Arm	Supplier: SureCare Item: Simplicity Drop Down Grab Rail Material: 304 Stainless Steel 32mm x 1.6mm Finish: Satin stainless steel Finish Options: Bright Polished Stainless Steel Powdercoat: Dimensions: Ensure to meet AS1428 requirements, requirements, Size: 830mm from wall Code: SIMP Installation: Installed to post within wall cavity. <i>Confirm with structural engineer re: timber F17 90x90mm post (recommended by supplier) or steel SHS</i>	Main Building: Resident Ensuities ILA: Resident Ensuities	
GR5		Ambulant Grab Rail	Manufacturer: Con-Serv Description: HS Toilet Rail SS 450mm Dimensions: 450 x 450mm Code: HS 454 BS LH (Left Hand) HS 454 BS RH (Right Hand) Finish: Brushed stainless steel	Ambulant WC's where required	
GR6		Grab Rail, Towel Rail	Manufacturer: Con-Serv. Description: HS Straight Grab Rail Stainless Steel Dimensions: 600mm Code: HS 600 BS Finish: Brushed Stainless Steel	MAIN BUILDING: Resident / Visitor Accessible Bathroom ACC SH/WC Staff ACC Shower & WC RACF: Resident Room Ensuities	
TR1		Hand Towel Rail	Supplier: Caroma Description: Luna Hand Towel Rail Dimensions: 264 W x 25 H x 70 D Finish: Brushed Nickel Overall Length when extended: 745mm	ILA Premium Rooms – Level 2 Only Ensuite	
TR2		Towel Rail	Supplier: Caroma Description: Urbane II Hand Towel Rail Dimensions: 250mm x 65mm Finish: Chrome	ILA Standard Rooms – Bathrooms	

TR3		Heated Towel Rail	Supplier: Pheonix Description: Heated Towel Rail Product: Radii Heated Towel Ladder 550 x 740mm Round Plate Finish: Chrome Code: RA8750 – CHR IP Rating: IXP5	ILA Premium Rooms – Level 2 Only Ensuite	
TR4		Tea-Towel Rail	Supplier: Hafele Description: Towel Rail, Extendable Code: 510.54.971 Dimensions: Mounting Bracket: 485mm Extending Rails: 460mm - Overall Length when extended: 745mm	Main Building: Communal Kitchenette	
GT1		Grated Trench	Supplier: Stormtech Description: 100AriDis Threshold Drain for door track. Finish: 316 marine grade stainless steel with electropolishing Dimensions: custom to sliding door requirements	To all external sliding (Excluding Pod and paver system)	
GT2			Supplier: Stormtech Description: 100Ari40MTL Linear Drainage System Finish: 316 marine grade stainless steel Dimensions: 106W x 42mmD TBC WITH APM	To all external hinged doors (at ground floor level)	
FW01		Floor waste	Supplier: Allproof Industries Item: HeelGrate® SS316 Floor Drain Grate Square 100x80 PVC Slip-In Finish: Stainless Steel Size: 100mm x 80mm Code:302445X	Main Building: Resident/Visitor WC / ACC WC Resident Ensuites Staff WC/ACC WC ACC WC RACF: Ensuites ILA's: Ensuites	
FW02		Floor waste, Tiled Flooring	Supplier: Allproof Industries Item: Tile Floor waste Finish: Brushed Nickel Finish Options: Size: 100mm Code: 168.100SNIT	Cafe Servery	


FW03		Floor waste, Resilient Flooring	80mm brass floor waste suitable for resilient flooring (vinyl) installation, Equivalent to: All Proof Industries – VCR Vinyl Point Drain Cast Bronze base Finish: Stainless Steel Feature: • Vinyl/waterproofing membrane clamped using 3x stainless screws and clamp ring. • Cam-lock grate for easy waste access without disturbing vinyl/membrane. • Clamp ring/grate finishes flush with flooring Note: Provide Puddle flange and adaptor kit required when installing in a shower recess	Wet Areas with floor Vinyl	
FW04		Round Floor Waste	Manufacturer: Reece Description: Round Floor Waste Code: 202370 Finish: Stainless Steel Note: Refer to Structural Engineer drawings to ensure specific fixture is satisfactory.	Standard waste outlet where required: RACF Terrace, ILA Balconies	


Sanitaryware & Tapware

Code	Image	Fixture	Description / Detail	Indicative Location	Rev
S1		Single Bowl	Supplier: Clark Product: Evolution Care Single Bowl Overmount 1TH REV Dimensions: 510 L x 460 W, 145mm D Code: 4601.1 Finish: Stainless Steel NOTE: Builder to allow for 2 tap holes for sink mixer and Billi unit. Check Drawings for Left or Right Hand orientation prior. Billi Tap to be installed as shown.	Main Building: Treatment Rooms Staff Room	
		TAP12 Sink Mixer	Supplier: GWA Caroma Manufacturer: Caroma Product: Saracom Sink Mixer - Lead Free Finish: Chrome Code: 98025C4AF WELS: 4* 7.5L/Min		
S2		Kitchen sink, Undermount Compact,	Supplier: Description: Stainless Steel Single Bowl Coloured Sink Code: BS1b Finish: Coloured Dimensions: 360W x 360D x 160H Installation: Underbench Bar: Kitchen Consultant Drawing specifies G304 Hand Basin Custom Sink 240x340x200g 3 Monkeez / T-3MSS-HMSTB + WA-PTDIC + WA-SD-B / 3 Monkkex and Rubbermaid / FG295500BLA / Rubbermaid SSG TO CONFIRM	Main Building: Bar Cafe Servery -Prep Sink Handwash Sink Private Dining	
		TAP3 Sink Mixer, – Gooseneck, Pull Out Spray	Manufacturer: CAROMA Product: Urbane II Pull Out Sink Mixer - Brushed Brass - Lead Free Code: 99672BB56AF Finish: Brushed Brass Bar: Kitchen Consultant Drawing specifies G305 Sink with Tapset Custom Sink 1x 400x400x250h 3 Monkeez T-3MS6MIX SSG TO CONFIRM		
		TAP9 Handwash, Sensor tap, bench mounted	Supplier: Billi Manufacturer: Billi Product: Bench Mount Sensor Tap Code/Finish: 961000BB - Brushed Brass Power: Mains Supply	Main Building: Bar & Cafe Servery – Handwash Bay	

AS3		1.5 Bowl & Drainer	Supplier: GWA Group Product: Clark Evolution care1.5 End Bowl - tap landing. Dimensions: 1035 L x 460 W, 145mm D Code: 4070 NOTE: Builder to allow for 2 tap holes for sink mixer and Billi unit. Check Drawings for Left or Right Hand orientation prior. Billi Tap to be installed as shown.	Main Building: Staff Room Activity Rooms Communal Kitchens Pantrys	
		TAP12 Sink Mixer	Supplier: GWA Caroma Manufacturer: Caroma Product: Saracom Sink Mixer - Lead Free Finish: Brushed Nickel Code: 98025C4AF WELS: 4* 7.5L/Min		
S4		Sluice Sink	Supplier: Britex Description: Dirty Utility Sink Dimensions: CUSTOMISABLE to be complete with fully freestanding support frame Finish: Stainless Steel 316 Grade (Product can be customisable to any length)	Main Building: Sluice Room	
		S6-SF Sink, Flushing Cone	Supplier: Britex Item: Round Inset Flushing Sink Steel Grade: 316 Size: 450 diameter with 50mm waste diameter Code: FLI2	Sluice Room (Dirty Utilities)	
		FL01 Sink Flushing Valve	Supplier: Britex Description: Single Electronic Flush Valve - Single Button w SS Plate Model: FFV-E1-P Single Button Electronic Flush Valves are available with single piezo button only or mounted in stainless steel security plate.		

		TAP9 Trigger Spray	Supplier: Britex Item: Slop hopper Trigger Spray Supplied with: Britex Flushing Device Britex Flush Pipe Kit for Slop hopper Code: TW-ST5 Note: Mounted 420mm above pan		
		TAP10 Wall Sink Taps, Lever 150mm, Elbow mixer,	Supplier: GWA Caroma Product: G Series+ Exposed Wall Sink Set (200mm outlet + 150mm handles) - Lead Free Finish: Chrome Red & Blue Indicators Code: G53450C6AF		
RBDP		Pan & Bottle Rack	<u>Supplier:</u> Britex <u>Product:</u> Bed Pan and Bottle Rack LPBR		
S5		Sink, Cleaner, Floor Mounted	Supplier: Britex 316 Grade Stainless Steel Cleaners Sink with Grate' 35L capacity with 50mm Outlet. Floor Mounted Finish: Satin Code: CSF – Custom 216 SS Note: Secured into appropriate noggins within wall supplied by builder	Main Building: Cleaners Rooms Chemical Store	
		TAP10 Wall Sink Taps, Lever 150mm, Elbow mixer	Supplier: GWA Caroma Product: G Series+ Exposed Wall Sink Set (200mm outlet + 150mm handles) - Lead Free Finish: Chrome Red & Blue Indicators Code: G53450C6AF		
		TAP11 Tapware, Hosecock	Supplier: Enware Item: Leva Washing Machine Tap set WELS Rating: 6 Star Finish: Chrome Code: FS729 FS110 FS071 WLC80HT-LTC		

S6		Single Bowl - Undermount	Supplier: Caroma Product: Monaco Single Bowl Undermount Dimensions: 438L x 358W, 190D Code: EVBU Finish: Stainless Steel	Main Building: Theatre/Chapel ILA Premium Apartments – Level 2: Resident Laundry - Joinery	
		TAP12 Gooseneck	Supplier: GWA Caroma Manufacturer: Caroma Product: Saracom Sink Mixer Finish: Chrome Code: 98025C4AF WELS: 4* 7.5L/Min Warranty:		
S7	 	1 & ½ undermount sink	Supplier: Semia Product: Kubic 560 stainless steel sink Collection: Elevate Installation: Under Mount Size: 614 W x 445 L Finish: Stainless Steel	ILA Standard + Premium Apartments Kitchen Joinery	
		TAP13 Kitchen Sink Mixer	Supplier: Phoenix TEVA Product: Teva Sink Mixer 200mm squareline Code: 152-7340-00 Dimensions: 305 H x 200 W Finish: Chrome	ILA Standard + Premium Apartments Kitchen Joinery	
	  	Billi tap + Font Kit	Supplier: Billi Australia Item: Quadra 4100 with XL Levered Dispenser (Water-Cooled) with Optional Tubing Extension Kit Finish: Chrome Capacity: Up to 100 people Code: 904100LCH Riser: (Optional) 70mm Font & Riser Underbench Unit Size: 340H x 315W x 465D Installation: As per manufacturers guidelines. Water stop tap & drainage point as per hydraulic engineers' documentation.	Main Building: Staff Training Room	
BWU2		Boiling/ Chilled	Supplier: Billi Australia Item: Quadra 4100 with XL Levered	Main Building: Bar	

		Water Unit	Dispenser (Water-Cooled) with Optional Tubing Extension Kit Finish: Chrome Capacity: Up to 100 people Code: 904100LCH Riser: 70mm Riser Underbench Unit Size: 340H x 315W x 465D Installation: As per manufacturers guidelines. Water stop tap & drainage point as per hydraulic engineers' documentation.	Café Servery Private Dining	
BWU3		Boiling/ Chilled Water Unit, Accessible Levers	Supplier: Billi Australia Item: Quadra 4100 with XL Levered Dispenser (Water-Cooled) with Optional Tubing Extension Kit Finish: Chrome with Red & Blue Levers with Braille Pads Capacity: Up to 100 people Code: 904100LRB 996300 990720 Chrome Underbench Unit Size: 340H x 315W x 465D Installation: As per manufacturers guidelines. Water stop tap & drainage point as per hydraulic engineers' documentation.	RACF: Communal Kitchens Activity Room	
BWU4		Water Dispenser, Font	Supplier: Billi Australia Item: Billi Filter Tap with extended Dispenser + X Series Font Panel Set Finish: Chrome Capacity: Up to unlimited persons Code: 932210EMB Font: 852229 Water Type: Chilled Underbench Unit Size: 320H x 130W x 130D Installation: As per manufacturers guidelines. Water stop tap & drainage point as per hydraulic engineers' documentation.	Main Building: Gym – water station	
		Under Bench Unit	Item: Alpine Under-Bench Unit Description: Chilled water unit Size: 340mm H x 180mm W x 460mm D		

02900 - SITE WORKS AND LANDSCAPING

Bicycle Racks

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Bike Parking Rail, external	Supplier: Bike Parking Experts (Bicycle Network Victoria Tel: 1300 727 563) Range: 'Arc de Triomphe' parking rail (850H x 1000L). Installation: Base fixing, set in concrete footing. Finish: Type 316 Stainless Steel	Refer Site Plan and Ground Floor Plan	
-	Bike Parking Rail, internal	Supplier: Bike Parking Experts (Bicycle Network Victoria Tel: 1300 727 563) Range: 'Ned Kelly' hanging parking rail. Installation: Loxined to masonry wall / stud wall. Finish: TBA Colour: TBA	Refer Basement Plan	

Carpark Fittings – Refer Metalwork

Fencing – Refer Separate Landscape Architect for Fence details

Refer also Metalwork, 'Enclosures'

Code	Product / Material	Detail / Description	Indicative Location	Rev
		To be co-ordinated with Architect and Landscape Architect	Refer Site Plan	

Gates

Code	Product / Material	Detail / Description	Indicative Location	Rev
		To be co-ordinated with Architect and Landscape Architect	Refer Site Plan	

Paving (Unit)

Surface materials of Ramps and Stairs to have minimum slip resistance of P3 (internal/ dry surface condition), P4 (external/ wet surface condition).

Code	Product / Material	Detail / Description	Indicative Location	Rev
PU		To be co-ordinated with Architect and Landscape Architect	ILA and RACF Terraces, Ground Floor external space	

Allow to seal pavers to the satisfaction of Architect.

Paving – Concrete

Surface materials of Ramps and Stairs to have minimum slip resistance of P3 (internal/ dry surface condition), P4 (external/ wet surface condition).

Code	Product / Material	Detail / Description	Indicative Location	Rev
PV(-)	Concrete paving, natural	Installation: Refer to Civil Drawings & Specification for Details Finish: Stippled or Broomed or TBA		
-	Concrete paving, integrally coloured	Installation: Refer to Civil Drawings & Specification for Details		

-	Concrete paving, exposed aggregate	Installation: Refer to Civil Drawings & Specification for Details Finish: Integrally coloured and exposed aggregate finish to match Hanson Imagecrete ‘, ...		
---	---------------------------------------	---	--	--

For asphalt paving refer Specification – Section 02740 Bituminous Concrete Pavement

Retaining Walls

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Retaining walls, blockwork	Supplier / Range: Refer Blockwork Installation: Refer to Structural Engineers Drawings.		

Stormwater Pit Grates

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Accessible Grate Covers (heelguard type)	All grated pit covers in public pedestrian areas to be heelguard type. Supplier: Road and Safety Grating Co-ordinate all product types, sizes and classification requirements with Civil documentation. Raise any discrepancies with Superintendent. Product examples listed below: SG-L-MSG-SM9090 (light duty example) SG-H-MSG-SM9090 (heavy duty example)		

Tactile Indicators/ Miscellaneous Site Fittings

Code	Product / Material	Detail / Description	Indicative Location	Rev
TGSI(-)	Tactile Indicator Tiles, external	Supplier: Classic Architectural Group/ Tred FX Range: ‘Ceramic Tactile indicator tiles’ Installation: Tiles inset into setdown in concrete paving slab. Installed in accordance with manufacturer’s instructions and AS 1428.4. Finish: Vitrified Ceramic Colour: TBC	Refer Floor / Site Plan	

03300 - CONCRETE

Applied Floor Finishes to Concrete - refer Section 09610 Applied Finishes to Concrete Floors.

Concrete Paving - refer Section 02900 Siteworks

Floor Setdowns

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Setdowns to concrete floor slabs	Installation: Set down floor slab to depths required for installation of screeds, falls, thermal insulation. Refer below for granolithic screed.	Refer Floor plans All floor to be finished with Tiles and Vinyl	

Granolithic Concrete Screeds

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Granolithic concrete screed	Installation: Insulation and vapour barriers are to be supplied and installed by the refrigeration sub-	Refer Plans	

		contractor. Install approx. 70mm deep granolithic concrete of 25 MPa strength, reinforced with min SL62 mesh, over the insulation. Screed to receive sheet vinyl flooring, coved to walls, and Tiles with Tile Skirtings Refer: Section 09650 Resilient Finishes		
--	--	--	--	--

03450 – PRECAST CONCRETE PANELS

Applied Finish to Concrete Panel Walls

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Applied Finish	Supplier: NawKaw Allow for 5 colours/ stages of application. Colours: TBC Installation to comply with manufacturer's written instructions. 25 year warranty.	Exposed precast concrete faces ILA Fire Stairs	

Brick Snaps

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

04210 – BRICKWORK

Brickwork

Code	Product / Material	Detail / Description (L x H x W)	Indicative Location	Rev
BR1	Brickwork 	Supplier: Austral Bricks Range: 'Melbourne Mornington' range, 230 x 76 x 110mm Installation: Brick on edge sill Mortar colour selected to closely match brick colour. TBC with architect	RACF - Refer Floor Plan / Elevations	-

04220 – BLOCKWORK

Blockwork

Code	Product / Material	Detail / Description (L x H x W)	Indicative Location	Rev
BL1	Blockwork, standard grey	Supplier: National Masonry Range: grey, 390 x 190 x 90 solid core grey, 390 x 190 x 140 solid core grey, 390 x 190 x 190 solid core Installation: Complete with matching corner return blocks and sill blocks. Mortar colour selected to closely match block colour. Finish: Smooth	Refer Floor Plan / Internal Elevations / Wall Types Page	
BL	Blockwork,	Supplier: National Masonry	Refer Floor Plan /	

	structural	Range: REFER TO STRUCTUREAL ENGINEERS DOCUMENTS. Installation: Refer Structural Engineers drawings for reinforcing / core-filling details. Finish: Smooth	Elevations	
--	------------	---	------------	--

05100 – STRUCTURAL STEEL**Fire Rated Encasement to Structural Steel**

Code	Product / Material	Detail / Description	Location	Rev
-	Encasement via board system	Supplier: Promat (Tel 9645 3866) Item: 'Promatect' Boards to thicknesses required, refer to Promat Package. Installation: Structural steel members scheduled shall have product applied to the relevant thickness to achieve the FRL required. The product is to be applied strictly in accordance with the manufacturer's instructions. All work to be certified by the applicator. Refer to Structural Engineer's Documents.	FRL 90/90/90	

05300 - METAL ROOFING AND ROOF PLUMBING**Wire Safety Mesh**

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Galvanised Wire Safety Mesh	Item: 'Ausmesh 300 galvanised' Installation: Installed to all roof areas in accordance with AS/NZS 4389.	All Roof Areas, Refer Roof Plan.	

Roof & Metal-Clad Wall Insulation / Spacers

Comply with Requirements of Energy Rating Report.

Note: R_M = R value of insulation material only, R_T = Total R value of system, refer to Insulation Council of Aust & NZ Handbook.

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Roof insulation, blanket / metal spacers	Supplier: CSR Bradford Refer to ESD report for further details Provide an air and vapour Barrier at the roof line below the bulk insulation of the roof. (ceiling insulation to be excluded from the R value calculation) Overall system including air gaps/ air films achieves R_T value of minimum $R_T 3.2$ in summer 'Ashgrid' spacers of height 110mm to suit blanket (spacer height max. 25mm less than blanket height). Installation: Install metal spacers over blanket. (Refer to CSR Bradford Commercial Roofing Insulation Product Selector, System R0900).	Roof Areas (lined suspended ceilings below), refer Roof Plan	
-	Roof Insulation, to box gutters	Installation: Roof blanket to be continuous under box gutters, or utilise equal alternative method, to satisfaction of Building Surveyor.	Underside of box gutters.	T1

-	Fire Rated Insulation, to achieve fire ratings to wall / roof junctions	Supplier: CSR Bradford Range: 'Fireseal party wall batt' Installation: Stop roof insulation blanket each side of wall and install fire seal insulation to top of walls, to satisfaction of Building Surveyor.	Sandwiched between underside of roofing and concrete panel walls to fire rated walls	T1
---	---	---	--	-----------

Note: Refer Section 09260 Partitions for insulation and membrane to stud framed walls and ceilings.

Roofing

Code	Product / Material	Detail / Description	Indicative Location	Rev
RF1	Metal Deck Roofing	Supplier: Bluescope Lysaght Product: 'Spandek', 0.48mm BMT Installation: Refer Specification Finish: Colorbond Colour: Surfmist	Refer Roof Plan	T1
RF2	Metal Deck Roofing	Supplier: Bluescope Lysaght Product: 'Spandek', 0.48mm BMT Installation: Refer Specification Finish: Colorbond Colour: Basalt	Refer Roof Plan Typically Roof at lower levels where visible from resident amenity.	T1

Fascias & Barges

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Fascias & Barges, custom- facing	Supplier: jameshardie Range: hardiefine Installation: as pre manufactures details Colour: refer to elevations for details	Refer Elevations	
-	Fascias & Barges, custom- facing	Supplier: Bluescope Lysaght Range: Custom folded, 0.6mm BMT sheet Installation: Steel sheet folded to fit over timber fascia board, refer Section 06100 Carpentry. Finish: Colorbond Colour: refer to elevations for details	Refer Elevations	

Box Gutters, Sumps, Overflow Pops, Rainwater Heads, Flashings/Cappings

Refer Specification Section 05300, II, 201 for details.

Eaves Gutters

Code	Product / Material	Detail / Description	Indicative Location	Rev
EG1	Eave Gutter	Supplier: Bluescope Lysaght Range: 'Quad' Installation: Finish: Colorbond Colour: TBA, confirm with Architect (typically to match fascia)	Refer Roof Plan	

Downpipes

Code	Product / Material	Detail / Description	Indicative Location	Rev
DP	Colorbond Steel	Installation: Sizes as shown on drawings, 0.55 BMT. Refer to hydraulic drawings for sizes.	Refer Roof Plan	

		Finish: Colorbond Colour: TBA, Confirm with Architect (typically to match cladding)		
-	Downpipe brackets	Proprietary clamp-type offset steel brackets to suit downpipe size, colorbond finish, fixed with matching colorbond fixings. Flat strap-type brackets will not be accepted. Colour: to match DP.	Refer Roof Plan	

Safe Access Items

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Hatchway	Supplier: Sayfa Systems Range: 'Skydore Roof Access Hatch', min. 1200 x 800mm, hinged (with pneumatic gas struts) or sliding hatch. Installation: Located to suit roof access ladder and to comply with AS 1657. Securely fit hatch to roof framing and brace to prevent forced entry. Comes with lock that can be opened by use of one hand only, keyed to master key system. To include guardrail at roof level, refer below. Finish: to match roofing.	Refer Roof Plan	
-	Hatchway Guardrail	Supplier: Sayfa Systems Range: 'Sentry GW394 Hatch Guardrail Kit', 1800 x 1800mm Installation: Located to suit roof access hatch and to comply with AS 1657. Finish: aluminium.	Refer Roof Plan	
-	Walkway / fixed ladder	Supplier: Sayfa Systems Range: 'Pace 600 GW8' roof walkways Installation: Securely clipped to roof decking and proprietary fixed ladders / steps / guardrails/ handrails, all installed in accordance with manufacturer's instructions and AS 1657. Finish: aluminium	Refer Roof Plan	
-	Roof Access / Fall Arrest System	Supply and install system to complete roof area to provide safe access, to current Occupational Health and Safety practice requirements for working at heights. Provide ladder bracket for access from ground to roof at shortest distance, confirm location with Architect. System to include fixed ladders where required for access between roof levels. Sub-contractor to provide details of provision for approval prior to installation, and certification of the complete installation upon completion. Contractor to also allow to carry out re-certification of the fall arrest system just prior to the expiry of the defects liability period. Refer Specification for further requirements/Standards etc.	Full roof area of each building	

Roof Access Ladder

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Ladder, pull down	Supplier: Sayfa Systems Range: Vista 'Commercial' or 'Maxi', rated to 150kg,	ILA Level 2 communal space	

		selected to suit ceiling height. Installation: Installed within suspension kit system supported off roof structure, within suspended flush plasterboard ceiling. Fixed secondary ladder to upper section in ceiling space to have retractable stiles/ handrails through roof hatch that can be operated by use of one hand only. Prefinished heavy duty aluminium support frame at ceiling level. Complete assembly constructed in accordance with AS 1657.		
--	--	--	--	--

Over flow pops

Code	Product / Material	Detail / Description	Indicative Location	Rev
OF		Installation: size as nominated by hydraulic engineer Refer specification for detail. Refer to hydraulic drawings for sizes. All overflow pop to contain a Flap Valve stainless steel Vent Screen to eliminate vermin and mosquito build up in pipe work Supplier: Tankshop or similar Colour: Paint finish to match adjoining wall or soffit.		T1

05400 - EXTERNAL WALL CLADDINGS

AC - Aluminium Cladding

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

CFC – Compressed Fibre Cement Cladding

Code	Product / Material	Detail / Description	Indicative Location	Rev
CFC(1)	Compressed Fibre Cement sheet	Supplier: James Hardie Range: 'ExoTec' Façade Panel, 9.0mm thick. Installation: joints set with 10mm gap, using proprietary top hat and gaskets as required. Sheets fixed to framing with galvanised screws, flushed over. Finish as specified in Section 09900 Painting.	Wall Cladding / Eaves Soffits	

FC – Fibre Cement Claddings (external) - for internal refer Section 09260 Partitions

Code	Product / Material	Detail / Description	Indicative Location	Rev
FC1	Fibre Cement sheet <i>with grooves</i>	Supplier: James Hardie Range: 'Scyon Axon', 9.0mm thick. Size module: 133mm Smooth Sheets installed running horizontally. Allow to batten out walls and install in accordance with manufacturer's instructions (refer 'Horizontal Axon' Supplement). AND Sheets installed running vertically using proprietary accessories as required. Sheets fixed to framing with brads or screws, flushed over. Installed on 19mm proprietary fibre cement cavity battens	Wall Cladding. Refer Elevations for orientation	

		Paint finish TBA, confirm with Architect		
FC2	Fibre Cement Sheet	Supplier: James Hardie Range: 'Hardie Fine', 8.50mm thick. Sheets installed using proprietary accessories as required. Sheets fixed to framing with brads or screws, flushed over. Installed on 19mm proprietary fibre cement cavity battens Paint finish TBA, confirm with Architect	Wall Cladding.	
FC3	Fibre Cement Sheet <i>Timber Look</i> 	Supplier: CSR Cemintel Item: 'Territory Woodlands' external cladding system, sheets 16.00mm thick Colour: Teak (TBC) Installation: sheets fixed to framing via proprietary fixing clips	Wall Cladding	
FC4	Fibre Cement Sheet	Supplier: James Hardie Range: 'Versilux' lining, pre-primed, 6.0mm thick. Installation: Sheets fixed to framing, joints set with 10mm gap, finished against walls with 10mm shadowline. OR Sheets evenly set out in long lengths with and butted together into 'expressed joint look' PVC jointing strips, finished against walls with 10mm shadowline. Sheets fixed to framing with adhesive and screws, flushed over.	Eaves & Soffit Linings	

Stone Veneer Cladding

Code	Product / Material	Detail / Description	Indicative Location	Rev
		Summerset Request - TBA		

05500 - METALWORK**Aluminium Windows & Doors**

All openable sashes with a fall height to the ground below of 2m or greater and within 1700mm AFL, or with a fall height to the ground below of 4m or greater, are to be fitted with a device to restrict the opening size to less than 125mm. The device shall be permanently fixed where required by the NCC. *NCC 2013 applies this to Residential Classes 1,2,3.*

All Capral Aluminium framing to be LocAL Green low carbon aluminium. Comply with Requirements of Energy Rating Report.

Finish to all aluminium framing: Powdercoat Colour: Monumnet

Windows and frames to comply with the JV3 report requirements nominated by the ESD consultant.

	U-Value	SHGC
Awning Window	≤4.4	0.41 ± 10%
Fixed Windows	≤2.9	0.57 ± 10%
Sliding Doors	≤3.19	0.48 ± 10%
Casement Doors	≤3.6	0.41 ± 10%

Double glazed window suites.

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Aluminium Framed Window Suite - Fixed	Supplier: Alspec Range: Eco Frameplus 101.6mm Centre pocket Double Glazed Installation: To manufacturers requirements slotted sub-sills fitted to all windows, and head channel fitted to all windows allow for structural movement. Provide extended sub sills where shown or required.	Refer Window Schedule	T1
AW	Aluminium Awning Windows	Supplier: Alspec Range: Commercial windows & Doors - Awning and Casement window Double Glazed DDA Compliant Lockable chain winders to closely match frame colour, keyed alike. Supplier: Lockwood TBC	Refer Window Schedule	T1
	External Glazed Doors	Supplier: Alspec Range: Commercial windows & Doors Swan Evo 45mm Commercial shopfront door Double Glazed Where midrails are scheduled, use 125mm midrail. Installation: Refer Specification for further requirements. Refer Door Schedule for hardware.	Refer to Window Schedule	T1
	Auto sliding door Internal & External	Supplier: Alspec Range: Swan Evo 45mm Commercial Shopfront door Automation Hardware refer to automatic door operators section	Refer to Window Schedule	T1
SL	Sliding Doors - External	Supplier: Alspec Range: Commercial Windows & Doors // ProGlide UltraFlat™ Sliding Door Double glazed Refer to manufactures information for slab rebates Zero threshold requirement for all sliding doors Extras: Flyscreen – refer to Flyscreens below	To all Terraces & Balconies	T1
H	Hinged Doors - External	Supplier: Alspec Range: Swan Evo 45mm Commercial Shopfront door	Refer to Window Schedule	T1

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Flyscreens	Item: Nom. 25 x 10mm extruded aluminium frame. Installation: Mitred at corners and securely fixed to window frame, with PVC coated fibreglass mesh infill. Finish: Powdercoat Colour: to match window frame colour.	All openable sashes	T1
	Window Shroud			

Refer Section 08800 Glass & Glazing for Glass Types.

Frames to Doors acoustic doors to have Kilargo 'IS7080' acoustic /

All external doors to have manufacturer's proprietary perimeter seals factory fitted (For bottom seal refer door schedule).

All door frames to have strike boxes, supplied with mortice locks, fitted to frames as per manufacturer's installation instructions. Fabricate any fixing tabs required to achieve this requirement and allow strike plates to finish flush with door frames.

Automatic Door Operator


Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Automatic Door Operator	Supplier: Dorma BWN Range: 'EL – 301 Series' Installation: 240V fully electric Operators, fully housed in an extruded aluminium housing (height 265 x width 152mm) self-supporting in accordance with AS 2047/2048. External Door Security: Motor Electric Lock (Breaking strain 1950kg): Power on to lock with battery reserve and LM91 Module (standard). BCM10 battery/charger monitor (standard). P2 Emergency Exit Button on engraved back plate (standard as per BCA Regulations). External SK2 (secure entry) Keyswitch (master keyed) Internal SK4 (open, auto, exit, lock) Keyswitch (master keyed) Refer Specification for further requirements. Contractor to allow for Door Signage in accordance with AS 5007 – Clause 3.5.1. Finish: Powdercoat Colour: TBC with Architect	Refer Door Schedule	

Lift

Code	Product / Material	Detail / Description	Indicative Location	Rev
		Refer Services.		

Internal Lift Finishes

Code	Item	Detail / Description	Indicative Location	Rev
-	Rear and Side Walls	Manufacturer: Schneider 3000 Design Line: Park Ave Ceiling: Round Spots Car Ceiling decoration: Mercury Hairline 443 Stainless Car Door and Front: Mercury Hairline 443 Stainless Side Car Wall Material: Laminate CPL Material – Pecan Wood Rear Car Wall: Laminate CPL Cladding – Oxford Blue Glossy	RACE Lifts	

		Skirting: Anodized Aluminium – Straight Floor: Matching Tile – TBC Handrail: Mercury Hairline 304 Stainless Steel – On the left wall No mirror		
-	 	Manufacturer: Schneider 3000 Design Line: Park Ave Ceiling: Round Spots Car Ceiling decoration: Mercury Hairline 443 Stainless Car Door and Front: T22 Black Granex Side Car Wall Material: Laminate CPL Material – Pecan Wood Rear Car Wall: Laminate CPL Cladding – Oxford Blue Glossy Skirting: Anodized Aluminium – Straight Floor: Matching Tile – TBC Handrail: Mercury Hairline 304 Stainless Steel – On the left wall No mirror	ILA Apartment: Lift Lobbies RACF Lifts	

HR – Handrails, Balustrades

Code	Product / Material	Detail / Description	Indicative Location	Rev
HR	Galvanised MS, single handrail with balustrade – Internal Escape Stair	Item: Escape stair balustrades in accordance with requirements of Building Code of Australia (Clause D2.16 Reduced requirement). Handrails, intermediate rails & balusters 48mm OD MS pipe section, with capped ends welded to stair former. Lower intermediate rail max 150mm above stair nosings. Space between intermediate rails shall not exceed 460mm. Handrail to be 865mm above stair nosings and 1100mm above landings, measured above finished surface. Allow stair rails to be paint finished in a colour selected by Architect	RACF & ILA Fire Stairs	
BAL 1	Powder Coated Balustrade	Supplier: Axiom Group or equivalent in specification to the approval of the Project Manager. Range: Lynfield Suite Lynfield SD10-04 (Custom) 50x10mm Vertical baluster infill at 100mm centres with slab overhang & AXRHCS handrail fixed to a structural L section base plate. Powdercoat Colour: TBC With Architect HEIGHT: 1200H AFFL SSG TO CONFIRM – UNDER REVIEW, MAY DIFFER FROM CBN	ILA Balconies and RACF Juliets (refer elevation) Review height for RACF	T1
BAL 2	Powder Coated	Supplier: Axiom Group or equivalent in specification	ILA Balconies (Ground)	T1

	Balustrade	to the approval of the Project Manager. Range: Lynfield Suite (custom) APE Post Baseplate fixed to slab 6528HR Handrail with endcaps Axiom Modular Balustrade System AC-5025/AI-5025 Structural Bottom Rail LF6 50x10mm Vertical baluster infill at 100mm centres Height: 1200H AFFL Powdercoat Colour: TBC With Architect SSG TO CONFIRM – UNDER REVIEW, MAY DIFFER FROM CBN	Floor, refer elevation)	
--	------------	---	-------------------------	--

RD / RS / D – Roller Doors and Roller Shutters, Fold-up/ Tilt Doors & Gates

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Motorised Roller Door, steel continuous curtain type	Supplier: B&D Doors Range: 'Roll-A-Door Series 2' (Industrial Grade) Installation: Continuous lock seamed curtain fitted with nylon glide running strips, extruded aluminium bottom rail with PVC weather seal. Door to be motorised, controlled by 'Lock it well' keyswitch (master-keyed). Functions / positions to suit doors and to Architect's approval. Finish: Colorbond, colour TBC with Architect	Loading dock. Refer to door schedule and elevations for size	
-	Roller Door, steel continuous curtain type	Supplier: B&D Doors Range: 'Roll-A-Door Series 2' (Industrial Grade) Installation: Continuous lock seamed curtain fitted with nylon glide running strips, extruded aluminium bottom rail with PVC weather seal. Doors fitted with chrome plated central lift lock, keyed to masterkey system on the external face and latched on the internal face. Finish: Colorbond, colour TBC with Architect	SCV and Main Switchboard, Refer to door schedule and elevations for size	
-		Car park tilt-up door TBC with Architect	Basement Carpark	
		Doors controlled by 'Lock it well' keyswitch with Bilock cylinder. Functions / positions to suit doors and to Architect's approval. Mullion (surface) mounted or stainless steel (recessed) mounted.		

Rooftop Condenser Deck




Code	Product / Material	Detail / Description	Indicative Location	Rev
		TBA With services – can a conform type deck work?		

Bollards

Code	Product / Material	Detail / Description	Indicative Location	Rev
BOL	Bollards, MS, Hot dipped galvanised and paint finish.	Item: 140mm OD, 3.0mm thick pipe on 250mm dia 8mm thick baseplate with 4 fixings into concrete floor or footing. Height: 1300mm high above FSL. Finish: Powdercoated yellow with Class 1 red	Access spaces to Accessible Carparks	

		reflective tape. Equal to Safety Express 'BOLSM140D'.		
-		TBA with architect	Port cochere	

Fabricated Metalwork (not scheduled elsewhere)

Code	Product / Material	Detail / Description	Indicative Location	Rev
SA	Seat Brackets, internal Shelf Brackets, internal	Item: 38 x 38 x 5mm MS EA triangular brackets mitred, fully welded at joints and ground smooth. Drill brackets for fixing each timber rail. Hot dipped galvanised finished. Brackets to be securely fixed into walls at max. 900mm centres. Installation: Provide secure trimmers in lightweight wall framing for anchoring brackets with galvanised coach screws, or other approved fixings. Timber seat battens, refer Carpentry.	Change Rooms. Shelving units to store rooms	
-	Steel plate window surrounds	Item: Assembly welded together from 6mm thick MS plate and fixing angles, complete assembly hot dipped galvanised. Installation: Assembly bolted to concrete panel via fixing angles.		
MT01		Item: Perforated Mesh powdercoated to match Finish: Powdercoated in Dulux Powdercoat – Manor Red Satin Finish	Main Building: Café	
MT02		Supplier: Rimex Metals Product: Granex – Quartz Finish: Champagne	Main Building: Reception Desk Bar Fireplace	
MT03		Supplier: Rimex Metals Product: Granex – T22 Finish: Matt Black	Main Building: Lift Lobbies ILA Apartment: Lift Lobbies	

Carpark Fittings (External & Internal Carparks)

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Wheelstops, concrete	Item: 1650mm long. Installation: Fixed to asphalt or concrete pavement, 3 no. fixings per wheelstop.	Basement Carpark	
-	Bollards	Refer Metalwork		
-	Signage	Refer Metalwork		

-	Height Limitation Bar, Steel	Item: 100 x 50mm RHS with capped ends, fitted with eyelets. Welds ground smooth. Installation: Suspension chain loxined to slab soffit. Bar set at level to suit Carpark height limit, confirm on site. Finish: paint finish, with signage to future detail.	Basement Carpark Entry	
---	------------------------------	---	------------------------	--

Protection Items

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Protection Angles and trims	6.0mm thick galvanised MS protection angles and trims to building service pipework, where required to provide protection from vehicle damage. Protection to extend on walls from 300 to 1500mm above floor level, loxined to masonry or bolted to lightweight framing. Protection to extend on soffit/ceiling as required to protect pipework from loaded roof-racks on cars, loxined to masonry.	Basement Carpark, where required.	
WG01	Eall Protection – wall guard / crash rail	Supplier: CS Acrovyn Description: 150W20 EPDM Rubber Crash Rail Dimensions: 150mmH x 3mL x 20mm thick	Waste rooms (RACF & ILA), BOH Corridors, Loading Dock	
JP	Door Frame Protection	Supplier: CS Acrovyn Description: A1 and A2 Door Frame Protectors Dimensions: 1.6mm thick, full height of frame Colour: Finish to match door frame colour 2 piece product installed to side frames only, not top frame	Refer to door schedule for locations	
DPR1	Door Protection	Supplier: CS Acrovyn Description: Acrovyn 4000 Rigid Sheet Dimensions: 1mm thick, Refer to door Schedule Colour: 378 Brushed Nickel (C2C Silver)	BOH Facing Doors (ref. Schedule)	
DPR2	Door Protection	Supplier: CS Acrovyn Description: Acrovyn 4000 Rigid Sheet Dimensions: 1mm thick, Refer to door Schedule Colour: Finish to match door leaf colour	FOH Facing Doors (ref. Schedule)	

Toilet Partitions

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Toilet/Bathroom Partitions, 13mm thick compact laminate board more hard wearing and more impact resistant than 33mm laminate, and water resistant. Good for high use/ vandalism prone areas. Generally, more expensive than 33mm laminate	System: KYI Systems 'partition system. Floor mounted Toilet Partitioning System with frontals firmly bracketed to the floor and concealed at the floor line with Black Matt Powdercoated Steel; 100mm Flush Skirting/Flashing to the Front Panels. Frontal Panels to be Full Height. Panel height option 1 <<beware more board wastage & sprinkler layout likely affected>>: Doors to have 250mm clearance from ceiling & 150mm clearance from floor. Dividing Panels to have 250mm clearance from ceiling & 150mm clearance from floor. System to have minimal aluminium channels at division/ wall junctions, division/ frontal junctions and nib/ wall junctions.	RACF Amenities	

		Frontal panels to be fixed to the ceiling using a 'concealed' angle. Angle to be concealed from outside cubicle, but can be visible from inside of cubicle. Builder to install timber supports directly above ceiling as required. Panels: Nom. 13mm thick Compact Laminate Panels in Thickness nominated by supplier, in Selected Colour. Panel Colour/ Finish: Compact Laminate Blackened Elm Standard Hardware: Turnbolt / Indicator, escape staple and bumper. Lift off gravity hinges. Coat Hook part of standard hardware offer by Supplier, in Black All Standard Hardware to be in 'Black Matt select Metlam Moda Series Ensure Partitions with Ambulant Grab Rails fixed thereto have bolt through fixings.		
--	--	---	--	--

Equipment

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

Lifting Equipment

Code	Product / Material	Detail / Description	Indicative Location	Rev
PLH	Ceiling Hoisting Rail 	Supplier: HLS healthcare <u>Product:</u> HLS Healthcare Straight Track System Rated to 255kg with self-installing GH1F portable hoists rated to 255kg. <u>Colour:</u> White – TBA With Architect	To all RACF Resident Rooms	
HST	Hoist	Supplier: HLS healthcare <u>Product:</u> self-installing GH1F portable hoists rated to 255kg.	? x Hoist to be provided for facility	

Expansion / Contraction Joint Covers – Refer Section 09680 Carpet / Modular Carpet & Miscellaneous Floor Items

Signage

Submit shop drawings for all signage for Architect's approval.

Signage must meet the requirements of BCA and not be fixed, installed or attached to the internal parts or external face of an external wall that is required to be non-combustible unless it is one of the following:

- non-combustible to AS1530.1,
- a required sign, as defined by the BCA,
- A sign that—
 - (i) achieves a group number of 1 or 2; and
 - (ii) does not extend beyond one storey; and
 - (iii) does not extend beyond one fire compartment; and
 - (iv) is separated vertically from other signs permitted under (h) by at least 2 storeys. (C1.14 item h)

Note that any wiring, paint, gasket, caulking, sealant or adhesive directly associated with the signage item are exempted from this requirement. < BCA 2019 C1.14>

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Statutory Signage	To include Statutory signage in accordance with Authority requirements and Braille and Tactile Signage in accordance with BCA Spec D3.6 / AS 1428.1.		

		Including but not limited to the following: - Internal Services Room/ Cupboard Doors (Allow for signage to all whether a statutory requirement or not); Stair/Lobby Doors; Fire/Smoke Doors: aluminium plate signage panels with engraved lettering - External Services Room/ Cupboard Doors (Allow for signage to all whether a statutory requirement or not); Fire/Smoke Doors: all in lettering on aluminium plate - Sanitary facilities: brushed aluminium plate signage panels with black lettering / symbols / braille, screw fixed to doors / walls. - Exits: silver polypropylene plate panels with black lettering / braille, fixed to walls, for exits. - Accessible carparking/ other road/ traffic signage. - Signage required by the Fire Engineering Report. Builder to provide a statutory signage schedule (including all proposed materials, text fonts/ sizes and colours), for Architect's review, prior to shop drawing of Signage.		
	Building & Wayfinding Signage	Allow the amount scheduled in Monetary Provisions (Refer to Summerset) for supply and installation of Building & Wayfinding Signage. This amount does not include statutory signage.		

06100 - CARPENTRY

Battens – Architectural / Feature

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

Fascias and Barges – Refer 05300 Roofing

Flooring (Timber / CFC) including Floating Floors & Underlays

Code	Product / Material	Detail / Description	Indicative Location	Rev
TF1	Hybrid Timber Flooring 	Supplier: Embelton – Hybrid Flooring Product: Hybrid Timber - Byron Size: 1830mm x 190mm x 7.5mm Timber Veneer: 1.2mm Finish: Matte Brushed Underlay: 1.5mm Foam Underlay Pre-attached	ILA Standard - (Sand + Calm Scheme)	
	Hybrid Timber Flooring	Supplier: Embelton – Hybrid Flooring Product: Hybrid Timber - Barcelona Size: 1830mm x 190mm x 7.5mm Timber Veneer: 1.2mm Finish: Matte Brushed	ILA Standard - (Grounding Scheme)	



		Underlay: 1.5mm Foam Underlay Pre-attached		
TF2	Timber Flooring 	Supplier: Embelton Product: Engineered Timber Flooring - Bellagio Size: 2100 x 190 x 12mm Timber Veneer: 1.2mm Finish: Matte Brushed Slip Resistance: P3	ILA Premiums - (Sand + Calm Scheme)	
	Timber Flooring 	Supplier: Embelton Product: Engineered Timber Flooring - Normandy Size: 2100 x 190 x 12mm Timber Veneer: 1.2mm Finish: Matte Brushed Slip Resistance: P3	ILA Premiums - (Grounding Scheme)	

D – Decking

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

Wall Lining

Code	Product / Material	Detail / Description	Indicative Location	Rev
PR	Picture Rail 	Supplier: Intrim Product: Picture Rail – Intrim PR13, FJ Pine Primed Size: 55 W x 16mm thick Finish: Paint finish.	Resident's Room	
WL1	Wall Panelling 	Supplier: Intrim Description: Custom wainscoting / wall panelling Colour: Refer to paint finishes for panelling colour 140mmH Rectangular KDHW skirting piece refer to details All mouldings to be in FRMDF	Main Building: Corridors RACF: Corridors	
		DDR Supplier: Intrim Product: SN05 30x18mm Oak Hardwood with 9x5mm rebate to bottom edge Finish: Paint finish		

WL2	Wall Panelling 	Supplier: Intrim Description: Custom wainscoting / wall panelling 30mm border Colour: Refer to paint finishes for panelling colour 140mmH Rectangular KDHW skirting piece refer to details Height: 1800AFFL All mouldings to be in FRMDF	RACF: Communal Spaces	
DDR		DDR Supplier: Intrim Product: SN05 30x18mm Oak Hardwood with 9x5mm rebate to bottom edge Finish: Paint finish		
WL3	Wall Lining – Plywood 	Supplier: MaxiPly Description: MaxiPanel on timber studs Timber/Substrate: Hoop Pine Sheet Size: 2440 x 1220 Thickness: 12mm Colour: Natural Sand Note: Plywood to be free from visible knots and blemishes	MAIN BUILDING: Hobbies & Maintenance Workshop	
WL4		Supplier: Easycraft Description: Easy VJ Panelling VJ100 FR Dimensions: 12mm thick Colour: Capping: 40mmH Rectangular capping piece refer to details Skirting: 140mmH Rectangular KDHW skirting piece refer to details All mouldings to be in FRMDF	RACF: Standard Resident Rooms	
WL5	Aluminium Wall Panelling System 	Supplier: Screenwood Kristian Bright 0428 373 887 Range: Modulo Group 1 Flute Fire Rating: Group 1 Available Lengths: 2.7m, 3.6m, 5.4m Effective Cover: 100mm Max Thickness: 18.5m Colour: Navurban Balmoral TBC DURING DEVELOPMENT OF INTERNAL ELEVATIONS	Main Building: Reception Lift Lobbies – GF, L1 & L2 ILA Apartments: Lift Lobbies	

	 NAVURBAN™ Balmoral			
WL6	Aluminium Wall Panelling System   NAVURBAN WALL™ Black Mountain	Supplier: Screenwood Kristian Bright 0428 373 887 Range: Modulo Group 1 Flute Fire Rating: Group 1 Available Lengths: 2.7m, 3.6m, 5.4m Effective Cover: 100mm Max Thickness: 18.5m Colour: Navurban Black Mountain TBC DURING DEVELOPMENT OF INTERNAL ELEVATIONS	Main Building: Lift Lobbies	

Feature Ceiling

Code	Product / Material	Detail / Description	Indicative Location	Rev
MO1	Timber Mouldings  	Supplier: Screenwood Item: Stix FR – Rectangular 5025 Products: PEFC MDF FR – Prefinished Timber Size: 2.7m x 25mm Finish: Navurban – Birchgrove Fire Rating: Group 2 Acoustic Plasterboard: Soundlina – Group 1 Fire Rating – Finish – Birchgrove TBC DURING DEVELOPMENT OF INTERNAL ELEVATIONS	Main Building: Waiting Area - Ceiling Reception - Ceiling	
AC1		Supplier: Armstrong Ceiling Solutions Item: Woodwool Colour: Natural Product: Direct Mount Panels Size: 600mm x 600mm (also available in 1200mm x 600mm) Material: Magnesite bonded wood fibres Fire Rating: Group 1	Main Building: Waiting Area - Ceiling Reception - Ceiling	

Timber features (eg. Pergolas, Covered Ways)


Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

Timber Items, Internal

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Bench Seat Battens	Item: KD tas oak DAR, select grade 65 x 32mm Galvanised steel brackets, refer Metalwork. Installation: battens set with 10mm gaps and top edges arrised, fixed to brackets with countersunk head galv. steel screws.	Staff Amenities	

06400 - JOINERY

Trim, Architraves, Skirtings

Code	Product / Material	Detail / Description	Indicative Location	Rev
SK1	Skirting 	Manufacturer: Builder to confirm Description: Kiln Dried Hardwood (KDHW) Skirting Dimensions: 140mmH x 18mm thick Finish: PAINTED (Refer to paint finishes) – unless otherwise noted Profile: Square edge profile	Main Building: All residential rooms	
SK2	Skirting – Aluminium 	Manufacturer: Criterion Decor or equivalent approved Description: 140mm H Aluminium skirting Dimensions: 140mmH x 3mm thick Finish: Black Anodised Profile: Square edge profile	Main Building: All areas ground floor – unless noted otherwise	
SKC	Skirting – Vinyl Coving	Refer to floor finishes Floor finish to be coved up walls to 140mm H Note: Timberlook Vinyls DO NOT COVE. Timberlook Vinyls to have Timber or Aluminium Skirting.	BOH Refer to drawings for locations RACF: Treatment Supplies Consumables Server Room Chemical Room Bin Room Residential Laundry Cleaners Room Communal Laundry Sluice Room Commercial Kitchen Chef's Office Switch Room	

			Data Room Clean Linen Linen Trolley Electrical Cupboards	
-	Architraves	Item: 67 x 19mm primed MDF square profile Installation: mitred at corners and finished down to floor on both sides of doorways and around windows	All areas.	
-	Architraves	Doors: metal frame, no architrave. External Windows: Flush plasterboard carried into reveals of openings, no architrave Glazed Screens: P50 shadowline stopping bead, refer Internal Linings. OR 42 x 12mm primed MDF square profile	All areas.	
-	Trim	Provide where necessary for fitting only 19 x 13mm KD vic ash beads, square sided. <i>Use of beads is to be kept to a minimum to cover junctions where different materials cannot be satisfactorily matched.</i>		
-	Dado and Picture Rails, Mouldings	refer Section 06100 Carpentry, 'Timber Linings'		

Joinery Fittings

Refer Specification for general details of Materials / Workmanship / Construction.

Allow to construct all Joinery shown on the Drawings unless noted otherwise.

Joinery Schedule

Code	Product / Material	Detail / Description	Indicative Location	Rev
JF01		Supplier: Dorset or Similar Model: Cassini Single Row Wine Glass Rack Finish: Brass	Main Building: Bar Joinery	
JF02		Supplier: By Contractor - Custom Model: Brass Footrest – Fixed to Floor – Refer to Specialist Joinery Details Finish: Brass	Main Building: Bar Joinery	



Vinyl Wrap Finish



Code	Image	Colour / Finish	Notes	Rev
------	-------	-----------------	-------	-----


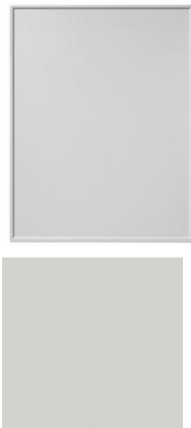
PC – Powdercoat

Code	Image	Colour / Finish	Indicative Location	Rev
PC01		Manufacturer: Dulux Powdercoat Description: Manor Red Finish: Satin	Main Building: Café Joinery	

LM – Laminate


Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
LM1		Laminate	Manufacturer: Laminex Description: Laminate Colour: Burnt Orche Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Main Building: Café Servery – Underbench cupboards	
LM2		Timberlook Laminate	Manufacturer: Laminex Description: Laminate Colour: Natural Walnut Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Main Building: Bar - Detailing Ceiling Panels Private Dining Library	
LM3		Laminate	Manufacturer: Laminex Description: Laminate Colour: Green Slate Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Main Building: Gym – Joinery	
LM4		Laminate	Manufacturer: Laminex Description: Laminate Colour: Aries Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Main Building: Reception	
LM5		LM5-1 Timberlook Laminate	Manufacturer: Laminex Description: Laminate Colour: Calm Oak Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	RACF Level 1: Resident Rooms – Joinery RACF Communal Kitchens - Joinery	
		LM5-2 Timberlook Laminate	Manufacturer: Laminex Description: Laminate Colour: Natural Walnut Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	RACF Level 2: Resident Rooms - Joinery RACF Communal Kitchens - Joinery	

LM7		LM7-1	Manufacturer: Laminex Description: Laminate Colour: Gumnut Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	RACF Household Level 1: Communal Areas - Joinery	
		LM7-2	Manufacturer: Laminex Description: Laminate Colour: Daintree Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish		
		LM7-3	Manufacturer: Laminex Description: Laminate Colour: Bluestone Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	RACF Household Level 2: Communal Areas - Joinery	
		LM7-4	Manufacturer: Laminex Description: Laminate Colour: Burnt Ochre Finish: Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish		
LM8			Manufacturer: Laminex Description: Laminate Colour: Battalion Finish: HPL Natural All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Kickers – General Hobbies & Maintenance	
LM9			Manufacturer: Laminex Description: Laminate Colour: Oyster Grey Finish: Flint All visible edges/ surfaces to have matching ABS edging Internal carcass to be white melamine finish	Main Building: BOH Joinery Staff Room ILA Apartment Standard: Kitchen Laundry Store Joinery (Standard)	

LM10		Timber look laminate	Manufacturer: Laminex Description: Compact Laminate Colour: Blackened Elm Finish: Natural Contact: Laura Burke 04417031987 Internal carcass to match Battalion Laminate	MAIN BUILDING: Theatre/Chapel	
LM11		Pre-Finish Compact Laminate Board	Manufacturer: Nikpol Description: 5150 Terrazzo Grigio Soft Touch Worktop Finish: ST Length: 210mm Thickness: 20mm Width: 99mm	BOH area benchtops	
LM12		Timber look laminate	Manufacturer: Laminex Description: Laminate Colour: Coastal Oak Finish: Natural Contact: Laura Burke 04417031987 Internal carcass to match Battalion Laminate	ILA Standard: Kitchen Joinery Bathroom Joinery Store Joinery Robe Joinery	
LM13		ABS Edge Banding	Manufacturer: Surteco Description: Black ABS Edge Banding Colour: Black	ILA Standard: Kitchen Joinery	
LM14		Profiled Thermolaminated Panels	Manufacturer: Polytec Description: Thermolaminated Profiled Joinery Panels Profile: Chifley Colour: Oyster Grey Finish: Thermolaminated Contact: Melissa Azzopardi - 0428 842 078	ILA Standard + Premiums: Kitchen (Sand + Calm + Grounding Scheme) Ensuite (Calm Scheme) Store Joinery (Sand + Calm + Grounding Scheme)	
LM15		Profiled Thermolaminated Panels	Manufacturer: Polytec Description: Thermolaminated Profiled Joinery Panels Profile: Chifley Colour: Florentine Walnut Woodmatt Finish: Thermolaminated Contact: Melissa Azzopardi - 0428 842 078	ILA Premiums: Kitchen (Sand Scheme) Ensuite (Sand Scheme) Store Joinery (Sand Scheme)	

					
	 	Profiled Thermolaminated Panels Manufacturer: Polytec Description: Thermolaminated Profiled Joinery Panels Profile: Chifley Colour: Coastal Oak Finish: Thermolaminated Contact: Melissa Azzopardi - 0428 842 078	ILA Premiums: Kitchen (Grounding Scheme) Ensuite (Grounding Scheme) Store Joinery (Grounding Scheme)		

ST – Stone


Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
ST1		Terrazzo Stone Slab	Supplier: Fibonnaci Product: Eve Slab Size: 1400 x 3050 x 30mm Installation: Allow for 3mm arris to all edges, mitre joints & slab ends. Sealer: Rockstar - Greenstar Sealant	Main Building: Café Servery NOTE: INCLUDED IN DWGS	
ST2		Natural Stone Slab	Supplier: G-Lux Product: Sahara Limestone – Brushed Slab Size: TBC Sealant: Greenstar Rockstar Sealant or similar Installation: Allow for 3mm arris to all edges, mitre joints & slab ends.	Main Building: Reception Desk	
ST3		Engineered Stone	Supplier: Stone Ambassador Name: White Truffle Finish: Polished Sheet Size: 3230x1450mm Thickness: 20mm Contact: Vanessa Turnbull 0490 065 939	RACF: Communal Kitchens	
ST4		Engineered Stone	Supplier: Stone Ambassador Name: Gracious Grey Range: Signature Finish: Polished Sheet Size: 3210x1610m Thickness: 20mm Contact: Vanessa Turnbull 0490 065 939	ILA Apartments: (Calm + Grounding Scheme) Kitchen Ensuite Laundry	


		Engineered Stone	Supplier: Stone Ambassador Name: Alpine Drift Range: Signature Finish: Polished Sheet Size: 3210x1610m Thickness: 20mm Contact: Vanessa Turnbull 0490 065 939	ILA Apartments: (Sand Scheme) Kitchen Ensuite Laundry	
ST5		Terrazzo Stone	Supplier: Fibonnaci Product: Slipstream Finish: Rugged and Mineral Slab Size: 1400 x 3050 x 30mm Installation: Allow for 3mm arris to all edges, mitre joints & slab ends. Sealant: Rockstar - Greenstar sealant	Main Building: Bar	

Joinery Hardware

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
BIN1		Pull out garbage bin	Supplier: Hafele Product: Halio-Eure-Cargo ST45 TWO-bin waste sorter, 2 X 38Litre Bins Installation behind hinged doors - Cabinet Width min 450mm, internal installation depth min 500 Code: 503.70.332 Note: Two compartment waste bin Bin holder: Steel, plastic coated, grey lid and bin: Plastic, graphite grey	Main Building: RACF Communal Kitchens Pantry Café Servery Bar	
BIN2		Pull-Out Laundry Hamper	Supplier: Hafele Item: Laundry Hamper, Hideaway Concelo Laundry Range 1 x 60L Hamper Code: 503.55.685	Main Building: Salon	
BIN3		Bin	Refer to FF&E schedule Supplier: Hafele Description: Single Waste Bin, Plastic Bucket 13 Litres Dimensions: 280Dia x 350mm H	Main Building: Salon	
		Desk / Bench Metal Legs	<u>Supplier:</u> Hafele <u>Product:</u> 'Rondella' 60Ø chrome leg with adjustable foot.	Reception, Office desks, Nurse stations	
CP		Cable Outlets	<u>Supplier:</u> Hafele <u>Product:</u>	Reception, Office desks, Nurse stations	

			'No. 429.99.324' plastic cable port cover. <u>Colour:</u> TBC		
		Adjustable Shelf Supports	Hafele Shelf support, for wood or glass, glass, plastic for plug fitting into drill hole 5mm Dia with steel pin, load bearing capacity 3-1 kg per piece.		
		Shelf Supports	Supplier: Restoration Online Description: Bracket For Shelf Dimensions: 75x100 Finish: Brass	Library, Bar, Lounge, Cinema	
JH01		Joinery Handles	Supplier: Kethy Range: Trumpet – BH170 Drawers: 160mm handle Code: BH170/160/Brass Matt (BRM) Full Height Cupboards: 224 mm handle Code: BH170/224/BRM Generally fitted vertically to all full height cupboards and horizontally to all drawers/ underbench cupboards, without washers.	Main Building: FOH Areas Salon Reception	
JH02		Joinery Handles	Supplier: Kethy Range: S333 Drawers, UBC and OHC: 128mm Code: S333/128/SS Full Height Cupboards: 192mm Code: S333/224/SS Finish: Stainless Steel Note: Generally fitted vertically to all cupboards and horizontally to all drawers, without washers.	Main Building: RACF Resident Rooms Admin Rooms	
JH03		Joinery Handles, doors and drawers, Accessible	Supplier: Kethy Range: AH333 Size: 135mm D Pull handle. Finish: Colour SS – Satin Stainless Code: AH333/128/SS Note: Generally fitted vertically to all cupboards	Main Building: Accesible Bed (LHS) Accesible Bed (RHS)	


			and horizontally to all drawers, without washers.		
JH04		Joinery handle for sliding door	Supplier: Allegion Range: Legge 1964 Flush Pulls Finish: Brushed Stainless Steel	Main Building: Sliding Door - Robes	
JH05		Joinery Handles	Supplier: Kethy Range: PM2820 Drawers, UBC and OHC: 128mm Code: PM2820/128/MBK#4 Full Height Cupboards: 192mm Code: S333/224/SS Finish: Matte Black -Die Cast Zinc Note: Generally fitted vertically to all cupboards and horizontally to all drawers, without washers.	ILA's: Kitchen Ensuite	
HR01		Hanging Rail	Supplier: Hafele Description: Wardrobe Rail and End Support Finish: Silver coloured anodised Code: 833.72.790, 803.33.957 Dimensions: 30 x 15mm Contact: Wade Anderson 0417 355 822	Main Building: All RACF Resident Robes ILA Apartments: All ILA Resident Robes	
HR02		Hanging Rail	Supplier: Hafele Description: 2004 Wardrobe Lift Finish: Black and chrome rail Code: TBC	Main Building: Accessible RACF Residential Robes ILA Apartments: Accessible ILA Resident Robes	T1

PU01		Pop up GPO	Supplier: Hafele Description: Point Pod Compact Dimensions: 100mm Dia Finish: Silver and White Model: 822.74.945	Main Building: RACF Communal Kitchen	
		Cutlery Tray	Manufacturer: Hafele Description: Plastic Cutlery Tray Code: 556.60.761 – ALA Kitchenettes 556.60.770 – CARE Kitchenettes Colour: White Contact: Natalie Brew 0457 803 302	Where required	
		Cutlery Tray	Refer to FF&E schedule Refer to Kitchen Consultant Specifications https://www.hafelehome.com.au/collections/kitchen/products/classico-500-non-slip-cutlery-tray Classico 500 Non-Slip Cutlery Tray	Where required	
		Undersink Rack	Supplier: Hafele or equivalent approved by client Description: Undersink Rack, Base Cabinet Fitting Code: 545.48.239 Finish: Chrome Plated Steel Dimensions: 217W x 470D x 400mmH	Main Building: RACF Communal Kitchens	
		Hinges	Generally hang each door on two (2 No.) heavy duty approved self-closing concealed hinges, 130° opening. Cupboard doors from 900-1600mm high to be hung on 3 no. hinges as specified above. Cupboard doors from 1600-2100mm high to be hung on 4 no. hinges as specified above.		
		Draw runners	Hafele soft close or equal.		
		Locks	Lockwood 693 rim mounted cupboard and drawer locks, master keyed in nominated code. Child lock system required for all serveries.		
JOINERY DOOR GRILLE		Ventilation Grille	Hafele anodised aluminium door vent dimensions 100 x 500 mm Finish: Black UNO Art. no. 575.26.334	Where required for appliances. Household Kitchenette, Induction, Hot water unit joinery generally. Café Joinery Refer to Mechanical Eng's drawings and	

				Door Schedule for locations	
		Magnetic Catch	Hafele Cat. No. 246.29.301		

PBA / PBB / PBC - Pinboards - Wall Lining Type

Installation: Instyle Products to be installed by an Instyle preferred installer only, in accordance with the manufacturer's recommendations.

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
PBBD1		Pinnable Acoustic Fabric	Supplier: Baresque Description: Zintra Acoustic Panel in 12mm Colour: Ivory	Main Building: Reception Desk	

07130 - WATERPROOFING AND TANKING**Waterproofing System Descriptions**

Full installation by Manufacturer's approved applicator in accordance with manufacturer's instructions.

Code	Product / Material	Detail / Description	Indicative Location	Rev
	Waterproofing	Supplier : Markham Products: TOP-TECH – Superior Waterproofing for concrete decks. Note that the admixture needs to be applied to the concrete mix. Refer to Markham for installation procedures Provide minimum 15 year Warranty for waterproofing.	Concrete roof plant areas	
-	Waterproofing Membrane	Supplier : Tremco Products: 'Paraseal LG' base coat waterproofing membrane sealed with Paraseal Permanent Seam Tape. Provide minimum 15 year Warranty for waterproofing.	Lift Pit, External walls below grade, refer Sections or [list].	
-	Waterproofing Membrane	Supplier : Tremco Products: 'TREMproof Torch' solvent based bitumen primer, 'TREMproof 3000', 1 layer, 'TREMproof 4000M', 1 layer, torch applied sheet membranes. Compliant to AS4654.1. Provide minimum 15 year Warranty for waterproofing.	External Balconies/ Terraces/ Podiums over internal areas. <i>need floor waste/drain to be metal/plastic ones will melt.</i> <i>Membrane can be either hidden under pavers or exposed to UV/traffic etc.</i>	
-	Waterproofing Membrane	Supplier : Tremco Products: Primer: solvent based bitumen. 'TREMproof 3000', 1 layer torch on,	Planter boxes over or against internal areas.	

		'TREMproof Antiroot APP', 1 layer torch on, Compliant to AS4654.1. Provide 15 year Warranty for membrane.		
-	Waterproofing Membrane (Liquid)	Supplier : Tremco Products: Primer: Tremproof 200EC Basecoat: Vulkem 350R Topcoat: Vulkem 951NF liquid applied polyurethane membranes. Compliant to AS4654.1. Provide minimum 15 year Warranty for waterproofing.	External Balconies/ Terraces not over an internal area.	
-	Waterproofing Membrane (Liquid)	Liquid applied membrane compliant to AS4654.1. Provide 10 year Warranty for waterproofing.	Planter boxes (Free-standing GRC).	
-	Drainage cell	Item: polypropylene drainage cell approved by the waterproofing membrane manufacturer, nom. 20-30mm thick. Installation: install drainage cell before laying of soil.	Planter boxes.	
-	Liquid membrane system	Supplier : Ardex Range : 'WPM 155 Rapid' (PU Acrylic hybrid), with WPM 265 primer. Class III membrane in accordance with AS4858 requirements. Provide 10 year Warranty for waterproofing.	Wet areas: Entire floor area. Walls of ensuites and walls of shower areas was	

08200 - DOORS AND DOOR FRAMES

Internal Door Frames, Timber

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	KD Pine / MDF	Item: Framing nom. 19mm of width to match wall thickness, with stops planted on. Installation: Fix frames into wall framing. Generally supplied with internal doors pre-hung / pre-latched.	Refer Door Schedule.	

Door Types / Door Hardware Schedule / Door Furniture - Refer Separate Schedule.

Code	Product / Material	Detail / Description	Indicative Location	Rev
RBH02	Robe Hook with rubber stop 	Refer to door hardware Schedule Supplier: Barben Description: Robe hook with bumper Code: BA-CH-95-SSS Finish: Stainless Steel	MAIN BUILDING: Resident / Visitors Bathrooms	
DH02	Door Handle	Refer to door hardware Schedule	MAIN BUILDING: Resident / Visitors Bathrooms	
PL01	Privacy Indicator	Refer to door hardware Schedule	MAIN BUILDING: Resident / Visitors Bathrooms	
DS01	Door Mounted Door	Refer to door hardware Schedule	Throughout	

	Stop			
DS02	Wall Mounted Door Stop	Refer to door hardware Schedule	Throughout	
	Door Handles	Refer to door hardware Schedule	Throughout	

08800 - GLASS AND GLAZING

Glass

Check scheduled glass thicknesses/types against code requirements and upgrade thicknesses/ substitute safety glass types where necessary.

Comply with Requirements of Energy Rating Report.

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

MI – Mirrors

Code	Product / Material	Detail / Description	Indicative Location	Rev
MI	First quality 6mm float glass mirrors, silver backed.	Mirrors fitted to Stegbar 'Microframe' surround frame. Provide vinyl safety backing to mirror. OR Ground and polished edges, Finish mirror / backing with nom. 10 x 10 x 2.5mm brushed aluminium reversed edge frame, with leading edge of leg exposed to view. Install mirror on wall lining with ceramic tiling caulked against edge frame. Coordinate mirror installation with tiling layout and sanitaryware installation to ensure no cut tiles and alignment as detailed.		
	Glass – Shower Screen	Manufacturer: Melbourne Safety Glass Description: Frameless Fixed Shower Screen and door – toughened glass Dimensions: Thickness to suit applications Finish: Clear	ILA BUILDING	
	Laminated, obscure	Min. 6.38mm A grade safety glass with Opal Interlayer.	Refer Window Schedule	
	Toughened, clear.	Toughened, clear.	Glass Balustrades.	

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

Glazing Films / Graphic Films / Decals

Code	Product / Material	Detail / Description	Indicative Location	Rev
AF1		Supplier: Formula8 Item: Applied Film Product: Reeded 06	Generally where specified – refer to drawings	

09220 – ACRYLIC OR CEMENT RENDER

Acrylic or Cement Render

For acrylic render to Rendered Wall Panel Cladding refer to this item in Section 05400 Claddings.

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

09250 – SUSPENDED CEILINGS

Suspended Ceiling Systems - Refer Specification

Acoustic and Fire Rated Ceiling Types

Construct Ceilings in strict accordance with relevant ceiling types as detailed in current CSR Technical Manual. To ceilings to wet areas, upgrade lining to MR variety of specified plasterboard. Comply with Flanking Path Details in Section Z of CSR Manual to maintain specified acoustic ratings.

Code	Product / Material	Detail / Description	Indicative Location	Rev
FRPB1	Plasterboard lined CSR ceiling system #6598 to achieve FRL of 120/120/120 from below	Rondo Furring Channels at 600mm max. ctrs clipped to Rondo suspended ceiling system Channels at 600mm max. ctrs. Insulation as per section J Report. 3 x 16mm Gyprock fychek Plasterboard	Ceiling to Ground floor Main Bin Store	

Flush Plasterboard, Ceilings

Code	Product / Material	Detail / Description	Indicative Location	Rev
PB	Plasterboard	Supplier: Gyprock Item: Plasterboard CD, 13mm.	Ceilings where shown, refer Refl Ceiling Plans.	
MRPB	Plasterboard, water resistant	Supplier: Gyprock Item: Aquachek, 13mm.	Ceilings where shown, refer Refl Ceiling Plans.	
LT1	Acoustic Perforated Grid Ceiling to office and exercise areas 	Manufacturer: Armstrong Description: Ultima Ceiling Panels Colour: White Sound Absorption (NRC) : 0.75 Sound Blocking (CAC) : 35	Office space Back of house corridors and stores	
APB	Acoustic Perforated Plasterboard 	Supplier: Gyprock Item: TBC	Ceilings where shown, refer Refl Ceiling Plans.	

AP– Access Panels

Code	Product / Material	Detail / Description	Indicative Location	Rev
AP	Access panel.	Access panel selected to comply with NCC Spec F5.2 2(e)(ii) which requires that the panel: does not open into any habitable room other than a kitchen, is firmly fixed to overlap the frame or rebate	Access panels in sole occupancy unit.	

		of the frame by 10mm and be fitted with a sealing gasket along all edges, and door lined with 9mm CFC sheet. Allow for sufficient number in various sizes to suit all services items that require access.		
AP	Access panel.	SS access panel: Type: Flush panel access panel with a satin polished expressed stainless steel perimeter frame. Material: Grade 304 stainless steel. Gauge: Minimum 1.2mm stainless steel sheet for both door and frame. Finish: #4 satin polished; having a roughness coefficient of not more than Ra 0.5.		
AP	Access panel, fire rated.	SS access panel: General: Provide certified "2 hour Fire Rated Access Panels" supported and anchored to permit ready removal and refixing. Access panels shall be provided in fire rated walls, as normally required for access to service valves, controls and the like, including at bends, I.O.'s and the like. Fire resistance level (FRL): 120/120/120. Size: 300 x 300mm. Edge: Expressed galvanised steel perimeter frame. Panel fixing: Screw fixed.		
AP	Metal access panel, acoustic	Supplier: Trafalgar Range: 'Rw31-M WW' or 'Rw34-M WW' Supplied with keyed-alike lock. Supply a total of 1 key for every 5 access panels (minimum quantity 5 keys). Installation: 'Wet wall' surround for flush set installation and no visible frame or hinges. Minimum 450 x 450mm or larger as required to suit services. Allow to supply and install all wall and ceiling access panels that are required for access to valves, dampers, controls, equipment, etc.	Access panels not in sole occupancy unit.	
AP	Metal access panel	Supplier: Trafalgar Range: 'AP-M (size) WW' Supplied with keyed-alike lock. Supply a total of 1 key for every 5 access panels (minimum quantity 5 keys). Installation: 'Wet wall' surround for flush set installation and no visible frame or hinges. Door lined internally with 13mm wallboard for reduced sound transmission. Minimum 450 x 450mm or larger as required to suit services. Allow to supply and install all wall and ceiling access panels that are required for access to valves, dampers, controls, equipment, etc.	Access panels not in sole occupancy unit.	

Insulation – Ceiling/ Floor (Thermal & Acoustic)

Note: R_M = R value of insulation material only, R_T = Total R value of system, refer to Insulation Council of Aust & NZ Handbook.

Comply with Requirements of Energy Rating Report REFER TO ACOUSTIC LOGICS REPORT FOR ACOUSTIC CEILING INSULATION REQUIREMENTS, REFER TO ESD REPORT FOR THERMAL RATINGS
the table below covers thermal insulation ONLY

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Insulation, Thermal, Ceiling	Supplier: CSR Bradford Range: 'Gold' ceiling batts, R _M 2.5 (140mm thick).	All ceilings directly under roofs.	
-	Insulation, Thermal, Floor (under slab)	Supplier: Kingspan Range: 'Kooltherm K10 FM G2' soffit board, 40mm thick, CFC/HCFC free rigid insulation comprising a high performance thermoset insulation core with autohesively bonded facings on both sides, R _M 2.6. Boards 1200mm wide, 2.27m long. Achieves Group 2 when tested in accordance with AS5637.1. 40mm R _M 2.6 R:3.2 Installation: Fixed to concrete with nylon anchors.	Underside of floor slab, floor of conditioned internal space exposed to unconditioned or outside air below soffit.	
-	Insulation, Thermal, Floor	Supplier: Kingspan Range: 'Kooltherm K10 FM G2' soffit board, 40mm thick CFC/HCFC free rigid insulation comprising a high performance thermoset phenolic insulation core with autohesively bonded facings on both sides, R _M 2.6. Boards 1200mm wide, 2.27m long. Achieves Group 2 when tested in accordance with AS ISO 9705 and AS5637.1. R:3.2 Installation: Fixed to concrete with nylon anchors.	All areas of external lined soffit with internal space above, ie. floor of internal space exposed to outside air below soffit.	
-	Insulation, Thermal, Ceiling	Supplier: Kingspan Product: 'Kooltherm K10 FM G2' soffit board, 50mm thick, CFC/HCFC free rigid insulation comprising a high performance thermoset phenolic insulation core with autohesively bonded facings on both sides, R _M 2.6 Boards 1200mm wide, 2.27m long. Achieves Group 2 when tested in accordance with AS5637.1. Installation: Fixed to concrete with nylon anchors.	All floor areas of Balcony/Terrace with an internal space directly below.	

Cornice Detail

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Plasterboard Junction Square Set	Supply and install 35 x 35mm galvanised metal angle, tape joint, flush and square set wall / ceiling junction.	Plasterboard Wall / ceiling junction generally.	

09260 - PARTITIONS

Wall Framing Generally - Refer Specification

Acoustic and Fire Rated Wall Types / Column Encasements

Walls scheduled as Acoustic Type (receiving acoustic insulation) or as Fire or Smoke Walls to be carried up to underside of floor slab or roof deck above to ensure separation is maintained. For walls generally, framing without linings to be connected to structure above for seismic restraint.

Construct walls in strict accordance with relevant wall types as detailed in current CSR Technical Manual. To walls to wet areas, upgrade lining to MR variety of specified plasterboard. Comply with Flanking Path Details in Section Z of CSR Manual to maintain specified acoustic ratings. Refer to wall types/ schedule on drawings.

Note: while the typical wall types drawing lists all walls, the schedule below only includes walls constructed to achieve a specific acoustic or fire rating and generally with a stud wall/ batten component. For specification details of the components of other walls, refer to the relevant other sections of this Materials Schedule.

Services Shafts: (continuous, no fire collars at floor peno's):

Refer to wall types sheet for selections

Internal: refer to Acoustic Engineer Report for details.

Note: Services Risers include sewer and stormwater pipes. Services Risers to have fire collars at floor penetrations.

Battens/ Furring/ Top Hats (Wall - Timber/Metal)

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Furring channels	Supplier: Rondo Item: No.129 / 308, 16 or 28mm according to selected system or to suit services. Installation: fixed to walls at 600mm centres. OR fixed to walls at 600mm centres with resilient mounts. [where required by Acoustic Consultant]	Masonry or concrete panel walls lined with plasterboard internally, Refer Wall types schedule on drawings.	

Flush Plasterboard, Walls

Code	Product / Material	Detail / Description	Indicative Location	Rev
PB	Plasterboard	Supplier: Gyprock Item: Plasterboard CD, 13mm.	Internal walls unless scheduled otherwise.	
IRPB	Plasterboard, impact resistant	Supplier: Gyprock Item: Impact-chek, 13mm.	All corridor walls to 12000mm AFFL	
MRPB	Plasterboard, water resistant	Supplier: Gyprock Item: Aquachek, 13mm.	All plasterboard walls to wet areas.	
PB(-)	Plasterboard, perforated	Supplier: Gyprock Item: Perforated Plasterboard, 13mm.		

Lining board, Fire Resistant

Code	Product / Material	Detail / Description	Indicative Location	Rev

Fibre Cement Linings (internal) - for external refer Section 05400 Claddings

Code	Product / Material	Detail / Description	Indicative Location	Rev

Timber Linings – refer Section 06100 Carpentry

Insulation – Wall (Thermal & Acoustic)

Note: R_M = R value of insulation material only, R_T = Total R value of system, refer to Insulation Council of Aust & NZ Handbook.

Comply with Requirements of Energy Rating Report.

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Wall Wrap/Membrane	Supplier: JamesHardie Item: 'HardieWrap Weather Barrier' Overlap and tape in accordance with manufacturer's written instructions. Thickness: <1mm Flammability Index to AS1530.2: Low Duty to AS/NZS 4200.1: Light	External Stud Walls and spandrels.	

		Vapour Resistance to ASTM E96: 0.59MN.s/g Vapour barrier classification to ASTM E96: Low. Emittance classification to AS/NZS 4201.5: 0.17 Water barrier classification to AS/NZS 4201.4: High.		
-	Insulation, Thermal, Wall	Item: glasswool wall batts, R _M 2.7 (90mm thick). Installation: Overall system including air films/ internal lining achieves R _T value of R2.8 minimum (refer ICANZ Handbook, System W0290NVS). Non-Combustible to AS1530.1	External Stud Walls and spandrels.	
-	Insulation, Acoustic	Supply and install insulation materials listed in Acoustic and Fire Rated Wall & Ceiling Types. refer to Acoustic Engineers report for minimal requirements		
-	Insulation, Acoustic	Provide acoustic treatments (which may include lagging, linings and insulation) to acoustically isolate services pipework as required by the NCC. refer to Acoustic Engineers report for minimal project requirements Can Use the details below, based on Acoustic Logic Details 2013...	All Service Pipework	

Note: Refer Section 05300 Metal Roofing for insulation to roof areas / areas of metal wall cladding on girts.

Casing Beads

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Shadowline	Supplier: Rondo Item: P50 Shadowline stopping bead.		

Wallpaper




Code	Image	Product / Material	Detail / Description	Indicative Location	Rev

09300 - TILING

T – Tiling


Surface materials of Ramps and Stairs to have minimum slip resistance of P3 (internal/ dry surface condition), P4 (external/ wet surface condition).


Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
T1		Porcelain Tiles	Chloe Thomas 0431 184 982 Product: Dolmix Light Colour: Grey Finish: Slip Rating P5 Grout: TBC Size: 600 x 600 x 9mm Thk	RACF: Reception Corridors – Front of House Café & Servery Salon	
T2		Porcelain Tiles	Supplier: Earp Bros Tiles Chloe Thomas 0431 184 982 Product: Dolmix - Dark Colour: Dark Grey Finish: Slip Rating P5 Grout: TBC Size: 600 x 600 x 9mm Thk	RACF: Lift Lobby - Wayfinding Resident/Visitor Amenities ACC WC	

T3		Porcelain Tiles	Manufacturer: National Tiles Description: In-Out Tile Code: PNT-I/01249 Dimensions: 600mm x 600mm Slip Rating: P4 Contact: Genie Bird 0447 892 061 Grout Colour: Ardex 273 – Magellan Grey	RACF: Resident Ensuites Staff WC's & Amenities	
T4		Porcelain Tiles	Manufacturer: National Tiles Description: In-Out Tile Code: PNT-I/01250 Dimensions: 600mm x 600mm Slip Rating: P4 Contact: Genie Bird 0447 892 061 Note: Requires minimum 30% luminous contrast between floor/wall and seat	RACF: Communal Resident ACC WC	
T5		Porcelain Tiles	Supplier: Ceredomus Description: Tundra Grigio Code: K3088 Dimensions: 300mm x 600mm Slip Rating: P4 Contact: Damien Turco – 0427 221 700 Grout Colour: TBC	ILA: (Sand + Calm Scheme) Bathrooms Ensuite Laundry	
		Porcelain Tiles	Supplier: Signorino Description: TG-YM-HAVANA 198 BALTIC MATT Code: TG-YM-HAVANA Dimensions: 300mm x 600mm Slip Rating: P3 Contact: Yulia Maydurova 0412 562 678 Grout Colour: TBC	ILA: (Grounding Scheme) Bathrooms Ensuite Laundry	
T6		Porcelain Tiles	TBA With Architect	ILA: Ground floor Lift Lobby. Level 01 & 02 lift lobby Lift car floor	
T7		Pod on Paver Tiles	Manufacturer: National Tiles Description: External Tile Code: PNT-EP764 Dimensions: 600mm x 600mm x 20mm Slip Rating: P5 Contact: Genie Bird 0447 892 061	Balconies	

WT – Wall Tiles

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
------	-------	--------------------	----------------------	---------------------	-----

WT1		Wall Tiles - Decorative	Supplier: Perini christina@perini.com.au Product: Yubi Clay Colour: Red Finish: Gloss Grout: TBC Size: 20x145 Code: KPT41469	Main Building: Café Severy Private Dining Theatre	
WT2		Wall Tile – Subway	Supplier: Classic Ceramics Sallie Kean 0409 403 711 Product: White Matt Colour: White Finish: Matt Grout: TBC Size: 50 x 200	Main Building: Café Severy	
WT3		Wall Tiles – Decorative	Supplier: Classic Ceramics Sallie Kean 0409 403 711 Product: Tetris Luc Forest Colour: Dark Green Finish: Gloss Grout: TBC Size: 50 x 200	Main Building: Bar Fireplace	
WT4		Wall Tiles – Decorative	Supplier: Classic Ceramics Sallie Kean 0409 403 711 Product: Tetris Luc Sage Colour: Light Green Finish: Gloss Grout: TBC Size: 50 x 200	Main Building: Bar	
WT5		Wall Tiles – Decorative	Supplier: Integra Surfaces Paul Greco 0411 273 008 Product: Salon Black Colour: Black Finish: Matt Grout: TBC Size: 80 x 315mm	Main Building: Fireplace	
WT6		Wall Tiles – Decorative		Main Building: Resident/Visitor WC	
WT7-1		Feature Wall Splashback Tiles	Supplier: Ceredomus Damian Turco 0427 221 700 Product: Tetra Colour: Pavilion Finish: Gloss Grout: TBC Size: 130mm x 130mm	RACF Household 1 Communal Kitchen	
WT7-2		Feature Wall Splashback Tiles	Supplier: Ceredomus Damian Turco 0427 221 700 Product: Tetra Colour: Pavilion Gumleaf	RACF Household 2 Communal Kitchen	


			Finish: Gloss Grout: TBC Size: 130mm x 130mm		
WT7-3		Feature Wall Splashback Tiles	Supplier: Ceredomus Damian Turco 0427 221 700 Product: Tetra Colour: Pavilion Sesame Finish: Gloss Grout: TBC Size: 130mm x 130mm	RACF Household 3 Communal Kitchen	
WT7-4		Feature Wall Splashback Tiles	Supplier: Ceredomus Damian Turco 0427 221 700 Product: Tetra Colour: Pavilion Irish Moss Finish: Gloss Grout: TBC Size: 130mm x 130mm	RACF Household 4 Communal Kitchen	
WT10 TBC		Wall Tiles	Supplier: National Tiles Genie Bird 0447 892 061 Product: Studio 39 Gesso Natural Tile Colour: [REQUIRES CONTRAST FROM FLOOR – TO BE REVIEWED] Finish: Matt Grout: TBC Size: 600mm x 600	RACF: Resident Ensuites	
WT11		Wall Tiles – Decorative	Supplier: National Tiles Genie Bird 0447 892 061 Product: Code: PNT-MOS994 Finish: Matt Grout: TBC Size: 284x292	ILA: (Sand + Calm Scheme) Ensuite Laundry	
		Wall Tiles – Decorative	Supplier: National Tiles Genie Bird 0447 892 061 Product: Code: PNT-MOS990 Finish: Matt Grout: TBC Size: 284x292	ILA: (Grounding Scheme) Ensuite Laundry	

T – Tiling Expansion Joints

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Tiling expansion joints	Supplier: Latham Range: Neoprene-x-pansion thin set tile strips, type TSA. Installation: Provide joints at spacings recommended by manufacturer.		

Expansion / Contraction Joint Covers – Refer 09680 Carpet / Modular Carpet & Miscellaneous Floor Items

Additional Items

Code	Product / Material	Detail / Description	Indicative Location	Rev
-	Tiling trims 	Supplier : BAT Trims Range : aluminium Colour : Brass	All external corners, or all exposed tile edges	

09610 – APPLIED FINISHES TO CONCRETE FLOORS

CO – Applied Finishes to Concrete Floors

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
		Acoustic Underlay	Manufacturer: Regupol Description: Regupol Sonus Multi 3 Dimensions: 20mL (Roll) x 1mW x 3mm thk	All and carpet flooring	
		Acoustic Underlay	Manufacturer: Regupol Description: Regupol Sonus Multi 4.5 Dimensions: 20mL (Roll) x 1mW x 4.5mm thk	All tile flooring	
		Exposed concrete life extension	Manufacturer: Markham Description: INFRA TECT AQURON 1000 Install to manufacturers requirements alex.portelli@markhamglobal.com	To external concrete footpaths	
		Concrete slab Medi-Seal/ Floor Sealer	Manufacturer: Markham Description: FLOOR TECT 1.0 AQURON 2000 to all Staff Back of house areas FLOOR TECT 2.0 AQURON 2000 (MEDI) to all resident use areas Install to manufacturers requirements alex.portelli@markhamglobal.com	Apply to all internal concrete slabs	
			Roof plant waterproofing – refer to waterproofing section	Concrete roof plant	

CO-1		Epoxy concrete sealer	Supplier: Parchem Range: Durafloor HP multi component solvent free epoxy. Installation: to comply with manufacturer's written instructions.	Internal Stairs all Levels	
------	--	-----------------------	---	----------------------------	--

			Apply two (2) coats, with addition of grit to achieve a minimum slip rating of R12 / P5. Colour: TBA With Architect		
CO-2		Epoxy concrete sealer	Supplier: Parchem Range: Fosroc Nitoflor FC130 two component water dispersed epoxy. Installation: Acid etch surface of in-situ concrete, apply neutralising solution, thoroughly rinse and allow to dry. Apply two (2) coats, with total dry film thickness of approximately 100 microns. Colour: TBA With Architect Installation to comply with manufacturer's written instructions.	Carpark, refer finishes plan <i>Preferred- water based</i>	
CO		Epoxy concrete sealer	Supplier: Parchem Range: Fosroc Nitoflor FC130 two component water dispersed epoxy. Installation: to comply with manufacturer's written instructions. Apply three (3) coats. Colour: Mid Grey.	All concrete block & precast walls to Waste Rooms.	
CO		Epoxy concrete sealer	Supplier: Dulux Range: 'Luxepoxy T' tinted polyamide cured epoxy floor finish Installation: Acid etch surface of in-situ concrete, apply neutralising solution, thoroughly rinse and allow to dry. Apply one (1) coat 'Luxepoxy 4' white primer, allow to dry. Apply two (2) coats 'Luxepoxy T', with 2-4 hours drying time between coats. Installation to comply with manufacturer's written instructions.		

E – Epoxy / Vinyl Flake Flooring

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
		Epoxy / Vinyl Flake Flooring	Rospry Vinyl Flake System™ Slip resistance rating: P4/R11. System to be applied in accordance with manufacturer's instructions. Colour: TBA Supplier/ Installer: Rospry Flooring (Tel: 9706 0295).	REFER TO FLOOR FINISHES PLAN	

Pavers - Terraces

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
		Raised Flooring Pedestal System	Supplier: Buzon Item: height adjustable pedestal system to suit installation height requirements. Installation : Pods installed over	Balconies/ Terraces, Refer Floor Plans, Construction Details.	

			membrane, to support pavers laid flat with joints left open. Finish all wall surfaces prior to installation of pods/pavers. System installed in accordance with manufacturer's instructions.		
--	--	--	--	--	--



09650 - RESILIENT FINISHES

LVT – Luxury Vinyl Flooring (Flooring)

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
LVT1		Luxury Vinyl Tile Planks	Supplier: Kardean Commercial Kalani Walerys 0407 191 159 Flooring Range: Looselay Originals Product: Danbury Code: LLP154 Slip Rating R10 Installation: Loose Lay Plank Size: 1050mm x 250mm x 4.5mm Provide Mediseal Substrate Below.	RACF: Ground Floor Café, Dining and Bar Health and Wellness Circulation, Consulting Rooms, Group Exercise	
LVT2		Luxury Vinyl Tile Planks	Supplier: Kardean Commercial Kalani Walerys 0407 191 159 Flooring Range: Looselay Longboards Product: Twilight Oak Code: LLP301 Slip Rating R10 Installation: Loose Lay Plank Size: 1050mm x 250mm x 4.5mm Provide Mediseal Substrate Below	RACF – Level 1: Communal Kitchen/Dining Activity Room	
LVT3		Luxury Vinyl Tile Planks	Supplier: Kardean Commercial Kalani Walerys 0407 191 159 Flooring Range: Looselay Longboards Product: Pure Fabric Oak Code: LLP329 Slip Rating R10 Installation: Loose Lay Plank Size: 1500mm x 250mm x 4.5mm Provide Mediseal Substrate Below.	RACF – Level 2: Communal Kitchen/Dining Activity Room	

V –Vinyl (Flooring)

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
------	-------	--------------------	----------------------	---------------------	-----



V1		Sheet Vinyl Flooring	Supplier: Tarkett Description: Heavy-duty heterogeneous vinyl safety floor Style: Safetred Universal Plus Colour: Mercury 382 2180 Roll Dimensions: 2x 15m Thickness: 2.5mm Slip Resistance: R12, P5 Contact: Sean Gilbert – 0438 000 029	RACF: BOH Corridor Commercial Kitchen Pantry Commercial Laundry (one side)	
V2		Sheet Vinyl Flooring	Supplier: Armstrong Description: Homogenous Vinyl Sheet Style: Accolade Foothold Colour: Camden Grey Roll Dimensions: 20m x 1.83m Thickness: 2mm Slip Resistance: R11, P4 , B Contact: Andrea Rose 0412 196 319	RACF: Sluice Room Treatment Room Cleaners Room Linen	
V3		Sheet Vinyl Flooring - Antistatic	Supplier: Armstrong Description: Homogenous Vinyl Sheet Style: Accolade Safe Colour: Camden Grey Roll Dimensions: 20m x 1.83m Thickness: 2mm Slip Resistance: R11, P4 , B Contact: Andrea Rose 0412 196 319	RACF: Comms Rooms	
V4		Sheet Vinyl Flooring	Supplier: Tarkett Description: Heavy-duty heterogeneous vinyl safety floor Style: Safetred Universal Plus Colour: Venus 382 2110 Roll Dimensions: 2x 15m Thickness: 2.5mm Slip Resistance: R12, P5 Contact: Paul Burrows 0432 425 142	RACF: Commercial Laundry (one side)	
V5		Sheet Vinyl Flooring – Timber Look	Manufacture: Shaw Contract Collection: Inhabit Plus Sheet Vinyl 4487V Colour: Barley Oak 87220 Slip Resistance: P4 Size: 2m roll Installation: Note do no cove	RACF: Standard Bedroom	

R – Rubber (Flooring)

Code	Image	Product /	Detail / Description	Indicative Location	Rev
------	-------	-----------	----------------------	---------------------	-----

		Material			
R1		Rubber Flooring	Supplier: Regupol Product: Everroll Ultimate Colour: Kush [2001] Slip Resistance: Standard P4, Sealed Sizes: 4mm thickness (1.25m x 40lm)	Main Building: Gym	

Wall Vinyl

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
WV1		Wall Vinyl	Supplier: Baresque Product: Tattersall Plaid Colour: Headlands	RACF: Household Entry – Level 1 Main Building: Library - Desk	
		Wall Vinyl	Supplier: Baresque Product: Tattersall Plaid Colour: Stonewashed	RACF: Household Entry – Level 1	
		Wall Vinyl	Supplier: Baresque Product: Tattersall Plaid Colour: Woolery	RACF: Household Entry – Level 2	
		Wall Vinyl	Supplier: Baresque Product: Tattersall Plaid Colour: Cashmere	RACF: Household Entry – Level 2	
WV2		Wall Vinyl	Supplier: Armstrong Product: Wallflex Colour: Cool White: 6W607245 Thickness: 1.25mm	Scullery Treatment Rm Dirty Utility Lifting Machine store Cleaners Rm Dirty Linen Holding	

VS – Vinyl Skirting



Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
------	-------	--------------------	----------------------	---------------------	-----


Expansion / Contraction Joint Covers – Refer Section 09680 Carpet / Modular Carpet & Miscellaneous Floor Items

09680 – CARPET / MODULAR CARPET & MISCELLANEOUS FLOOR ITEMS

C – Carpet / Modular Carpet Tiles

Code	Image	Product /	Detail / Description	Indicative Location	Rev
------	-------	-----------	----------------------	---------------------	-----

		Material			
		Medi-Seal Floor Sealer	Refer to applied concrete finishes for slab sealant/medi seal under all carpet floor finishes	Apply to all internal concrete slabs	
C1		Carpet Tiles	Supplier: Interface Lucia Lord 0407 266 717 Range: World Woven Collection Colour: 8113002 Flannel Dobby Layout: Ashlar Size: 25cm x 1m Backing: GlasBac Mediseal Substrate Below.	RACF: Staff Admin Sales Manager CBM Office Village Manager Meeting Reception (Staff side) Admin Store	
C2		Carpet Tiles - Feature	Supplier: Interface Lucia Lord 0407 266 717 Range: Scottish Sett Plaid Colour: Plaid– TBC Layout: Non-directional Size: 50cm x 50cm Backing: GlasBac Mediseal Substrate Below.	RACF: Theatre/Chapel Communal Lounge Library Bar/Lounge Private Dinning/ Lounge	
C3		Carpet Tiles	Supplier: Interface Lucia Lord 0407 266 717 Range: Scottish Sett Plaid Colour: Plaid– TBC Layout: Non-directional Size: 50cm x 50cm Backing: GlasBac Mediseal Substrate Below.	RACF: Residential lounge & Library L01 & L02	
C4		Carpet Tiles	Supplier: Interface Lucia Lord 0407 266 717 Range: Artisan Papers Collection Colour: 1859003 Jetty Layout: Ashlar Size: 50cm x 50cm	RACF: Corridors L01 & L02 Sitting Areas Linen store cupboards	
C5		Carpet Tiles	Supplier: Interface Lucia Lord 0407 266 717 Range: World Woven Collection Colour: 8113002 Flannel Dobby Layout: Ashlar Size: 25cm x 1m Installation: 6+ System – Seam sealed Mediseal Substrate Below.	RACF: Premium Bedrooms	

C6		Carpet Tiles - Feature	Supplier: Interface Lucia Lord 0407 266 717 Range: Scottish Sett Plaid Colour: Plaid– Charcoal Layout: Non-directional Size: 50cm x 50cm Backing: GlasBac Mediseal Substrate Below.	RACF: Waiting Areas	
C7		100% Wool Broadloom Carpet on underlay	Supplier: Godfrey Hirst Keenan Small – 0400 150 939 Range: Fyans – Toffee Colour: Toffee Surface Texture: Level Loop Pile Layout: Conventionally Laid Size: 4m	ILA: Bedrooms	
C8		Carpet Tiles	Supplier: Interface Lucia Lord 0407 266 717 Range: World Woven Collection Colour: 8113002 Flannel Dobby Layout: Ashlar Size: 25cm x 1m Backing: GlasBac Mediseal Substrate Below.	ILA: Corridors / Communal Lounge / Waiting Area	

M – Matting

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
M		Entry Matting	Manufacturer: Birrus Matting Description: Entry Matting Range: Cocamat - loop pile insert, closed extrusions, Slip Resistance: P4 Colour: Natural Installation: loose laid into mitred frame recessed in concrete floor.	Main Building: Airlock	

T – Tiling - Refer Section 09300.

TF – Timber Floor Finishes including Floating Flooring - Refer Section 06100.

Nosings (Stair Treads/ Tiered Seating)

Note: under AS1428 2009 a solid band across the tread with a 30% luminance contrast to background is required. Colour of nosing or stair finish to be selected to achieve this requirement.

Installation: Provide integrated hooped shafts for substrate mountings where required

1. A solid band of colour is required 50-75mm in depth across the tread with min. 30% luminance contrast required.

2. The contrasting strip shall be no more than 15mm back from the front of nosing. Max radius 5mm.

3. Where contrasting strip is not set back from nosing, any contrasting area is to extend no more than 10mm down the riser.

If the turndown is more than 10mm then the colour of the turndown section needs to closely match the stair finish..

Flooring Trims

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
		Detail Trim	Ensure this is picked up with alum threshold strips in door schedule then delete this item	Junctions between matting and external paving/ threshold.	
		Detail Trim	Supplier: Tredsafe Range: 'DT040', natural anodised aluminium.	Junctions between carpet / matting and sheet vinyl floors.	
		Detail Trim	Supplier: Tredsafe Range: 'DT084', natural anodised aluminium.	Junctions between cushion backed or thick carpet / matting and sheet vinyl floors.	
		Detail Trim	Supplier: Tredsafe Range: 'DT028', natural anodised aluminium. Setout: over carpet, mounted on vinyl flake epoxy, centred under door leaf.	Junctions between carpet and vinyl flake epoxy/ concrete floors.	
		Detail Trim	Supplier: Tredsafe Range: 'DT027', natural anodised aluminium, or flat cover strip (without slope). Centred under door leaf.	Junctions between sheet vinyl and vinyl flake epoxy/ concrete floors.	
		Detail Trim	Supplier: Tredsafe Range: 'DT029' natural anodised aluminium.	Junctions between timber and sheet vinyl floors.	

Expansion / Contraction Joint Covers

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
		Expansion joint cover strip	Supplier: Miska Range: 'RWMA' Installation: to comply with manufacturer's written instructions. Colour: Natural Anodised Aluminium.	Areas of vinyl flooring over control joints in concrete slab, refer Floor Plans.	

Concrete Sealer - Moisture Sealant

Code	Product / Material	Detail / Description	Indicative Location	Rev
------	--------------------	----------------------	---------------------	-----

09900 - PAINTING**Extent of Painting**

All new surfaces and finishes (except pre-finished items) are to be painted, unless noted otherwise in schedule or below:

Do not paint:

- internal surfaces within Basement Storage.
 - internal surfaces within Basement Carpark, other than all columns, and feature walls to Lift/ Stair Lobbies, Car Entries.
- Extent and Application of Feature Colours is called up in Main Spec, Section 09900 Painting, III, 304 D.

Textured Finish

For acrylic or cement render to Rendered Masonry walls, refer to Acrylic or Cement Render section.

Code	Substrate	Preparation / Product / Description	Indicative Location	Rev
------	-----------	-------------------------------------	---------------------	-----

Paint Type Schedule

Code	Substrate	Preparation / Product / Description	Indicative Location	Rev
	Off form Concrete	Fill deep holes with mortar or acrylic based filler. Remove surface contaminants and loose material. Dust down and wash surface, allow to dry. Apply One (1) coat acrylic sealer undercoat. Apply Two (2) coats semi-gloss acrylic (walls) OR Two (2) coats flat acrylic (soffits).	Exterior / Interior Off-form Concrete Walls / Columns / Soffits.	
	Rendered blockwork, brickwork or concrete	New render to cure for min 28 days before painting. Fill deep holes with mortar or acrylic based filler. Remove surface contaminants and loose material. Dust down and wash surface, allow to dry. Apply One (1) coat acrylic sealer undercoat. Apply Two (2) coats low sheen acrylic.	Exterior Rendered Masonry or Concrete, Refer Elevations	
	CFC sheet / FC sheet	Rub down, scrape and fill joints, cracks and surface blemishes. wipe clean and dust free. Correct filing of blemishes after sealer undercoat where necessary. Apply One (1) coat acrylic sealer undercoat, pigmented. Apply Two (2) coats low sheen acrylic (walls) OR Apply Two (2) coats flat acrylic (soffits).	Exterior CFC Sheet Wall Linings – Expressed Jointed & FC Sheet Soffit Linings.	
	Dressed Timber	Fill joints, blemishes and nail holes with acrylic wood filler. Sand smooth and wipe clean. Treat flush panel doors with one (1) coat grain filler. Apply one (1) coat oil based primer. Apply two (2) coats full gloss enamel.	Exterior Flush Panel Doors both sides. Other Exterior Timber.	
	Mild Steel to be Shop-Primed	Shop Applied Paint System: Refer to Specification, SECTION 05100 STRUCTURAL STEEL, PART V PROTECTIVE COATINGS 501 Painting.	Interior structural steelwork. If using Dulux special system for ext steel also in lieu of galv, amend the above	
	Structural Steelwork: Shop-Primed Mild Steel or Galvanised Mild Steel. Metalwork: Mild Steel, Shop-Primed Mild Steel or Galvanised Mild Steel.	Remove surface contaminants, rust and scale. Wipe clean. Mild Steel: Apply One (1) coat red oxide metal primer, OR Shop-Primed Mild Steel: Touch up shop primed steelwork, OR Galvanised Mild Steel: Apply One (1) coat Galvanised Iron Primer to all galvanised surfaces. Apply Two (2) coats gloss enamel.	All Exterior / Interior structural steelwork and metalwork exposed to view. Do NOT paint 'Colorbond' or prefinished metalwork.	
	PVC, Acrylic. HDPE is not to be painted.	Remove surface contaminants. Abrade surface as required for key with wet and dry paper or steel wool. Apply Two (2) coats low sheen acrylic.	Exterior / Interior Exposed plumbing and pipework.	
	Steel trowelled Concrete	Remove all surface contaminants. Scrape / Rub down, patching excessive pinholes, cracks, dents and blemishes. Wipe clean and dust free. One (1) coat acrylic sealer undercoat, pigmented. Apply Two (2) coats semi-gloss washable acrylic.	Interior Concrete Panel: Basement Carpark: concrete panel walls to stairs and lifts from within Carpark.	

	Dressed Timber	Remove sap and gum with solvent cleaner. Fix split timber. Fill joints, blemishes and nailholes with acrylic wood filler. Sand smooth and wipe clean. Treat Flush panel doors with one (1) coat grain filler. Apply One (1) coat oil based undercoat. Apply Two (2) coats gloss enamel.	Interior Flush Panel & Glazed Timber Doors, reveal linings, architraves, skirtings & trim. All Timber not scheduled as clear finish or stained.	
-	Plasterboard (various types) and internal FC sheet	Rub down, scrape and fill joints, cracks and surface blemishes with patching plaster or acrylic filler. Fill structural gaps with flexible filler. Sand and wipe clean. Correct filing of blemishes after sealer undercoat where necessary. Apply One (1) coat Dulux Professional Enviro2 Interior acrylic sealer undercoat. Apply Two (2) coats Dulux Professional Steriguard Durable Acrylic low sheen.	Internal Plasterboard walls, Internal FC Sheet wall linings in clinical areas generally.	
-	Plasterboard	Rub down, scrape and fill joints, cracks and surface blemishes with patching plaster or acrylic filler. Fill structural gaps with flexible filler. Sand and wipe clean. Correct filing of blemishes after sealer undercoat where necessary. Apply One (1) coat Dulux Professional Enviro2 Interior acrylic sealer undercoat. Apply Two (2) coats Dulux Wash & Wear Kitchen & Bathroom Ceiling Flat.	Internal Plasterboard ceilings in clinical areas generally. <i>Wash and wear acceptable for clinical areas ceilings generally</i>	

PTE - Paint Colours (External)

Code	Item	Image	Colour / Finish	Notes	Rev
PTE1	FC Cladding		Supplier: Dulux Colour: To match Colorbond Monument	Refer to Elevations	T1
PTE2	FC Cladding		Supplier: Dulux Colour: To match Colorbond Southerly	Refer to Elevations	T1
PTE3	FC Cladding		Supplier: Dulux Colour: To match Colorbond Windspray	Refer to Elevations	T1
PTE3	FD Cladding		Supplier: Dulux Colour: To match colorbond Basalt	Refer to Elevations	T1

PT - Paint Colours (Internal)

Code	Item	Image	Colour / Finish	Notes	Rev
PT1	Ceilings		Supplier: Dulux Colour: Ceiling White - Flat Finish: Low Sheen Flat Code: 15W	Unless noted otherwise	
PT2	Doors, Trims & Wall Panelling		Supplier: Dulux Colour: Natural White Finish: Semi Gloss Enamel Code: 15W Acculine CG: Feather 0238	Main Building: Staff Area Offices RACF: Resident Rooms	
PT3	Walls		Supplier: Dulux Colour: Natural White Finish: Low Sheen Code: 15W	RACF: Resident Rooms – Above Picture Rail Skirting	

				ILA Apartments	
PT4 -1	RACF Household 1, Feature Wall, Doors, Door Frames		Main Household Colour Supplier: Dulux Colour: Puhoi Finish: Semi-Gloss Enamel Code: S20B7	RACF Main Household Colour Household Apartment Entry Door Door Frame Household Entry Wall – Lift Lobby	
			Secondary Colour Supplier: Dulux Colour: Fuji Sands Finish: Low Sheen Code: S20B3	RACF Secondary Colour Feature Wall	
PT4-2	RACF Household 2, Feature Wall, Doors, Door Frames		Supplier: Dulux Colour: Willow Leaf Finish: Low Sheen Code: S20B3	RACF Main Household Colour Household Apartment Entry Door Door Frame Household Entry Wall – Lift Lobby	
			Supplier: Dulux Colour: Puhoi Finish: Semi-Gloss Enamel Code: S20B7	RACF Secondary Colour Feature Wall	
PT4-3	RACF Household 3, Feature Wall, Doors, Door Frames		Supplier: Dulux Colour: Fuji Sands Finish: Low Sheen Code: S20B3	RACF Main Household Colour Household Apartment Entry Door Door Frame Household Entry Wall – Lift Lobby	
			Supplier: Dulux Colour: Shire Finish: Semi-Gloss Enamel Code: S20B7	RACF Secondary Colour Feature Wall	
PT4-4	RACF Household 4, Feature Wall, Doors, Door Frames		Supplier: Dulux Colour: Shire Finish: Semi-Gloss Enamel Code: S20B7	RACF Main Household Colour Household Apartment Entry Door Door Frame Household Entry Wall – Lift Lobby	
			Supplier: Dulux Colour: Willow Leaf Finish: Low Sheen Code: S20B3	RACF Secondary Colour Feature Wall	
PT5	Door		Supplier: Dulux Colour: Pesto Finish: Semi-Gloss Enamel Code: S22B5	ILA Apartments: Apartment Entry Door	
PT6	Door Frame		Supplier: Dulux Colour: Domino Finish: Semi-Gloss Enamel Code: SG6G8	ILA Apartments: Door Frame	
PT7	Walls		Supplier: Dulux Colour: Oponini Half Finish: Low Sheen Code: NZ9G6	ILA Apartments: Corridors	

PT8	Wall Panelling Paint		Supplier: Dulux Colour: Oponini Half Finish: Semi gloss enamel Code: NZ9G6	Main Building: Corridor	
-----	----------------------	---	---	-----------------------------------	--

Line Marking

Code	Substrate	Preparation / Product / Description	Indicative Location	Rev
-	Asphalt / Concrete	Provide line marking in accordance with Vic Roads standards. All line marking to be applied to totally clean surfaces, using Dulux 'Roadmaster A1' to a min. dry film thickness of 210 microns. Apply coating in accordance with manufacturer's written instructions. Lines to be 90mm wide, white. Disabled Symbol, to comply with AS1428, blue/white.	Carparks, Roads.	

12000 – FIXTURES, FITTINGS & EQUIPMENT**Fittings, Fixtures (Group 1)**

Fittings as scheduled below to be located as shown on drawings, with noggings in walls as required to provide secure fixing.

Code	Image	Product Material /	Detail / Description	Indicative Location	Rev
TRH1		Toilet Roll Holders	Supplier: Caroma Item: Urbane II Toilet Paper Roll Holder with Secure Fix double screw fixing mechanism. Finish: Chrome Code: 99620C	Main Building: All RACF Resident Rooms ILA Apartment: Bathrooms Powder	
TRH2		Toilet Roll Holder	Supplier: RBA Description: Bobrick Double Toilet Roll Holder Finish: Satin Code: B6867 Dimensions: 320MM W X 50MM H	Main Building: Accessible WC Staff Accessible WC Resident/Visitor Amenities	
TRH3		Toilet Roll Holder	Supplier: Geesa Description: Franklins, Toilet Roll Holder Finish: Brushed Stainless Steel Code: Dimensions:	ILA Premium Rooms – Level 2 Only Ensuite	

RBH01		Robe Hook	Supplier: Caroma Description: Urbane II Robe Hook Finish: Chrome Code: 99621C Dimensions: 35mm D x 48mm H	RACF: Ensuite ILA Apartments: Bathrooms Powder Main Building: As shown	
RBH02		Robe Hook	Supplier: Citta or similar Description: Koti Wall Hook Finish: Warm Grey Code: MTL0004 Dimensions: 4.5x3.5x8H	ILA Apartments: Entry Storage Joinery	
SD1		Soap Dispenser, Bench Mounted	Supplier: RBA Group Description L Bobrick basin mounted soap Dispenser, Pump Model Bright Polished Finish Soap Dispenser 100mm Spout 600ml Capacity Top filling Antibacterial-soap resistant plastic cylinder	Main Building: RACF & ILA Resident Kitchenettes, Activity sinks Staff Training Room Bar & Café	
SD2		Soap Dispenser, Wall Mounted	Supplier: ABI Interiors Description: Lira Soap Bottle Holder Finish: Brushed Nickel Note: 304 Stainless Steel Construction, PVD Dimensions: Height: 80mm Width: 50mm Projection: 70mm Collar Diameter: 29mm	Main Building: Resident/Visitors WC Staff Amenities	
SD3		Soap Dispenser, Wall Mounted, Black	Supplier: ABI Interiors Description: Lira Triple Soap Bottle Holder Finish: Brushed Nickel Note: 304 Stainless Steel Construction, PVD Dimensions: Height: 34mm – Length: 224mm – Projection: 70mm – Collar Diameter: 28.5mm	Main Building: Staff Amenities RACF Resident Rooms ACC WC	

PTD1		Paper Towel Dispenser	Supplier: RBA Group Description: Recessed Convertible Paper Tower Dispenser & Waste Bin Code: B3940 Finish: Stainless Steel #304 Dimensions: 437mm W x 1422mm H x 100mm D Note: Accessible Compliant Joiner to refer to manufacturer details for cut-out dimensions	Main Building: Staff Amenities WC Accessible WCs	
PTD2		Paper Towel Dispenser	Supplier: RBA Group Description: bench Mounted Paper Towel Dispenser Code: B526 Finish: Stainless Steel Dimensions: 275mm x 100mm Joiner to refer to manufacturer details for cut-out dimensions	Main Building: Bar Café Servery	
PTD3		Paper Towel Dispenser 3-1 with Hand Dryer	Supplier: RBA Group Description: Bobrick recessed 3 in 1 towel, waste & dryer Accessible Code: B38030 Finish: Stainless Steel #304 Dimensions: 396 (W) x x1450 (H) x 100 (D) Note: Accessible Compliant Field Adjustable to promote dryer or paper towel use. Joiner to refer to manufacturer details for cut-out dimensions	Main Building: Resident/Visitor Amenities WC	
LO2		Lockers	Supplier: Intraspace Description: Standard Range 4 door locker unit, hanging rail Dimensions: 2100 mm H overall (900mmH individually) x 400mm W x 500mm D Finish: Matching Laminate with black ABS edging Plinth 110mm high, Charcoal Note: (ELECTRIC KEYPIN REQUIRED FOR STAFF TRAINING ROOM ONLY)	Main Building: Staff Room Gym Room/Flexi	

DSS01		Drug Storage Safe	Supplier: CMI Safe Co Description: Drug Safe DS1 Code: DS1K Locking mechanism to be confirmed Weight: 53Kg Dimensions: 305W x 230D x 457mm H	Main Building: Treatment Room	
PANR		Pan Rack	Supplier: Axis Health Description: Pan and Bottle Rack 6 Bay Code: AX552 Finish: Stainless Steel	Main Building: Sluice Room	
TLH01		Tool Holder – Wall Mounted	Manufacturer: Rubbermaid Description: 1993 Tool Holder Size: 860mmL x 90mmW x 110mmH Code: FG199300 GRAY	Main Building: Cleaner's Room Bin Room	
CR01		Curtain Track	Supplier: Medshop or equivalent approved by client Description: Curtain Track with curtain to suit Curtain Track: Dalcross Curtain Track 2500 x 1300mm, with drop rods and hooks Refer to plans to determine track shape – L shape and J shape tracks available Refer to Upholstery / Other for curtain specifications	Main Building: Consult Rooms	
FE		Fire Extinguisher	Installation: To comply with Authority requirements and located as directed by Superintendent.	Refer to GA plans and Fire Services Engineer's drawings for spec and locations	
FE-C		Fire Extinguisher Recessed Cabinet	Supplier: Check point Group Product: Recessed Fire Extinguisher Cabinet 4.5 kg - White Code: SKU: CB4018	Refer to GA plans and Fire Services Engineer's drawings for spec and locations	

FBK		Fire Blanket	Installation: To comply with Authority requirements and located as directed by Superintendent.	Refer to GA plans and Fire Services Engineer's drawings for spec and locations	
BC		Baby Change	Supplier: RBA Bathroom Products Product: Koala Kare Horizontal Mounted Baby Change Station Code: KB200-05 (White Granite) Note: Installation to comply with AS1428.1 requirements	Accessible WC behind Café	
FP01		Double Sided Fireplace - Electric	Supplier: Real Flame Description: Optimyst Cassette Electric Fireplace 1000 + CASS 500 Dimensions: 1000 W x 236 H x 354 D PROVIDE 2NO. POWER OUTLET ALLOW FOR VENTILATION AS PER MANUFACTURERS REQUIREMENTS AND INSTALATION MANUALS.	Main Building: Lounge/Bar - Joinery	
FR01		Foot Rest	Supplier: Comfortel Description: Comet Footrest Brass Dimensions: 400W x 60D x 180mm H	MAIN BUILDING: Salon	
BH01		Bag Hook	TBC Specification	MAIN BUILDING: Spa / Salon	
RB		Roller Blinds - Blockout	Manufacturer: Countrywide Concepts Description: Stirling Colour: Mario	Where Required	

		Roller Blinds – Sun Shading	Manufacturer: Countrywide Concepts Description: Kosi 10% Colour: Oatmeal	Where Required	
FA01		Sheer Curtains	Supplier: Country Wide Concepts Manufacturer: JAVA Description: Shell – TBC Code: Width: 3000mm	Main Building: All Residential Rooms	
FA02		Block out curtains	Supplier: Country Wide Concepts Manufacturer: Marvel Description: Truffle - TBC Code: Width:	Main Building: All Resident Rooms All ILA Apartments	
-		Motorised Internal Blinds Double Treatment	Supplier: As per contractor Manufacturer: Description: Code: Width: To be picked up on electrical consultant drawings	ILA Premium Rooms – Level 2 Only	
FA03		Velvet Curtain	Supplier: Instyle Colour: TBC	Main Building: Theatre / Chapel	

UPH		Leatherlook Vinyl	Supplier: Warwick Collection: Lustrell Charisma Colour: Tan Code: FLC12TANN	ILA Standard + Premiums Store Joinery (Sand + Calm Scheme)	
		Leatherlook Vinyl	Supplier: Warwick Collection: Lustrell Charisma Colour: Rain Code: FLC12RAIN	ILA Standard + Premiums Store Joinery (Grounding Scheme)	


Fittings, Fixtures (Group 2)

Fittings as scheduled below to be located as shown on drawings, with noggings in walls as required to provide secure fixing.

Code	Image	Product / Material	Detail / Description	Indicative Location	Rev
2DSPT		Paper Towel Dispenser	Refer to FF&E schedule Supplier Item	Throughout	
2DSDG		Glove Dispenser	Refer to FF&E schedule Supplier Item	Throughout	
2PBD	 		Refer to FF&E schedule Supplier: Whiteboards R us Description: Hook and loop receptive pinboard Colour: Grey Dimensions: 900L x 600mmH	Throughout	
2WBD		Whiteboard	Refer to FF&E schedule Supplier: Whiteboards R Us Description: Low Gloss Whiteboard Finish: Vitreous Enamel (Porcelain/Ceramic) Dimensions: 600 x 900mm	Throughout	
2BR01		Television Bracket	Supplier: Perfect Vision Systems Description: Articulated Wall Mount Dimensions: To suit 32" – 50"	Main Building: Lounge	

2BR02		Television Bracket	Supplier: Perfect Vision Systems Description: Ptouch PLB Dimensions: To suit 30" – 63"	Main Building: RACF Resident Rooms	
-		Cable Tray	Supplier: By contractor Description: Desk Cable Tray Organiser Finish: Black	Wherever required	
G2BD01		Bed Sheet Dispenser	Refer to FF&E schedule Supplier: Washroom Accessories Description: Halyard Medical Bed Sheet Dispenser Code: KC4924 Dimensions: 651L x 180W x 150mmH Finish: White powdercoated steel	Main Building: Consult Room	
2SBB01		Sharps Bin Bracket	Supplier: Cleanaway Daniels Description: Standard Wall Bracket Code: I-11200 Suitable for S14, S11, S32 regular Six screw fixture	Main Building: Treatment Room Consult Room	
2EW01		Eyewash	Supplier: Seton Description: Wall Mounted Eyewash Cabinet Code: A46218 Dimensions: 250W x 110D x 350mm H	Main Building: Cleaners Room	
2STD01		Stadiometer	Supplier: Seca Description: Seca 216 Mechanical Measuring Rod Dimensions: 217D x 1500DmmH (external dimensions)	Main Building: Consult Room	
2CLR01		Clerical Safe	Supplier: Abate Safe & Co Description: CMI Mini Guard 3K Dimensions: 320H x 440W x 340D	Main Building: Cafe	

Appliances

2CT01		Induction Cooktop	GROUP 2 FF&E Supplier: Fisher & Paykel Product: 60cm series 5 4 zone induction cooktop Dimensions: 61H x 600W x 530D	Main Building: RACF Communal Kitchens Staff Room ILA: Standard Kitchens	
2CT02		Induction Cooktop	GROUP 2 FF&E Supplier: Miele Product: KM 7464 FL Induction cooktop Dimensions: 51H x 620W x 520D	ILA: Premium Kitchens	
2RH01		Rangehood	GROUP 2 ITEM Supplier: Westinghouse Description: 52cm Integrated Undermount Rangehood with Hob2Hood	Main Building: RACF Communal Kitchens Staff Room	

			Model: WRI525BC Dimensions: W526 x D292 x H260	ILA: Standard Kitchens	
2RH02		Rangehood	GROUP 2 ITEM Supplier: Miele Description: DA 2578 Extractor unit Model: DA 2578 Dimensions: W702 x D402 x H50	ILA: Premium Kitchens	
2MW01		Built In Microwave	GROUP 2 ITEM Refer to FF&E schedule Supplier: Fisher & Paykel Description: Built in Microwave Oven 60cm Dimensions: 388H x 595W x 400D Finish: Black Code: OM25BLSX1	Main Building: RACF Communal Kitchens Staff Room ILA: Standard Kitchens	
2OV01		Oven 60cm	GROUP 2 ITEM Supplier: Fisher & Paykel Model: OB60SD11PLX1 Name: Oven 60cm 11 Function Self Cleaning Colour: Stainless Steel Dimensions: 598H x 596W x 565D Note:	Main Building: RACF Communal Kitchens Staff Room ILA: Standard Kitchens	
2OV02		Oven 60cm	GROUP 2 ITEM Supplier: Miele Model: H 7860 BPX Name: Handleless ArtLine Obsidian Black Pyrolytic oven Colour: Dimensions: 596H x 595W x 568D Note:	ILA: Premium Kitchens	
2OV03		Combination Microwave Oven 60cm	GROUP 2 ITEM Supplier: Miele Model: H 7840 BMX Name: Handleless ArtLine Obsidian Black Speed Oven Colour: Dimensions: 456H x 595W x 562D Note:	ILA: Premium Kitchens	

2FRG1		Integrated Refrigerator	GROUP 2 ITEM Supplier: Fisher & Paykel Description: Integrated Refrigerator Freezer, 60cm Finish: White Code: RB60V18 Capacity: 236L – 67L (freezer) 136L (fridge) Dimensions: 1773 H x 555 W x 540 D (Note: Ensure adequate ventilation)	Main Building: RACF Communal Kitchens	
2FRG2		Integrated Bar Fridge	Supplier: Fisher & Paykel Description: TBC Finish: Code: Capacity: Dimensions:	RACF Resident Premium Rooms	
2DW1		Commercial Freestanding	GROUP 2 ITEM Supplier: Miele commercial Description: PG8509SS Dimensions: 600W x 600D x 835H Finish: Stainless Steel Note: 24 month commercial warranty Miele PG 8059 [MK HYGIENE] Freestanding fresh water dishwasher, Stainless steel	Main Building: RACF Communal Kitchens	
2DW2		Single Dishdrawer	Supplier: Fisher & Paykel Description: Single Dishdrawer Dimensions: 410 H x 599 W x 573 D Model: DD60SAX9	ILA: Standard Kitchens	
2CT02		Induction Cooktop	GROUP 2 FF&E Supplier: Fisher & Paykel Description: 30cm series 5 2 zone induction cooktop Code: CI302CTB1	Main Building: ILA Apartments	
BWU		Boiling/Chilled Water Unit	Supplier: Billi Australia Item: Quadra 4100 with XL Levered Dispenser (Water-Cooled) with Optional Tubing Extension Kit Finish: Chrome	ILA Premium Rooms – [Purchaser Upgrade Only]	

			Capacity: Up to 100 people Code: 904100LCH Riser: 70mm Riser Underbench Unit Size: 340H x 315W x 465D Installation: As per manufacturers guidelines. Water stop tap & drainage point as per hydraulic engineers' documentation.		
2CT03		Induction Cooktop, Touch	Supplier: Miele Description: Code: [SSG TO CONFIRM INDUCTION]	ILA Premium Rooms – Level 2 Only	
2FRG3		Integrated French Door Fridge	GROUP 2 ITEM Supplier: Fisher & Paykel Description: Integrated French Door Fridge, 90cm Finish: Integrated – Match Joinery Code: RS90A1 Capacity: 476L Integrated Dimensions: 1798mm H x 896mm W x 610mm D (Note: Ensure adequate ventilation)	ILA Premium Rooms – Level 2: Kitchen [PURCHASER OPTION ONLY]	
2OV02		Wall Oven Tower	Supplier: Miele Description: Code:	ILA Premium Rooms – Level 2 Only Kitchen	
2RH02		Built-In Rangehood	Supplier: Miele Description: Code:	ILA Premium Rooms – Level 2 Only Kitchen	
2FRG4		Underbench Wine Fridge	Supplier: Miele Description: Code:	ILA Premium Rooms – Level 2 Only: Kitchen	

2PU01		Pull out Pantry	Supplier: Blum Description: Space Tower Range: Legrabox Pure – Anti Fingerprint Stainless Steel Width: Min. 270mm	ILA Premium Rooms – Level 2 Only	
-------	---	-----------------	--	----------------------------------	--

Fittings, Fixtures (Group 3 – By Client)

Fittings as scheduled below to be located as shown on drawings, with noggings in walls as required to provide secure fixing.

Code	Image	Product Material /	Detail / Description	Indicative Location	Rev
3CLK		Clock	Refer to FF&E schedule Supplier: Winc Office Supplies Description: Winc Quartz Wall Clock Code: 87161394 Dimensions: 300mm Colour: White	Main Building: Communal Kitchen Gym Salon Commercial Kitchen Meeting Room Village Managers Office Sales Managers Office Clinical Managers Office Flexible Consult Room RACF Communal Kitchen Staff Hub Care Managers Office	
3FRM		Drug Storage	Supplier: Axis Health Description: 125L Vaccine Refrigerator Model: PC125VA Dimensions: 600W x 600D x 830mm H Weight: 45Kg	Main Building: Treatment Room	
3FRS		Specimen Storage Fridge	Supplier: LEC Medical Description: Under-counter laboratory Fridge Solid Door 151L Model: LSR151UK Colour: White Dimensions: 595W x 595D x 705mm H Weight: 36Kg	Main Building: Treatment Room	
3LT01		Linen Trolley	Supplier: Cubro (or similar approved) Description: Porto triple, foot operated linen trolley Code: Cubro 542FO Dimensions: 460W x 1265D x 900mmH	Main Building: Sluice Room	

3LT02		Linen Trolley	Supplier: Description: Advance Trolleys Wet and Dry with Coil Spring Base Code: WDLT381/CSBG Dimensions:	Main Building: Sluice Room	
TRDRE1		Dressing Trolley	Supplier: Cubro (or approved equivalent by architect) Description: Milano Instrument/Dressing Trolley with two drawers Ordering Code: 3662 Dimensions: 500W x 500D x 900mm H	Main Building: Treatment Room Consult Room	
TRDRE2		Dressing Trolley Top	Supplier: Cubro (or approved equivalent by architect) Description: Milano Plastic Top (Single) to suit instrument/ dressing trolley Ordering Code: 3665	Main Building: Treatment Room	
3TRCL		Cleaning Cart	Supplier: Cubro (or approved equivalent by architect) Description: Spencer Cleaning Trolley Ordering Code: 617 Dimensions: 1170L x 550W x 970H	Main Building: Cleaners Room	
3CLV		Cleaners Vacuum	Refer to FF&E schedule Supplier: Description: Ordering Code: Dimensions:	Main Building: Cleaners Room	
3BIN		Bin	Refer to FF&E schedule	Main Building: Cleaners Room	
3CLM		Cleaners Mop	Refer to FF&E schedule	Main Building: Cleaners Room	
3CLS		Cleaner's Floor Scrubber	Refer to FF&E schedule	Main Building: Cleaners Room	
3DSAL		Dispenser – Alcohol Hand Rub	Refer to FF&E schedule	Throughout	
3DSS		Soap Dispenser	Refer to FF&E schedule	Throughout	
3DSCH		Dispenser – Chemical Mixer	Refer to FF&E schedule	Main Building: Cleaners Room	

3SHV		Shelving	Refer to FF&E schedule	Throughout	
3TRCL		Cleaning Cart	Refer to FF&E schedule Supplier: Cubro (or approved equivalent by architect) Description: Spencer Cleaning Trolley Ordering Code: 617 Dimensions: 1170L x 550W x 970H	Main Building: Cleaners Room	
3BIN		Bin	Refer to FF&E schedule Supplier: Officeworks (or similar approved) Description: Finish: Code:	Main Building: Offices: Sales Manager Village Managers Office Clinical Manager Chef's Office Reception Library Staff Hub	
3BIN		Medication Cart Bin	Supplier: Cubro (or similar approved) Description: Milano waste bin to suit medication cart Ordering Code: 689	Main Building: Treatment Room	
3TRLI		Linen Trolley	Refer to FF&E schedule Supplier: Description: Advance Trolleys Wet and Dry with Coil Spring Base Code: WDLT381/CSBG Dimensions:	Main Building: Sluice Room Linen Store	
-		Digital Scale	Refer to FF&E schedule for specification	Main Building: Consult Room	
-		Mail Trolley	Refer to FF&E schedule for specification	Main Building: Staff Admin Room	
-		Hair wash, Mobile basin	Mobile hair Wash Basin as required Note: speak to client to check if they require additional mobile hair wash basin for wheelchair users or memory care users that need to wash 'front-facing' at different height.	Main Building: Salon	



3WS1		Workstations	Refer to FF&E schedule Supplier: Supplied by Client	Main Building: Consult Rooms Staff Admin Care Manager Clinical Care Manager Maintenance office Village Manager	
STC		Styling Chair	Supplier: Comfortel Description: Chloe Tan II Dimensions: 69 × 65 × 41 cm	Main Building: Salon	
3TV1		Television	Refer to FF&E schedule Supplier: Phillips Dimensions: 43 Inch	Main Building: Village Managers Office (For future install. To be confirmed by Client).	
3TV2		Television	Refer to FF&E schedule Supplier: Phillips Dimensions: 65 Inch	Main Building: Sales Manager Office Meeting Room Main Lounge / TV Lounge - Ground Floor Village Reception	
3TV3		Television	Refer to FF&E schedule Supplier: Phillips Dimensions: 55 Inch	Main Building: Gym Exercise Room Staff Training Room	
3MW02		Freestanding Microwave	Refer to FF&E schedule Supplier: Sharp Description: 1200W Midsize inverter microwave oven Dimensions: 520W x 410D x 315mm H Code: R395EST Finish: Stainless Steel	Main Building: Staff Room Treatment Room	

3FRG2		Refrigerator	Refer to FF&E schedule Supplier: Fisher & Paykel Description: Freestanding 494 Litre Bottom Mount Refridgerator Finish: Stainless Steel Dimensions: 635W x 695D x 1720H Capacity: 403Lt Finish: Energy Rating 2.5 Stars Left Hinge Door	Main Building: Staff Room	
3TRDRE		Dressing Trolley	Refer to FF&E schedule Supplier: Cubro (or approved equivalent by architect) Description: Milano Instrument/Dressing Trolley with two drawers Ordering Code: 3662 Dimensions: 500W x 500D x 900mm H	Main Building: Treatment	

ELECTRICAL

Feature Lighting (To be coordinated with electrical drawings). Read in conjunction with Electrical Services Documentation.

Code	Image	Product	Detail / Description	Indicative Location	Rev
W1		Wall Light	Supplier: Beacon Lighting Description: Milan Adjustable LED White switch spotlight in warm white Finish: White Dimensions: 141mm H x 90 W	RACF Standard rooms	
W2		Wall Light	Supplier: Englightened Living Description: Roma Finish: Matt Gold Dimensions: 153mm D x 190mm H x 150mm W	RACF Premium Rooms	
W3		Recessed Night Light	Supplier: Beacon Lighting Description: Gala LED Day Night Sleep Arch Step Light in White Finish: White Dimensions: 58mm D x 90mm H x 90mm W	All RACF Resident Rooms	
W4		Wall Light	Supplier: About Space Description: Dante LED Wall Light Finish: Brass - Round Opal 100mm Dimensions: H480mm x D245mm	RACF Corridors	

W5		Wall Light	Supplier: About Space Description: Ripples Finish: Black/Frost Dimensions: Diam 127mm x 75mm	ILA Apartments: Ensuite	
W6		Wall Light	Supplier: RBW Description: Pastille 1 Wayfind Finish: Black Globe: Droplet Dimensions: 318L x 140W Light Source: 3000K (soft white) [Laser cut for apartment signage room numbers]	ILA Apartments: Apartment Entry	
W7		Wall Light	Supplier: TBC Description: Finish: Dimensions:	ILA Apartments: Lift Lobbies	
W8		Wall Light – Memory Box	Supplier: About Space Description: Mesa 200 Finish: White Dimensions: 200mm x 80mm H x 80mm W	RACF – Above Memory Boxes	
PD1		Pendant – over Island Bench	Supplier: About Space Description: ASP Fourty5 Custom Round LED Linear Pendant Finish: Black Dimensions: Length 1200mm	ILA Apartments Standard: Kitchen over Island Bench	
PD2		Pendant – over Island Bench	Supplier: About Space Description: 2BY4 Round with Round Edge LED Linear Pendant Finish: Natural Dimensions: Length 2000mm	ILA Apartments Premiums Kitchen over Island Bench (Sand + Calm Scheme)	
		Pendant – over Island Bench	Supplier: About Space Description: 2BY4 Round with Round Edge LED Linear Pendant Finish: Walnut Dimensions: Length 2000mm	ILA Apartments Premiums Kitchen over Island Bench (Grounding Scheme)	
PD3		Pendant – over Island Bench	Supplier: About Space Description: Massimo Finish: Brass Dimensions: 1500mm	RACF: Communal Kitchen	

TBC		Ceiling Light	Supplier: About Space Description: Cannon C 75 Finish: White Colour Temperature: 3K Dimensions: Diam 75mm x H 160mm	Main Building: Lounge Lift Lobbies	
TBC		Pendant	Supplier: About Space Description: Finish: Colour Temperature: Dimensions:	ILA Apartments: Lift Lobbies	
LED		Led Strip Light with Opal Diffuser	Manufacturer: By contractor Description: <u>Led Strip Lighting with Opal Diffuser</u>	Refer to drawings	

General Purpose Outlets

Code	Image	Product	Detail / Description	Indicative Location	Rev
		General Purpose Outlets	Refer To electrical Consultant specifications	MAIN BUILDING; Generally Refer to drawing	
		General Purpose Outlets, Wide rocker	Refer To electrical Consultant specifications	RACF & ILA	
		General Purpose Outlets. Feature with USB	Saturn Zen Double Power Point Single USB Charger, Finish: White Horizontal Mount, 250V, 10A	Main Building: Library Café Servery Reception/Waiting Area Lounge Bar	
		General Purpose Outlets	Zetr Surface Double Outlet 250V, 10A Zen Finish White Item Number: 12-O-W	Salon	

END OF SCHEDULE