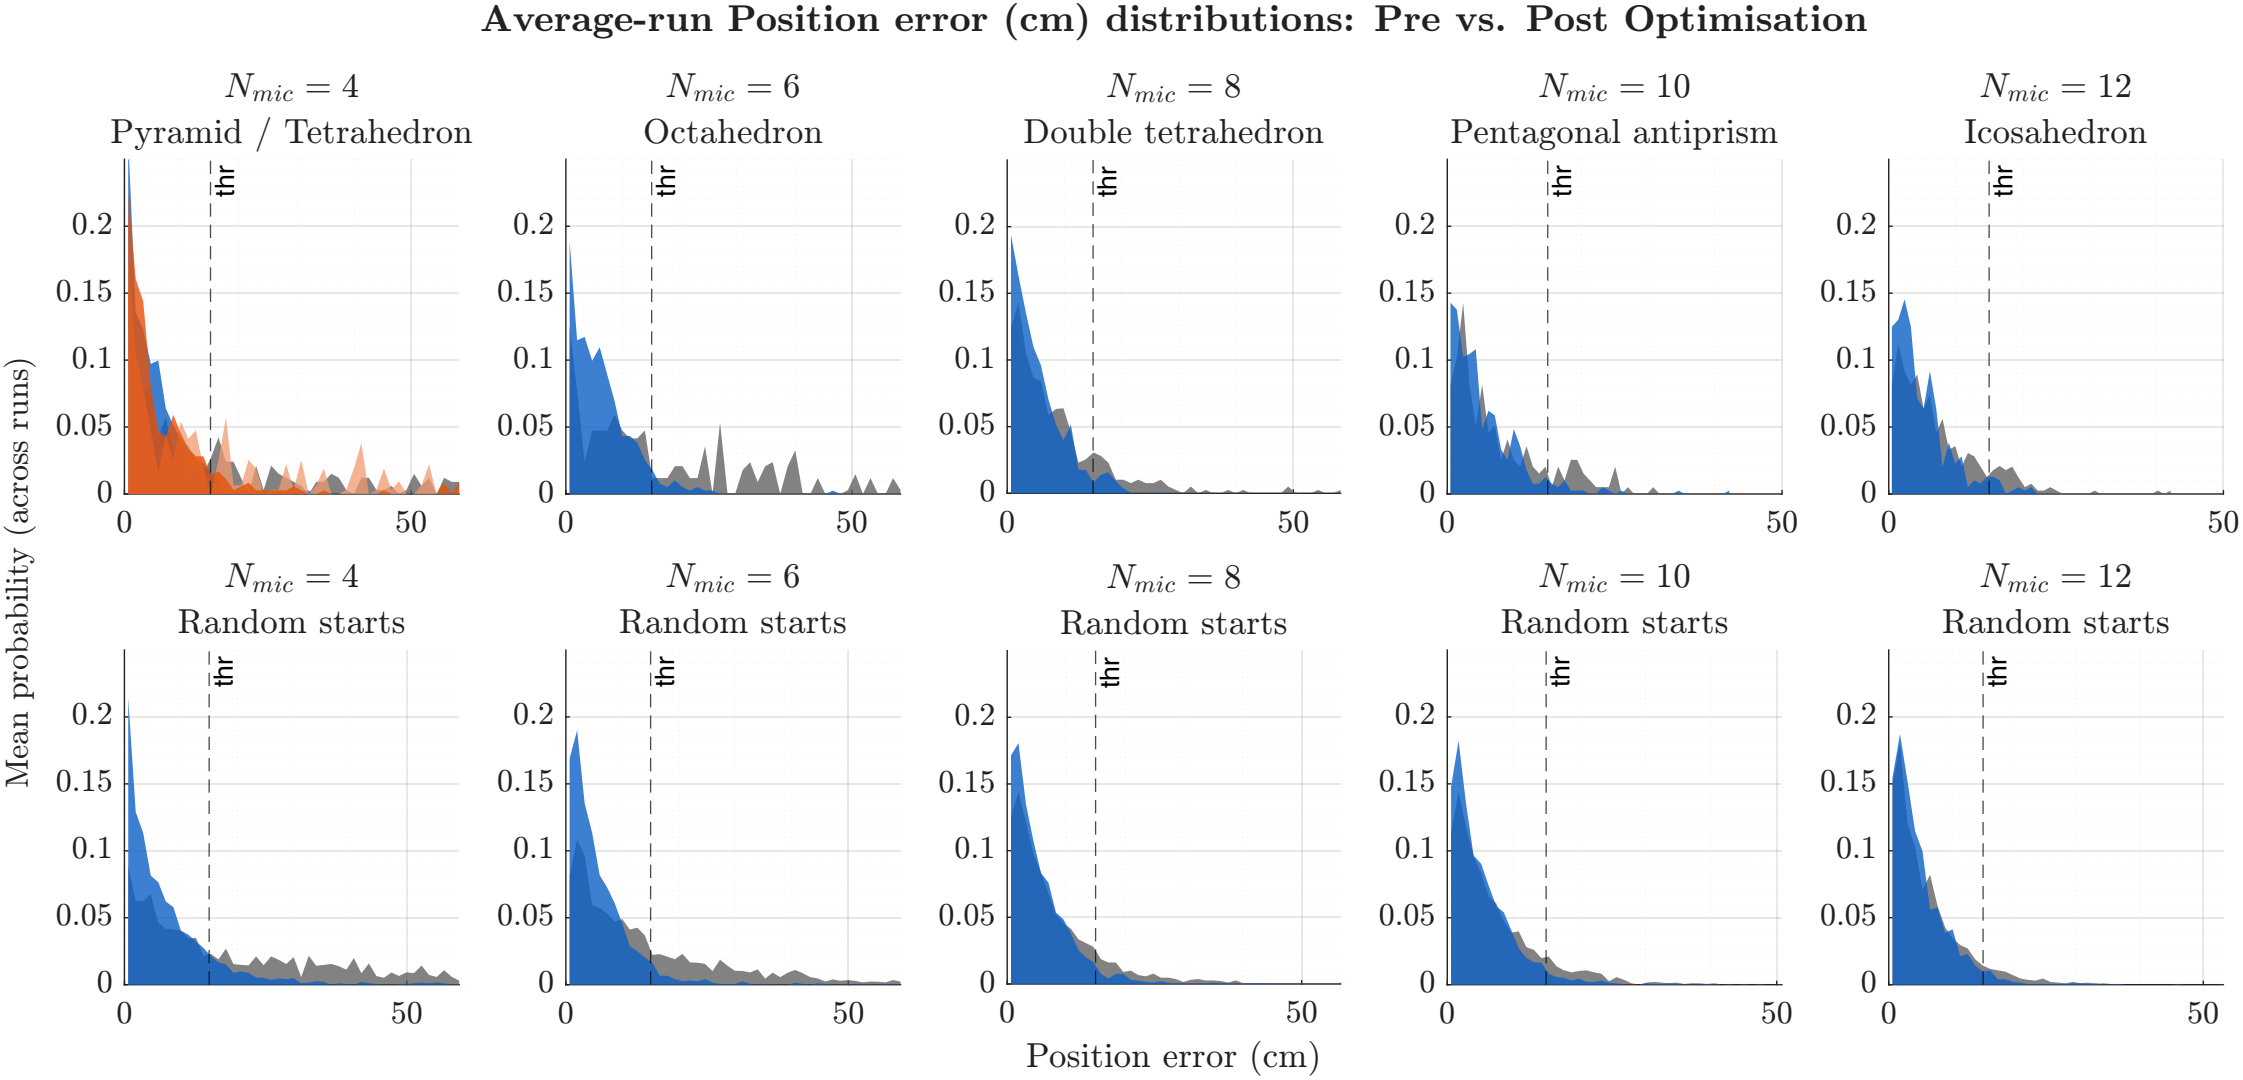

Average-run Position error (cm) distributions: Pre vs. Post Optimisation
$N_{mic} = 4$
Pyramid / Tetrahedron
$N_{mic} = 6$
Octahedron
$N_{mic} = 8$
Double tetrahedron
$N_{mic} = 10$
Pentagonal antiprism
$N_{mic} = 12$
Icosahedron
$N_{mic} = 4$
Random starts
$N_{mic} = 6$
Random starts
$N_{mic} = 8$
Random starts
$N_{mic} = 10$
Random starts
$N_{mic} = 12$
Random starts
thr
Mean probability (across runs)
Position error (cm)
0
0.05
0.1
0.15
0.2
50