


Objective(s) : understanding handling operations on an array.

task 0:

Create a folder `pack3_ArrayLinkedList`. Inside the folder create package `code`

Given `MyArrayBasic` class in package `code` with the following methods

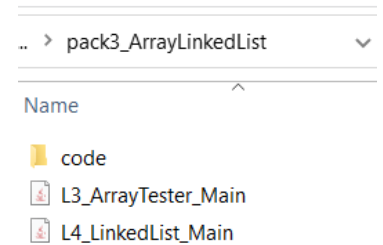

- void `add(int d)` – append `d` into an array
- void `insert(int d, int index)` – insert value `d` into the array at position `index`. Keep the order of the data unchanged.

```
package code;
public class MyArrayBasic {
    protected int MAX_SIZE = 5;
    protected int data[] = new int[MAX_SIZE];
    protected int size = 0;

    ...
}
```

- int `find(int d)` – return the index of value `d` in the array, else -1 (either ordered or unordered)
- int `binarySearch(int d)` – binary search in ordered array. return the index of value `d` in the array, else -1
- void `delete(int index)` – delete from ordered array i.e. the order of the data remains unchanged.
- `MyArray(int ... a)` – a constructor creating the first `MAX_SIZE`

Understand its mechanism through the following test code (`L3_ArrayTester.java`)

```
// import code.MyArray;
import code.MyArrayBasic;

class L3_ArrayTester_Main {
    public static void main(
        String[] args) {
        println("-demo1-----");
        arrayBasic_demo1();
        println("-demo2-----");
        arrayBasic_demo2();
        println("-demo3-----");
        arrayBasic_demo3();
    }
    ...
}
```

```
static private void arrayBasic_demo1() {
    MyArrayBasic demo =
        new MyArrayBasic(7,6,8,1,2,3);
    println(demo);
}
static private void arrayBasic_demo2() {
    MyArrayBasic demo = new MyArrayBasic();
    demo.insert(9, 0);
    demo.insert(7,0);
    demo.insert(5,0);
    println(demo);
    println("5 is at " + demo.find(5));
    println("5 is at " + demo.binarySearch(5));
    demo.delete(1);
    println(demo);
}
static private void arrayBasic_demo3() {
    MyArrayBasic demo = new MyArrayBasic(null);
    demo.add(3); demo.add(7);
    demo.add(5); demo.add(4);
    demo.add(6);
    //index out of bound due to overflow
    demo.add(1);
}
```

task 1: implement class MyArray which extends MyArrayBasic

with the following enhancements:

- MyArray() – a constructor with default MAX_SIZE = 100_000
- MyArray(int max) – a constructor with with supplied MAX_SIZE;
- boolean isFull() – return true if there is not available cell to insert d (insertion would cause an exception)
- Boolean isEmpty() – return true if there is no data in the array (deletion would cause an exception)
- int [] expandByK(int k) – implicitly allocate a k * MAX_SIZE array to prevent overflow addition (add() method)
- int [] expand() – default k = 2 i.e. call expandByK(2); i.e. double the array's capacity

```
import code.MyArray;
import code.MyArrayBasic;

class L3_ArrayTesterPackX {
    public static void main(
        String[] args) {
        ...
        println("-demo4-----");
        myArray_demo4();
        println("-task2-----");
        task2();
    }
}
```

```
static private void myArray_demo4() {
    MyArray demo = new MyArray(5);
    demo.delete(0);
    demo.add(3);
    demo.add(7);
    demo.add(5);
    demo.add(4);
    demo.add(6);
    demo.add(1);
    println(demo);
}
```

task 2: use

System.currentTimeMillis()

to measure time

performance. Notice the time it takes for each data size.

```
static private void task2() {
    for (int N = 200_000;
        N <= 10 * 200_000; N += 200_000) {
        long start = System.currentTimeMillis();
        MyArray mArray = new MyArray(N);
        for (int n = 1; n < N; n++)
            mArray.add((int) (Math.random()*1000));

        long time = (System.currentTimeMillis() - start);
        println(N + "\t\t" + time);
    }
    println("with expansion");
    for (int N = 200_000;
        N <= 10 * 200_000; N += 200_000) {
        long start = System.currentTimeMillis();
        MyArray mArray = new MyArray();
        for (int n = 1; n < N; n++)
            mArray.add((int) (Math.random()*1000));

        long time = (System.currentTimeMillis() - start);
        println(N + "\t\t" + time);
    }
}
```

Run task2() 3 times. Write down the result execution time to the bellowed table.

If you adjust the size of the initial N (and step size), correct it to the table as well.

N	MyArray(N)			MyArray()		
	1 st	2 nd	3 rd	1 st	2 nd	3 rd
200_000	8	7	8	4	6	5
400_000	4	4	4	6	5	12
600_000	13	8	13	8	12	10
800_000	7	8	7	8	10	11
1_000_000	9	9	10	11	19	19
1_200_000	11	10	10	14	19	19
1_400_000	12	13	12	15	22	20
1_600_000	12	14	14	17	23	21
1_800_000	16	17	16	17	25	19
2_000_000	18	22	20	18	26	21

In your opinion,

1. Given the different characteristic between the fixed sized and the expandable array (MyArray(N) vs. MyArray()), which type of array's execution time should be faster?

MyArray(N) should be faster due to pre-allocated memory which BigO is lesser.

2. In your opinion, how this experiment should be improved such that the execution time should reflect its true characteristic.

Increase number of loop size and data size sample and run the program multiple times.

submission: MyArray_XXYYYY.java and this pdf.

Due date: TBA