

Planning Poker Installation Guide

Table of Contents

Planning Poker Installation Guide	1
Introduction	1
System Requirements	1
Hardware:	1
Software:	1
Setup	2
Database access	11
Starting the Server	12
Starting the Client	13

Introduction

This installation guide provides a detailed walk-through of the requirements and steps to take to successfully launch both the server and the client applications. It also describes how to access the database directly. The software might, but is not guaranteed to, function properly if the below requirements and steps are not followed to the letter.

System Requirements

Hardware:

- No specific requirements listed.


Software:

Operating System:

- Windows 10 or Windows 11, updated as of May 2024.

Other:

- IntelliJ IDEA 2023.3.5 or later, with these dependencies:
 - o Junit5.8.1
 - o Java SDK, liberica 17.0.9
 - o Mockito-core v. 5.11.0 (included in project folder)
 - o Byte-buddy-agent v. 1.12.3. (included in project folder)
 - o Byte-buddy v. 1.12.3. (included in project folder)
 - o Postgresql v. 42.7.3. (included in project folder)




Setup

This section describes how to set properly set up the source code files, so the server and client applications may be launched through IntelliJ IDEA. It is assumed that software requirements are fulfilled and properly installed.


1. Unpack the source code files, such that they are laid out as shown below:

.git	27-05-2024 18:44	Filmappe	
.idea	28-05-2024 12:13	Filmappe	
ClientModule	27-05-2024 17:25	Filmappe	
out	01-05-2024 09:23	Filmappe	
ServerModule	27-05-2024 17:25	Filmappe	
SharedModule	27-05-2024 17:25	Filmappe	
.gitattributes	16-04-2024 19:03	Tekstdokument	1 KB
.gitignore	23-04-2024 13:46	Tekstdokument	1 KB
byte-buddy-1.12.3.jar	14-05-2024 14:28	Executable Jar File	3.638 KB
byte-buddy-agent-1.12.3.jar	14-05-2024 14:28	Executable Jar File	247 KB
mockito-core-5.11.0.jar	14-05-2024 14:28	Executable Jar File	688 KB
postgresql-42.7.3.jar	08-05-2024 08:03	Executable Jar File	1.064 KB
qodana.yaml	23-04-2024 13:46	Yaml Source File	2 KB
Tasklist.csv	24-05-2024 09:44	Microsoft Excel-fil me...	1 KB


2. Launch IntelliJ.
3. Create a New Project in IntelliJ, by selected: New -> **Project from existing sources**, in the menu. Navigate to the extracted folder, as shown on the example below, where “SEP5_PlanningPoker” is the name of the folder containing the source files:

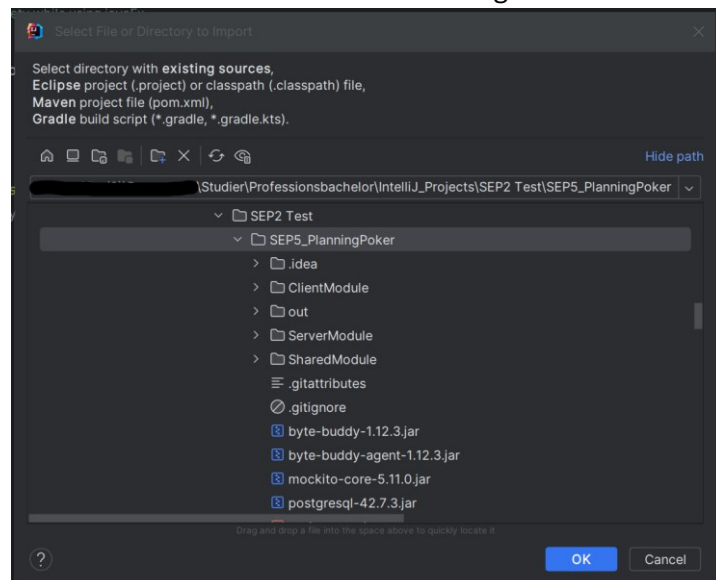


4. Click “ok”
5. Select “Create project from existing sources”, Click “Next”.
6. Choose a project name (Example: PlanningPoker), and select where to save the project. Keep the project format as “.idea (directory-based)”. Select “Next” when done.




7. On the next screen, ensure all directories have a checkmark next to them (there should only be 1), and choose “Next”.
8. IntelliJ will complain about a missing framework. Simply choose “Create”.
9. Wait for IntelliJ to create the project, if prompted by Microsoft Defender, select “automatically”.
10. The project will initially be mostly empty. Don’t worry, we will insert the source code files in the next steps.

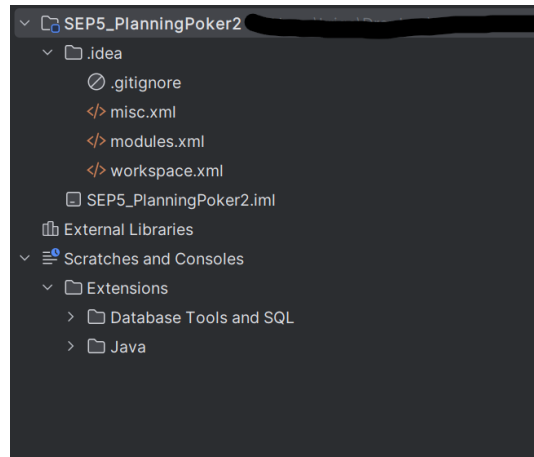


11. Right click on the project name, select “Open in” and select “Explorer”:

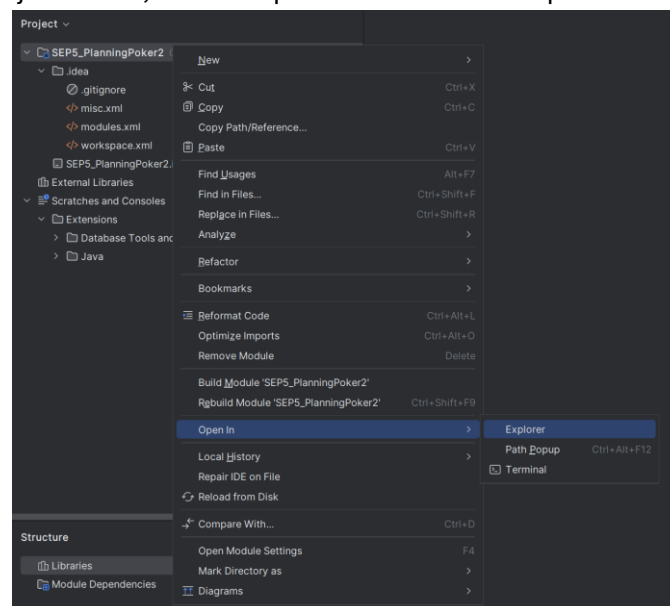

12. The project location will now open and should display a folder (.idea) and a .iml file named after the project.





13. Copy, or move, the selected files from the extracted source files into the IntelliJ project folder:

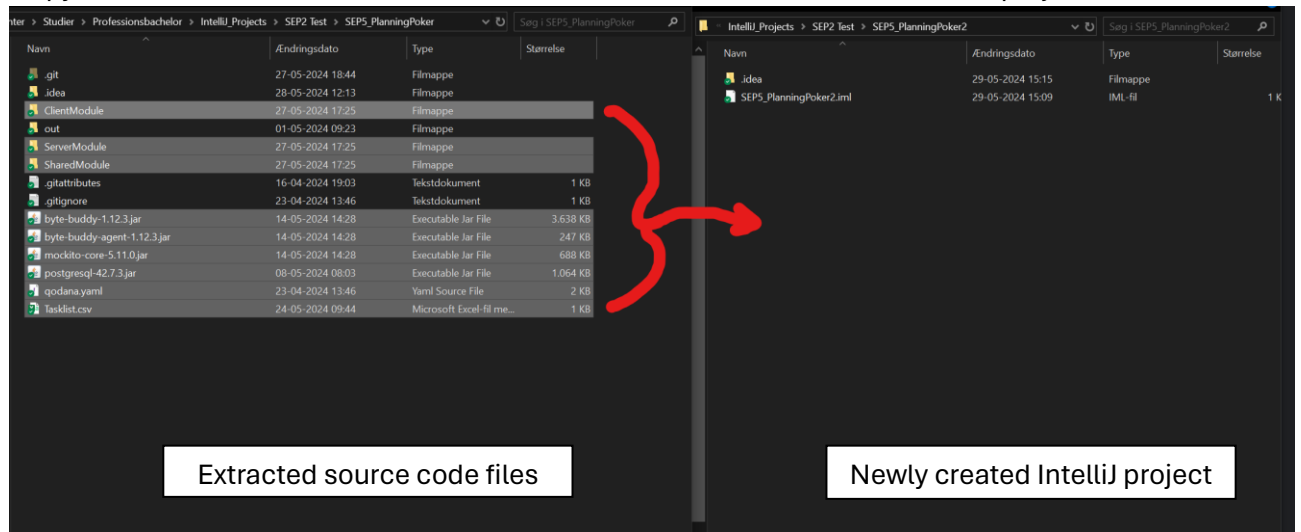


14. Now all source code files are shown in the IntelliJ project overview. Next step will be to properly set up each Module.

15. Right click on the project name and select “Open Module Settings”, or press “F4”:

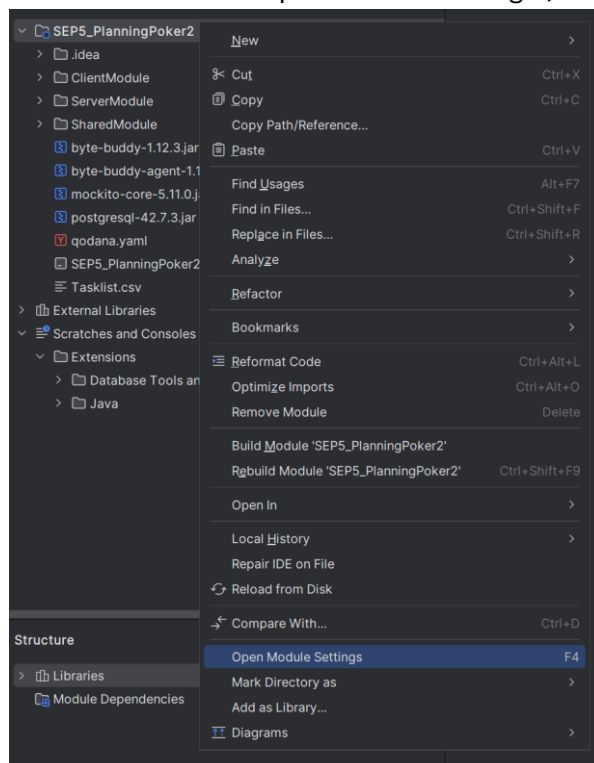





16. Navigate to the “Project” section, and select SDK liberica-17, set the language level to 17 and then click “apply”

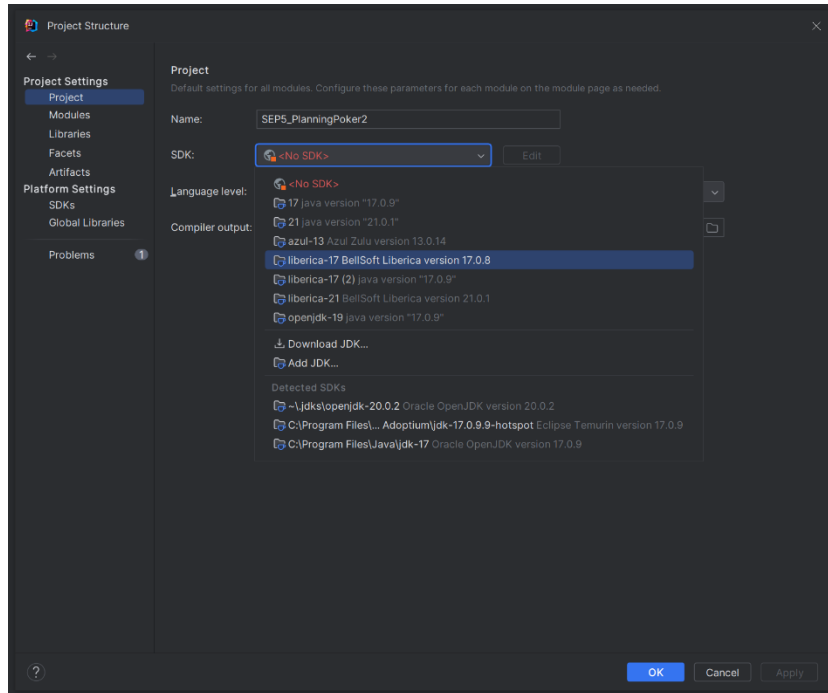


Ensure the Language level is set to 17, before clicking Apply!

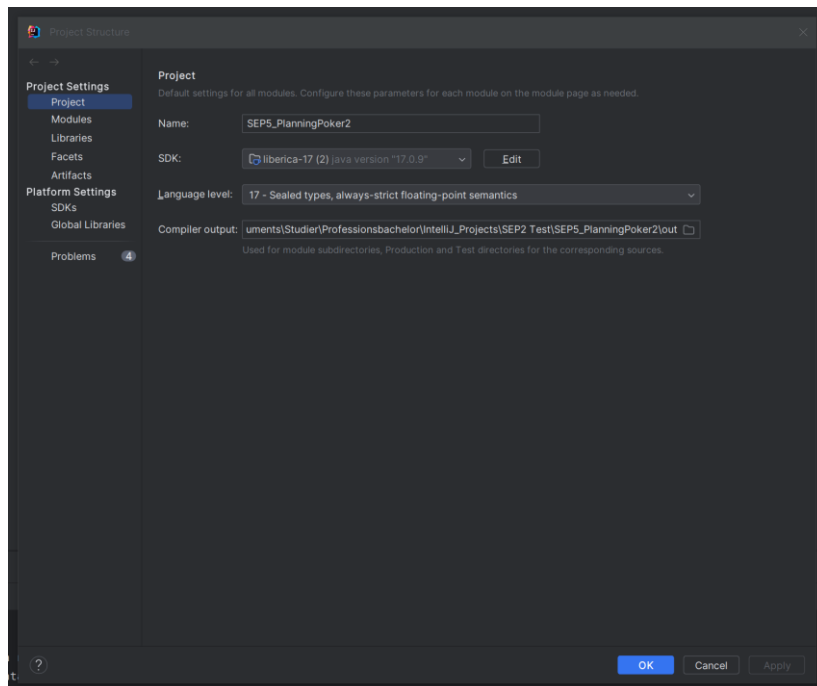





17. We will now set up each Module in the project. Navigate to the Module section, and select “add”. Choose “import Module” from the dropdown.

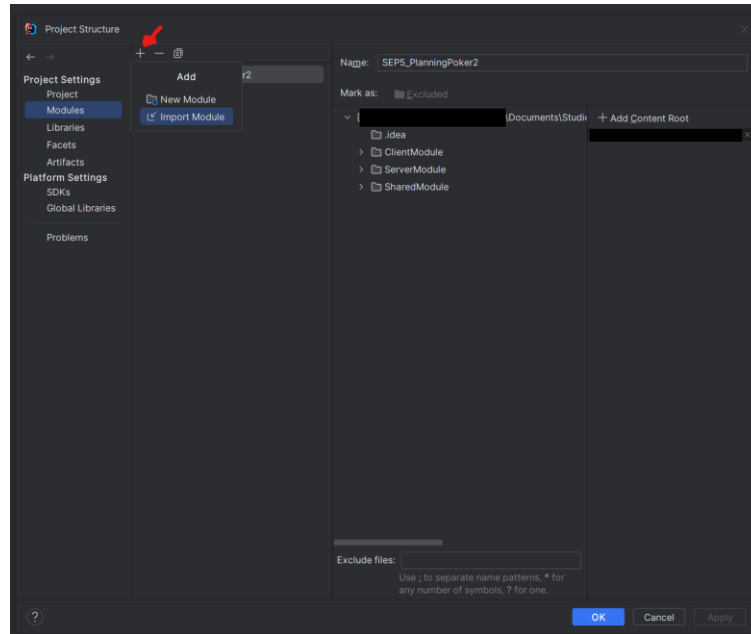


18. Navigate to the folder where you extracted the source files and select the “ClientModule” folder. Click “ok”.

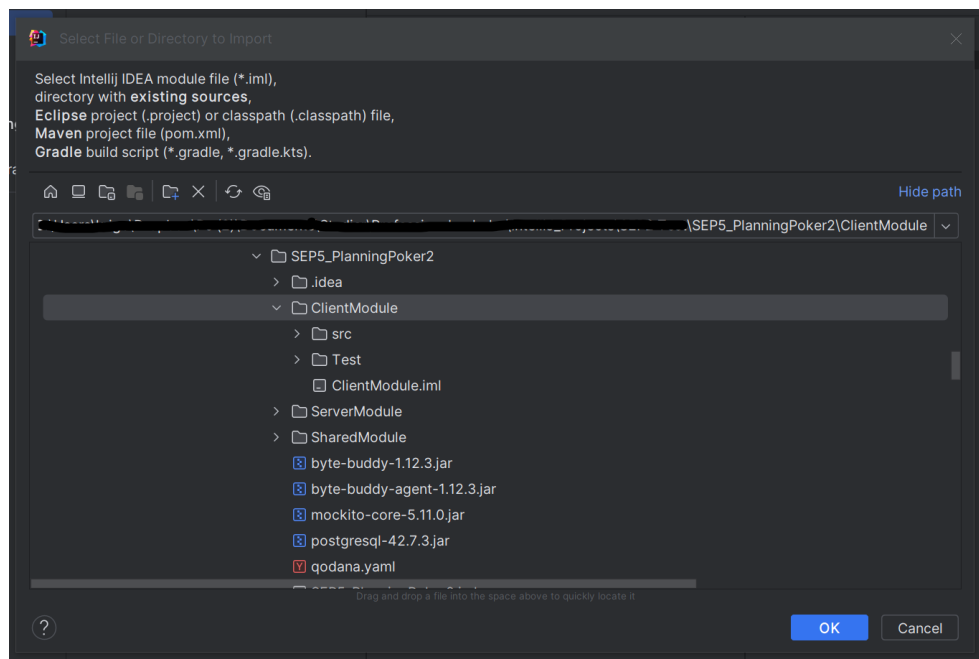





19. A popup will appear. Select “Create module from existing sources”, and click “Next”.

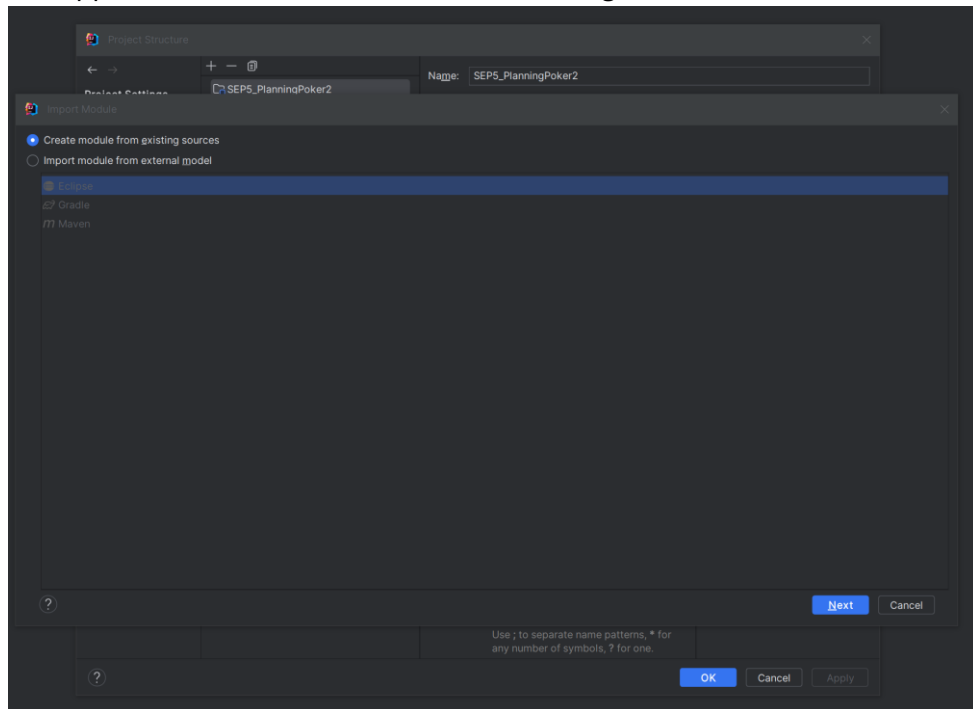


20. Select “Mark All” in the bottom right corner of the next popup, and click “Next”.

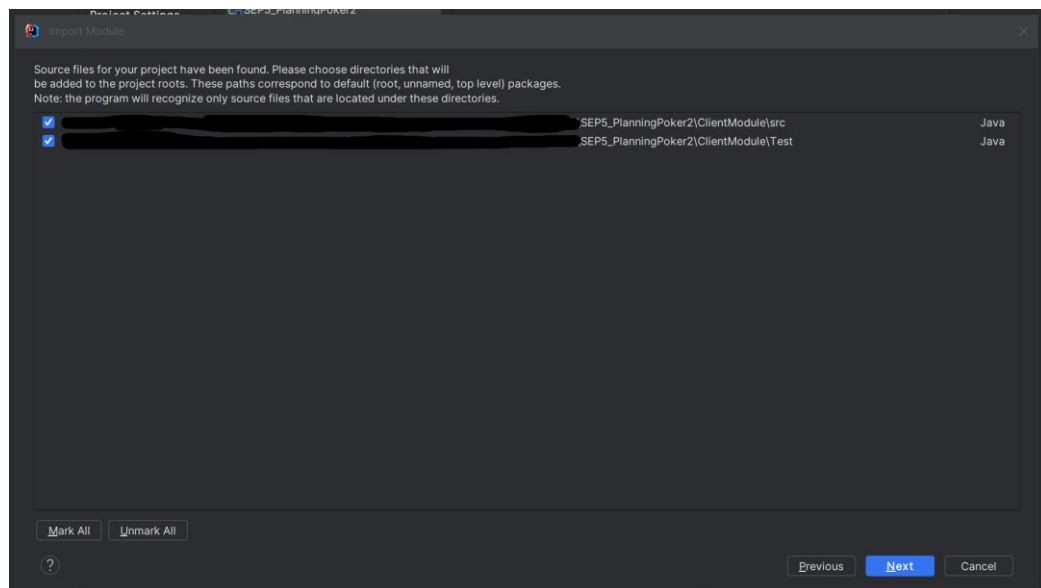


21. Select “Next” on the next popup.




22. Ensure the new module is selected on the next popup, and then click “Next”.

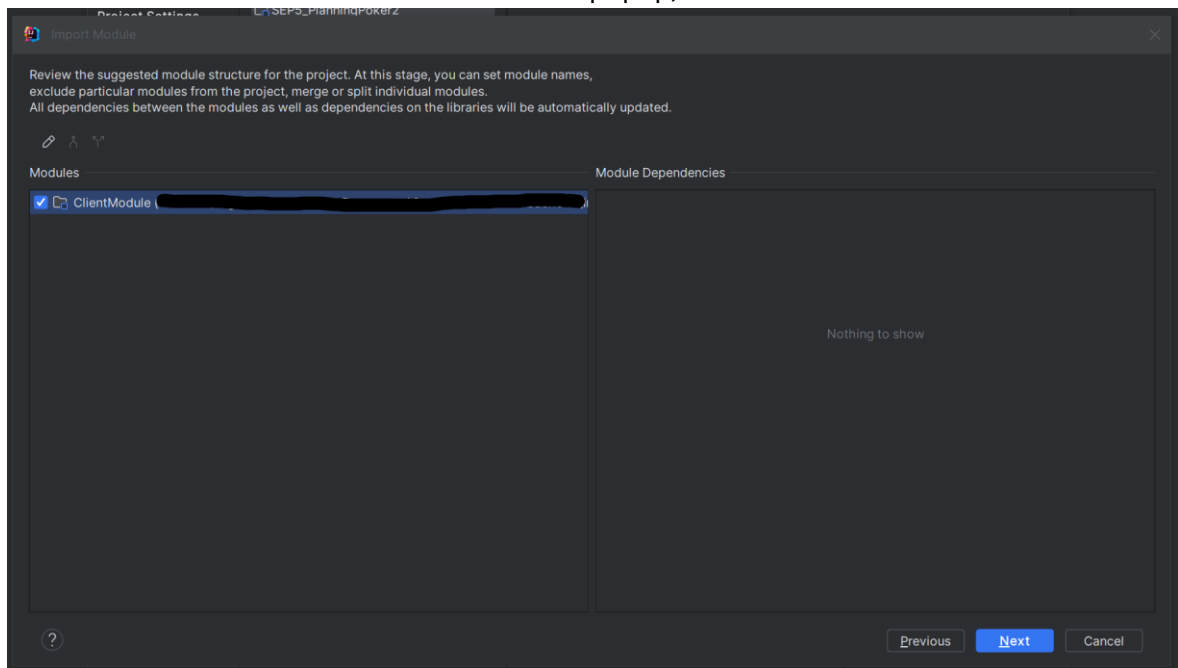


23. IntelliJ will display a warning “File Already Exists”. Select the “**Reuse**” option.

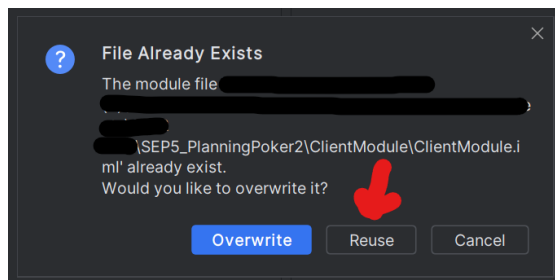


24. On the next popup a warning about “No frameworks detected” will appear. Select the “Create” option.

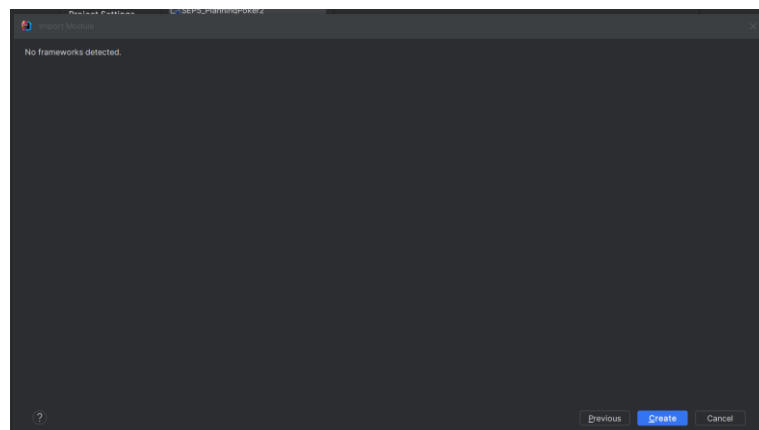





25. The Module should now be imported. Click “Apply.”

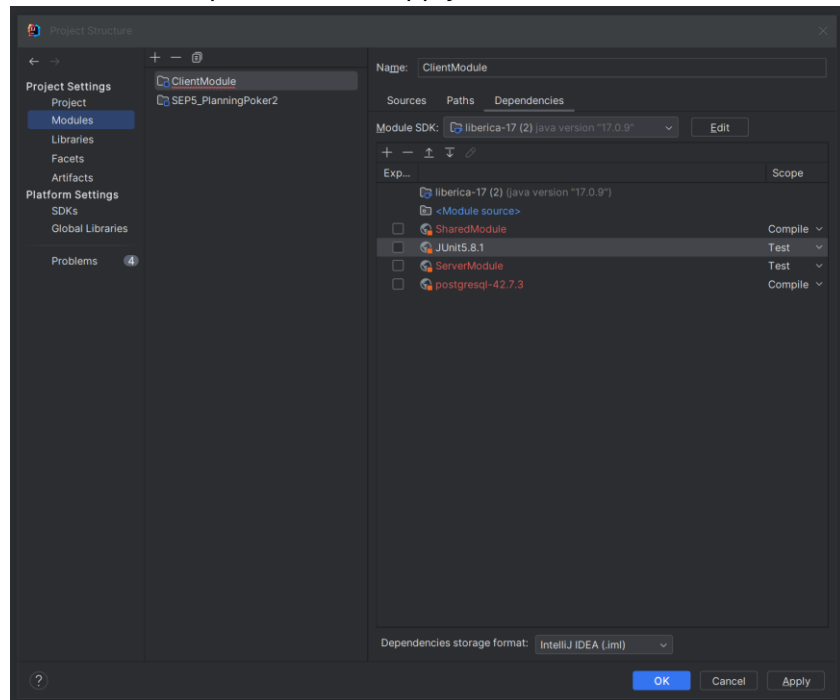


26. Repeat steps 18 – 25, but with the next Module “ServerModule” instead:

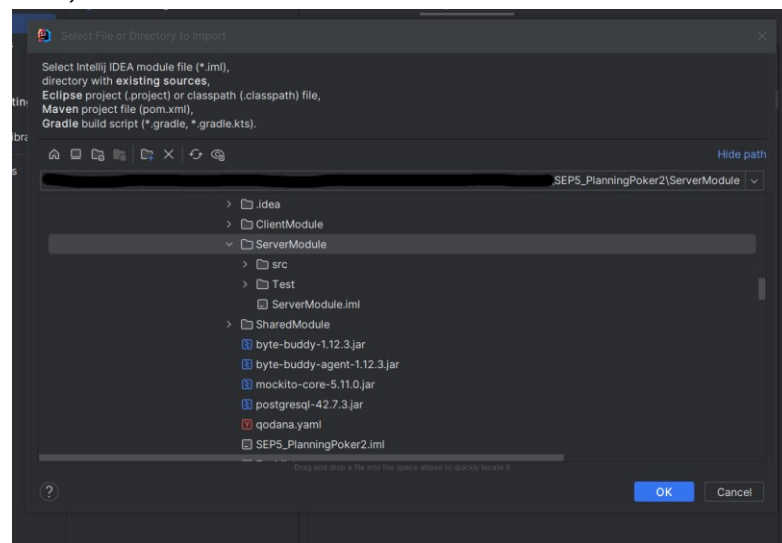





27. Repeat steps 18 – 25, but with the next Module “SharedModule” instead:

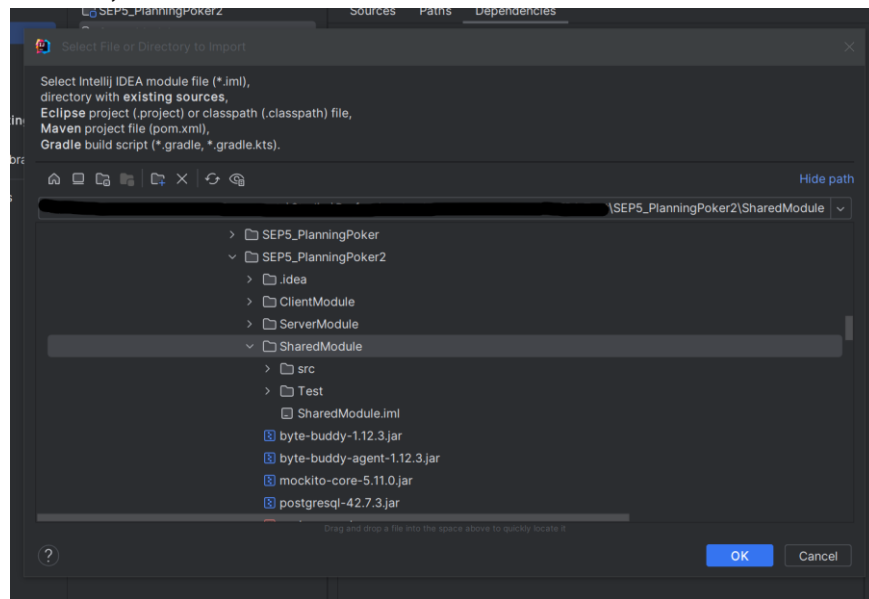


28. The 3 main Modules are now set up. But we are still missing a few dependencies. Select “ok” to close the “Project Structure” popup window.

29. Right click on the “postgresql-42.7.3.jar” file in the overview, and select “Add as Library”. Click “OK” on the next window.

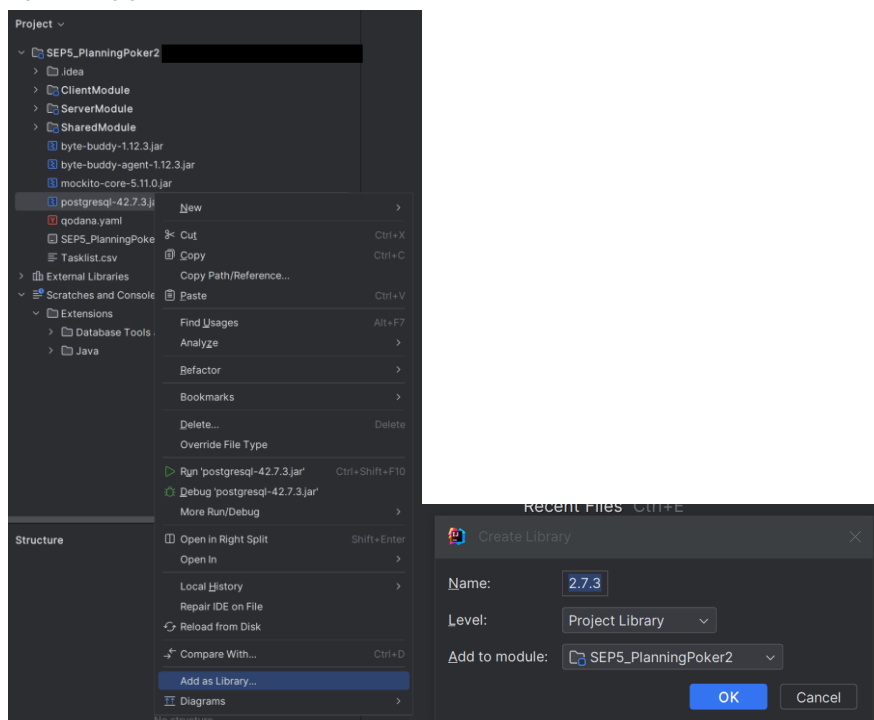



30. Do the same for “Mockito-core-5.11.0.jar”, “byte-buddy-1.12.3.jar” and “byte-buddy-1.12.3.jar”, but only add these 3 libraries to the ServerModule:

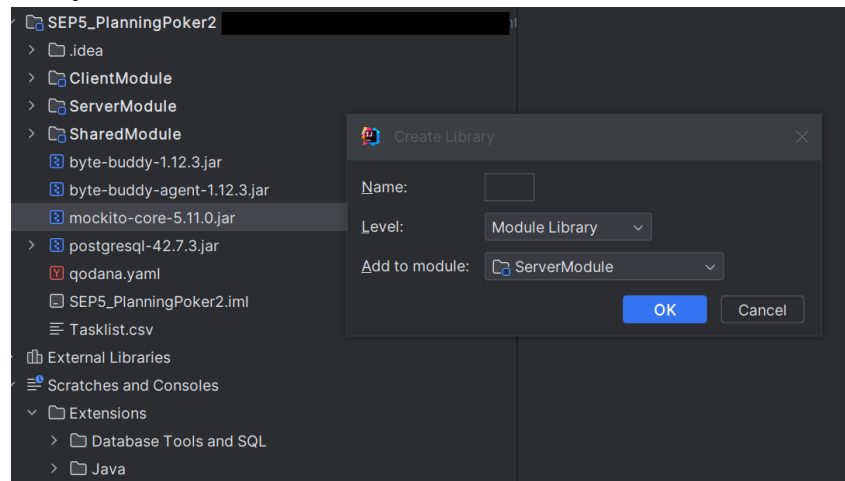

31. All Modules are now set up, and the application is ready to be launched

Database access

Warning:


Be very careful when accessing or manipulating the database, as crucial data might be unintentionally lost.

Hosting location

The system database is hosted at elephantsql.com and has a maximum limit of 20 MB.


Access

Server : ella.db.elephantsql.com (ella-01)
Region : azure-arm::westeurope
User & Default database : piefiptf
Password : gFnqYKMTdno36JWY5Fv8ZBx4oBSgXxgM
URL: postgres://piefiptf:gFnqYKMTdno36JWY5Fv8ZBx4oBSgXxgM@ella.db.elephantsql.com/piefiptf





Starting the Server

To launch the server, please find the “RunServer” class, inside ServerModule -> src -> Application. Right click on the class, and select “Run”:

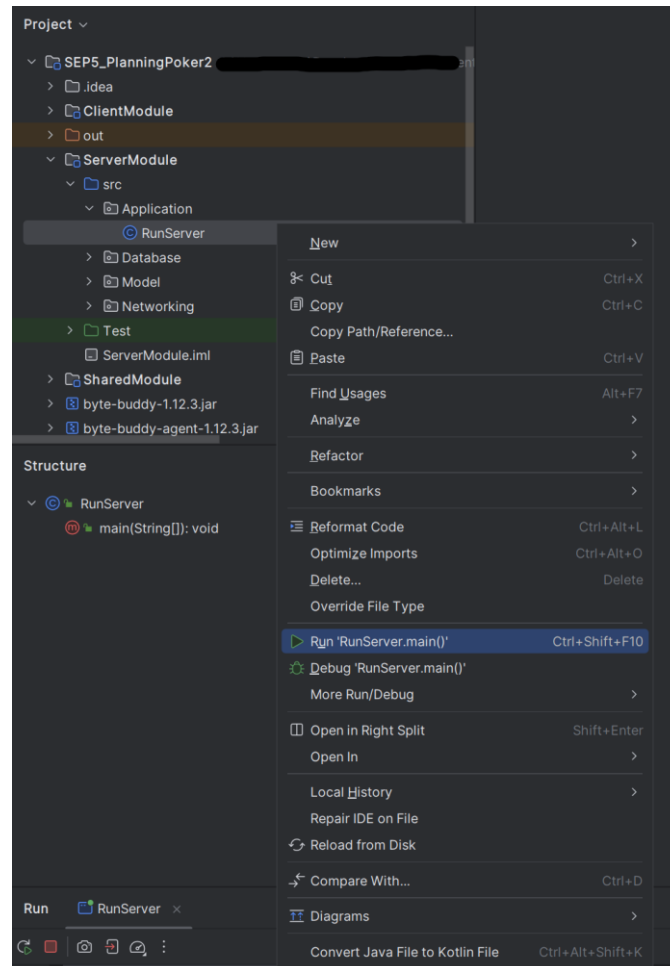


Wait for the server to finish initializing before attempt to launch any clients.

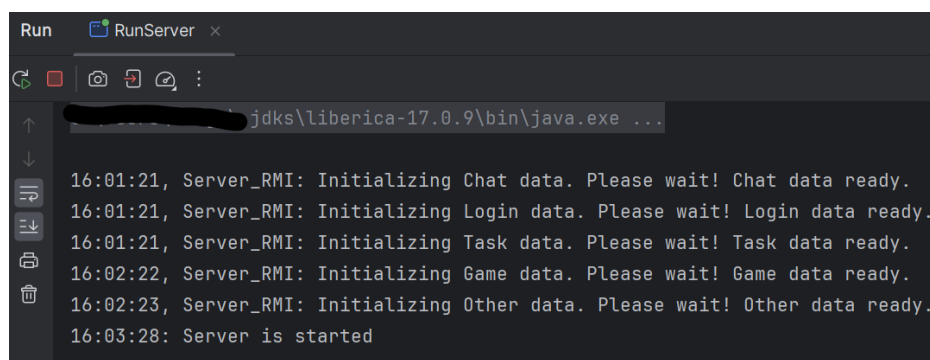



Starting the Client

To launch a client application, please find the “RunApplication” class inside the “ClientModule -> src” directory. Right click it and select “run” from the menu, to launch:

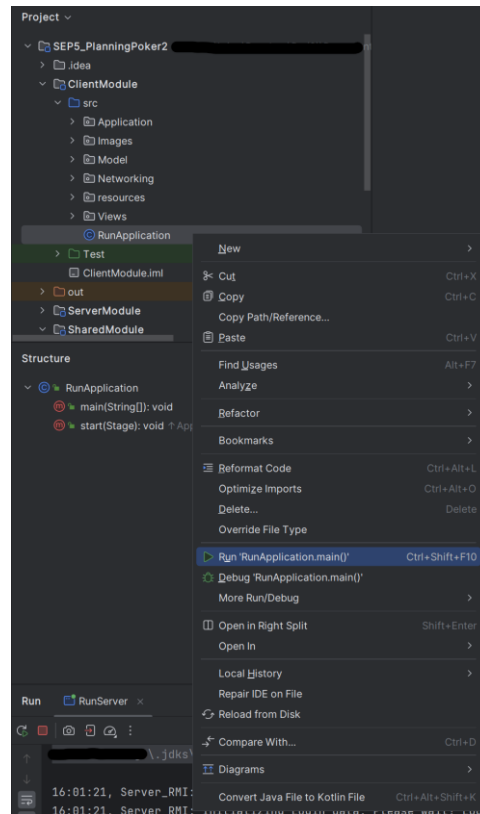

A UI will appear once the client finishes loaded. Please note that the client requires an active server connection before any UI elements will appear. Ensure that the server is up and running before launching any clients:

