HirePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:29:40

QUESTION: 1 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

A shopkeeper advertise to attract the customers, that he allows 5% discount on marked price and also gives an article as a complimentary, on purchase of every dozen articles. But he marks up his articles 20% above the cost price. What percentage profit does the shopkeeper makes on selling dozen articles?

- 5.23 %
- 5.6 %
- 14%
- 5.67%

Previous Question Next Question

HirePro

Instructions

Mangesh Shravan Dam

TIME LEFT: 00:29

1

2

3

4

5

QUESTION: 2 GROUP: **Aptitude** SECTION: **Problem Solving** Mark(s): 1

What is the probability of getting a sum 8, while throwing two dice together?

- 1/5
- 1/8
- 1/9
- 5/36

Previous Question

Next Question

Adaptive SYNC

irePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:29:29

QUESTION: 3 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

Four friends P, Q, R, and S are assigned to complete a project. P, R, and S together can complete the project in 6 days, while P and R can complete the project in 10 days. Q is 10% more efficient than S and the ratio of the efficiencies of P and R is 2:3. If Q and R individually take x and y days, respectively, to complete the work, then find x + y.

- 26.4 days
- 16.6 days
- 30.2 days
- 12.6 days

Previous Question

Next Question

HirePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:29:22

QUESTION: 4 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

Suraj is the second child of Mr. and Mrs. Anand. He is three years younger than his elder sister and two years elder than the third child of Mr. and Mrs. Anand. When Suraj was five years old, Mrs. Anand gave birth to her fourth and the last child. If the product of the present ages of the four children is equal to 46816, find the present age of Suraj.

- 14 years
- 19 years
- 16 years
- 12 years

Previous Question Next Question

HirePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:29:1

QUESTION 5 GROUP Aptitude SECTION Puzzles Mark(s): 1

In a code language, COMPANY is coded as 414141521326, how would you code CONTACT in the same language?

- 41415212421
- 41415192221
- 41415210419
- 41415192421

Previous Question Next Question

HirePro

Instructions

Mangesh Shravan Dam

TIME LEFT: 00:29

1

2

QUESTION 6 GROUP Aptitude SECTION Logical Reasoning Mark(s) 1

Direction: Study the following information and answer the questions given below.

There are five persons 'P', 'Q', 'R', 'S' and 'T'. One is football player, one is chess player and one is hockey player.

I) 'P' and 'S' are unmarried ladies and do not participate in any game.

II) None of the ladies plays chess or football.

III) There is a married couple in which 'T' is the husband.

IV) 'Q' is the brother of 'R' and is neither a chess player nor a hockey player.

Question: Who is the football player?

- P
- S
- Q
- R

Previous Question Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shravan Da

TIME LEFT: 00:29

2

3

QUESTION 7 GROUP Aptitude SECTION Logical Reasoning Mark(s) 1

Direction: Study the following information and answer the questions given below.

There are five persons 'P', 'Q', 'R', 'S' and 'T'. One is football player, one is chess player and one is hockey player.

I) 'P' and 'S' are unmarried ladies and do not participate in any game.

II) None of the ladies plays chess or football.

III) There is a married couple in which 'T' is the husband.

IV) 'Q' is the brother of 'R' and is neither a chess player nor a hockey player.

Question: Who is the chess player?

- S
- T
- P
- R

Previous Question | Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shravan

TIME LEFT: 00:

3
4
5
6

QUESTION: 8 GROUP: **Aptitude** SECTION: **Logical Reasoning** Mark(s): 1

Direction: Study the following information and answer the questions given below.

There are five persons 'P', 'Q', 'R', 'S' and 'T'. One is football player, one is chess player and one is hockey player.

I) 'P' and 'S' are unmarried ladies and do not participate in any game.

II) None of the ladies plays chess or football.

III) There is a married couple in which 'T' is the husband.

IV) 'Q' is the brother of 'R' and is neither a chess player nor a hockey player.

Question: Who is the wife of 'T'?

- P
- S
- R
- Q

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shrava

TIME LEFT: 00

4
5
6
7
8

QUESTION: 9 GROUP: **Aptitude** SECTION: **Logical Reasoning** Mark(s): 1

Direction: Study the following information and answer the questions given below.

There are five persons 'P', 'Q', 'R', 'S' and 'T'. One is football player, one is chess player and one is hockey player.

I) 'P' and 'S' are unmarried ladies and do not participate in any game.

II) None of the ladies plays chess or football.

III) There is a married couple in which 'T' is the husband.

IV) 'Q' is the brother of 'R' and is neither a chess player nor a hockey player.

Question: Which of the following is the correct group of ladies?

- P, Q and R
- Q, R and S
- P, R and S
- P, Q and S

Previous Question

Next Question

HirePro

Instructions

Mangesh Shrava

TIME LEFT: 00

5

QUESTION: 10 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

6

Direction: Study the following information and answer the questions given below.

7

There are five persons 'P', 'Q', 'R', 'S' and 'T'. One is football player, one is chess player and one is hockey player.

I) 'P' and 'S' are unmarried ladies and do not participate in any game.

8

II) None of the ladies plays chess or football.

III) There is a married couple in which 'T' is the husband.

9

IV) 'Q' is the brother of 'R' and is neither a chess player nor a hockey player.

Question: Who is the hockey player?

- S
- R
- Q
- T

Previous Question

Next Question

HirePro

Instructions

Mangesh Shrav

TIME LEFT: 00

6
7
8
9
10
1 ☆

QUESTION: **11** GROUP: **Aptitude** SECTION: **Puzzles** Mark(s): 1

What is the angle between two hands of a clock at 2:40?

- 160°
- 165°
- 170°
- 140°

Previous Question Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shra

TIME LEFT: 0

7
8
9
10
11
12 ☆

QUESTION: **12** GROUP: **Aptitude** SECTION: **Problem Solving** Mark(s): 1

The ratio of speeds of A is to B is 2 : 3 and therefore A takes 20 minutes more time than B takes. What is the ratio of time taken by A and B?

- ◯ 2 : 5
- ◯ 3 : 2
- ◯ 2 : 3
- ◯ 3 : 5

Previous Question | Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shra

TIME LEFT: 0

QUESTION: 13 GROUP: Aptitude SECTION: Data Analysis Mark(s): 1

Direction: Read the following information and answer the question given below.

The following table gives the break - up of the revenues earned by the company Soft - Soft for five different years. Figures are in Rs. Crores.

	1994 – 1995	1995 – 1996	1996 – 1997	1997 – 1998	1998 – 1999
Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In which year revenue of the hardware exports has been between 35% and 40% of the total revenue?

- 1997 - 1998 and 1994 - 1995
- 1995 - 1996 and 1996 - 1997

Previous Question | Next Question

Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In which year revenue of the hardware exports has been between 35% and 40% of the total revenue?

- 1997 - 1998 and 1994 - 1995
- 1995 - 1996 and 1996 - 1997
- 1998 - 1999 and 1995 - 1996
- 1997 - 1998 and 1998 - 1999

HirePro

Instructions

Mangesh Shrava

TIME LEFT: 00

9
10
11
12
13
14 ☆

QUESTION: 14 GROUP: Aptitude SECTION: Data Analysis Mark(s): 1

Direction: Read the following information and answer the question given below.

The following table gives the break - up of the revenues earned by the company Soft - Soft for five different years. Figures are in Rs. Crores.

	1994 – 1995	1995 – 1996	1996 – 1997	1997 – 1998	1998 – 1999
Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In how many years the total revenue of training and maintenance is less than ten percent of the total revenue?

- 3
- 4

Previous Question   Next Question

HirePro

Instructions

Mangesh Shravar

TIME LEFT: 00

9

10

11

12

3

Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In how many years the total revenue of training and maintenance is less than ten percent of the total revenue?

- 3
- 4
- 5
- 2

Previous Question

Next Question

HirePro

Instructions

Mangesh Shravar

TIME LEFT: 00

QUESTION: 15 GROUP: Aptitude SECTION: Data Analysis Mark(s): 1

10

11

12

13

4

Direction: Read the following information and answer the question given below.

The following table gives the break - up of the revenues earned by the company Soft - Soft for five different years. Figures are in Rs. Crores.

	1994 – 1995	1995 – 1996	1996 – 1997	1997 – 1998	1998 – 1999
Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In which of the following years the total hardware revenue is more than 50% of that of the software revenue in the same year?

- 1997 - 1998 and 1994 - 1995
- 1996 - 1997, 1997 - 1998 and 1998 - 1999

Previous Question Next Question

Adaptive SYNC

10

11

12

13

Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: In which of the following years the total hardware revenue is more than 50% of that of the software revenue in the same year?

- 1997 - 1998 and 1994 - 1995
- 1996 - 1997, 1997 - 1998 and 1998 - 1999
- 1995 - 1996 and 1996 - 1997
- 1994 - 1995

Adaptive SYNC

10
11
12
13
14
15
16
17

QUESTION 16 GROUP Aptitude SECTION Data Analysis Mark(s): 1

Direction: Read the following information and answer the question given below.

The following table gives the break - up of the revenues earned by the company Soft - Soft for five different years. Figures are in Rs. Crores.

	1994 – 1995	1995 – 1996	1996 – 1997	1997 – 1998	1998 – 1999
Hardware					
(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: If in 1999 - 2000 total revenue decrease by five percent over previous year and software revenue decreases to 2437 Crores, what is the approxi[...] decrease in revenue of the rest of the heads taken together?

3.3%

Previous Question
Next Question

(a) Domestic	68	54	52	66	35
(b) Exports	540	600	730	1770	1827
Software					
(a) Domestic	142	127	150	320	422
(b) Exports	1100	1200	1339	2500	2215
Peripherals	25	10	25	20	37
Training	140	106	160	240	161
Maintenance	21	19	25	92	126
Others	12	10	19	40	24
Total	2048	2126	2500	5048	4847

Question: If in 1999 - 2000 total revenue decrease by five percent over previous year and software revenue decreases to 2437 Crores, what is the approximate percenta decrease in revenue of the rest of the heads taken together?

- 3.3%
- 1.8%
- 1.0%
- 1.92%

Previous Question
Next Question

HirePro

Instructions

Mangesh Shravan Da

TIME LEFT: 00:2

10

11

12

3

QUESTION 17 GROUP Aptitude SECTION Problem Solving Mark(s): 1

From 4 officers and 8 jawans, in how many ways can a team of six to be chosen to include exactly one officer?

- 224
- 250
- 275
- 330

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shravan Da

TIME LEFT: 00:2

10

11

12

13

4

QUESTION: 18 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

A retail major has a warehouse (W) located at (16, 10) in a town having roads laid on a square grid parallel to the x and y axes. There are five retail supermarkets (M, N, O, P, Q) located respectively at (4, 4), (6, 16), (16, 24), (20, 16) and (26, 4). Which of the following is the correct ordering of the supermarkets from the nearest to the farthest from the warehouse?

- Q, M, N, O
- P, O, Q, N
- P, Q, M, O
- P, O, M, N

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shravan Damr

TIME LEFT: 00:28:

QUESTION: 19 GROUP: **Aptitude** SECTION: **Problem Solving** Mark(s): 1

The average runs scored by a batsman before the Ranji trophy series is 25. In the Ranji trophy of 8 matches, he scored 380 runs. After this series his average runs become 2
After the Ranji trophy, he played 2 matches in the world cup series, his average runs becoming 29. Find the average runs he scored in the world cup series.

- 48
- 42
- 59
- 34

Previous Question Next Question

Adaptive SYNC

ePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:27:53

QUESTION: 20 GROUP: Aptitude SECTION: Puzzles Mark(s): 1

Abhi travelled 10 km to the south and then turned right and travelled 5 km. Then traveled 10 km towards north and turned right and traveled 15 km. In which direction is he with respect to his initial position?

- West
- North
- East
- South

Previous Question Next Question

irePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:29:22

QUESTION: 21 GROUP: Programming Basics SECTION: Data Structures Basics Mark(s): 1

If each element of a two-dimensional array A[X][Y], where the index values of X and Y range from -5 to +5, requires one memory cell, how many memory cells are required to store the array?

- 100
- 121
- 36
- 110

qualcomm 112047-13273377

Previous Question

Next Question

HirePro

Instructions

Mangesh Shravan Da

TIME LEFT: 00:2

21

QUESTION: 22 GROUP: **Programming Basics** SECTION: **Computer Architecture** Mark(s): 1

Consider the instruction given below:

```
STORE 9, R19
```

Which one of the notations given in options is the correct meaning of the given instruction?

- 19
- R9, 9, 19
- R19 = = 9
- M[9] = R19

Previous Question | Next Question

HirePro

Instructions

Mangesh Shrava

TIME LEFT: 00

21

22

23

24

QUESTION: 23 GROUP: **Programming Basics** SECTION: **C Programming** Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    char *p;
    p = "Hello";
    printf("%c\n", *&*p);
    return 0;
}
```

- H
- Hello
- Compile time error
- e

Previous Question   Next Question

21
22
23 ☆
24
25
26
27

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    char *p;
    p = "Hello";
    printf("%c\n", *&*p);
    return 0;
}
```

- H
- Hello
- Compile time error
- e

Previous Question
Next Question

Adaptive SYNC

HirePro

Instructions

Mang

TIME

21

22

23

24

25

26

27

QUESTION: 24 GROUP: **Programming Basics** SECTION: **Data Structures Basics** Mark(s): 1

The elements 'p', 'a', 'e', 'd' are sorted using selection sort and in the pass two elements will be PUSHed to stack of size 3. Which one of the element given in

first from the stack?

- e
- p
- a
- d

qualcomm 112047-13273377

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Shravan Da

TIME LEFT: 00:2

QUESTION: 25 GROUP: **Programming Basics** SECTION: **Operating System Fundamentals** Mark(s): 1

The process of transferring a block of program code or other data into internal memory, replacing what is already stored is know as:

- *Swapping*
- *Paging*
- *Overlaying*
- *Chain loading*

Previous Question Next Question

HirePro

Instructions

Mangesh Sh

TIME LEFT:

21

22

23

4

QUESTION: 26 GROUP: **Programming Basics** SECTION: **C Programming** Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    int y = 4, r;
    r = y >> 1;
    if ( r == 0)
        printf("Pass");
    else if (r == 2)
        printf("Fail");
    else
        printf("Not decided");
    return 0;
}
```

Not decided

Previous Question Next Question

21

22

23

24

```
int y = 4, r;
r = y >> 1;
if ( r == 0)
    printf("Pass");
else if (r == 2)
    printf("Fail");
else
    printf("Not decided");
return 0;
}
```

- Not decided
- Pass
- Fail
- Compile time error

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh

TIME LEF

22

23

24

5

QUESTION: 27 GROUP: **Programming Basics** SECTION: **Operating System Fundamentals** Mark(s): 1

In which of the below given model(s) is data exchanged in smaller amounts?

I) Message Passsing

II) Shared memory

- Neither (I) nor (II)
- Only (I)
- Both (I) and (II)
- Only (II)

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

23
24
25
26
27
28
29
30
31
32

QUESTION 28 GROUP Programming Basics SECTION C Programming Mark(s) 1

What will be the output of the program given below?

```
#include <stdio.h>
int func(char a, char b)
{
    printf("%d  %d  ", ~a++ && ++b, ~b);
    return a;
}
int main(void)
{
    int a = 10;
    char b = 0xa;
    float c = 10.0;
    if(func(a, b) || c != 1)
        func(b, c);
    return 0;
}
```

Previous Question

HirePro

Instruction

23

24

25

26

27

28

```
}
int main(void)
{
    int a = 10;
    char b = 0xa;
    float c = 10.0;
    if(func(a, b) || c != 1)
        func(b, c);
    return 0;
}
```

- 1 -11 1 -11
- 1 0 1 0
- 1 -11
- Compile time error

Previous Question

HirePro

Instructions

Mangesh

TIME LEF

24

25

26

7

QUESTION: 29 GROUP: **Programming Basics** SECTION: **Computer Architecture** Mark(s): 1

Convert the below given hexadecimal number into its binary equivalent:

$(7D9FAB)_{16}$

- $(0111\ 1101\ 1001\ 1111\ 1010\ 1011)_{10}$
- $(1100\ 0011\ 0001\ 0110\ 1011\ 1000)_2$
- $(0111\ 0100\ 1001\ 0110\ 0001\ 0010)_2$
- $(0111\ 1101\ 1001\ 1111\ 1010\ 1011)_2$

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh

TIME LEF

25

26

27

QUESTION: 30 GROUP: **Programming Basics** SECTION: **Data Structures Basics** Mark(s): 1

Which of the statement(s) is/are incorrect about stacks?

I) Merging of stacks is possible in O(1) time only; when a stack is implemented using array.
II) By using only ADT functions a stack can be reversed using recursion.

- Both (I) and (II)
- Neither (I) nor (II)
- Only (II)
- Only (I)

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh

TIME LEF

26

27

28

9

QUESTION 31 GROUP Programming Basics SECTION Data Structures Basics Mark(s) 1

A perfect binary tree has 15 complete nodes. What is the level at which 32nd item will be inserted, if root is at level 0?

- 6
- 5
- 7
- 4

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh

TIME LEF

27

28

29

QUESTION: 32 GROUP: Programming Basics SECTION: Error Finding Mark(s): 1

The given code attempts to print the sum of two numbers. Identify the error in the code (if exists), and how can it be fixed?

```
#include <stdio.h>

int main() {
    float num1 = 5.5;
    float num2 = 6.5;
    float sum;
    sum = num1 + num2;
    printf("The sum is: %d\n", sum);
    return 0;
}
```

- Incorrect data type for sum; Fix: Change the data type of sum to double
- Incorrect format specifier; Fix: Change "%d" to "%f" in the printf statement
- Incorrect data type for num1 and num2; Fix: Change the data type to int

Previous Question

Next Question

Adaptive SYNC

QUESTION 33 GROUP Programming Basics SECTION C Programming Mark(s) 1

If the statement "printf("%d", ting(x, y, z));" is placed in place of //blank in the program given below, then what will be the output?

```
#include <stdio.h>
static int v, n;

int main()
{
    int x, *y, **z;
    x = 'A';
    y = &x;
    z = &y;
    //blank
    return 0;
}

int ting(int a, int *b, int **c)
{
    **c += a == 2;
```


Adaptive SYNC

29
30
31
32
33
34
35
6
7

```
    return 0;
}

int ting(int a, int *b, int **c)
{
    **c += a == 2;
    *b += 3;
    n += 2 << v;
    return n || v || b;
}
```

- This program will show run time error.
- This program will show compile time error.
- It will print the output as : 1.
- It will print some garbage value.

Previous Question
Next Questio

HirePro

Instructions

Mangesh

TIME LEFT

29

30

31

QUESTION: 34 GROUP: **Programming Basics** SECTION: **Operating System Fundamentals** Mark(s): 1

What is the average waiting time for the Round Robin scheduling with the quantum size of 20 for which the Burst time are given below in the snapshot?

Processes	Burst time
P1	84
P2	27
P3	69
P4	35

- 235 ms
- 115 ms
- 166 ms
- 215 ms

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

30

31

32

3

4

5

QUESTION: 35 GROUP: **Programming Basics** SECTION: **Error Finding** Mark(s): 1

The following C code segment calculates the sum of two integers and prints the sum. Identify any potential e

```
#include <stdio.h>

int main()
{
    int x = 10;
    int y = 20;
    int sum;
    sum = x + y;
    printf("The sum of %d and %d is %d\n", x, y);
    return 0;
}
```

- Incorrect format specifier; Fix: Change '%d' to '%f' in the printf statement
- No Error

Previous Question Next Question

HirePro

Instructions

Mangesh

TIME LEF

30

31

2

QUESTION: 36 GROUP: **Programming Basics** SECTION: **Computer Architecture** Mark(s): 1

Which of the circuit(s) given below use(s) inverters in their logic diagram?

I) Parallel adder

II) Parallel subtractor

- Neither (I) nor (II)
- Only (I)
- Both (I) and (II)
- Only (II)

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh Sh

TIME LEFT:

QUESTION: 37 GROUP: **Programming Basics** SECTION: **C Programming** Mark(s): 1

What is the meaning of the statement given below?

```
Char *ipointer = NULL;
```

- ipointer is pointing to the value "zero".
- ipointer is pointing to a garbage value.
- It means a invalid declaration.
- ipointer is pointing to nothing.

Previous Question

Next Question

HirePro

Instructions

Mangesh Sh

TIME LEFT:

QUESTION: 38 GROUP: **Programming Basics** SECTION: **Computer Architecture** Mark(s): 1

If a logic gate accepts 3 input values, how many input states are feasible to the logic gate in all?

- 4
- 8
- 2
- 6

Previous Question

Next Question

Adaptive SYNC

HirePro

Instructions

Mangesh S

TIME LEFT:

QUESTION 39 GROUP Programming Basics SECTION Computer Architecture Mark(s) 1

What will be the result of converting the given number to octal format?

$(9ED)_{16}$

- $(4776)_8$
- $(4755)_8$
- $(4765)_8$
- $(4855)_8$

Previous Question

Next Question

HirePro

Instructions

Mangesh Si

TIME LEFT:

QUESTION: 40 GROUP: **Programming Basics** SECTION: **C Programming** Mark(s): 1

In the program given below, what could be placed in the place of //Fill here...! to print the value 12 -96 -64?

```
#include <stdio.h>
main()
{
    char a = 12;
    char b = 10;
    char c = a | b;

//Fill here.....!

printf("%d  %d  %d  ", a, b, c);
}
```

- c = c >> b – 5;
  a = a >> b = b << a/3;

- c = c << b – 5;

Previous Question

Next Question

HirePro

Instructions

Mangesh Sh

TIME LEFT:

```
    char c = a | b;

    //Fill here.....!

    printf("%d  %d  %d  ", a, b, c);
}
```

- c = c >> b − 5;
  a = a >> b = b << a/3;
- c = c << b − 5;
  a = a >> (b = b << a/3);
- c = c >> b − 5;
  a = a >> (b = b << a/3);
- c = c << b − 5;
  a = a >> b = b << a/3;

Previous Question Next Question

Adaptive SYNC

HirePro

Instructions

41 42 43 44 45 46 47 48 49 50 51

QUESTION: 41 GROUP: **Computer Science** SECTION: **Operating Systems** Mark(s): 1

Which of the below given is/are file access method(s)?

I) Direct access

II) Indexed sequential access

- Both (I) and (II)
- Only (I)
- Only (II)
- Neither (I) nor (II)

Previous Question Next Question

HirePro

Instructions

41
42
43
44
45
46
47
48
49
50
51

QUESTION: 42 GROUP: **Computer Science** SECTION: **C programming** Mark(s): 1

What will be the value of the variable "x" after executing the below given statements?

```
unsigned int x = 240;
x = (x & 1) ^ (x | 1);
```

- 242
- 241
- Compile time error
- 240

Previous Question Next Question

144Hz / Adaptive SYNC

HirePro

Instructions

41

42

43

44

45

46

47

48

49

50

51

QUESTION: 43 GROUP: **Computer Science** SECTION: **C programming** Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int call(int s);
int main()
{
    int a = 2, b = 3;
    a = a + b;
    b = a - b;
    a = a - b;
    call(a);
    return 0;
}

int call(int s)
{
    printf("%d", s ^ 2);
}
```

Previous Question

Next Question

HirePro

Instructions

41
42
43
44
45
46
47
48
49
50
51

```
        b = a - b;
        a = a - b;
        call(a);
        return 0;
    }

int call(int s)
{
    printf("%d", s ^ 2);
}
```

- 3
- 2
- 14
- 1

Previous Question

Next Question

HirePro

Instructions

41
42
43
44
45
46
47
48
49
50
51

QUESTION: 44 GROUP: **Computer Science** SECTION: **Computer Architecture 1** Mark(s): 1

Which one of the given options is the correct form after simplifying the expression given below?

B'D + BC'D + C'D

- B' + C'D
- BD + C'D
- B'D + C'D
- B' + B + C'

Previous Question Next Question

144HZ / Adaptive SYNC

HirePro

Instructions

41
42
43
44
45
46
47
48
49
50
51

QUESTION 45 GROUP **Computer Science** SECTION **Operating Systems** Mark(s) 1

Consider the steps given below:

I) Main thread creation.

II) Process Control Block (PCB) creation.

III) Address space creation for the process.

IV) Mapping the image to the virtual address space of that process.

V) Load the executable file.

What is the correct order of the steps for the process creation?

- (V), (IV), (III), (II) and (I)
- (II), (III), (I), (IV) and (V)
- (I), (II), (III), (IV) and (V)
- (V), (III), (II), (I) and (IV)

Previous Question Next Question

HirePro

Instructions

41
42
43
44
45
46
47
48
49
50
51
52

QUESTION: 46 GROUP: **Computer Science** SECTION: **OOPS** Mark(s): 1

Consider the diagram given below:

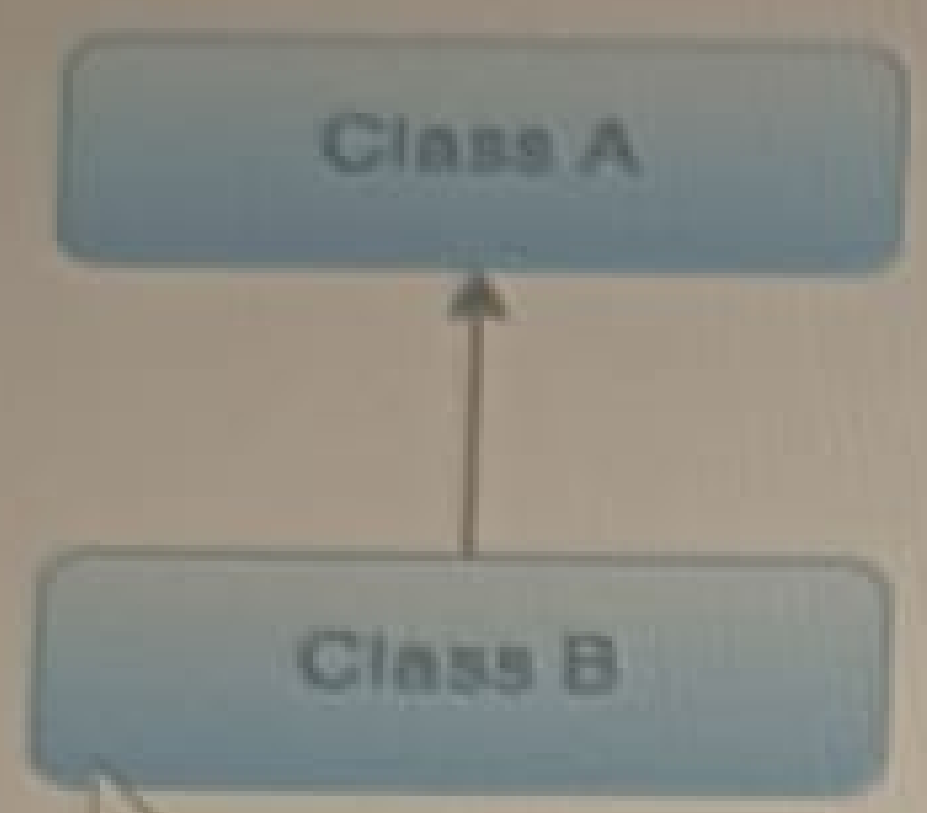

Which type of inheritance is depicted by the above diagram?

- Single Inheritance
- Multilevel Inheritance
- Multiple Inheritance
- Hybrid Inheritance

Previous Question Next Question

HirePro

Instructions

42
43
44
45
46
47
48
49
50

QUESTION: 47 GROUP: **Computer Science** SECTION: **C programming** Mark(s): 1

What will be the output when the code snippet given below is executed?

```
char *sentence = "Changing Experience";
printf("%d", printf("%s", sentence));
```

- 19
- Changing Experience19
- C18
- Changing Experience

Previous Question Next Question

HirePro

Instructions

43
44
45
46
47
48
49
50
51
52
53

QUESTION: **48** GROUP: **Computer Science** SECTION: **Data Structures** Mark(s): 1

Which of the conditions given in options depicts only one element can be inserted to the queue of size 4?

- FRONT = REAR = 1
- FRONT = 2 REAR = 3
- FRONT = 0 REAR = 1
- FRONT = REAR = 2

Previous Question

Next Question

HirePro

Instructions

44
45
46
47
48
49
50
51
2
3

QUESTION: **49** GROUP: **Computer Science** SECTION: **Data Structures** Mark(s): 1

What will be the evaluated value of the postfix notation given below?

32 108 9 8 * 6 / 6 * - + 2 + 1 ^

- 68
- 70
- 4900
- 100

Previous Question Next Question

HirePro

Instructions

45

46

47

48

49

50

QUESTION: 50 GROUP: **Computer Science** SECTION: **C programming** Mark(s): 1

What will be the output of the program given below?

```
#include<stdio.h>
int f (int x, int *py, int **ppz)
{
    int y, z;
    **ppz += 1;
    z = **ppz;
    *py += 2;
    y = *py;
    x += 3;
    return x + y + z;
}
int main()
{
    int c, *b, **a;
    c = 4; b = &c; a = &b;
    printf("%d", f(c, b, a));
    return 0;
}
```

19

Previous Question

Next Question

HirePro

Instructions

45
46
47
48
49
50
51
52
3
4
5

```
    z = **ppz;
    *py += 2;
    y = *py;
    x += 3;
    return x + y + z;
}
int main()
{
    int c, *b, **a;
    c = 4; b = &c; a = &b;
    printf("%d", f(c, b, a));
    return 0;
}
```

- 19
- 18
- 22
- 21

Previous Question

Next Question

HirePro

Instructions

46
47
48
49
50
51
52
53
54
55
56
57

QUESTION: 51 GROUP: **Computer Science** SECTION: **Algorithms** Mark(s): 1

What will be the return value of the function given below if it is called as display(5)?

```
int display(int i)
{
    int k, s = 1;
    if (i == 0)
        return 0;
    for (k = 1; k > s; k = 2 * k);
        (0);
    return s;
}
```

- -1
- 0
- 1

Previous Question Next Question

44Hz / Adaptive SYNC

ASUS

HirePro

Instructions

46

47

48

49

50

51 ☆

52

53

54

55

56

57

```
int display(int i)
{
    int k, s = 1;
    if (i == 0)
        return 0;
    for (k = 1; k > s; k = 2 * k);
        (0);
    return s;
}
```

- -1
- 0
- 1
- 2

Previous Question

Next Question

HirePro

Instructions

47
48
49
50
51
52
53
54
55
56
57
58

QUESTION: 52 GROUP: **Computer Science** SECTION: **Computer Architecture 1** Mark(s): 1

Which of the addressing modes given below feature the advantage of 'no memory reference' except the fetching of i

I) Stack
II) Direct
III) Register
IV) Indirect
V) Register Indirect

- Only (I), (III) and (V)
- Only (I) and (II)
- Only (I) and (III)
- Only (II), (III) and (IV)

Previous Question Next Question

HirePro

Instructions

48
49
50
51
52
53
54
55
56
57
58
59

QUESTION: 53 GROUP: **Computer Science** SECTION: **Operating Systems** Mark(s): 1

Which of the given below statement(s) is/are not true regarding memory management?

I) Memory management refers to management of primary memory.

II) Memory management refers to management of secondary memory.

- Only (I)
- Neither (I) nor (II)
- both (I) and (II)
- Only (II)

Previous Question Next Question

HirePro

Instructions

49
50
51
52
53
54
55
56
57
58
59
60

QUESTION: 54 GROUP: Computer Science SECTION: C programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main(void)
{
    char a = -128;
    char b = 128;
    char c = 64;
    printf("%d  ", b << 1);
    printf("%d  ", a << 1);
    printf("%d  ", c << 2);
    return 0;
}
```

- 256 256 256
- -256 -256 256

Previous Question Next Question

49 50 51 52 53 54 55 56 57 58 59 60

```
int main(void)
{
    char a = -128;
    char b = 128;
    char c = 64;
    printf("%d  ", b << 1);
    printf("%d  ", a << 1);
    printf("%d  ", c << 2);
    return 0;
}
```

- 256 256 256
- -256 -256 256
- -256 256 256
- 0 0 0

Previous Question

Next Question

HirePro

Instructions

Mangesh Shravan Damre

TIME LEFT: 00:27:36

QUESTION: 55 GROUP: **Computer Science** SECTION: **Computer Architecture 1** Mark(s): 1

The content of a 4 – bit register is initially 1101. The register is shifted 2 times to the right with the serial input being 1011101. What is the content of the register after each shift?

- 1001, 1001
- 0001, 1000
- 1101, 1011
- 1110, 0111

Previous Question Next Question

HirePro

Instructions

50
51
52
53
54
5

QUESTION: **56** GROUP: **Computer Science** SECTION: **OOPS** Mark(s): 1

Which of the statement(s) given below is/are true?

I) A constructor must have the same name as the class within which it is defined, however this is not necessary for a method.
II) A constructor does not have any return type while a method can have a return type.
III) A constructor is called only once during object creation, while a method can be called any number of times.

- Only II
- Only I
- Only III
- All I, II and III

Previous Question

Next Question

HirePro

Instructions

50
51
52
53
54
55
56
57
58
59

QUESTION: 57 GROUP: **Computer Science** SECTION: **OOPS** Mark(s): 1

Which of the below given statement(s) is/are true about "Class Modifiers"?

I) An abstract class can have both abstract and nonabstract methods.

II) The first concrete class to extend an abstract class must implement all of its abstract methods.

- Only (I)
- Only (II)
- Both (I) and (II)
- Neither (I) nor (II)

Previous Question

Next Question

HirePro

Instructions

50
51
52
53
54
55
6
7

QUESTION: 58 GROUP: **Computer Science** SECTION: **C programming** Mark(s): 1

What will be the output when the statements given below are executed?

```
int num = 221;

num ^= 2 ^ (num - 1) | num & 4 << 2;
```

- 8
- 5
- 0
- 3

Previous Question

Next Question

HirePro

Instructions

QUESTION: 59 GROUP: Computer Science SECTION: C programming Mark(s): 1

50

51

52

53

54

55

56

What one of the given options is correct about the program given below?

```
#include <stdio.h>
int main()
{
    int *ptr = "dfghci";
    int **p = &ptr;
    ++**p++;
    printf("%d", --*++*p);
    return 0;
}
```

- It will show compile time error.
- It will print : f
- It will print : g

Previous Question Next Question

HirePro

Instructions

50
51
52
53
54
55
56
7
8
9 ☆

```
#include <stdio.h>
int main()
{
    int *ptr = "dfghci";
    int **p = &ptr;
    ++**p++;
    printf("%d", --*++*p);
    return 0;
}
```

- It will show compile time error.
- It will print : f
- It will print : g
- It will show a warning message.

Previous Question

Next Question

4HZ / Adaptive SYNC

HirePro

Instructions

50
51
52
53
54
55
56
57
58
59
60

QUESTION 60 GROUP Computer Science SECTION Data Structures Mark(s) 1

Consider an array 'T' as given below.

T: 76 23 09 78 91 28 36

What will be the array after three passes of bubble sort if T is sorted in ascending order?

- 09 28 23 36 76 78 91
- 28 23 09 36 76 78 91
- 23 09 28 36 76 78 91
- 09 23 28 36 76 78 91

Previous Question

Next Question