

PASSAGE

The delivery charges for goods bought from ABC Company are decided according to the following procedure. The customers

1. are divided into two categories:
 - a. those who have a sales region code of 10 or above
 - b. those who have a sales region code of less than 10;
2. must have bought goods worth \$500 or more in the previous month;
3. must not have dealership of any other similar company;
4. must not have been provided bulk discount before;
5. must have been provided a special discount of 5% or less than that in the previous dealings;
6. must have regularly ordered for more than three years.

However, if the customer

- a. fulfills all the conditions except (2), and if the sales region code is less than 10, delivery charges of \$10 would be levied. Delivery charges of \$8 would be levied for a code more than 10;
- b. fulfills all the conditions except (3), and if the sales region code is less than 10, delivery charges of \$5 would be levied. Delivery charges of \$12 would be levied for a code more than 10;
- c. does not fulfill two or more of the conditions stated above, then s/he would have to pay delivery charges of \$30 regardless of the sales region code.

Does the customer need to pay delivery charges? (The case is presented on July 12, 2011.)

There are two cases based on the given set of conditions. Take a decision for both the cases and choose the correct option for each.

Jacob is a customer whose sales region code is 14. He bought goods worth \$150 from ABC Company in June. He is not a dealer for any other similar company. He has never been provided any bulk discount or special discount.

OPTIONS

The customer need not pay any delivery charges

The customer would have to pay \$30 as delivery charges

The customer would have to pay \$10 as delivery charges

The customer would have to pay \$8 as delivery charges

Insufficient data

SUBMIT ANSWER

PASSAGE

A manufacturing company produces 8 products in its 4 subdivisions headed by Alan, Betty, Cathy and Diana. Mixer, Grinder, Juicer, Blender, Water Pump, Iron, Heater and Geyser are the eight products. Each subdivision produces two products and no two divisions manufacture the same product. Diana's subdivision produces Geyser and Cathy's subdivision produces Water Pumps. Mixer and Iron are manufactured in the divisions headed by Alan and Betty respectively. Mixer and Blender are not manufactured in the same subdivision.

Refer to the given puzzle. There are 4 questions based on this puzzle. Answer the questions based on the given information.

If Mixer and Juicer are produced in the same subdivision, then what is the number of ways in which products can be produced in pairs in the four subdivisions?

OPTIONS

3

4

5

6

SUBMIT ANSWER

- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24

SHLamazon

15:56

PASSAGE

A manufacturing company produces 8 products in its 4 subdivisions headed by Alan, Betty, Cathy and Diana. Mixer, Grinder, Juicer, Blender, Water Pump, Iron, Heater and Geyser are the eight products. Each subdivision produces two products and no two divisions manufacture the same product. Diana's subdivision produces Geyser and Cathy's subdivision produces Water Pumps. Mixer and Iron are manufactured in the divisions headed by Alan and Betty respectively. Mixer and Blender are not manufactured in the same subdivision.

Refer to the given puzzle. There are 4 questions based on this puzzle. Answer the questions based on the given information.

If the subdivision that manufactures Mixer cannot manufacture Juicer, then which of the given statements is true?

OPTIONS

Water Pump and Blender are produced in one subdivision.

The subdivision which produces Mixer also produces either Heater or Grinder.

Grinder and Geyser are produced in one subdivision.

Iron and Juicer are produced in one subdivision.

SUBMIT ANSWER

- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24



Analyze the given number series. Identify the pattern and select the missing number.

2, 3, 7, 8, 13, 14, ____

OPTIONS

24

21

18

20

SUBMIT ANSWER

Read the passage carefully and select the option that can be inferred from it.

Every organization faces some problems at all levels. The complications at senior levels are resolved with precision. However, information about serious problems at lower levels is progressively lightened and distorted as it goes up each step in the management hierarchy. Chief executives get the information about the major issues at lower levels through their subordinates.

OPTIONS

Generally, subordinates do not share their problems with senior officials.

Problems at higher levels of organization hierarchy are more complex than those at the lower levels.

Chief executives are less informed about problems at lower levels than their subordinates at those levels.

Problem solving ability is more important at senior level than it is at lower levels of management hierarchy.

SUBMIT ANSWER

Read the passage carefully and select the option that can be inferred from it.

Buyme and INXsell are similar to each other based on the fact that they enable people to buy products online. However, Buyme allows buying and selling of second hand products as well and INXsell does not. A person can sell his/her book, bike or treadmill on this website at the best possible price. The seller sets the lowest price for a product and potential buyers bid on the product. The one with the highest bid at the end of the auction has to buy the product at the quoted price. Legal action can be taken against the bidder if he/she refuses to buy the product after that. The site, however, doesn't provide any warranty for the products auctioned on it. INXsell enables buying of new products from the inventory of the organizations to which the product belongs.

OPTIONS

Both Buyme and INXsell are websites for online buying and selling.

Books, bikes and treadmills are the only second hand items that can be auctioned on Buyme.

The only difference between Buyme and INXsell is that Buyme allows buying of second hand products as well.

The lowest price of a product being sold on Buyme can be as low as zero.

It is mandatory for a person to buy the product if his/her bid is the highest.

SUBMIT ANSWER

PASSAGE

A manufacturing company produces 8 products in its 4 subdivisions headed by Alan, Betty, Cathy and Diana. Mixer, Grinder, Juicer, Blender, Water Pump, Iron, Heater and Geyser are the eight products. Each subdivision produces two products and no two divisions manufacture the same product. Diana's subdivision produces Geyser and Cathy's subdivision produces Water Pumps. Mixer and Iron are manufactured in the divisions headed by Alan and Betty respectively. Mixer and Blender are not manufactured in the same subdivision.

Refer to the given puzzle. There are 4 questions based on this puzzle. Answer the questions based on the given information.

If Alan's subdivision produces Mixer and Heater and Cathy's subdivision produces Water Pump and juicer, then which products are produced at Betty's subdivision?

OPTIONS

Blender and Geyser

Juicer and Grinder

Iron and Blender

Iron and Grinder

Cannot be determined

SUBMIT ANSWER

13
14
15
16
17
18
19
20
21
22
23
24

Choose the correct option.

Steffi is standing at point A facing north. She walks 15 yards to her left and then takes a 180° turn and walks 30 yards. How far and in which direction is she from the starting point?

OPTIONS

15 yards, West


15 yards, East

45 yards, East

45 yards, West

SUBMIT ANSWER

- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22

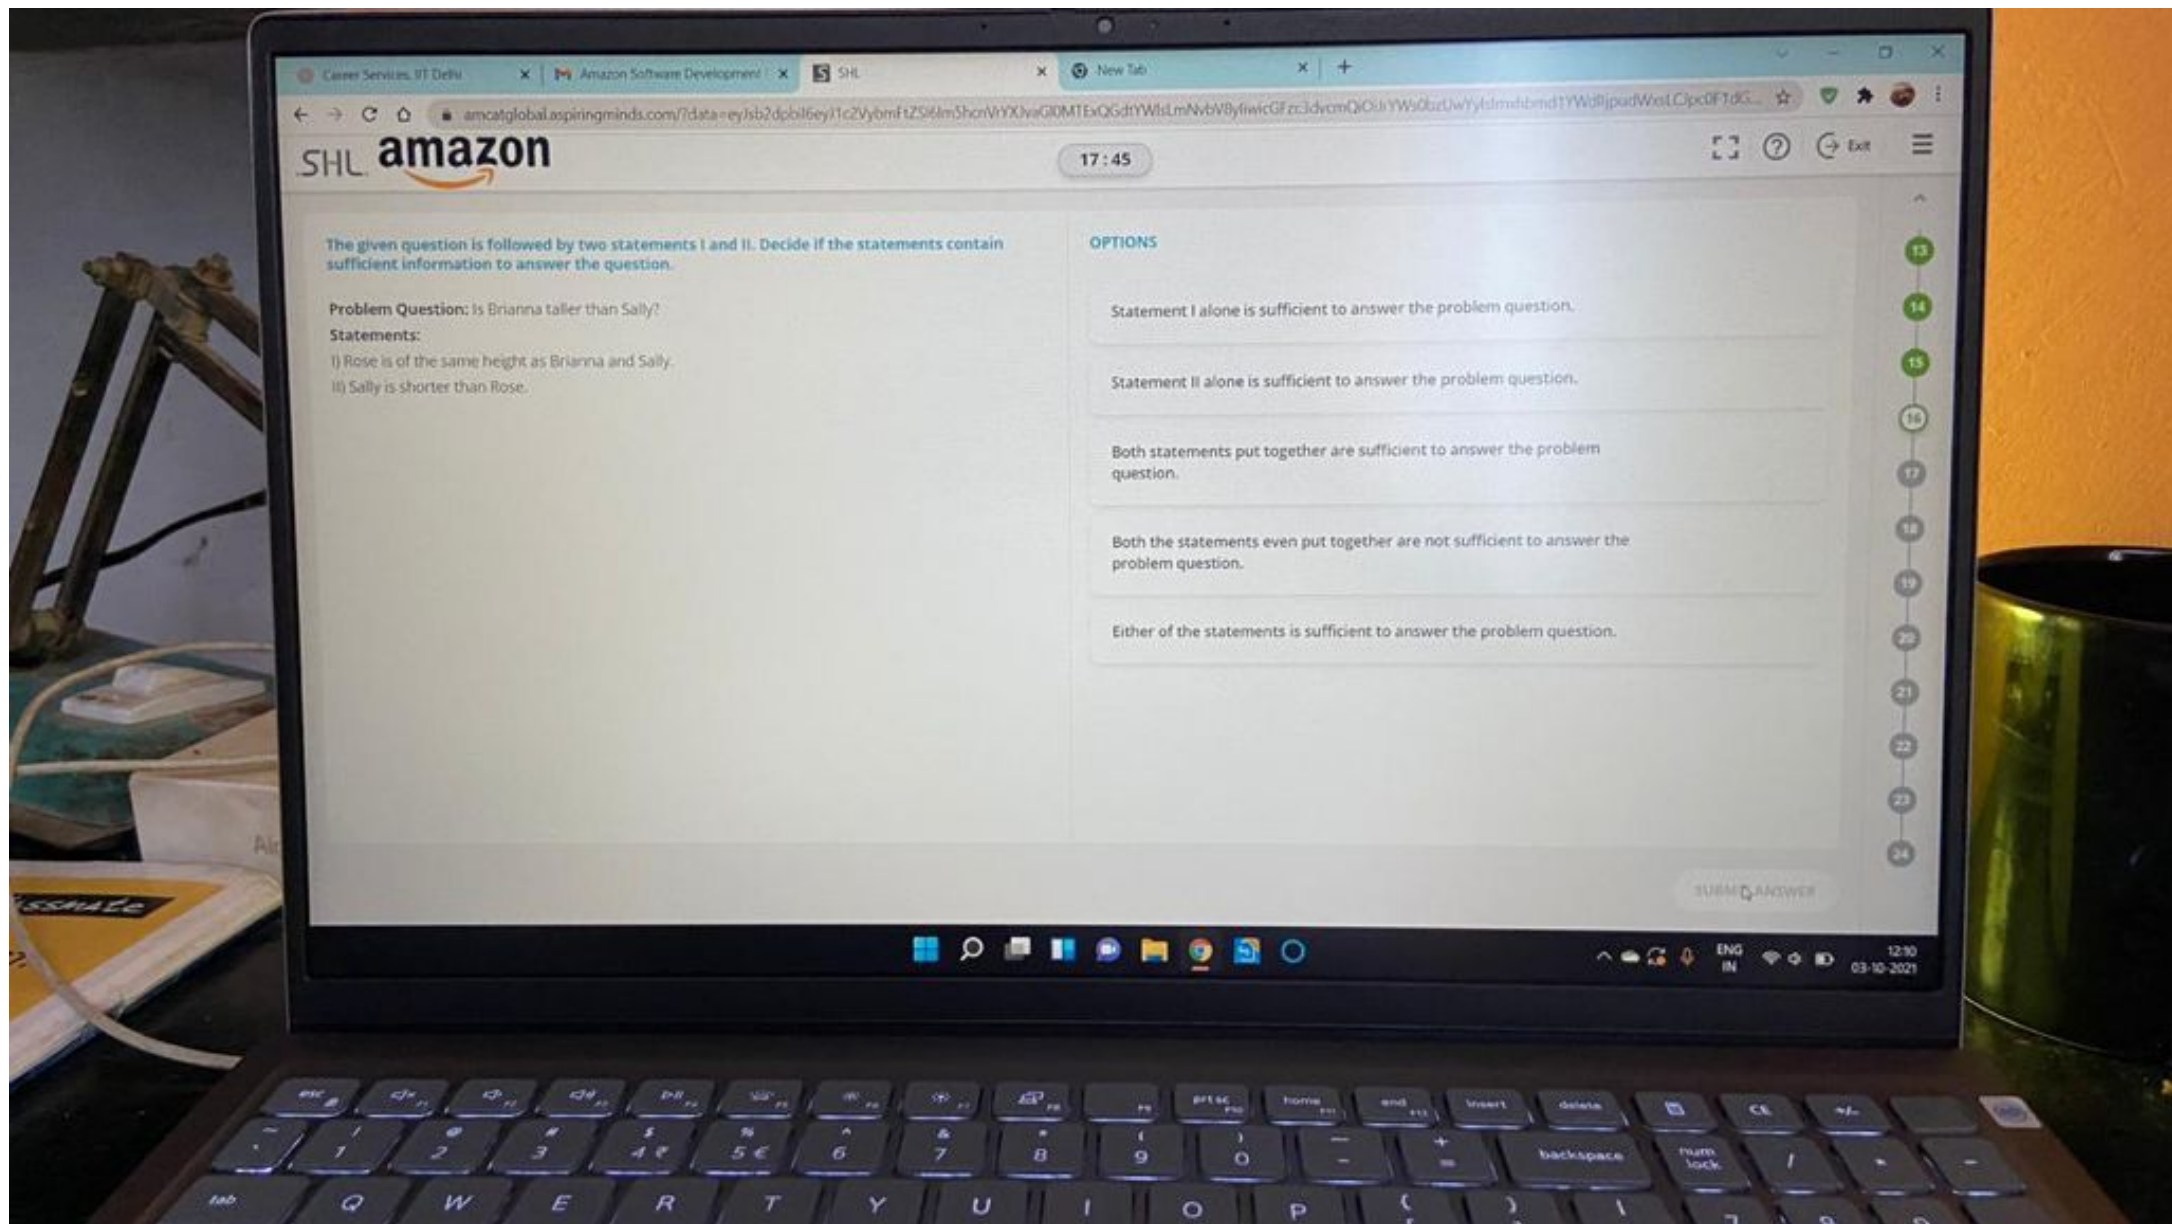

The given question is followed by two statements I and II. Decide if the statements contain sufficient information to answer the question.

Problem Question: What fraction of mangoes did Emma get?

Statements:

- I) There are five people among whom mangoes have been distributed.
- II) Everyone has got equal number of mangoes.

OPTIONS

Statement I alone is sufficient to answer the problem question.

Statement II alone is sufficient to answer the problem question.

Both statements put together are sufficient to answer the problem question.

Both the statements even put together are not sufficient to answer the problem question.

Either of the statements is sufficient to answer the problem question.

- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24

Problem | Test Cases | Output

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***printPattern(int num)*** prints even or odd numbers based on the value of the input argument *num* (*num* ≥ 0).

If the input number *num* is even, the function is expected to print the first *num* even whole numbers and in case it is odd, is expected to print the first *num* odd numbers.

For example: given input 2, the function prints the string "0 2" (without quotes).

The function compiles successfully but fails to print the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 void printPattern(int num){
4     int i, print=0;
5     if(num%2==0){
6         print = 0;
7         for(i=0;i<num;i++){
8             cout<<print<<" ";
9             print +=2;
10        }
11    }
12    else{
13        print = 1;
14        for(i=0;i<num;i++){
15            cout<<print<<" ";
16            print +=2;
17        }
18    }
```

SUBMIT ANSWER



01 : 05 : 56

Problem	Test Cases	Output
---------	------------	--------

Code saved

Compile and Run

The current selected programming language is **CPP**. We emphasize the submission of a fully working code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use `cout` to debug your code. The `cout` may not work in case of syntax/runtime error. The version of **GCC** being used is **8.1.0**.

Imagine that an employment tree represents the formal employee hierarchy at Amazon. Manager nodes have child nodes for each employee that reports to them; each of these employees can, in turn, have child nodes representing their respective reportees. Each node in the tree contains an integer representing the number of months the employee has spent at the company. Team tenure is computed as the average tenure of the manager and all the company employees working below the manager. The oldest team has the highest team tenure.

Write an algorithm to find the manager of the team with the highest tenure. An employee must have child nodes to be a manager.

Input

The input to the function/method consists of an argument - *president*, a node representing the root node of the employee hierarchy.

Output

Return the node which has the oldest team.

Note

Note
There will be at least one child node in the tree and there will be no ties.

Example

input:
president =

```
1 // INCLUDE HEADER FILES NEEDED BY YOUR PROGRAM
2 // SOME LIBRARY FUNCTIONALITY MAY BE RESTRICTED
3 // DEFINE ANY FUNCTION NEEDED
4 // EmployeeNode CLASS IS ALREADY DEFINED
5 // FUNCTION SIGNATURE BEGINS, THIS FUNCTION IS REQUIRED
6 EmployeeNode* getBusiestNode(EmployeeNode* president)
7 {
8     // WRITE YOUR CODE HERE
9 }
10 // FUNCTION SIGNATURE ENDS
```


→ ↻ 🏠 🔒 amcatglobal.aspiringminds.com/?data=eyJsb2dpbil6eyJ1c2VybmFtZSI6Im5hcnVrYXJv

amazon

Problem | **Test Cases** | **Output**

The current selected programming language is **CPP**. We emphasize the submission of a fully working code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use `cout` to debug your code. The `cout` may not work in case of syntax/runtime error. The version of **GCC** being used is **8.1.0**.


Amazon is performing an analysis on the computers at one of its offices. The computers are spaced along a single row. The analysis is performed in the following way:
Choose a contiguous segment of a certain number of computers, starting from the beginning of the row. Analyze the available hard disk space on each of the computers. Determine the minimum available disk space within this segment. After performing these steps for the first segment, it is then repeated for the next segment, continuing this procedure until the end of the row (i.e. if the segment size is 4, computers 1 to 4 would be analyzed, then 2 to 5, etc.)

Given this analysis procedure, write an algorithm to find the maximum available disk space among all the minima that are found during the analysis.

Input
The input to the function/method consists of three arguments:
numComputer, an integer representing the number of computers;
hardDiskSpace, a list of integers representing the hard disk space of the computers;
segmentLength, an integer representing the length of contiguous segment of computers to be consider in each iterations.

Output
Return an integer representing the maximum available disk space among all the minima that are found during the analysis.

Constraints
 $1 \leq \text{numComputer} \leq 10^6$

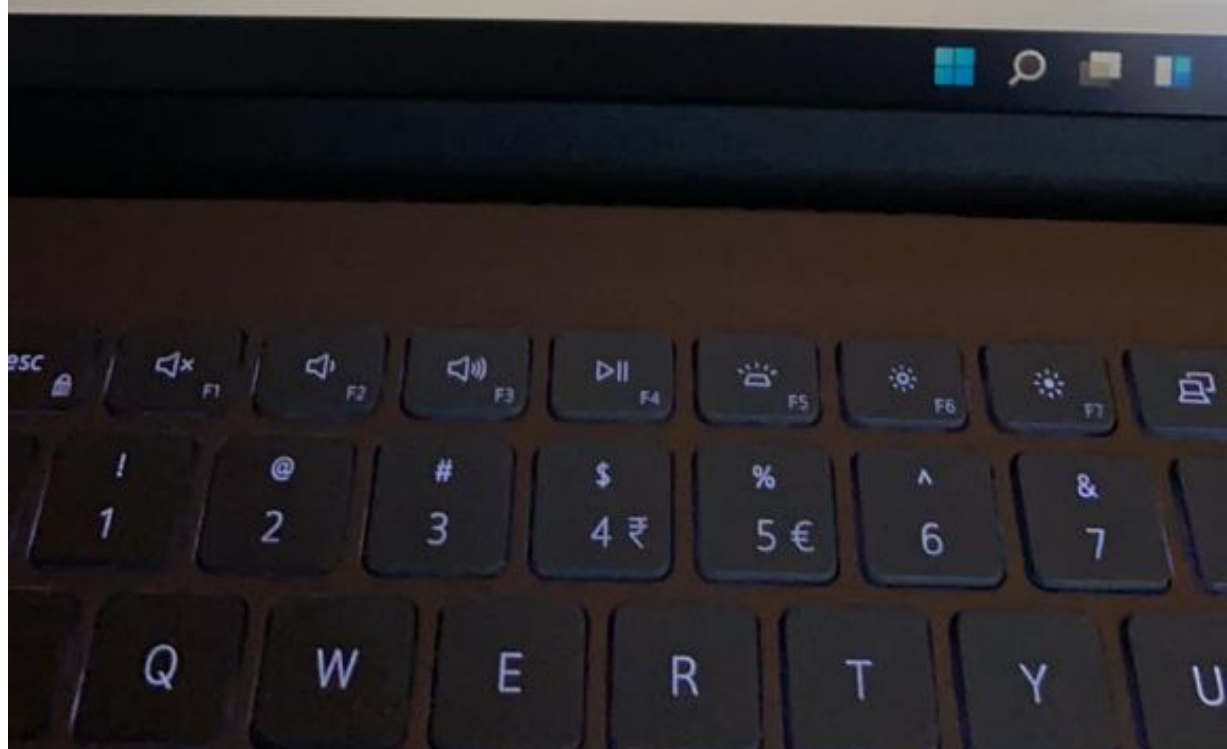

Problem | Test Cases | Output |

The current selected programming language is **C++**. We emphasize the submission of a fully working code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use *cout* to debug your code. The *cout* may not work in case of syntax/runtime error. The version of **G++** being used is **8.1.0**.

Imagine that an employment tree represents the formal employee hierarchy at Amazon. Manager nodes have child nodes for each employee that reports to them; each of these employees can, in turn, have child nodes representing their respective reportees. Each node in the tree contains an integer representing the number of months the employee has spent at the company. Team tenure is computed as the average tenure of the manager and all the company employees working below the manager. The oldest team has the highest team tenure.

Write an algorithm to find the manager of the team with the highest tenure. An employee must have child nodes to be a manager.

Input

The input to the function/method consists of an argument - *president*, a node representing the root node of the employee hierarchy.

Output

Return the node which has the oldest team.

Note

There will be at least one child node in the tree and there will be no ties.

Example

Input:
president =

Compile and Run

```
3 // DEFINE ANY FUNCTION NEEDED
4 // EmployeeNode CLASS IS ALREADY DEFINED
5 // FUNCTION SIGNATURE BEGINS, THIS FUNCTION IS REQUIRED
6 #include<bits/stdc++.h>
7 using namespace std;
8
9 double MAX = INT_MIN;
10 EmployeeNode* mNode = NULL;
11
12 pair<double,double>* helper(EmployeeNode* root){
13     if(root == NULL) return new pair<double,double> {0,0};
14
15     double curTotal = root->value;
16     double count = 1;
17
18     for(auto child : root->subEmployeeNode){
19         pair<double,double>* cur = helper(child);
20         curTotal += cur->first;
21         count += cur->second;
22     }
23
24     double avg = (double)(curTotal/count);
25     if(count > 1 && avg > MAX){
26         MAX = avg;
27         mNode = root;
28     }
29
30     return new pair<double,double> {curTotal,count};
31 }
32
33 EmployeeNode* getBusiestNode(EmployeeNode* president)
34 {
35     if(president == NULL) return NULL;
36     helper(president);
37     return mNode;
38 }
39
40
```

SUBMIT ANSWER

Problem | Test Cases | Output

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***replaceValues(int *arr, int len)*** accepts an array *arr* of length *len* ($len \geq 0$) as an input and returns an array of the same length.

If the length of *arr* is odd, all the elements of *arr* are supposed to be replaced by 1s and in case it is even, the elements should be replaced by 0s.

For example: given the input array (0,1,2), the function will return the array (1,1,1)

The function compiles successfully but fails to return the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 int* replaceValues(int *arr, int len){
4     int i, j;
5     if(len%2==0){
6         for(i=0;i<len;i+=2)
7             arr[i]=0;
8     }
9     else{
10        for(j=0;j<len;j+=2)
11            arr[j]=1;
12    }
13    return arr;
14 }
15
```

SUBMIT ANSWER



[Problem](#) | [Test Cases](#) | [Output](#) |

The current selected programming language is **C++**. We emphasize the submission of a fully code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use `cout` to debug your code. The `cout` may not work in case of syntax/runtime error. The version of **G++** being used is **8.1.0**.

Amazon Basics has several suppliers for its products. For each of the products, the stock is represented by a list of a number of items for each supplier. As items are purchased, the supplier raises the price by 1 unit for each item purchased. Let's assume Amazon's profit on any single item is the same as the number of items the supplier has left. For example, if a supplier has 4 items, Amazon's profit on the first item sold is 4, the second is 3, then 2 and the profit of the last one is 1.

Given a list where each value in the list is the number of the item at a given supplier and also given the number of items to be ordered, write an algorithm to find the highest profit that can be generated for the given product.

Input

The input to the function/method consists of three arguments:
numSuppliers, an integer representing the number of suppliers;
inventory, a list of long integers representing the value of the item at a given supplier;
order, a long integer representing the number of items to be ordered.

Output

Return a long integer representing the highest profit that can be generated for the given product.

Constraints

$1 \leq \text{numSuppliers} \leq 10^5$

$1 \leq \text{inventory}[i] \leq 10^5$

$0 \leq i < \text{numSuppliers}$



Type here to search



Problem | Test Cases | Output

numComputer, an integer representing the number of computers;
hardDiskSpace, a list of integers representing the hard disk space of the computers;
segmentLength, an integer representing the length of contiguous segment of computers to be consider in each iterations.

Output

Return an integer representing the maximum available disk space among all the minima that are found during the analysis.

Constraints

$1 \leq \text{numComputer} \leq 10^6$
 $1 \leq \text{segmentLength} \leq \text{numComputer}$
 $1 \leq \text{hardDiskSpace}[i] \leq 10^9$
 $0 \leq i < \text{numComputer}$

Example

Input:
numComputer = 3
hardDiskSpace = [8, 2, 4]
segmentLength = 2

Output:
2

Explanation:

In this array of computers, the subarrays of size 2 are [8, 2] and [2, 4]. Thus, the initial analysis returns 2 and 2 because those are the minima for the segments. Finally, the maximum of these values is 2. Therefore, the answer is 2.

Compile and Run

1 2 3 4 5 6 7 8 9 C++

```
1 // INCLUDE HEADER FILES NEEDED BY YOUR PROGRAM
2 // SOME LIBRARY FUNCTIONALITY MAY BE RESTRICTED
3 // DEFINE ANY FUNCTION NEEDED
4 // FUNCTION SIGNATURE BEGINS, THIS FUNCTION IS REQUIRED
5 int maxOfAllMin(int numComputer, vector<int> hardDiskSpace, int segmentLength)
6 {
7     // WRITE YOUR CODE HERE
8 }
9 // FUNCTION SIGNATURE ENDS
```

SUBMIT ASSESSMENT

SUBMIT ANSWER



Problem | Test Cases | Output |

The current selected programming language is **CPP**. We emphasize the submission of a fully working code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use `cout` to debug your code. The `cout` may not work in case of syntax/runtime error. The version of **GCC** being used is **8.1.0**.

An Events Operations Manager at Amazon has devised a fun game to help identify deserving visitors for a special tour of The Spheres at the HQ campus in Seattle, and posted the game using advertisements in newspapers distributed all around the city. The public has to find the maximum number of substrings with exactly "K" distinct characters.


Write an algorithm to help a deserving visitor find the right solution. If the given string does not have K distinct characters, return 0.

Input

The input to the function/method consists of two arguments:
`inputString`, representing a string provided in the advertisement;
`num`, an integer representing the number, K, provided in the advertisement.

🪟 🔍 Type here to search



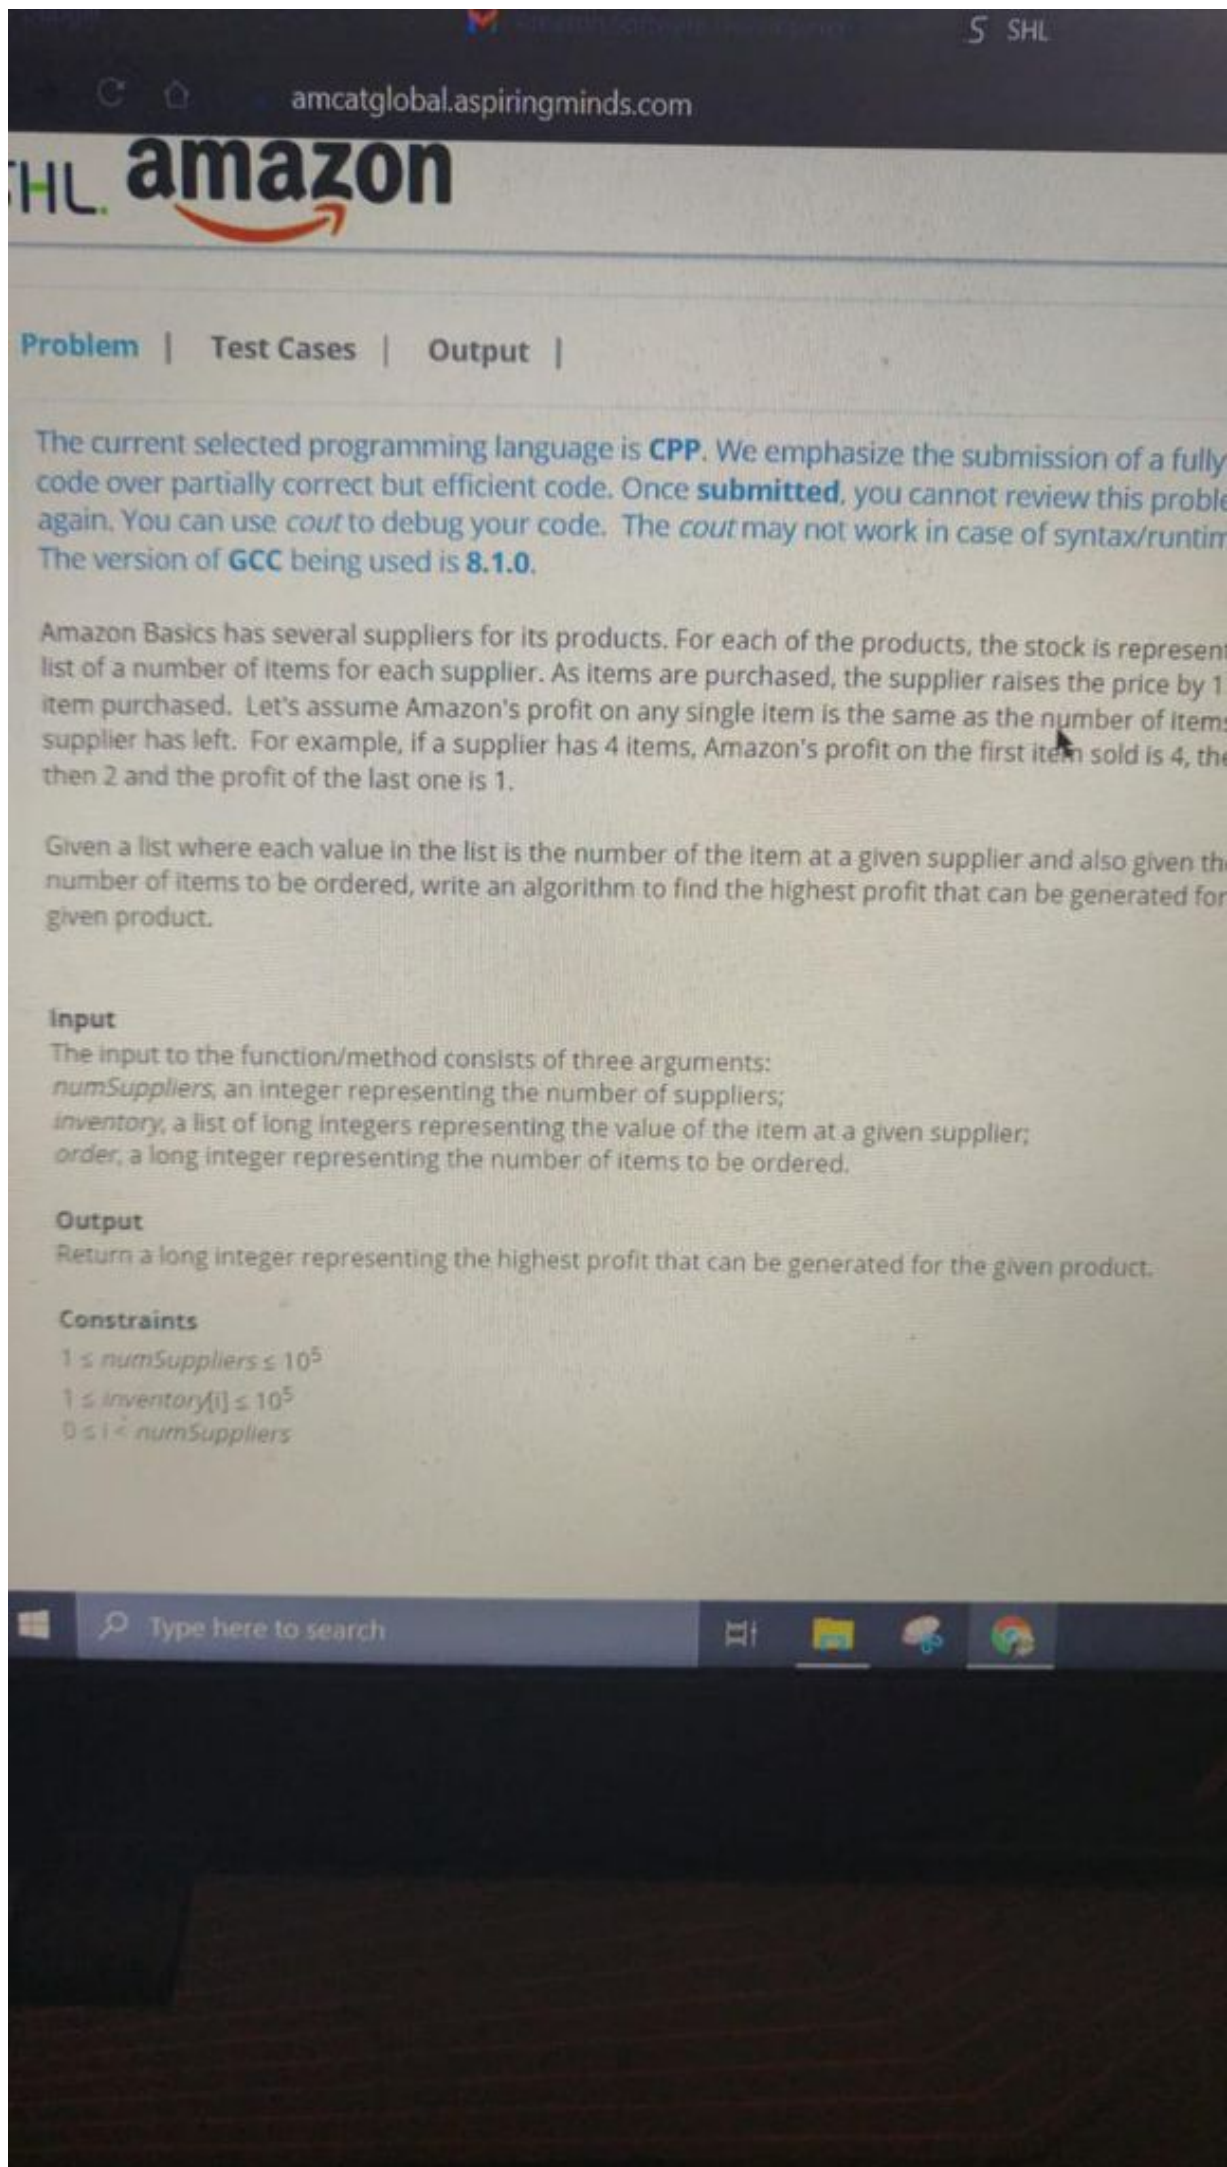

Problem | Test Cases | Output

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***removeElement(int *arr, int len, int index)*** takes an array *arr* of length *len* as an input. It is supposed to return an array of length *len-1* after removing the integer at the given *index* in the input array *arr*. If the given *index* is out of bounds, then this function should return the input array *arr*.

The function compiles successfully but fails to return the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Assumptions:

- The inputs *len* and *index* are always non-negative integers.
- Zero based indexing is followed to access array elements

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 int* removeElement(int *arr, int len, int index){
4     int i,j;
5     if(index<len){
6         for(i=index;i<len-1;i++){
7             arr[i]=arr[i+1];
8         }
9         int *rarr = new int[len-1];
10        for(i=0;i<len-1;i++){
11            rarr[i]= arr[i];
12        }
13        return rarr;
14    }
15    else
16        return arr;
17 }
```

SUBMIT ANSWER

not work in case of syntax/runtime error. The version of GCC being used is 8.1.0

Your team at Amazon is overseeing the design of a new, high-efficiency data center at HQ2. A supplying power to N servers. All servers in the grid have to be connected such that they have between different servers varies.

Assume that there are no ties, the names of servers are unique, connections are directionless, pair of servers, all costs are greater than zero, and a server does not connect to itself.

Write an algorithm to minimize the cost of connecting all servers in the power grid.

Input

The input to the function/method consists of two arguments -

num, an integer representing the number of connections.

connection, representing a list of Connections where each element of the list consists of two the servers.

Output

Return a list of Connections where each element of the list consists of two servers and the cost all servers are connected at the lowest total cost. If no such Connections exists, then return a

Note

The cost of connection between the servers is always greater than 0.

Example

Input:

num = 5

connection =

[[A, B, 1],

[B, C, 4],

[B, D, 6],

[D, E, 5],

[C, E, 1]]

Output:

[[A, B, 1],

[B, C, 4],

[C, E, 1],

[D, E, 5]]

Type here to search

Problem | Test Cases | Output

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***countDigits(int num)*** is supposed to return the remainder when the input argument *num* (*num* > 0) is divided by the number of digits in *num*.

The function compiles successfully but fails to return the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 int countDigits(int num){
4     int count = 0;
5     while(num != 0){
6         num = num/10;
7         count++;
8     }
9     return (num%count);
10 }
11
12
```

SUBMIT ASSESSMENT

SUBMIT ANSWER

Problem | Test Cases | Output

The current selected programming language is **C++**. We emphasize the submission of a fully working code over partially correct but efficient code. Once **submitted**, you cannot review this problem again. You can use `cout` to debug your code. The `cout` may not work in case of syntax/runtime error. The version of **G++** being used is **8.1.0**.

Amazon is performing an analysis on the computers at one of its offices. The computers are spaced along a single row. The analysis is performed in the following way:
Choose a contiguous segment of a certain number of computers, starting from the beginning of the row. Analyze the available hard disk space on each of the computers. Determine the minimum available disk space within this segment. After performing these steps for the first segment, it is then repeated for the next segment, continuing this procedure until the end of the row (i.e. if the segment size is 4, computers 1 to 4 would be analyzed, then 2 to 5, etc.)

Given this analysis procedure, write an algorithm to find the maximum available disk space among all the minima that are found during the analysis.

Input

The input to the function/method consists of three arguments:
`numComputer`, an integer representing the number of computers;
`hardDiskSpace`, a list of integers representing the hard disk space of the computers;
`segmentLength`, an integer representing the length of contiguous segment of computers to be considered in each iteration.

Output

Return an integer representing the maximum available disk space among all the minima that are found during the analysis.

Constraints

$1 \leq \text{numComputer} \leq 10^6$

Compile and Run

```
1 // INCLUDE HEADER FILES NEEDED BY YOUR PROGRAM
2 // SOME LIBRARY FUNCTIONALITY MAY BE RESTRICTED
3 // DEFINE ANY FUNCTION NEEDED
4 // FUNCTION SIGNATURE BEGINS, THIS FUNCTION IS REQUIRED
5 int maxOfAllMin(int numComputer, vector<int> hardDiskSpace, int segmentLength)
6 {
7     // WRITE YOUR CODE HERE
8 }
9 // FUNCTION SIGNATURE ENDS
```

SUBMIT ASSESSMENT

SUBMIT ANSWER

Refer to the symbols below and their corresponding meanings.

The given signs denote the following operations/relationships:

$A+B$ means A is equal to B.

$A-B$ means A is not equal to B.

$A \times B$ means A is greater than B.

$A \div B$ means A is greater than or equal to B.

A/B means A is less than B.

Which of the two conclusions I and II is/are definitely true based on the information provided?

Statements:

$Q+R$, R/S , S/T

Conclusions:

I. Q/S

II. $Q=R$

OPTIONS

Only conclusion I is true

Only conclusion II is true

Neither conclusion I nor II is true

Both conclusions I and II are true

SUBMIT ANSWER



Problem | Test Cases | Output

Test Case 1

Status:

Correct

Expected:

3

Returned:

3

Test Case 2

Status:

Correct

Expected:

10

Returned:

10

The program was also checked on other test cases. 15 out of 15 passed.

Compile and Run

C++

```
1 // INCLUDE HEADER FILES NEEDED BY YOUR PROGRAM
2 // SOME LIBRARY FUNCTIONALITY MAY BE RESTRICTED
3 // DEFINE ANY FUNCTION NEEDED
4 // FUNCTION SIGNATURE BEGINS, THIS FUNCTION IS REQUIRED
5 int maxOfAllMin(int numComputer, vector<int> hardDiskSpace, int segmentlength)
6 {
7     int k = segmentlength;
8     int n = hardDiskSpace.size();
9     if(n == 0) return 0;
10
11     int MAX = 0;
12     priority_queue<pair<int,int>, vector<pair<int,int>>, greater<pair<int,int>>> pq;
13     vector<int> ans;
14     for(int i=0; i<k; i++){
15         pq.push({hardDiskSpace[i],i});
16     }
17
18     for(int i=k; i<n; i++){
19         while(!pq.empty() && pq.top().second <= i-k)
20             pq.pop();
21         pq.push({hardDiskSpace[i],i});
22         ans.push_back(pq.top().first);
23     }
24
25     for(int i=0; i<ans.size(); i++)
26         MAX = max(ans[i],MAX);
27     return MAX;
28
29 }
30 // FUNCTION SIGNATURE ENDS
```

SUBMIT ASSESSMENT

SUBMIT ANSWER

Choose the correct option.

Consider the direction codes given below:

A @ B = A is 10 yards to the left of B.

A # B = A is 15 yards to the right of B.

A \$ B = A is 5 yards to the right of B.

A % B = A is 20 yards to the left of B.

What is the position of Z with respect to W, if the direction of Z is given by: Z @ X % Y \$ W?

OPTIONS

W is 20 yards to the left of Z.

W is 15 yards to the left of Z.

Z is 35 yards to the right of W.

Z is 25 yards to the left of W.

SUBMIT ANSWER

[Problem](#) | [Test Cases](#) | [Output](#) |[Compile and Run](#)

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function `countOccurrence(int *arr, int len, int value)` is supposed to return the count of occurrences of a number *value* in the input array *arr* of length *len* ($len \geq 0$).

The function compiles successfully but fails to return the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 int countOccurrence(int *arr, int len, int value){
4     int i=0, count = 0;
5     while(i<len){
6         if(arr[i]==value)
7             count += 1;
8     }
9     return count;
10 }
11 |
```

SUBMIT

Problem | Test Cases | Output |

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***descendingSortArray(int *arr, int len)*** accepts an integer array *arr* of length *len* ($len \geq 0$) as an input and performs an inplace sort operation on it. The function is expected to return the input array sorted in descending order, but instead, it returns the array sorted in ascending order due to a bug in the code.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 int* descendingSortArray(int *arr, int len){
4     int small, pos, i, j, temp;
5     for(i=0; i<len-1;i++){
6         for(j=i; j<len;j++){
7             temp = 0;
8             if(arr[i]>arr[j]){
9                 temp=arr[i];
10                arr[i]=arr[j];
11                arr[j]=temp;
12            }
13        }
14    }
15    return arr;
16 }
17
```

SUBMIT ANSWER



Problem | **Test Cases** | **Output**

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function `checkGrade(int score)` is supposed to return a student's grade when the student's test score is passed to it as an argument ($0 \leq \text{score} \leq 100$).

Given a particular score, a grade is calculated as per the following table:

Score	Grade
1. $\text{score} \geq 91$	A
2. $76 \leq \text{score} \leq 90$	B
3. $61 \leq \text{score} \leq 75$	C
4. $\text{score} \leq 60$	D

The function compiles successfully but fails to return the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 char checkGrade(int score){
4     if(score<60)
5         return 'D';
6     else
7         if((61<=score)||((score<=75)))
8             return 'C';
9         else
10            if((76<=score)||((score<=90)))
11                return 'B';
12            else
13                return 'A';
14 }
```

Problem | Test Cases | Output

You are required to fix all logical errors in the given code. You can click on *Compile & Run* anytime to check the compilation/execution status of the program. You can use *cout* to debug your code. The submitted code should be logically/syntactically correct and pass all testcases. Do not write the *main()* function as it is not required.

Code Approach: For this question, you will need to correct the given implementation. We **do not** expect you to modify the approach or incorporate any additional library methods.

The function ***printPattern(int num)*** prints even or odd numbers based on the value of the input argument *num* (*num* ≥ 0).

If the input number *num* is even, the function is expected to print the first *num* even whole numbers and in case it is odd, is expected to print the first *num* odd numbers.

For example: given input 2, the function prints the string "0 2" (without quotes).

The function compiles successfully but fails to print the desired result due to logical errors.

Your task is to debug the program to pass all the test cases.

Compile and Run

```
1 // You can print the values to stdout for debugging
2 using namespace std;
3 void printPattern(int num){
4     int i, print=0;
5     if(num%2==0){
6         print = 0;
7         for(i=0;i<num;i++){
8             cout<<print<<" ";
9             print +=2;
10        }
11    }
12    else{
13        print = 1;
14        for(i=0;i<num;i++){
15            cout<<print<<" ";
16            print +=2;
17        }
18    }
```

SUBMIT ANSWER

06:38

⌘ ? ⌘ → Exit ≡

There are two cases based on the given set of conditions. Take a decision for both the cases and choose the correct option for each.

- Olivia scored 76% in BCA and 90% in 12th grade. She has worked as a software developer in an IT firm for two years. She is not willing to commit to work with the company for two years but is ready to pay \$1,000 as a security deposit. She would be 24 years of age as of February 15, 2012.

OPTIONS

- The candidate should be recruited
- The candidate should not be recruited
- The candidate should be referred to the President
- The candidate should be referred to the Director
- Insufficient data

Should the given candidate be recruited? (The case is presented on February 1, 2012.)