

2. Question 2

Criteria for OSPF DR and BDR election?[Choose two]

Pick **ONE OR MORE** options

☐

Router Priority

☐

Router ID

☐

Loopback Address

☐

OSPF Area ID

Clear Selection



Search



3. Question 3

Eight bit Ripple up counter with a modules of 256 is holding the count 01111111. What will be the count after 135 clicks

Pick ONE option

☐ 0000110

☐ 0000101

☐ 00011000

☐ 00110010

Clear Selection

4. Question 4



Search



4/ Question 4

What will happen if the switch interface is configured with Full Duplex and 1 Gbps rate, while the server side is configured with half duplex and 1 Gbps rate, and there is unidirectional and bidirectional traffic at 1 Gbps?

Pick ONE OR MORE options

☐ Packets drop

☐ No impact

☐ High rx/tx load

☐ CRC

Clear Selection



Search



5. Question 5

If four edge triggered D flipflops are connected in series. What is the frequency of the output signal if the input clock signal to first flipflop is x Hz

Pick ONE option

☐ 4x Hz

☐ $x/4$ Hz

☐ $x/8$ Hz


☐ $x/16$ Hz

Clear Selection

6. Question 6



Search

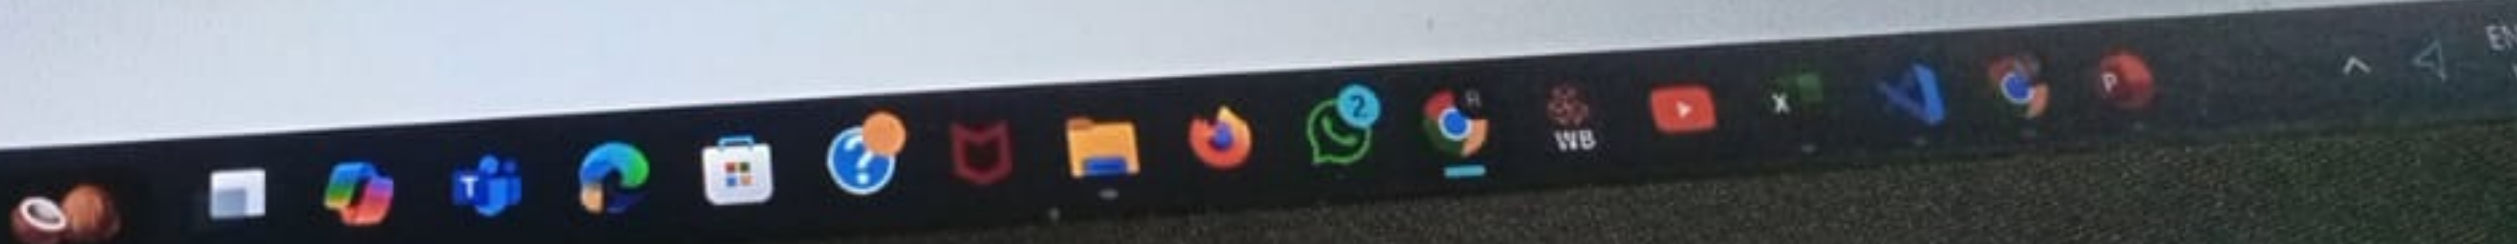

6. Question 6

Which of below is not supported by TCP?

Pick ONE option

☐ Data transmission in sequence

☐ Broadcast of data

☐ Data Re-transmission





☐ Congestion control

Clear Selection

7. Question 7



Search



7. Question 7

The minimum number of 2 to 1 multiplexers required to realize a 4 to 1 multiplexer is

Pick **ONE** option

☒ 2

☐ 1

☐ 4

☐ 3

Clear Selection

HackerRank Confidential



Search



8. Question 8

Adding a new input variable to a pre-existing regression model is guaranteed to:

Pick ONE option

☐ Increase R^2

☐ Increase Adj- R^2

☐ Increase p-value of the F-statistic in the ANOVA model





☐ Decrease p-value of the F-statistic in the ANOVA model

Clear Selection

9. Question 9



Search



A developer is working on a new application that is supposed to process tasks. The application has three modules: Module A, Module B, and Module C. Each module processes tasks at different speeds and has different constraints:

- Module A can process 60 tasks per hour but cannot operate for more than 6 continuous hours without an hour of maintenance.
- Module B can process 40 tasks per hour and can operate non-stop.
- Module C can process 25 tasks per hour but can only operate for a total of 8 hours in a 24-hour period.

The developer wants to maximize the number of tasks processed in a 24-hour period. Assume there is an unlimited number of tasks to be processed and no time is lost for switching between modules.

How many tasks can the developer process in a 24-hour period by optimally using the modules?

Pick **ONE** option

☐ 12500

☐ 2394

☐ 3244

☐ 1M

Clear Selection



Search



ENG IN



02-09-2



10. Question 10

In a 100 m race, Ram covers the distance in 72 second, Hari in 90 seconds and Shreeja in 96 seconds. If same speed is maintained in a race of 1600m, Hari will beat Shreeja by?

Pick **ONE** option

☐ 75m

☐ 100m

☐ 110m

☐ 80m

Clear Selection



Search



11. Question 11

The binary numbers $A = 1100$ and $B = 1001$ are applied to the inputs of a comparator. What are the output levels?

Pick **ONE** option

☐ $A > B = 1, A < B = 0, A = B = 1$

☐ $A > B = 0, A < B = 1, A = B = 0$


☐ $A > B = 1, A < B = 0, A = B = 0$

☐ $A > B = 0, A < B = 1, A = B = 1$

Clear Selection



Search



12. Question 12

Which of the following is not correct approach to develop algorithm?

Pick ONE option



Brute Force



Dynamic Programming



Randomised Greedy



Back Tracking

Clear Selection



Search



13. Question 13

What are the three parameters a router considers for choosing a route?

Pick **ONE** option

- ☐ Administrative distance, metrics, longest prefix match
- ☐ Link bandwidth, Administrative distance, shortest prefix match
- ☐ Link bandwidth, Link delay, next-hop distance
- ☐ Routing protocol used, number of hops, link bandwidth

Clear Selection

14. Question 14

ALL

14. Question 14



Type of optical fibre used to transport for longer distance (>80KMs)

Pick **ONE** option



Multimode Fibre



coaxial cable



Single mode fibre



Fibre breakout cable

Clear Selection

11



13

14

15

16

17



Search



15. Question 15

An ant has to move from one corner of a cube to the diagonally opposite corner. It has to move on the surface of the cube only. What is the shortest distance if the sides of cube are one meter long?

Pick **ONE** option

☐ 2.236

☐ 3

☐ 1.414

☐ 2.414

Clear Selection

16. Question 16

33°C
Haze



Search



ENG IN



ALL



16. Question 16

Which of below is not supported by TCP?

HackerRank Confidential

Pick **ONE** option

☐ Data transmission in sequence

☐ Broadcast of data

☐ Data Re-transmission

☐ Congestion control

Clear Selection

Search

1 33°C
Haze



Search



ALL



17. Question 17

Consider the set of integers from 1 to 10, inclusive. Let x be a randomly selected integer from the set and y be another randomly selected integer from the same set. If $x + 2y > 15$, what is the probability that the product of x and y is greater than 40?

Pick **ONE** option

☐ 0.25

☐ 0.66

☐ 0.33

☐ 0.5

Clear Selection

HackerRank Confidential

baliramk.ug22.cs@npt.ac.in

33°C
Haze



Search



ALL

18. Question 18

Which DNS security would you choose to use, inside highly secure corporate network behind strict firewall rules, that hides query information during transmission?

Pick **ONE** option

☐ DNSSEC

☐ DoT

☐ DoH

☐ Any of Above

Clear Selection



Search



ENG IN



19. Question 19

"Program runs in 20 seconds on a computer Draco, which has 400MHz clock. What should be the clock rate of computer hercules to run the same program in 10 seconds. Given Hercules takes 2 times as many clock cycles as draco for this program."

Pick **ONE** option

☐ 1600Mhz

☐ 800Mhz

☐ 2000Mhz

☐ 400Mhz

Clear Selection



Search



ENG
IN



18:02-09-20





A statistician is asked to help a court determine the chance of innocence of an accused. Witnesses in this theft case provide the following description. They saw a Magenta coloured van driven by a man in his early 30s with grey-beard, force breaking into a store using a rod. The criminal in question used his left hand to break open the store. The accused had his face covered with an opaque mask while attempting to commit burglary.

The statistician quotes the following events and associated probabilities.
Assume these numbers to be factually correct and that the van belonged to the criminal (not necessarily the accused).

Owning a Magenta Van -- 1 in 6000
Man to be in his early 30s -- 1 in 5
Man with grey beard -- 1 in 10
Man being left-handed -- 1 in 10

After quoting these stats, the statistician then goes on to state the probability of innocence of the accused based on the above facts. Pick the correct value of probability

Pick **ONE** option

☐ $(1/6000) * (1/5) * (1/10) * (1/10)$

☐ $1 - [(1/6000) * (1/5) * (1/10) * (1/10)]$

☐ $1 - [(1/6000) + (1/5) + (1/10) + (1/10)]$

☐ Insufficient Information



Search





ALL



21. Question 21

In a certain series resonant circuit, $V_C = 125\text{ V}$, $V_L = 125\text{ V}$, and $V_R = 40\text{ V}$. The value of the source voltage is

Pick **ONE** option

☐ 40 V

☐ 125 V

☐ 250 V

☒ 290 V

Clear Selection

18

19

20

21

22


23

24

22. Question 22



Search



33°C
Haze



ALL



19

20

21

22

23

24

25

22. Question 22

Eight bit Ripple up counter with a modules of 256 is holding the count 01111111. What will be the count after 135 clks

Pick **ONE** option

☐ 0000110

☐ 0000101

☐ 00011000

☐ 00110010

Clear Selection

Continue

1 33°C
Haze



Search



ALL

i

21

22

23

24

25

26

27

What is the output of following program in javascript
console.log(typeof(String))
console.log(typeof(object))
console.log(typeof(Array))
console.log(typeof(function a(){}))

Pick **ONE** option

☐ object
☐ object
☐ object
☐ function

☐ function
☐ undefined
☐ function
☐ function

☐ function
☐ object
☐ object
☐ function

☐ string
☐ object
☐ array
☐ function

33°C
Haze



Search




```
public String callMethod(Object obj) {  
    return "Rare";  
}  
}
```

Pick **ONE** option

☐

Rare

☐

White

☐

Tiger

☐

Program has a compilation Error

Clear Selection

26. Question 26



Search



33°C
Haze



Disconnected from network.

What is the output of the following program:

```
public class Test6 {
    public static void main(String[] args) {
        Rare rare = new Rare();
        System.out.println(rare.callMethod(new Rare()));
    }
}

class Tiger {
    public String callMethod(Tiger obj) {
        return "Tiger";
    }
}

class White extends Tiger {
    public String callMethod(White obj) {
        return "White";
    }
}

class Rare extends White {
    public String callMethod(Object obj) {
        return "Rare";
    }
}
```

Pick **ONE** option

Imagine a business environment where employees regularly participate in video conferencing calls and use Voice over Internet Protocol (VoIP) for real-time communication with clients and colleagues. Additionally, employees access shared files and applications hosted on local servers or cloud platforms. However, during peak hours, network congestion occurs, leading to degraded audio and video quality during important meetings. As the network administrator, you are tasked with implementing a solution to prioritize voice and video traffic over data traffic to ensure uninterrupted communication experiences for users

Pick **ONE** option



QoS



VLAN



NAT



MPLS

Clear Selection



Search



ENG
IN



Trying to reconnect.

27. Question 27

Which commands are required to properly configure a router to run OSPF and to add network 172.16.16.0/24 to OSPF area 10? (Choose two)

Pick **ONE OR MORE** options

☐ Router(config)#router ospf 1

☐ Router(config)#router ospf 0

☐ Router(config)#router ospf area 10

☐ Router(config-router)#network 172.16.16.0 0.0.0.255 area 10

Clear Selection

HackerRank Confidential



Search



28. Question 28

HackerRank Confidential

You are building multiboot system with various Windows and Linux distros. Which bootloader would you use, keeping support for both UEFI and Legacy boot?

Pick **ONE** option

- ☐ systemd-boot
- ☐ GNU GRUB
- ☐ BSD Loader
- ☐ Any of above

Clear Selection



Search



ALL

29. Question 29

Which of the following is not correct approach to develop algorithm?

Pick **ONE** option

☐ Brute Force

☐ Dynamic Programming

☐ Randomised Greedy

☐ Back Tracking

Clear Selection



Search



30. Question 30

A university wants to enable Apple TV streaming for all their classrooms which uses mDNS protocol. What type of traffic and class of IP address will this belong to?

Pick **ONE** option

- ☐ Its Class D, used for broadcast traffic
- ☐ Its Class B, used for Local Area Network
- ☐ Its Class D, used for multicast traffic
- ☐ Its Class C, used for Public IPs

Clear Selection



Search



Connected to network.

How Noise cancelling/reducing earphone works?

- a) Specially designed ear buds with foam pads to cancel the noise.
- b) It has digital sound feature with synthesizer to cancel the noise.
- c) Earphones's microphone cancels the noise by the amplified and inverted phase noise from the surrounding.

Pick **ONE** option

- ☐ All the above
- ☐ a,b
- ☐ b,c
- ☐ c,a

Clear Selection

ALL



32. Question 32

The minimum number of 2 to 1 multiplexers required to realize a 4 to 1 multiplexer is

Pick **ONE** option

☐ 2

☐ 1

☐ 4

☐ 3

Clear Selection

HackerRank Confidential

33°C
Partly cloudy



Search



ENG
IN



ALL

i

30

31

32

33

34

35

36

33. Question 33

18:36 :: 7: 72 , Find the value

Pick **ONE** option

☐ 12

☐ 14

☐ 16

☐ 20

Clear Selection

33°C
Partly cloudy



Search



ALL










34. Question 34

Three doors are in front of you, and behind one of them is a car; the other two have goats behind them. You choose a door (say Door 1), but before it's opened, the host, who knows what's behind all the doors, opens another door (say Door 3), revealing a goat. The host then gives you a chance to switch your choice to the unopened door (Door 2). Should you switch, stick with your initial choice, or does it not matter?

- A) Switch to Door 2; it increases your chances of winning the car.
- B) Stick with Door 1; it has the car behind it.
- C) Switch to Door 2; it has a 50/50 chance just like Door 1.
- D) It doesn't matter; the odds are the same regardless of your choice.

Pick **ONE** option☐ B☐ D☐ C☐ A

Clear Selection



23. Question 23

In a neural network, there are nodes representing servers capturing neural signals in a cutting-edge machine learning application. Akin to the architecture of a neural network, there are $server_nodes$ servers, where the i^{th} server captures the signal of minimum neural activity represented by $minActivity[i]$. The servers are connected in a tree structure with $server_nodes - 1$ connections, where the i^{th} connection connects the servers $server_from[i]$ and $server_to[i]$ and the change in neural activity of the signal traveling the i^{th} connection is represented by $server_weight[i]$.

The neural activity of a signal transmitted from server x and reaching server y is the sum of the neural activity change by traveling across the path from x to y .

Note:

- All the servers transmit the signals of activity 0.
- The tree is rooted at server 1.
- It is possible for a signal to have negative neural activity as well.
- The neural activity of a signal after passing through a connection improves or deteriorates, depending on whether the $server_weight[i]$ is positive or

Language C++20

Environment

Autocomplete Loading...

```
1 > #include <bits/stdc++.h>
10
11 /*
12  * Complete the 'getMinServers'
13  *
14  * The function is expected to return an INTEGER.
15  * The function accepts following parameters:
16  * 1. WEIGHTED_INTEGER_GRAPH server
17  * 2. INTEGER_ARRAY minActivity
18  */
19
20 /*
21  * For the weighted graph, <name>:
22  *
23  * 1. The number of nodes is <name>_nodes.
24  * 2. The number of edges is <name>_edges.
25  * 3. An edge exists between <name>_from[i] and <name>_to[i]. The w
26  * [i].
27  */
28
29 int getMinServers(int server_nodes, vector<int> server_from, vect
30 server_weight, vector<int> minActivity) {
31 }
32
33 > int main() ...
```

Language switched successfully! Your previous code at any time.

Test Results

Custom Input

33°C
Haze



Search



Note:

- All the servers transmit the signals of activity 0.
- The tree is rooted at server 1.
- It is possible for a signal to have negative neural activity as well.
- The neural activity of a signal after passing through a connection improves or deteriorates, depending on whether the $server_weight[i]$ is positive or negative respectively.

A server u is said to be *vulnerable* if there exists a server $v (v \neq u)$ in the subtree of u such that:

- The neural activity of the signal reaching server v from server u is greater than $minActivity[v]$.

Note: A subtree of a node x is a tree containing all the children of x and having x as the root.

The server can be disconnected in the following way:

- Choose a leaf node from the remaining tree and remove that server.

The task is to determine the minimum number of servers that need to be disconnected such that no server remains *vulnerable*.

Example

Language C++20


```

1 >
10
11
12 /*
13  * Complete the 'getMinServers' function below.
14  *
15  * The function is expected to return an INTEGER.
16  * The function accepts following parameters:
17  * 1. WEIGHTED_INTEGER_GRAPH server
18  * 2. INTEGER_ARRAY minActivity
19  */
20
21 /*
22  * For the weighted graph, <name>:
23  *
24  * 1. The number of nodes is <name>_nodes.
25  * 2. The number of edges is <name>_edges.
26  * 3. An edge exists between <name>_from[i] and <name>_to[i]
27  *    [i].
28  */
29
30 int getMinServers(int server_nodes, vector<int> server_fr
31 server_weight, vector<int> minActivity) {
32
33 > int main() ...

```

Test Results


Custom Input



server remains vulnerable.

Example

server_nodes = 5
 server_from = [1, 1, 3, 3]
 server_to = [2, 3, 4, 5]
 server_weight = [-2, 5, -5, -3]
 minActivity = [0, -10, 5, -5, 5]

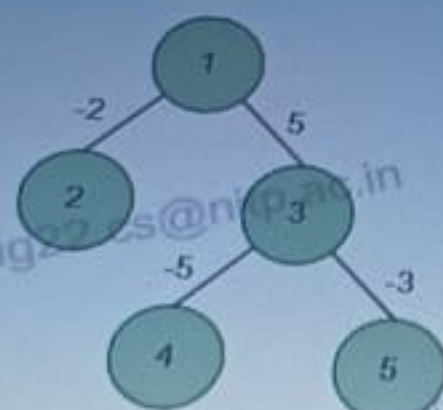

Server 1 is vulnerable as the neural activity of signal reaching server 4 from 1 has an activity of 0 (> -5). So server 4 is removed.

Server 1 is vulnerable as the neural activity of signal reaching server 2 from 1 has an activity of -2 (> -10). So server 2 is removed.

Hence, the answer is 2.

Function Description

Complete the function `getMinServers` in the editor below.

`getMinServers` has the following parameters:

`int server_nodes`: the number of servers

Language C++20

```

1 > #include <bits/stdc++.h>
10
11
12 /*
13  * Complete the 'getMinServers' function below.
14  * The function is expected to return an INTEGER.
15  * The function accepts following parameters:
16  * 1. WEIGHTED_INTEGER_GRAPH server
17  * 2. INTEGER_ARRAY minActivity
18  */
19
20 /*
21  * For the weighted graph, <name>:
22  *
23  * 1. The number of nodes is <name>_nodes.
24  * 2. The number of edges is <name>_edges.
25  * 3. An edge exists between <name>_from[i] and <name>_to[i]. The wei
26  * [i].
27  */
28
29 int getMinServers(int server_nodes, vector<int> server_from, vecto
30 server_weight, vector<int> minActivity) {
31
32 }
33 > int main() ...
    
```

Test Results

Custom Input

Function Description

Complete the function `getMinServers` in the editor below.

`getMinServers` has the following parameters:

- `int server_nodes`: the number of servers
- `int server_from[server_nodes - 1]`: the one end of the connections
- `int server_to[server_nodes - 1]`: the other end of the connections
- `int server_weight[server_nodes - 1]`: the change in the neural activity of the signal after traveling the connections
- `int minActivity[server_nodes]`: the minimum activity of the neural signal captured by the servers

Returns

`int`: the minimum number of servers that need to be disconnected such that no server remains vulnerable

Constraints

- $1 \leq \text{server_nodes} \leq 2 \cdot 10^5$
- $1 \leq \text{server_from}[i], \text{server_to}[i] \leq \text{server_nodes}$
- $-10^9 \leq \text{server_weight}[i] \leq 10^9$
- $-10^9 \leq \text{minActivity}[i] \leq 10^9$

▶ Input Format For Custom Testing

Language C++20

Environment

Autocomplete

```
1 > #include <bits/stdc++.h>
10
11
12 /*
13  * Complete the 'getMinServers' function below.
14  * The function is expected to return an INTEGER.
15  * The function accepts following parameters:
16  * 1. WEIGHTED_INTEGER_GRAPH server
17  * 2. INTEGER_ARRAY minActivity
18  */
19
20 /*
21  * For the weighted graph, <name>:
22  *
23  * 1. The number of nodes is <name>_nodes.
24  * 2. The number of edges is <name>_edges.
25  * 3. An edge exists between <name>_from[i] and <name>_to[i].
26  * [i].
27  */
28
29 int getMinServers(int server_nodes, vector<int> server_from,
30 server_weight, vector<int> minActivity) {
31 }
32
33 > int main() ...
```

Test Results

Custom Input

1h 27m left

▶ Input Format For Custom Testing

▼ Sample Case 0

Sample Input For Custom Testing

STDIN	FUNCTION
3 2	→ server_nodes = 3, server_nodes - 1 = 2
1 2 2	→ server_from = [1, 1], server_to = [2, 3], server_weight = [2, 3]
1 3 3	→ minActivity[] size
3	→ minActivity = [1, 2, 3]

Sample Output

0

Explanation

The signal from server 1 reaching server 2 has a quality 2 and the signal from server 1 reaching server 3 has a quality 3. Hence, no server is vulnerable.

▶ Sample Case 1

Language C++20

Environment

Autocomplete Ready

```

1 > #include <bits/stdc++.h>
10
11
12 /*
13  * Complete the 'getMinServers' function below.
14  *
15  * The function is expected to return an INTEGER.
16  * The function accepts following parameters:
17  * 1. WEIGHTED_INTEGER_GRAPH server
18  * 2. INTEGER_ARRAY minActivity
19  */
20
21 /*
22  * For the weighted graph, <name>:
23  *
24  * 1. The number of nodes is <name>_nodes.
25  * 2. The number of edges is <name>_edges.
26  * 3. An edge exists between <name>_from[i] and <name>_to[i]. The
27  *    weight of the edge is <name>_weight[i].
28  */
29
30 int getMinServers(int server_nodes, vector<int> server_from, vector<int> server_to, vector<int> server_weight, vector<int> minActivity) {
31
32 }
33 > int main() ...

```

Test Results

Custom Input

1 Feels hotter Now



Search



1h 27m left
server 3 has a quality 3. Hence, no server is vulnerable.

Sample Case 1

Sample Input For Custom Testing

STDIN	FUNCTION
4 3	server_nodes = 4,
server_nodes - 1 = 3	
1 2 1	server_from = [1, 2, 3],
server_to = [2, 3, 4],	server_weight =
[1, -10, -5]	
2 3 -10	
3 4 -5	
4	minActivity[] size
server_nodes = 4	
0	minActivity = [0, -1,
-2, -3]	
-1	
-2	
-3	

Sample Output

3

Explanation

The signal from 1 reaching 2 has a quality of 1 (> -1). Hence, server 2 has to be removed. In order to remove server 2 servers 3 and 4 also have to be removed.

Hence, the answer is 3.

Language C++20

Environment

Autocomplete Ready

```
1 > #include <bits/stdc++.h>
10
11 /*
12  * Complete the 'getMinServers' function below.
13  *
14  * The function is expected to return an INTEGER.
15  * The function accepts following parameters:
16  * 1. WEIGHTED_INTEGER_GRAPH server
17  * 2. INTEGER_ARRAY minActivity
18  */
19
20 /*
21  * For the weighted graph, <name>:
22  *
23  * 1. The number of nodes is <name>_nodes.
24  * 2. The number of edges is <name>_edges.
25  * 3. An edge exists between <name>_from[i] and <name>_to[i]. The weight
26  *    [i].
27  */
28
29 int getMinServers(int server_nodes, vector<int> server_from, vector<int>
30 server_weight, vector<int> minActivity) {
31 }
32
33 > int main() ...
```

Test Results

Custom Input

9. Question 9

There are n regions where some servers are hosted. The number of machines in the i^{th} region is $machineCount[i]$, where $0 \leq i < n$. It can get difficult to manage all the different regions, so the team decided to move some machines to exactly 3 regions, where the number of machines in the i^{th} region is given by $finalMachineCount[i]$, where $0 \leq i < 3$.

There are two operations that can be performed.

- Add or remove a machine from any existing region. The number of computers in that server should be non-zero before and after the operation. This operation costs 1 unit.
- Move all machines from one region to another existing region at a cost of $shiftingCost$ units. The now empty region is destroyed in this operation.

Find the minimum cost to shift the machines so that any 3 regions have the counts required in $finalMachineCount$.

Note: It is possible that there are additional machines left at the end apart from the ones placed in the final 3 regions.

Language C++20

Environment

Autocomplete Ready

```
1 > #include <bits/stdc++.h> ...
9
10 /*
11  * Complete the 'getMinimumCost' function below.
12  *
13  * The function is expected to return an INTEGER.
14  * The function accepts following parameters:
15  * 1. INTEGER_ARRAY machineCount
16  * 2. INTEGER_ARRAY finalMachineCount
17  * 3. INTEGER shiftingCost
18  */
19
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount, int shiftingCost) {
21
22 }
23
24 > int main() ...
```

Test Results

Custom Input

Run Code

1h 25m left



ALL



6

7

8

9

10

11

12

Note: It is possible that there are additional machines left at the end apart from the ones placed in the final 3 regions.

Example

It is given that $n = 4$, $machineCount = [2, 3, 5, 7]$, $finalMachineCount = [5, 10, 5]$, and $shiftingCost = 2$. On increasing the number of machines in the 1st and 2nd regions by 1 and 2 machines respectively, the new $machineCount = [3, 5, 5, 7]$. Total cost for these operations = $1 + 2 = 3$.

Now, moving all the machines from the 4th region to 1st, which takes $shiftingCost = 2$, the new $machineCount = [10, 5, 5]$. The cost of this operation = 2

Therefore, total cost = $3 + 2 = 5$.

Function Description

Complete the function `getMinimumCost` in the editor below.

`getMinimumCost` has the following parameters:

`int machineCount[n]`: the initial number of machines in the regions

`int finalMachineCount[3]`: the final number of machines required in the 3 regions

`int shiftingCost`: the cost to move all machines from one region to another

Returns

`int`: the minimum cost to move machines into 3

Language C++20

Environment

Autocomplete Ready

```
1 > #include <bits/stdc++.h>
9
10 /*
11  * Complete the 'getMinimumCost' function below.
12  *
13  * The function is expected to return an INTEGER.
14  * The function accepts following parameters:
15  * 1. INTEGER_ARRAY machineCount
16  * 2. INTEGER_ARRAY finalMachineCount
17  * 3. INTEGER shiftingCost
18  */
19
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount, int shiftingCost) {
21
22 }
23
24 > int main() ...
```

Test Results

Custom Input

Run Code



Returns

int: the minimum cost to move machines into 3 regions

Constraints

- $3 \leq n \leq 10$
- $1 \leq \text{machineCount}[i], \text{finalMachineCount}[i] \leq 10^6$
- $1 \leq \text{shiftingCost} \leq 10^6$

Input Format For Custom Testing

The first line contains an integer n , the number of regions.

The next n lines each contain $\text{machineCount}[i]$ ($0 \leq i < n$).

The following line contains an integer 3, the final number of regions.

The next 3 lines each contain $\text{finalMachineCount}[i]$ ($0 \leq i < 3$).

The next line contains an integer, shiftingCost .

Sample Case 0

Sample Input For Custom Testing

STDIN	FUNCTION
4	machineCount[] size n =
4	
2	machineCount = [2, 4, 5,
3]	

Language C++20

Environment

Autocomplete Ready

```

1 > #include <bits/stdc++.h>
9
10 /*
11  * Complete the 'getMinimumCost' function below.
12  *
13  * The function is expected to return an INTEGER.
14  * The function accepts following parameters:
15  * 1. INTEGER_ARRAY machineCount
16  * 2. INTEGER_ARRAY finalMachineCount
17  * 3. INTEGER shiftingCost
18  */
19
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount, int
21
22 }
23
24 > int main() ...

```

Test Results

Custom Input



Sample Case 0

Sample Input For Custom Testing

	FUNCTION
4	→ machineCount[] size n =
4	→ machineCount = [2, 4, 5,
2	
3]	
4	
5	→ finalMachineCount[] size
3	
3	→ finalMachineCount = [4,
4	
4	
4	
5	→ shiftingCost = 5

Sample Output

2

Explanation

On increasing the number of machines of the 4th region by 1 and decreasing the number of machines of the 3rd region by 1, the new machineCount = [2, 4, 4, 4]. Total cost for these operations = 1 + 1 = 2.

Use the 2nd, 3rd, and 4th regions as the required servers, leaving behind the 1st region.

Sample Case 1

Language C++20

Environment

Autocomplete Ready

```

1 > #include <bits/stdc++.h>
9
10 /*
11  * Complete the 'getMinimumCost' function below.
12  *
13  * The function is expected to return an INTEGER.
14  * The function accepts following parameters:
15  * 1. INTEGER_ARRAY machineCount
16  * 2. INTEGER_ARRAY finalMachineCount
17  * 3. INTEGER shiftingCost
18  */
19
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount) {
21
22 }
23
24 > int main() ...
    
```

Test Results

Custom Input

JPY/INR
-0.53%



Search



Sample Case 1

Sample Input For Custom Testing

STDIN	FUNCTION
5	→ machineCount[] size n =
5	
5	→ machineCount = [5, 10,
15, 20, 25]	
10	
15	
20	
25	
3	→ finalMachineCount[] size
= 3	
20	→ finalMachineCount = [20,
20, 20]	
20	
20	
3	→ shiftingCost = 3

Sample Output

8

Explanation

On increasing the number of machines of the 5th region by 5, the new *machineCount* = [5, 10, 15, 20, 20]. Total cost required for these operations =


```
1 >
2
3
4
5
6
7
8
9
10
11 /*
12  * Complete the 'getMinimumCost' function below.
13  *
14  * The function is expected to return an INTEGER.
15  * The function accepts following parameters:
16  * 1. INTEGER_ARRAY machineCount
17  * 2. INTEGER_ARRAY finalMachineCount
18  * 3. INTEGER shiftingCost
19  */
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount,
21
22 }
23
24 > int main() ...
```

Test Results

Custom Input



Search



ALL

i

6

7

8

9

10

11

12

```
5 machineCount[] size n =  
5 → machineCount = [5, 10,  
15, 20, 25]  
10  
15  
20  
25  
3 → finalMachineCount[] size  
= 3  
20 → finalMachineCount = [20,  
20, 20]  
20  
20  
3 → shiftingCost = 3
```

Sample Output

8

Explanation

On increasing the number of machines of the 5th region by 5, the new *machineCount* = [5, 10, 15, 20, 20]. Total cost required for these operations = 5.

Now, moving all the machines from the 3rd region to the 1st region, which takes *shiftingCost* (= 3) dollars, the new *machineCount* = [20, 10, 20, 20]. Total cost required for these operations = 3. Use the 1st, 3rd, and 4th regions as the required regions, leaving behind the 2nd region. The total cost = 5 + 3 = 8.

Language C++20

Environment

Autocompl

```
1 > #include <bits/stdc++.h>  
9  
10 /*  
11 * Complete the 'getMinimumCost' function below.  
12 *  
13 * The function is expected to return an INTEGER.  
14 * The function accepts following parameters:  
15 * 1. INTEGER_ARRAY machineCount  
16 * 2. INTEGER_ARRAY finalMachineCount  
17 * 3. INTEGER shiftingCost  
18 */  
19  
20 int getMinimumCost(vector<int> machineCount, vector<int> finalMachineCount, int shiftingCost) {  
21  
22 }  
23  
24 > int main() ...
```

Test Results

Custom Input

1 JPY/INR
-0.53%



Search

