


QUESTION 2 GROUP Aptitude SECTION Puzzles

Which of the number given in options will replace the question mark (?)



☐ 5918

☐ 107

☐ 159

☐ 3178

1

QUESTION 4 GROUP: Aptitude SECTION: Problem Solving Marks: 5

Instructions

Submit your answer

2

TIME LEFT 00:27:44

3

The population of animals in a certain forest was 1 lakh in the year K. In the year $(K+1)$ it has increased by $X\%$ of total and in the year $(K+2)$ (due to some natural disaster) the count is decreased by $Y\%$ of the total. After that, it is found that the population is still 1 lakh. Which of the following is correct?

4 ☆

☐ Cannot be determined

5

☐ $X < Y$

6

☐ $X > Y$

7

☐ $X = Y$

8

9

10

11

12

Previous Question

Next Question

QUESTION: 5

GROUP: Aptitude

SECTION: Problem Solving

Mark(s): 1

Instructions

2020-10-10

TIME LEFT: 00:27:55

The distance covered by a particle in t seconds consists of two parts, one of which varies with t , and the other which varies with t^2 . If the particle covered 75 units, and 195 units in the first and tenth seconds respectively, then what is the distance travelled by the particle in the first three seconds?

☐ 105 units

☐ 85 units

☐ 75 units

☐ 55 units

QUESTION: 6 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

Submit your reply

TIME LEFT: 00:26:14

Mr. A can work 50% faster than Mr. B and Mr. B alone can complete an assignment in 60 hours. In how many hours can Mr. A finish the same assignment with the help of Mr. B?

- ☐ 30 hours
- ☐ 12 hours
- ☐ 24 hours
- ☐ 36 hours

QUESTION: 7 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1


10/10/2020 10:25:30

TIME LEFT: 00:25:30


A chef mixes 36 litres of water with 65 liters of broth. She serves $\frac{1}{5}$ th of the mixture to her guests and then adds more water to maintain the original quantity. What is the resultant proportion of broth to water in the mixture?

☐ 49:52☐ 49:101☐ 52:49☐ 52:101


The bar graph below shows the percentage of the quantity of mixture in each container out of the maximum capacity of five different containers (A, B, C, D and E) in dairy farming.

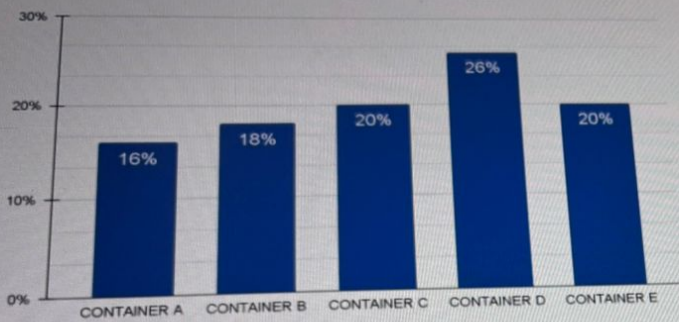PERCENTAGE OF MIXTURE

The bar graph below shows the percentage of the quantity of water in the five different containers out of the total quantity of mixture in that container.

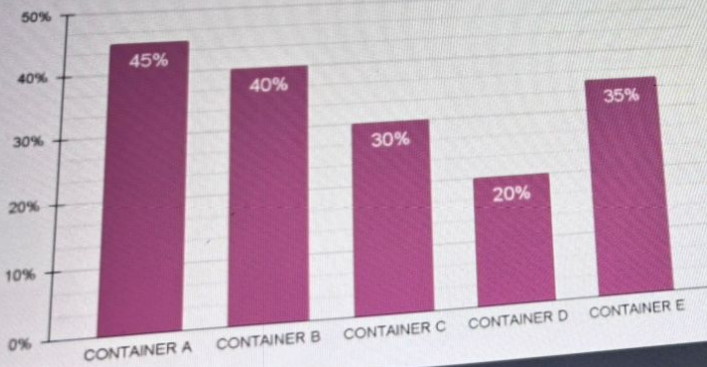PERCENTAGE OF WATER[Previous Question](#)[Next Question](#)

PERCENTAGE OF WATER

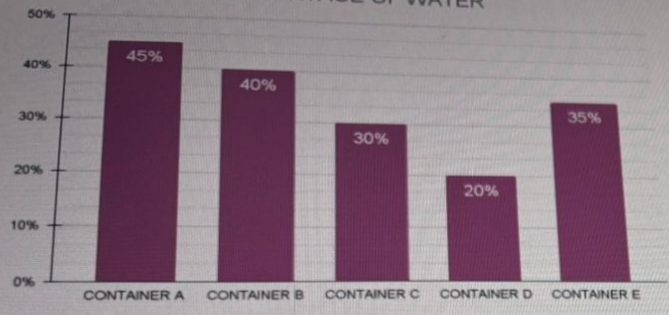

[Notes: (i) Mixture (litre) = Milk + Water


(ii) The difference between the quantity of milk and water in container A is 12 litres.]

Question: If 40 litres of mixture is taken out of container A and 4 litres of water is added to it, then find the ratio of the quantity of milk to the quantity of water in the final mixture in container A.

- ☐ 11:10
- ☐ 11:12
- ☐ 10:11
- ☐ 11:13

Previous Question

Next Question

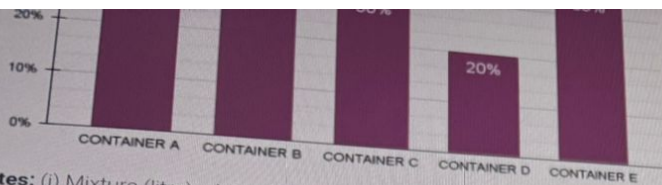

[Notes: (i) Mixture (litre) = Milk + Water

(ii) The difference between the quantity of milk and water in container A is 12 litres.]

Question: The capacity of container E is 175 litres and the remaining space in the container is filled with water. What is the final ratio of the quantity of milk to the quantity of water in container E?

☒ 37:31




☐ 39:32

☐ 39:31

☐ 39:37

[Previous Question](#)

[Next Question](#)

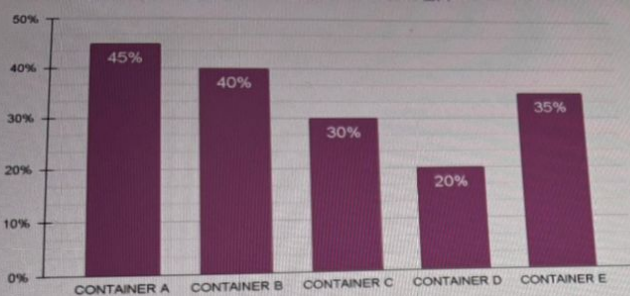

[Notes: (i) Mixture (litre) = Milk + Water

(ii) The difference between the quantity of milk and water in container A is 12 litres.]

Question: If the mixture in Container A and Container E are mixed together, then find the ratio of the quantity of milk to the quantity of water in the final mixture.

☒ 109:71


☐ 103:52

☐ 94:85

☐ 114:37

[Previous Question](#)

[Next Question](#)

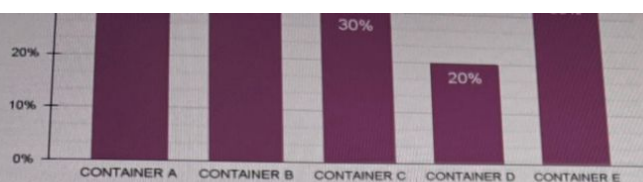

[Notes: (i) Mixture (litre) = Milk + Water

(ii) The difference between the quantity of milk and water in container A is 12 litres.]

Question: If the capacity of containers B and C is 180 litres and 200 litres, respectively, then find the sum of the quantities of mixtures required to fill containers B and C.

☐ 105 litres

☐ 85 litres

☐ 75 litres

☐ 95 litres

[Previous Question](#)

[Next Question](#)

QUESTION: 19 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

Subhika Jyoti Singh

TIME LEFT: 00:12:5

A four-digit number is called peculiar if the sum of the number formed by the first two digits and the last two digits is equal to the number formed by the middle two digits (Example 1978, $19 + 78 = 97$). If all numbers are arranged in ascending order, find the sum of peculiar numbers just before and after 1978.

- ☐ 4285
- ☐ 4175
- ☐ 3876
- ☐ 2876

22 ☆

What will be the output of the program given below?

23

#include <stdio.h>

24

int main(void)

25

{
char a = 1;

26

char b = -1;

27

printf("%d %d ", ~++a || b, a || ~b-- && ~++b);

28

printf("%d %d", a, b);

return 0;

☐ 1 0 2 -1☐ 1 1 2 -1☐ 1 0 3 1☐ Compile time error

23

#include <stdio.h>

int main()

{

char strarr[][5] = {"159", "hello", "pro"};

char *ptr[] = {(char *) (strarr+2), (char *) strarr, (char *) (strarr+1)};

char **p = ptr;

printf("%c", *****p++); p--;

printf("%c", *****p++); p++;

printf("%c", *****p++); p--;

printf("%c", ----*p--); p--;

printf("%c", ----*p--); p++;

return 0;

}

☐ 6sfgo☐ 6sfg

QUESTION 26 GROUP: Programming Basics SECTION: Error Finding Marks: 1

The following code is attempting to calculate and print the count of lonely 1s but it may contain some error. Which of the statements can fix the error (if exists)?

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
```

```
void CountLonelyOne(int number) {
    char num_str[20];
    sprintf(num_str, "%d", number);
    int count = 0;
    int len = strlen(num_str);

    for (int i = 0; i < len; i++) {
        if (num_str[i] == '1') {
            if (i == 0) {
                if (len == 1 || num_str[i + 1] != '1') {
                    count++;
                }
            } else if (i == len - 1) {
                if (num_str[i - 1] != '1') {
                    count++;
                }
            }
        }
    }
}
```

Previous Question

Next Question


```
21         }
22     } else {
23         if (num_str[i - 1] != '1' && num_str[i + 1] != '1') {
24             count++;
25         }
26     }
27     print("%d\n", count);
28 }
29
30 int main() {
31     int N;
32     scanf("%d", &N);
33     CountLonelyOne(N);
34     return 0;
35 }
```

- i) The `sprintf(num_str, "%d", number);` line should use `%s` instead of `%d`.
- ii) The `for (int i = 0; i < len; i++)` loop should start from `i = 1` instead of `i = 0`.
- iii) The `print("%d\n", count);` statement should be `printf("%d\n", count);`.
- iv) The `scanf("%d", &N);` line should use `%s` instead of `%d`.

[Previous Question](#)[Next Question](#)

```
23 int N;  
24 scanf("%d", &N);  
25 CountLonelyOne(N);  
    return 0;  
    }
```

- 26 ☆
- 27 i) The `sprintf(num_str, "%d", number);` line should use `%s` instead of `%d`.
 - 28 ii) The `for (int i = 0; i < len; i++)` loop should start from `i = 1` instead of `i = 0`.
 - 29 iii) The `print("%d\n", count);` statement should be `printf("%d\n", count);`.
 - 30 iv) The `scanf("%d", &N);` line should use `%s` instead of `%d`.

31 ☐ Statement iv

32 ☒ Statement i and ii

33 ☐ Statement i and iii

4 ☐ Statement iii

Previous Question

Next Question

QUESTION 27 GROUP: Programming Basics SECTION: C Programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    int x = 5;
    printf("%d", -x << 2 | x ^ ++x);
    return 0;
}
```

☐ -20

☐ -14

☐ -21

☐ -24

[Previous Question](#)

[Next Question](#)

lenovo

24

Programming Basics

SECTION

Operating System Fundamentals

Mark(s): 1

25

Which of the below given statement(s) is/are correct about context switching?

26

I) The context of a process state is represented in the PCB of a process.

II) The system stores and restores the CPU's state such that multiple processes can share a single CPU.

III) Context switching is just limited to thread switching.

27

☆

☐ Only (II) and (III)

☐ Only (II)

☒ Only (I) and (II)

☐ Only (III)

What will be the output of the program given below? (Consider the address of the variable as 1200)

```
#include <stdio.h>
int main()
{
    int *p;
    int a = 4;
    p = &a;
    printf("%d %d %d %d", a, *p, *(&a), *(*&p));
    return 0;
}
```

☐ 4 4 4 4

☐ Compile time error

☐ 4 4 1200 1200

☐ 4 4 1200 4

QUESTION: 32 GROUP: Programming Basics SECTION: C Programming Marks: 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    int x = 5;
    printf("%d", ~x << 2 | x ^ ++x);
    return 0;
}
```

☐ -24

☐ -21

☐ -20

☐ -14

QUESTION: 33

GROUP: Programming Basics

SECTION: Operating System Fundamentals

Mark(s): 1

Sudhanshu Singh

TIME LEFT: 00:16:24

Consider the page sequence given below:

3, 9, 0, 9, 1, 2, 9, 3, 0, 2, 1, 3, 9, 0, 1, 2

Which of the statement given in options is correct if the frame size used is 4 which does not contain any page initially in memory?

- ☐ Number of page faults generated by FIFO (First In First Out) algorithm is more than the number of page faults generated by LRU (Least Recently Used) algorithm.
- ☐ FIFO (First In First Out) algorithm cannot be implemented for the given page sequence.
- ☐ Number of page faults generated by FIFO (First In First Out) algorithm and LRU (Least Recently Used) algorithm are equal in number.
- ☐ Number of page faults generated by LRU (Least Recently Used) algorithm is more than the number of page faults generated by FIFO (First In First Out) algorithm.

[Previous Question](#)[Next Question](#)

QUESTION: 34

GROUP: Programming Basics

SECTION: Computer Architecture

Mark(s): 1

Consider the statement given below:

"Add the value stored in location 2 and in location 1 and store the result in location 0. If the result is not zero then get the next instruction from location 4."

Which one of the given options is the correct representation of an single address instruction for the given statement?

☐ SUB [1],4,5

☐ ADD [0],[1],[2],NZ,4,5

☐ NZ 4, 5, SUB [0], [1], [2]

☐ SUB [1][0],4,5

QUESTION: 35 GROUP: Programming Basics SECTION: Computer Architecture Mark(s): 1

27

28

Which of the instruction(s) given below is/are correct?

29

I) MOV BL, AL, DL

II) MOV BH

30

III) MOV SP, AX

31

☐ Only (I) and (II)

32

☐ Only (III)

33

☐ Only (II) and (III)

34

35 ☆

☐ Only (I)

36

37

38

QUESTION 37 GROUP: Programming Basics SECTION: Data Structures Basics Mark(s): 1

What is the memory location of item `ARR[1][23]` when the array is stored in row major and column major respectively?

Given array `ARR[35][45]` requires 4 byte for every element and base memory location is 3280.
[Note: row-major or column storage, a multidimensional array in linear memory is organized such that rows are stored one after the other. column-major order is a similar method of flattening arrays into linear memory, but the columns are stored in sequence.]

☐ 5352 and 6544

☐ 4912 and 7464

☐ 4292 and 4292

☐ 6244 and 7152

Previous Question

Next Question

lenovo

27

QUESTION: 40

GROUP: Programming Basics

SECTION: Data Structures Basics

Mark(s): 1

[Instructions](#)

28

Given a circular queue Q with 2 elements and capacity of 4 what will be rear if front = 2?

☐ 2☒ 1☐ 0☐ 3[Unanswer](#)

41 ☆

QUESTION: 41 GROUP: Computer Science SECTION: OOPS Mark(s): 1

42

Which of the below given statement(s) is/are true?

43

I) Static initialization blocks run once, when the class is first loaded.

44

II) Instance initialization blocks run every time a new instance is created.

45

☐ Neither (I) nor (II)

46

☐ Both (I) and (II)

47

☐ Only (II)

48

☐ Only (I)

QUESTION: 42 GROUP: Computer Science SECTION: OOPS Mark(s): 1

Choose the incorrect statements from the given options.

- I) Static variables live as long as their object lives.
- II) Instance variables live basically as long as their class lives.
- III) Local variables live as long as their method is on the stack; however, if their method invokes another method, they are temporarily unavailable.
- IV) Block variables live until the block completes.

☐ Only (III) and (IV)

☐ Only (I) and (IV)

☐ Only (I) and (II)

☐ Only (II) and (III)

Previous Question

Next Question

41

42

What will be the output of the program given below?

43

#include <stdio.h>

44

int m = 25;

45 ☆

int main()

46

int q = &m;

47

int ***f(int**);

48

int ***p;

p = f(&q);

printf("%d", ***p);

49

return 0;

50

int ***f(int **q)

51

{

52

**q += **q;

m += 1;

53

return (&q);

54

626

QUESTION 46 GROUP: Computer Science SECTION: C programming Marks: 1

What will be the output of the program given below?

```
#include <stdio.h>
int main(void)
{
    char a = 5;
    char b = 10;
    char c = a == 10 / 2;
    char d = a == 10 | 2;
    printf("%d %d", c, d);
    return 0;
}
```

☐ 5 10

☐ 1 0

☐ 1 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    unsigned int num = 8;
    char *nu = (char *)&num;
    printf("%d ", ~num + function(nu));
    return 0;
}
```

```
int function(char *n)
{
    *n = *n | *n ;
    return !(*n);
}
```

☐ -9

☐ -8

QUESTION: 48 GROUP: Computer Science SECTION: Operating Systems Mark(s): 1

TIME LEFT: 00:25:21

If there are 55 frames to be divided among two processes P1 and P2, P1 has 17 pages and P2 has 30 pages, then what will be the number of frames each process may get using a proportional allocation algorithm?

- ☐ 20 frames for P1 and 35 frames for P2.
- ☐ 17 frames for P1 and 30 frames for P2.
- ☐ 25 frames for P1 and 30 frames for P2.
- ☐ 19 frames for P1 and 36 frames for P2.

Previous Question

Next Question

46

47

What will be the return value of the function given below, if called as `t(6, 3)`?

48

```
int t(int x, int y)
```

49

```
{
```

```
    if (y <= 1)
```

```
        return 0;
```

50 ☆

```
    if (x == y)
```

```
        return y;
```

51

```
    else
```

```
        return x + t(x, y - 1);
```

52

```
}
```

53

☐ 11

54

☐ 12

55

☒ 10

56

☐ 9

57

47 What will be the output of the program given below?

```
48 #include <stdio.h>
49 int main()
50 {
51     char *p = "Kerala", *q = "Ooty", *r = "Mysore", *s = "Shimoga";
52     enum loc {Kerala = 1, Ooty = 2, Mysore = 3, Shimoga = 4};
53     enum loc dir;
54     dir = Shimoga;
55     if (dir == Shimoga)
56     printf("The best place is %s\n", s);
57     return 0;
58 }
```

☐ The best place is Kerala

☐ The best place is Ooty

☐ The best place is Mysore

QUESTION: 51 GROUP: Computer Science SECTION: C programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    char *p = "Kerala", *q = "ooty", *r = "Mysore", *s = "Shimoga";
    enum loc {Kerala = 1, Ooty = 2, Mysore = 3, Shimoga = 4};
    enum loc dir;
    dir = Shimoga;
    if (dir == Shimoga)
        printf("The best place is %s\n", s);
    return 0;
}
```

- ☐ The best place is Kerala
- ☐ The best place is Ooty
- ☐ The best place is Mysore
- ☐ The best place is Shimoga

Previous Question

Next Question

QUESTION: 52 GROUP: Computer Science SECTION: Computer Architecture 1 Mark(s): 1

Which of the data type given in options is a 32-bit signed integer?

☐ SDWORD

☐ DWORD

☐ SWORD

☐ WORD

QUESTION: 53 GROUP: Computer Science SECTION: C programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>

int prime(int *m, int *n, int *o, int *p, int *q);
int num();

int main()
{
    static int arr[] = {45, 46, 47, 49, 50, 51, 52};
    int *ptr = arr + 1;
    num();
    prime(++ptr, ptr--, ptr++, ptr--, ptr);
    return 0;
}

prime(int *m, int *n, int *o, int *p, int *q)
{
    printf("\n%d %d %d %d %d", *m, *n, *o, *p, *q);
}

int num()
{
    static int a[] = {0, 1, 2, 3, 4};
```

Previous Question

Next Question

```
47 prime(int *m, int *n, int *o, int *p, int *q)
48 {
49     printf("\n%d %d %d %d %d", *m, *n, *o, *p, *q);
50 }
51
52 int num()
53 {
54     static int a[] = {0, 1, 2, 3, 4};
55     static int *p[] = {a + 2, a, a + 4, a + 3, a + 1};
56     int **ptr;
57     ptr = p;
58     **++ptr;
59     printf("%d %d", **ptr, ptr - p);
60 }
```

☐ 1 0

46 45 45 46 46

☐ 0 1

49 47 47 47 46

☐ 0 1

46 46 45 46 46

Previous Question

Next Question

QUESTION: 54 GROUP: Computer Science SECTION: Data Structures Mark(s): 1

The elements of a stack S are enqueued in a deque 'Q' alternatively starting from FRONT end. What will be the element at REAR of queue after the stack is completely exhausted?
Initially TOP = 5, FRONT = 3 and REAR = 3

S: 3 1 4 5 6 2

☐ 3

☐ 2

☐ 4

☐ 1

What will be the output of the program given below?

```
#include <stdio.h>

int main()
{
    int a = 4;
    if ( a ^ a &&(a ^ a) || a)
        printf("%d", a);
    return 0;
}
```

☐ 7

☐ 4

☐ 5

☐ 6

[Previous Question](#)

[Next Question](#)

QUESTION: 56 GROUP: Computer Science SECTION: Computer Architecture 1 Mark(s): 1

An unpipelined processor with 5 stages has the following execution stages :

90ns, 70ns, 10ns, 40ns, 130ns

What is the instruction latency of the unpipelined stage?(Assume an overhead of 5ns)

☐ 135 ns

☐ 340 ns

☐ 345 ns

☐ 130 ns

Previous Question

Next Question

QUESTION: 57 GROUP: Computer Science SECTION: OOPS Mark(s): 1

Which of the below given statement(s) is/are rule(s) for Overriding a method?

- I) If a method cannot be inherited, then it cannot be overridden.
- II) A method declared as static cannot be overridden and it cannot be re-declared too.
- III) Instance methods cannot be overridden.

☐ Only (III)

☐ Only (I) and (III)

☐ Only (II) and (III)

☐ Only (I)

QUESTION: 59 GROUP: Computer Science SECTION: Computer Architecture 1 Mark(s): 1

Which of the below given is/are general register(s)?

- I) Data registers
- II) Pointer registers

☐ Only (I)

☐ Only (II)

☐ Neither (I) nor (II)

☐ Both (I) and (II)

Previous Question

Next Question

QUESTION: 60 GROUP: Computer Science SECTION: Operating Systems Mark(s): 1

Which of the statement(s) given below is/are correct for CPU scheduling algorithms?


- I) The throughput of Shortest Process Next (SPN) algorithm is on the higher side as compared to First Come First Serve (FCFS) algorithm.
- II) The overhead for Round Robin algorithm is lower as compared to the Shortest Process Next (SPN) algorithm.
- III) Starvation of processes is possible in First Come First Serve (FCFS) algorithm.


☐ Only (II)

☐ Only (II) and (III)

☐ Only (I) and (II)

☐ Only (I) and (III)

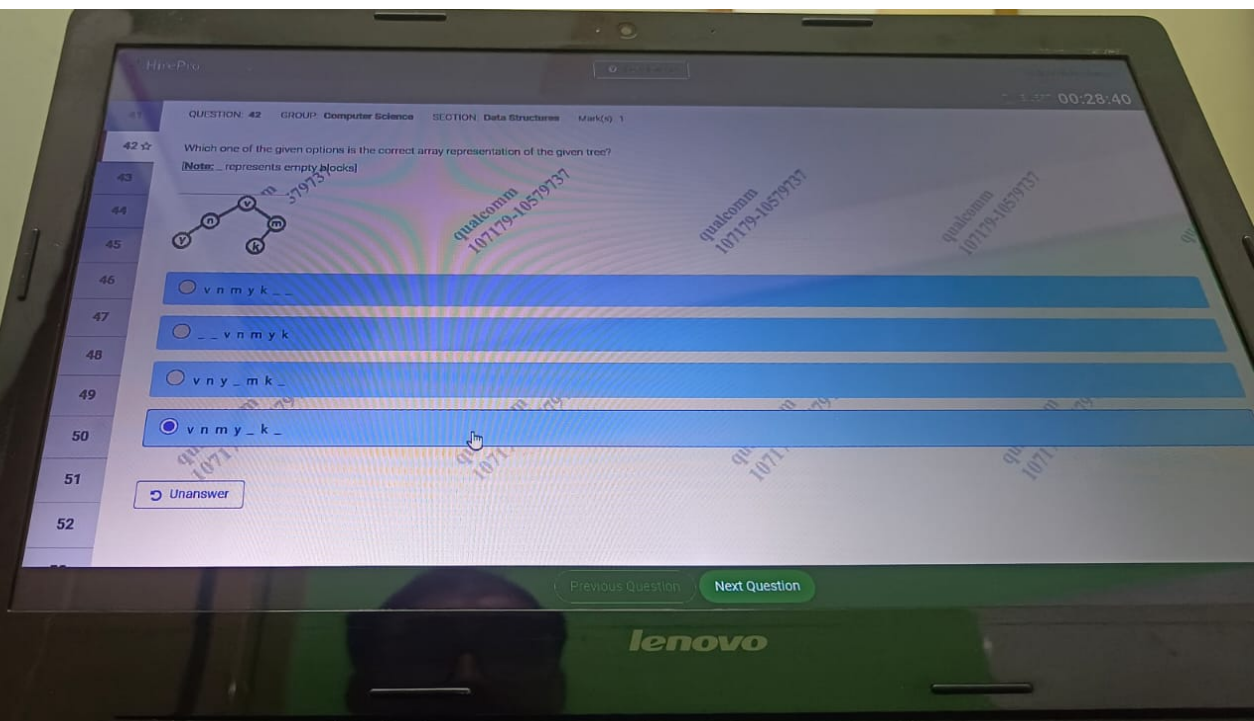

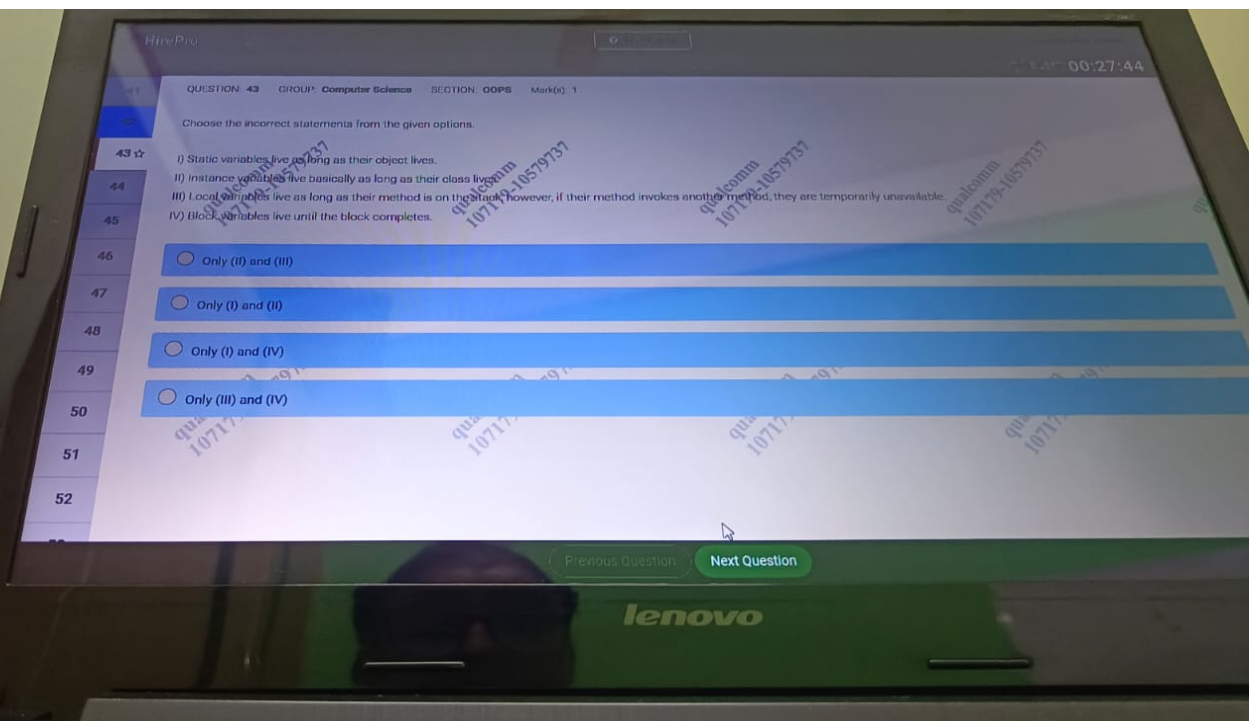

QUESTION: 44 GROUP: Computer Science SECTION: Operating Systems Mark(s): 1

If there are 55 frames to be divided among two processes P1 and P2, P1 has 17 pages and P2 has 30 pages, then what will be the number of frames each process may get using a proportional allocation algorithm?

- ☐ 19 frames for P1 and 36 frames for P2.
- ☐ 25 frames for P1 and 30 frames for P2.
- ☐ 20 frames for P1 and 35 frames for P2.
- ☐ 17 frames for P1 and 30 frames for P2.

[Previous Question](#)[Next Question](#)

lenovo

The elements of a stack S are enqueued in a deque Q alternatively starting from FRONT end. What will be the element at REAR of queue after the stack is completely exhausted?
Initially $TOP = 5$, $FRONT = 2$ and $REAR = 3$

$S: 3\ 1\ 4\ 5$

☐ 2

☐ 1

☐ 3

☐ 4

Previous Question

Next Question

lenovo

QUESTION 46 GROUP: Computer Science SECTION: Data Structures Mark(s): 1

The elements of a stack S are enqueued in a deque 'Q' alternatively starting from FRONT end. What will be the element at REAR of queue after the stack is completely exhausted?
Initially TOP = 5, FRONT = 2 and REAR = 3

S: 3 1 4 5 2

☐ 2

☐ 1

☐ 3

☐ 4

Previous Question

Next Question

lenovo

00:22:24

QUESTION 47 GROUP: Computer Science SECTION: Data Structures Mark(s): 1

Identify the type of a binary tree by given property.

i) A tree where each parent node has only one associated child node.

☐ None of the options given

☐ Full Binary Tree

☐ Complete Binary Tree

☐ Degenerate Tree

Previous Question

Next Question

lenovo

QUESTION 48 GROUP Computer Science SECTION Computer Architecture 1 Mark(s) 1

An unipipeline processor with 5 stages has the following execution stages:

90ns, 70ns, 10ns, 40ns, 130ns

What is the instruction latency of the unipipeline stage (assume an overhead of 5ns)

☐ 345 ns☐ 340 ns☐ 130 ns☐ 135 ns

Previous Question

Next Question

lenovo

QUESTION: 49 GROUP: Computer Science SECTION: Operating Systems Mark(s): 1

A file block uses the fixed blocks of 5 programs namely A, B, C, D and E of size 15 bytes. Each is placed in the same order in the file block of size 75 bytes. After sometime the program A and program C are unloaded from the memory. A new program named F of size 30 bytes is loaded but it cannot fit into this file block even though there is availability of space. Which of the below given observations is/are correct for the given scenario?

- I) There is a problem of internal fragmentation due to space deficiency.
- II) There is a problem of external fragmentation as the programs that are unloaded from memory are not adjacent to each other.

☐ Neither (I) nor (II)☐ Only (I)☐ Only (II)☒ Both (I) and (II)[Previous Question](#)[Next Question](#)

lenovo

Home Pro

0

00:22:09

QUESTION: 50 GROUP: Computer Science SECTION: Algorithms Mark(s): 1

What will be the return value of the function given below, if called as t(6, 3)?

```
int t(int x, int y)
{
    if (x == y)
        return 0;
    if (x < y)
        return y;
    else
        return x + t(x, y - 1);
}
```

☐ 12

☐ 11

☐ 10

☐ 9

Previous Question

Next Question

lenovo

HirePro

00:22:04

QUESTION: 52 GROUP: Computer Science SECTION: C programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    unsigned int num = 8;
    char *nu = (char *) &num;
    printf("%d ", ~num + function(nu));
    return 0;
}
```

```
int function(char *n)
```

```
{
    *n = *n | ~n;
    return *n;
}
```

☐ Compile time error

☐ 16

Previous Question

Next Question

lenovo


```
47 unsigned int num = 0;  
48 char *s = (char *)num;  
49 printf("%d ", -num + function(num));  
50 return 0;
```

```
51 int function(char *n)  
52 {  
53     *n = *n | *n;  
54     return (*n);  
55 }
```

☐ Compile time error

☐ -16

☐ -9

☐ -8

[Previous Question](#)[Next Question](#)

lenovo

Which of the statement(s) given below is/are correct for CPU scheduling algorithms?

- I) The throughput of Shortest Process Next (SPN) algorithm is on the higher side as compared to First Come First Serve (F-CFS) algorithm.
- II) The overhead of Round Robin algorithm is lower as compared to the Shortest Process Next (SPN) algorithm.
- III) Starvation of processes is possible in First Come First Serve (F-CFS) algorithm.

☐ Only (I) and (II)

☐ Only (II)

☐ Only (II) and (III)

☐ Only (I) and (III)

[Previous Question](#)[Next Question](#)

lenovo

QUESTION: 54 GROUP: Computer Science SECTION: C programming Mark(s): 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    char *p = "Kerala", *q = "Ooty", *r = "Mysore", *s = "Shimoga";
    enum loc {Kerala = 1, Ooty = 2, Mysore = 3, Shimoga = 4};
    enum loc dir;
    dir = Shimoga;
    if (dir == Shimoga)
        printf("The best place is %s\n", s);
    return 0;
}
```

- ☐ The best place is Ooty
- ☐ The best place is Mysore
- ☐ The best place is Shimoga

Previous Question

Next Question

lenovo

HivePro

0

00:21:46

```
#include <stdio.h>
int main()
{
    char *p = "Kerala", *q = "Ooty", *r = "Mysore", *s = "Shimoga";
    enum loc(Kerala = 1, Ooty = 2, Mysore = 3, Shimoga = 4);
    declare r;
    if (r == Shimoga)
        printf("The best place is %s\n", s);
    return 0;
}
```

☐ The best place is Ooty

☒ The best place is Mysore

☐ The best place is Shimoga

☐ The best place is Kerala

Previous Question

Next Question

lenovo

New Page

0

00:21:42

QUESTION 55 GROUP Computer Science SECTION C programming Marked: 1

What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    int i = 5, *p;
    p = &i;
    printf("%d", ++*p);
    return 0;
}
```

☐ compile time error

☐ 6


☐ Garbage value

☐ 5

Previous Question

Next Question

lenovo

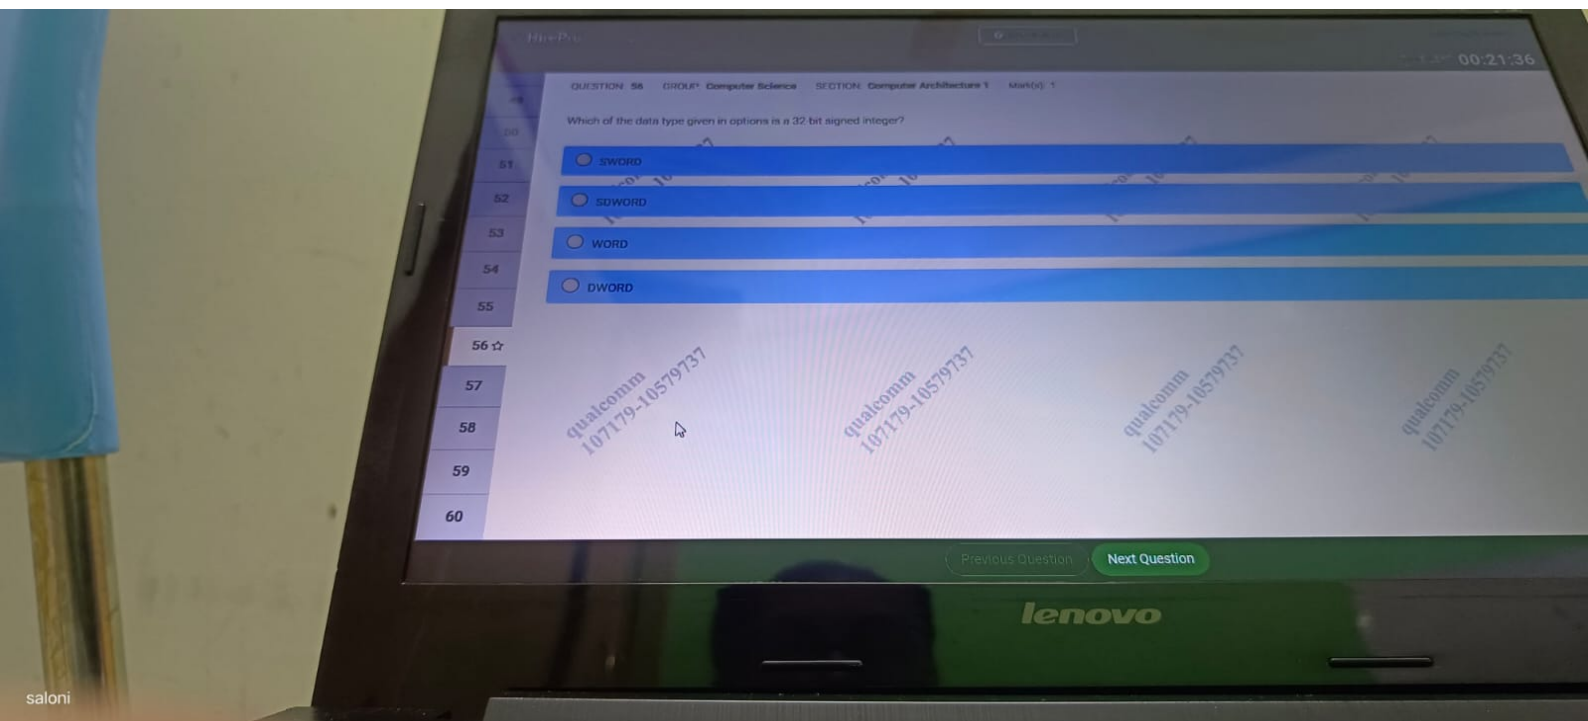

QUESTION 57 GROUP Computer Science SECTION: C programming Mark(s) 1

What will be the output of the program given below?

```
#include <stdio.h>
int prime(int *a, int *n, int *o, int *p, int *q);
int num(int *a, int *n);

int main()
{
    static int arr[] = {45, 46, 47, 49, 50, 51, 52};
    int *ptr = arr + 1;
    num();
    prime(++ptr, ptr--, ptr++, ptr--, ptr);
    return 0;
}

prime(int *a, int *n, int *o, int *p, int *q)
{
    printf("intd %d %d %d %d", *n, *o, *p, *q);
}
```

[Previous Question](#)[Next Question](#)

lenovo

```
static int arr[] = {45, 46, 47, 48, 49, 50, 51, 52};
int *ptr = arr + 1;
num();
printf("%p, %p, %p, %p, %p", ptr, ptr++, ptr--, ptr);
return 0;
}

51
52
53
54
55
56
57 ☆
58
59
60

static int arr[] = {0, 1, 2, 3, 4};
static int *p[] = {a + 2, a, a + 4, a + 3, a + 1};
int **ptr;
ptr = p;
**ptr;
printf("%d %d", **ptr, ptr - p);
}
```

Previous Question

Next Question

lenovo

```
int main()
{
    static int a[] = {0, 1, 2, 3, 4};
    static int x[] = {0, 1, 2, 3, 4};
    int **p;
    p = (int**) malloc(5 * sizeof(int));
    printf("%d %d", **p, p[0] - p[1]);
}
```

☐ 0 1
49 47 47 46

☒ 1 0
46 45 45 46

☐ 0 1
46 46 45 46

☐ 1 0

Previous Question

Next Question

lenovo

8

What is the missing one in the below series?

9

J7 T5 _ N6 X9

10

☐ Z7

11

☐ D8

12

☐ L5

13

☐ W4

4