

21 ☆

```
(  
    union yoon  
    {  
        int y : 5;  
        int n : 1;  
    }yo;  
    yo.y = 2;  
    enum state{s, s1 = yo.y, s2 = yo.n, s3, s4, s5}; //Line 1  
    if (yo.y == s1) //Line 2  
        printf("offer");  
    else if (yo.n == s4) //Line 3  
        printf("receive");  
    else  
        printf("format");  
    return 0;  
}
```

☐ Line 1☐ No error in the program☐ All Line 1, Line 2 and Line 3☐ Line 2 and Line 3

Previous Question


Next Question

21 QUESTION: 23 GROUP: Programming Basics SECTION: CA Mark(s): 1


22 Which of the given below gate(s) will generate output as 0 (zero) when inputs are given as A = 1 and B = 1?

23 ☆

I)



II)

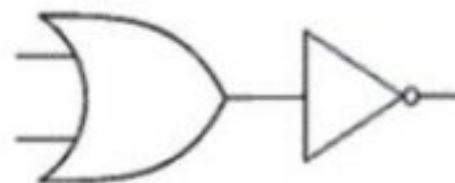☐ Neither (I) nor (II)☐ Both (I) and (II)☐ Only (I)☐ Only(II)

Previous Question

Next Question

21 QUESTION: 24 GROUP: Programming Basics SECTION: Operating System Fundamentals Mark(s): 1

22 If a file system uses the concept of un-spanned blocking, what will be the percentage amount of wasted space for file allocation when the system has 100 bytes of block size with the records contained

23 in file as given below?

24 ☆ 34, 56, 78, 12, 91

25 ☐ 43%

26 ☐ 33.12%

27 ☐ 25.80%

28 ☐ 32.25%

30

31

32

33

34

35

Previous Question

Next Question

21 QUESTION: 25 GROUP: Programming Basics SECTION: C Programming Mark(s): 1

22 Which of the statement given in options is true about run-time memory organization for C?

23 ☐ Data area contains only global variable.

24 ☒ Generally data area contains static variables (internal and external) as well as global variable.

25 ☆ ☐ Data area contains only static variable internal (local to function).

26 ☐ Data area contains only static variable external.

27

28

29

30

31

32

33

34

35

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:26:17

21

22

23

24

25

26 ☆

27

28

29

30

31

32

33

34

35

QUESTION: 26 GROUP: Programming Basics SECTION: Operating System Fundamentals Mark(s): 1

When the request is granted in deadlock avoidance algorithm, whenever a process requests a resource that is currently available?

I) The request is granted only if the allocation leaves the system in a safe state.

II) The request is granted either if the allocation leaves the system in a safe state or unsafe state.

☒ Both (I) and (II)

☐ Only (I)

☐ Only (II)

☐ Neither (I) nor (II)

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:26:04

22

23

24

25

26

27 ☆

28

29

30

31

32

33

34

35

36

QUESTION: 27 GROUP: Programming Basics SECTION: C Programming Mark(s): 1

How many bytes are required to store the string "politics as usual"?

☐ 14 bytes

☐ 18 bytes

☐ 19 bytes

☐ 21 bytes

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:25:56

23

24

25

26

27

28 ☆

29

30

31

32

33

34

35

36

37

QUESTION: 28 GROUP: Programming Basics SECTION: CA Mark(s): 1

Which one of the given options is the correct reduced expression for the below given?

ABC + BC + AC = ?

☐ AB + BC

☐ AB

☐ ABC

☐ C (A + B)

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:25:42

24

25

26

27

28

29 ☆

30

31

32

33

34

35

36

37

38

QUESTION: 29 GROUP: Programming Basics SECTION: C Programming Mark(s): 1


What will be the output of the program given below?

```
#include <stdio.h>
int main()
{
    static int y, z = 3;
    y += (z > (y, 3) ? call(z - 1) : call(y));
    return y;
}

int call(int g)
{
    enum hike
    {
        h,
        k = 3,
        i,
    };
    if (k > h || k < i)
        printf("%d", h << g || i);
    else
        printf("%d", call(g - 1));
}
```

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:25:33

25

QUESTION: 30 GROUP: Programming Basics SECTION: Data Structures Basics Mark(s): 1

26

Consider:

27

28

29

30 ☆

31

32

33

34

35

36

37

38

39

```
void Test(int arr[], int n)
{
    int i, j;
    bool temp;
    for (i = 0; i < n-1; i++)
    {
        temp = false;
        for (j = 0; j < n-i-1; j++)
        {
            if (arr[j] > arr[j+1])
            {
                swap(&arr[j], &arr[j+1]);
                temp = true;
            }
        }
        if (temp == false)
            break;
    }
}
```

What is the best time complexity of the above function?

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:25:24

26

QUESTION: 31 GROUP: Programming Basics SECTION: Operating System Fundamentals Mark(s): 1

27

How many periods of delay are required for access to moving head disks before the information is brought into memory?

28

29

30

31 ☆

32

33

34

35

36

37

38

39

40

☐ 1

☐ 3

☐ 4

☐ 2

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:25:04

26

QUESTION: 33 GROUP: Programming Basics SECTION: Data Structures Basics Mark(s): 1

27

Identify the type of binary tree.

28

29

30

31

32

33 ☆

34

35

36

37

38

39

40

```
graph TD; A((A)) --- B((B)); A --- C((C)); B --- D((D)); B --- E((E)); C --- F((F))
```

☐ Full Binary Tree

☐ Degenerate Tree

☐ None of the options given

☐ Complete Binary Tree

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:29:17

1 ☆

QUESTION: 1 GROUP: Aptitude SECTION: Puzzles Mark(s): 1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

A watch which gains uniformly, is 4 min slow at 8 o' clock in the morning on Sunday, and is 4 min 48 sec fast at 6 a.m. on the next day. When was the watch showing the correct time?

☐ 6.30 p.m. on Sunday

☐ 7.00 p.m. on Sunday

☐ 5.00 p.m. on Sunday

☐ 6.00 p.m. on Sunday

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:24:54

26

QUESTION: 34 GROUP: Programming Basics SECTION: Error Finding Mark(s): 1

27

The following code tries to calculate and print the product of the variables 'p' and 'q'. What is the error in the code (if any), and how can it be fixed?

28

```
#include <stdio.h>
```

29

```
int main() {
```

30

```
    int p = 5;
```

31

```
    int q = 10;
```

32

```
    int z;
```

33

```
    z = p x q;
```

34 ☆

```
    printf("The product of %d and %d is %d\n", x, y);
```

35

```
    return 0;
```

36

```
}
```

37

☐ Replace "x" with "*" in the calculation of z

38

☐ Change "%d" to "%f" in the printf statement

39

☐ No Error

40

☐ Add third argument in printf

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:24:45

26

QUESTION: 35 GROUP: Programming Basics SECTION: CA Mark(s): 1

27

Which one of the given options is the correct complemented code for the below given binary number?

28

101001101

29

☐ 11111111

30

☐ 001011000

31

☐ 010110010

32

☐ 010110011

33

34

35 ☆

36

37


38

39

40

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:24:36

26

QUESTION: 36 GROUP: Programming Basics SECTION: CA Mark(s): 1

27

Convert the given number $(105.35)_8$ into Hexadecimal

28

☐ $(35.72)_{16}$

29

☐ $(55.76)_{16}$

30

☐ $(45.74)_{16}$

31

☐ $(25.70)_{16}$

32

33

34

35

36 ☆

37


38

39

40

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:24:24

26

```
#include <stdio.h>

int main()
{
    struct pin
    {
        int p;
        int i;
    }pi = {2, 3};
    call(pi.p, pi.i);
    return 0;
}

int call(int a, int b)
{
    int arr[2][2][2] = {2, 5, 7, 9, 6, 10, 15};
    printf("%d ", arr[1][1][0]);
    if (a == b)
        call1(a - 1);
    else
        call1(4);
}

int call1(int s)
{
    printf("%d", s | s - 1 ? s + 1 : s ^ 2 : 3 & s : 2 * s);
}
```

27

28

29

30

31

32

33

34

35

36

37 ☆

38

39

40

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:24:24

26

```
#include <stdio.h>

int main()
{
    struct pin
    {
        int p;
        int i;
    }pi = {2, 3};
    call(pi.p, pi.i);
    return 0;
}

int call(int a, int b)
{
    int arr[2][2][2] = {2, 5, 7, 9, 6, 10, 15};
    printf("%d ", arr[1][1][0]);
    if (a == b)
        calll(a - 1);
    else
        calll(4);
}

int calll(int s)
{
    printf("%d", s | s - 1 ? s + 1 : s ^ 2 : 3 & s : 2 * s);
}
```

27

28

29

30

31

32

33

34

35

36

37 ☆

38

39

40

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:23:53

26

QUESTION: 39 GROUP: Programming Basics SECTION: CA Mark(s): 1

27

Which of the given below addressing modes is/are used to improve the operation of program loops in ARM processor?

28

I) Auto-increment addressing mode

29

II) Auto-decrement addressing mode

30

☐ Only (I)

31

☐ Only (II)

32

☐ Both (I) and (II)

33

☐ Neither (I) nor (II)

34

35

36

37

38

39 ☆

40

Previous Question

Next Question

26 QUESTION: 40 GROUP: Programming Basics SECTION: Data Structures Basics Mark(s): 1

27 Consider the following text.

28 "The Ram Mandir is a Hindu temple that is under construction in Ayodhya, Uttar Pradesh, India."

29 This is a plain text and its words need to be rearranged. The process of rearrangement is as follows

30 - According to the length of word, priority is assigned. (more length - high priority). if two words have the same priority then the word that occurred first in the sentence will get high priority.

31 - Insert only the words that have even priority into a queue based on their priority from high to low to get the modified text.

32 Please note : 1 depicts high priority

33 Given the plain text identify the modified text based on the above algorithm.

34 ☐ construction mandir temple that is is in

35 ☐ a in is is Ram The that india utter under hindu temple mandir Pradesh Ayodhya construction

36 ☐ construction Ayodhya Pradesh mandir temple hindu under utter india that The Ram is is in a

37 ☐ in is is that temple mandir construction

38

39

40 ☆

Previous Question

Next Question



Your network connectivity to our servers has stopped working.

41 ☆ QUESTION: 41 GROUP: Computer Science SECTION: Operating System Mark(s): 1

42 A disk driver is requested for disk cylinders in the order given below. C-SCAN disk scheduling algorithm is used where each seek consumes 4ms of time per cylinder. What will be the total seek time if the disk drive is currently at cylinder 30?

43 67, 45, 22, 180, 112, 95, 77, 69, 66, 55, 10

44 ☐ 408ms

45 ☐ 558ms

46 ☐ 996ms

47 ☐ 1096ms

48

49

50

51

52

53

54

55

Previous Question

Next Question

HirePro

Your network connectivity to our servers has stopped working.

Abhinav Kuruma

TIME LEFT: 00:24:45

41

QUESTION: 43 GROUP: Computer Science SECTION: OOPS Mark(s): 1

42

Which of the below given statements(s) is/are true?

43 ☆

I) To instantiate an instance of inner class, there should be a live instance of outer class.

44

II) An inner class instance can be created only from an outer class instance.

45

III) An inner class shares a special relationship with an instance of the enclosing class.

46

☐ Only (I)

47

☐ Only (II)

48

☐ Only (III)

49

☐ All (I), (II) and (III)

50

51

52

53

54

55

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:24:25

41

QUESTION: 44 GROUP: Computer Science SECTION: C programming Mark(s): 1

42

Which one of the statement given in options is correct about the following line of code?

43

`country.city.person = 32`

44 ☆

45

☐ Structure city is nested within structure country

46

☐ Structure person is nested within structure city

47

☐ Structure city is nested within structure person

48

☐ Structure country is nested within structure city

49

50

51

52


53

54

55

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:29:08

1

QUESTION: 2 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

2

☆

Flag this question

Three friends are running in the race with six more contestants. Persons who get rank 1, rank 2 and rank 3 win the medal. How many groups of winners are possible where at least two of the above mentioned friends are there?

3

4

☐ 18

5

☐ 6

6

☐ 19

7

☐ 3

8

9

10

11

12


13

14

15

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:20:23

46

QUESTION: 59 GROUP: Computer Science SECTION: Computer Architecture 1 Mark(s): 1

47

Which one of the given options is the correct description of Reorder Buffer (ROB) in branch prediction?

48

49

☐ ROB accommodates the result of a completed instruction before commit.

50

☐ ROB contains the address of the last taken Jump and Link instruction.

51

☐ ROB contains the address of the last taken branch instruction.

52

☐ ROB contains the address of the most recently completed instruction.

53

54

55

56

57

58

59

☆

60

Previous Question

Next Question

End Test

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:19:52

46

QUESTION: 56 GROUP: Computer Science SECTION: Operating System Mark(s): 1

47

Given below is a page table with a page size of 2⁶ bytes:

48

Present/ Absent in memory	Frame
P	10101
P	11011
A	01000
A	00010
A	11000
P	01110

51

Which of the virtual addresses of pages given below successfully get mapped to physical address? (If page fault occurs, specify the same)

52

Page P: 0000101011100

54

☐ Page Fault occurs

55

☐ Page P: Physical address is 01110011100

56 ☆

☐ Page P: Physical address is 01110001110

57

☐ Information inadequate

58

59

60

Previous Question

Next Question

End Test

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:19:40

46

QUESTION: 55 GROUP: Computer Science SECTION: Computer Architecture 1 Mark(s): 1

47

Instructions like LDS and LES belong to which type of instructions given in options?

49

☐ Processor control instructions

50

☐ Data transfer instructions

51

☐ Loop control instructions

52

☐ Logic instructions

53

54

55 ☆

56

57

58

59

60

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:19:26

46

QUESTION: 54 GROUP: Computer Science SECTION: OOPS Mark(s): 1

47

Which of the statements given below are true about message passing?

48

I) Message passing between two objects is generally unidirectional.

49

II) Message passing enables all interactions between objects.

50

III) Message passing essentially involves invoking class methods.

51

IV) Objects in different processes can be involved in message passing.

51

☐ Only (I), (II) and (III)

52

☐ Only (I), (III) and (IV)

53

☐ (I), (II), (III) and (IV)

54 ☆

☐ Only (II), (III) and (IV)

55

56

57

58


59

60

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:19:08

46

QUESTION: 52 GROUP: Computer Science SECTION: Operating System Mark(s): 1

47

A disk driver is requested for disk cylinders in the order given below. C-SCAN disk scheduling algorithm is used where each seek consumes 4ms of time per cylinder. What will be the total seek time if the disk drive is currently at cylinder 30?

48

49

67, 45, 22, 180, 112, 95, 77, 69, 66, 55, 10

50

☐ 996ms

51

☐ 408ms

52 ☆

☐ 558ms

53

☐ 1096ms

54

55

56

57

58

59

60

Previous Question

Next Question

End Test

46 QUESTION: 56 GROUP: Computer Science SECTION: Operating System Mark(s): 1

47 Given below is a page table with a page size of 2^6 bytes:

48

Present/ Absent in memory	Frame
P	10101
P	11011
A	01000
A	00010
A	11000
P	01110

49

50

51 Which of the virtual addresses of pages given below successfully get mapped to physical address? (If page fault occurs, specify the same)

52 Page P: 0000101011100

53 ☐ Page Fault occurs

54 ☐ Page P: Physical address is 01110011100

55 ☐ Page P: Physical address is 01110001110

56 ☆ ☐ Information inadequate

Previous Question

Next Question

End Test

46 QUESTION: 54 GROUP: Computer Science SECTION: OOPS Mark(s): 1

47 Which of the statements given below are true about message passing?

- 48
- 49 I) Message passing between two objects is generally unidirectional.
- 50 II) Message passing enables all interactions between objects.
- 51 III) Message passing essentially involves invoking class methods.
- 52 IV) Objects in different processes can be involved in message passing.

53 ☐ Only (I), (II) and (III)

54 ☐ Only (I), (III) and (IV)

55 ☐ (I), (II), (III) and (IV)

56 ☐ Only (II), (III) and (IV)

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:18:00

46

QUESTION: 52 GROUP: Computer Science SECTION: Operating System Mark(s): 1

47

A disk driver is requested for disk cylinders in the order given below. C-SCAN disk scheduling algorithm is used where each seek consumes 4ms of time per cylinder. What will be the total seek time if the disk drive is currently at cylinder 30?

48

49

67, 45, 22, 180, 112, 95, 77, 69, 66, 55, 10

50

☐ 996ms

51

☐ 408ms

52 ☆

☐ 558ms

53

☐ 1096ms

54

55

56

57

58


59

60

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:18:00

46

QUESTION: 52 GROUP: Computer Science SECTION: Operating System Mark(s): 1

47

A disk driver is requested for disk cylinders in the order given below. C-SCAN disk scheduling algorithm is used where each seek consumes 4ms of time per cylinder. What will be the total seek time if the disk drive is currently at cylinder 30?

48

49

67, 45, 22, 180, 112, 95, 77, 69, 66, 55, 10

50

☐ 996ms

51

☐ 408ms

52 ☆

☐ 558ms

53

☐ 1096ms

54

55

56

57

58

59

60

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:16:48

41

QUESTION: 45 GROUP: Computer Science SECTION: OOPS Mark(s): 1

42

Which of the below given statement(s) is/are true about Local variables?

43

I) Variables defined inside methods, constructors or blocks are called local variables.

44

II) The variable will be declared and initialized within the method and the variable will be destroyed when the method has completed.

45 ☆

☐ Neither (I) nor (II)

46

☐ Only (I)

47

☐ Both (I) and (II)

48

☐ Only (II)

49

50

51

52

53

54

55

Previous Question

Next Question

End Test



Instructions

Abhinav Kuruma

TIME LEFT: 00:28:56

1

QUESTION: 3 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

2

How many minutes does Rakesh take to cover a distance of 850 m, if he runs at a speed of 25 km/hr?

3 ☆

☐ 1.74 minutes

4

☐ 1.94 minutes

5

☐ 2.04 minutes

6

☐ 2.09 minutes

7

8

9

10

11

12

13

14

15

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:28:44

1

QUESTION: 4 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

2

3

4 ☆

5

6

7

8

9

10

11

12

13

14

15

A store is offering a 25% discount on a jacket that originally costs \$120. If a customer has an additional coupon for 10% off the discounted price, what is the final price the customer pays for the jacket?

☐ \$81

☐ \$80

☐ \$91

☐ \$90

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:28:32

1

QUESTION: 5 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

2

3

4

5 ☆

6

7

8

9

10

11

12

13

14

15

Direction: Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: Who among the following is a girl?

☐ B

☐ E

☐ F

☐ C

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:28:19

1

2

3

4

5

6 ☆

7

8

9

10

11

12

13

14

15

QUESTION: 6 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

Direction:

Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: Find the odd one out?

☐ B, D

☐ C, H

☐ A, E

☐ D, E

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:28:12

2

3

4

5

6

7 ☆

8

9

10

11

12

13

14

15

16

QUESTION: 7 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

Direction:

Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: How many people are sitting between A and H, counting from the left of H?

☐ 5


☐ 2

☐ 3

☐ 4

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:28:01

3

4

5

6

7

8 ☆

9

10

11

12

13

14

15

16

17

QUESTION: 8 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

Direction: Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: Who is 4th to the left of the one who is 2nd to the right of C?

☐ E

☐ G

☐ F

☐ H

Previous Question

Next Question



Instructions

Abhinav Kuruma

TIME LEFT: 00:27:53

4

5

6

7

8

9 ☆

10

11

12

13

14

15

16

17

18

QUESTION: 9 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

Direction: Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: Which of the following statements is true?

☐ G is a girl sitting 2nd to the left of B

☐ H is a girl sitting between G and F

☐ B is a boy sitting next to G

☐ C is not a girl and sitting 2nd to the right of H

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:27:03

4

5

6

7

8

9 ☆

10

11

12

13

14

15

16

17

18

QUESTION: 9 GROUP: Aptitude SECTION: Logical Reasoning Mark(s): 1

Direction:

Study the following information and answer the question that follows:

Eight people A, B, C, D, E, F, G and H are sitting around a square table, two on each side facing inwards.

i) There are four girls and they are not sitting next to each other and the remaining are boys.

ii) There is a girl sitting between B and E.

iii) F is sitting between B and H.

iv) B is sitting opposite to A, who is a girl.

v) D is a girl who is sitting 2nd to the left of F.

vi) G is sitting between C and H.

Question: Which of the following statements is true?

☐ G is a girl sitting 2nd to the left of B

☐ H is a girl sitting between G and F

☐ B is a boy sitting next to G

☐ C is not a girl and sitting 2nd to the right of H

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:26:57

5

6

7

8

9

10 ☆

11

12

13

14

15

16

17

18

19

QUESTION: 10 GROUP: Aptitude SECTION: Problem Solving Mark(s): 1

Find the average of all the multiples of 3 between 50 and 160.

☐ 200

☐ 162

☐ 105

☐ 205

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:26:47

6

QUESTION: 11 GROUP: Aptitude SECTION: Puzzles Mark(s): 1

7

8

9

10

11 ☆

12

13

14

15

16

17

18

19

20

If $X + Y$ means X is the husband of Y , $X - Y$ means X is the wife of Y , $X \times Y$ means X is the father of Y , X / Y means X is the mother of Y , $X \% Y$ means X is the brother of Y and $X * Y$ means X is the sister of Y , then what is the relation of A with K from the following statement?

$A * P \% L - R \times M * K + B$

☐ Sister-in-law

☐ Mother

☐ Sister

☐ Aunt

Previous Question

Next Question

HirePro

Instructions

Abhinav Kuruma

TIME LEFT: 00:27:59

21 ☆

QUESTION: 21 GROUP: Programming Basics SECTION: C Programming Mark(s): 1

22

23

24

25

26

27

28

29

30

31

32

33

34

35

Which of the line(s) generates error(s) in the program given below?

```
#include <stdio.h>
int main()
{
    union yoon
    {
        int y : 5;
        int n : 1;
    }yo;
    yo.y = 2;
    enum state{s, s1 = yo.y, s2 = yo.n, s3, s4, s5};    //Line 1
    if (yo.y == s1)                                    //Line 2
        printf("offer");
    else if (yo.n == s4)                                //Line 3
        printf("receive");
    else
        printf("format");
    return 0;
}
```

☐ Line 1

☐ No error in the program

Previous Question

Next Question

21 QUESTION: 22 GROUP: Programming Basics SECTION: Error Finding Mark(s): 1

22 ☆ The given code aims to print the 5th number in an array named numbers, initialized with the values {1, 2, 3, 4, 5}. However, there is an error in the code. Identify the line causing the error.

23 #include <stdio.h> // Line 1

24 int main() {

25 int numbers[5] = {1, 2, 3, 4, 5}; // Line 3

26 printf("The 5th number in the array is: %d\n", numbers[5]); // Line 4

27 return 0; // Line 5

28 }

29 ☐ Line 530 ☐ Line 331 ☐ Line 132 ☐ Line 4

33

34

35

Previous Question

Next Question

