

ALL

6. Question 6

3 men can dig a trench 3 feet deep working for 3 hours a day in 3 days. How deep a trench can 6 men dig working for 6 hours a day for 6 days

Pick **ONE** option

☐ 6

☐ 12

☐ 24

☐ 48

Clear Selection

7. Question 7

There are 256 Tennis players, find out minimum number matches required to get the second best player among them. Condition is that if player A



5. Question 5

3 men can dig a trench 3 feet deep working for 3 hours a day in 3 days. How deep a trench can 6 men dig working for 6 hours a day for 6 days

Pick **ONE** option

☐ 6

☐ 12

☐ 24

☐ 48

Clear Selection

5. Question 5

A bag contains 25 coffee and 25 caramel flavoured chocolates.

Alice picks one random chocolate and eats it.

After that, Bob also picks one random chocolate and eats it.

What is the probability that at least one of them ate a caramel chocolate?

Pick **ONE** option

☐ 75/100

☐ 74/99

☐ 37/50

☐ 37/49

Clear Selection

► Input Format for Custom Testing

▼ Sample Case 0

Sample Input

STDIN	Function
3	→ weights[] size n = 3
2	→ weights = [2, 4, 5]
4	
5	

Sample Output

1

Explanation

First the worker takes stones with weights 4 and 5 and crashes them into each other. The first one disintegrates completely. The second one is reduced to a weight of 1. Next the worker crashes that stone into the last stone with weight 2. The smaller stone disintegrates, and the last stone is reduced to a weight of 1.

```
17 int lastStoneWeight(vector<int> wei
18
19 }
20
21 > int main() ...
```

Test Results

Custom Input

11. Question 11

The number of different (unique, but need not make sense) words that can be formed from the letters of the word COCOON is

Pick **ONE** option

☐ 15

☐ 30

☐ 60

☐ 120

Clear Selection

12. Question 12

Rahul and Ram invests in a business in a ratio of 4:5. They donate 10% of total profit to charity, Rahul's net profit is 10 lakhs, how much

1) 584.


2) ~~0~~ 1

3) 720

4) 10

5) 37 | 49

75

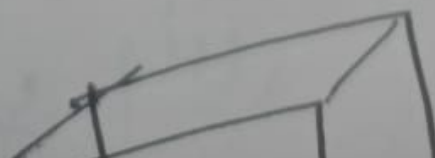

ALL

10. Question 10

Two men, A and B, are standing 100 km away from each other. At certain time, A starts running towards B at 20 kmph. At the same time, a Bee sitting on shoulder of A starts flying at the speed of 50 km towards B. It touches B, and starts flying back to A. It does this until both A and B meet. How much is the distance traveled by the Bee?

Pick **ONE** option

☐ 500 km

☐ 475 km

☐ 450 km

☐ 400 km

Clear Selection

7. Question 7

There are 256 Tennis players, find out minimum number matches required to get the second best player among them. Condition is that if player A beats B, and B beats C then A beats C.

Pick **ONE** option

☐ 262☐ 265☐ 255☐ 256

ear Selection

Question 8

When, A and B, are standing 100 km away from each other. At certain time, A starts running towards B at 20 kmph. At the same time, B starts running away from A. A helicopter of A starts flying at the speed of 50 km towards B. It touches B, and starts flying back towards A. It touches A and then starts flying back towards B. This process continues until A and B meet. Find the distance between A and B at the time when the helicopter touches A for the first time.

4. Question 4

There is a small virus in a large jar. The virus doubles itself every minute. The virus fills up the jar in 12 minutes. How many minutes did it take for the virus to fill up a quarter of the jar?

Pick **ONE** option

☐ 3☐ 6☐ 10☐ None of the above

Clear Selection

Question 5

bag contains 25 coffee and 25 caramel flavoured chocolates.
m/test/69hkmjd163o/questions/14irf95r48h eats it.

cpp2.cpp > main()

```
#include<bits/stdc++.h>
using namespace std;
int main() {
    unsigned char ch = 0;
    int c = 0;
    while(++ch <= 255) {
        c++;
    }
    cout << c << endl;
    return 0;
}
```

TERMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
D:\visual code workspace\Codes\Practise> cd "d:\visual code workspace\"
g++ cpp2.cpp -o cpp2 } ; if ($?) { .\cpp2 }
```

2. Question 2

3 couples need to be seated around a circular table such that no two persons of the same gender sit next to each other and spouses do not sit next to each other. In how many different configurations is this possible

Pick **ONE** option

☐ 1

☐ 2

☐ 4

☐ 6

Clear Selection

Question 3

How many unique ways can a six faced cube be painted such that no two faces have the same color?

ALL

10. Question 10

i

A shopkeeper purchased a few apples at 10 rupees per apple.

He sells half the apples at 14 rupees per apple.

The remaining apples start to decay, so he sells them at only 8 rupees per apple.

What is his profit/loss percentage in the overall transaction ?

6

Pick **ONE** option

7

☐ 10% profit

8

☐ 5% profit

9

☐ No profit; No loss

10

☐ 5% loss

11

Clear Selection

12

13

14

11. Question 11

55m left

7. This is shattered into two stones of weight 7. There are no stones left, so the remaining stone weight is 0.



ALL



Function Description

Complete the function `lastStoneWeight` in the editor below. The function must return an integer that denotes the weight of the last stone, or 0 if all stones shattered into dust.

`lastStoneWeight` has the following parameter(s):

`int weights[n]`: an array of integers indicating the weights of each stone

21

22

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq weights[i] \leq 10^9$

23

24

► Input Format for Custom Testing

25

▼ Sample Case 0

Sample Input

26

STDIN	Function
3	→ weights[] size n = 3
2	→ weights = [2, 4, 5]
4	
5	

27

28

Sample Output

29

1

Explanation

```

1 > #include <bits/stdc++.h> ...
9
10 /*
11  * Complete the 'lastStoneWeight' funct
12  *
13  * The function is expected to return
14  * The function accepts INTEGER_ARRAY
15  */
16
17 int lastStoneWeight(vector<int> weigh
18
19 }
20
21 > int main() ...

```

Test Results

Custom Input

3. Question 3

Given six distinct colors, in how many unique ways can a six faced cube be painted such that no two faces have the same color?

Pick **ONE** option

☐ 120

☐ 720

☐ 180

☐ 30

ear Selection

Question 4

is a small virus in a large jar. The virus doubles itself every minute. The virus fills up the jar in 12 minutes. How many minu

55m left

29. Question 29

Given a binary string, find a regex that checks whether that binary number when converted to a decimal number is a power of two or not.

Complete the code in the editor below by replacing the blank (i.e., "_____") with a regular expression that matches something according to the criterion above. Locked code in the editor prints *True* for each correct match and *False* for each incorrect match.

Example

s = '0101010'

This is 42 decimal which is not a power of 2. The regex should return a false value and the code stub will print 'False'.

Constraints

- Test strings consist only of ascii characters '0' or '1'

► Input Format For Custom Testing

► Sample Case 0

```

1  #include <map>
2  #include <set>
3  #include <list>
4  #include <cmath>
5  #include <ctime>
6  #include <deque>
7  #include <queue>
8  #include <stack>
9  #include <string>
10 #include <bitset>
11 #include <cstdio>
12 #include <limits>
13 #include <vector>
14 #include <climits>
15 #include <cstring>
16 #include <cstdlib>
17 #include <fstream>
18 #include <numeric>
19 #include <sstream>
20 #include <iostream>
21 #include <algorithm>
22 #include <unordered_map>
23
24 using namespace std;
25 int main() {
26     /* Enter your code here
27     return 0;
28     */

```



ALL



24



```
        return 0;
    }
    int GetData(float b)
    {
        cout << "From float getdata";
        return 0;
    }
};

int main()
{
    QMS<int> *qms = new QMS<int>();
    qms->PutSampleData(0);
    cout<< qms->GetSampleData(0.0);
    return 0;
}
```

Pick **ONE** option

From float getdata



Will Throw an exception



Will run but not print anything



From int getdata

13. Question 13

The sum of two numbers is 30. The sum of the squares of the two numbers is 458. The square of the difference between the two numbers is

Pick **ONE** option

☐ 4

☐ 15

☐ 16

☐ 24

Clear Selection



ALL

7. Question 7

3 couples need to be seated around a circular table such that no two persons of the same gender sit next to each other and spouses do not sit next to each other. In how many configurations is this possible

Pick **ONE** option

☐ 1

☐ 2

☐ 4

☐ 6

Clear Selection



Q Search



ALL

24. Question 24

What is the output of the following program?

(i)

```
template <typename T> class QMS
{
public:
    T * m_pData;
    void PutSampleData(T* val)
    {
        m_pData = val;
    }
    T GetSampleData(T input)
    {
        return GetData(input);
    };
    int GetData(int a)
    {
        cout << "From int getdata";
        return 0;
    }
    int GetData(float b)
    {
        cout << "From float getdata";
        return 0;
    }
};
```

24

25

What operation does this function perform ?

```
int MyFunction(int a, int b)
{
    int k = 0;
    while ( a - k*b >= b ) ++k;
    return a - k*b;
}
```

Pick **ONE** option

☐ Division

☐ Modulo

☐ Weighted Average

☐ Multiplication

Clear Selection

18°C
Mostly cloudy



28. Question 28

ALL

i

21

22

23

Example

weights = [1,2,3,6,7,7].

24

25

26

27

28



29

Function Description

Complete the function *lastStoneWeight* in the editor below. The function must return an integer

<https://www.hackerrank.com/test/69bkmid163o/questions/6mngbk50670> or 0 if all

9

10

11

12

13

14

15

16

17

18

19

20

21

```
/*  
 * Complete the 'lastStoneWeight'  
 *  
 * The function is expected to  
 * The function accepts INTEGER  
 */  
  
int lastStoneWeight(vector<int>  
  
}  
  
> int main() ...
```

Test Results

Custom

```
bool isPowerOf2(std::string binaryStr)
{
    int countOnes = 0;
    for (char c : binaryStr)
    {
        if (c == '1')
        {
            countOnes++;
            if (countOnes > 1)
            {
                return false; // More than one '1', not a power of 2
            }
        }
        else if (c != '0')
        {
            return false; // Invalid binary string
        }
    }
    return countOnes == 1;
}
```

9. Question 9

ABC is a triangle with angle A equal to 90 degrees, and $BC = 25$.
If the area of ABC is 84, find its perimeter.

Pick **ONE** option

☐ 50

☐ 52

☐ 54

☐ 56

Clear Selection

14. Question 14

ALL

A bag contains 25 coffee and 25 caramel flavoured chocolates.
Alice picks one random chocolate and eats it.
After that, Bob also picks one random chocolate and eats it.
What is the probability that at least one of them ate a caramel chocolate?

Pick ONE option

☐ 75/100

☐ 74/99

☐ 37/50

☐ 37/49

Clear Selection



13. Question 13

The sum of two numbers is 35. The sum of the squares of the two numbers is 458. The square of the difference between the two numbers is

Pick **ONE** option

☐ 4

☐ 13


☐ 16

☐ 24

Clear Selections

14. Question 14

Joseph and William leave from a point A and B which are 1200m apart. Joseph starts at a speed of 10m/s and William starts at a speed of 15m/s. They both start at the same time and move towards each other. How long will it take for them to meet?



ALL

12. Question 12

Rahul and Ram invests in a business in a ratio of 4:5. They donate 10% of total profit to charity, Rahul's net profit is 10 lakhs, how much is the total profit.

Pick **ONE** option

☐ 20 lakhs

☐ 25 lakhs

☐ 30 lakhs

☐ 35 lakhs

Clear Selection

13. Question 13

The sum of two numbers is 30. The sum of the squares of the two numbers is 458. The square of the difference between the two numbers is

[kerrank.com/test/69hkmjd163o/questions/5a3hi9lsjgh](https://www.kerrank.com/test/69hkmjd163o/questions/5a3hi9lsjgh)

26. Question 26

What operation does this function perform ?

```
int MyFunction(int a, int b)
{
    int k = 0;
    while ( a - k*b >= b ) ++k;
    return a - k*b;
}
```

Pick **ONE** option



Division



Modulo

15. Question 15

5 boys and 8 girls can complete a job in 4 days. 10 boys and 6 girls can complete the same job in 3 days. How many girls need to work with 15 boys to complete the same job in 2 days.

Pick **ONE** option

☐ 3

☐ 4

☐ 4.5

☐ 9

Clear Selection

Continue

55m left

▼ Input Format For Custom Testing

Input from stdin will be processed as follows and passed to the function.

The first line consists of an integer, n , the number of binary strings to follow.

Each of the next n lines contains a string representation of a binary number.

▼ Sample Case 0

Sample Input

	STDIN	Function
	-----	-----
	4	→ number of strings $n = 4$
23	1000	→ string 0
	0100	→ string 1
	0010	→ string 2
24	0110	→ string 3

Sample Output

True
True
True
False

Click bar to open/close the example.

Explanation

Values of the inputs are 8, 4, 2 (2^3 , 2^2 and 2^1) and 5 in decimal.

Language C++20

Environment

```

1  #include <map>
2  #include <set>
3  #include <list>
4  #include <cmath>
5  #include <ctime>
6  #include <deque>
7  #include <queue>
8  #include <stack>
9  #include <string>
10 #include <bitset>
11 #include <cstdio>
12 #include <limits>
13 #include <vector>
14 #include <climits>
15 #include <cstring>
16 #include <stdlib>
17 #include <fstream>
18 #include <numeric>
19 #include <sstream>
20 #include <iostream>
21 #include <algorithm>
22 #include <unordered_map>
23
24 using namespace std;
25 int main() {
26     /* Enter your code here. Read
27        return 0;
28     }

```

Test Results

Custom Input

Clear Selection

Mukku Shashank Reddy

8. Question 8

Two men, A and B, are standing 100 km away from each other. At certain time, A starts running towards B at 20 kmph. At the same time, B starts running away from A at 10 kmph. At the same time, a Bee sitting on shoulder of A starts flying at the speed of 50 km towards B. It touches B, and starts flying back towards A. It touches A and then starts flying back towards B. It does this until both A and B meet. How much is the distance traveled by the Bee ?"

Pick **ONE** option

☐ 500 km

☐ 475 km

☐ 450 km

☐ 400 km

Clear Selection

1

9

1020


11

9.2

54

215

5

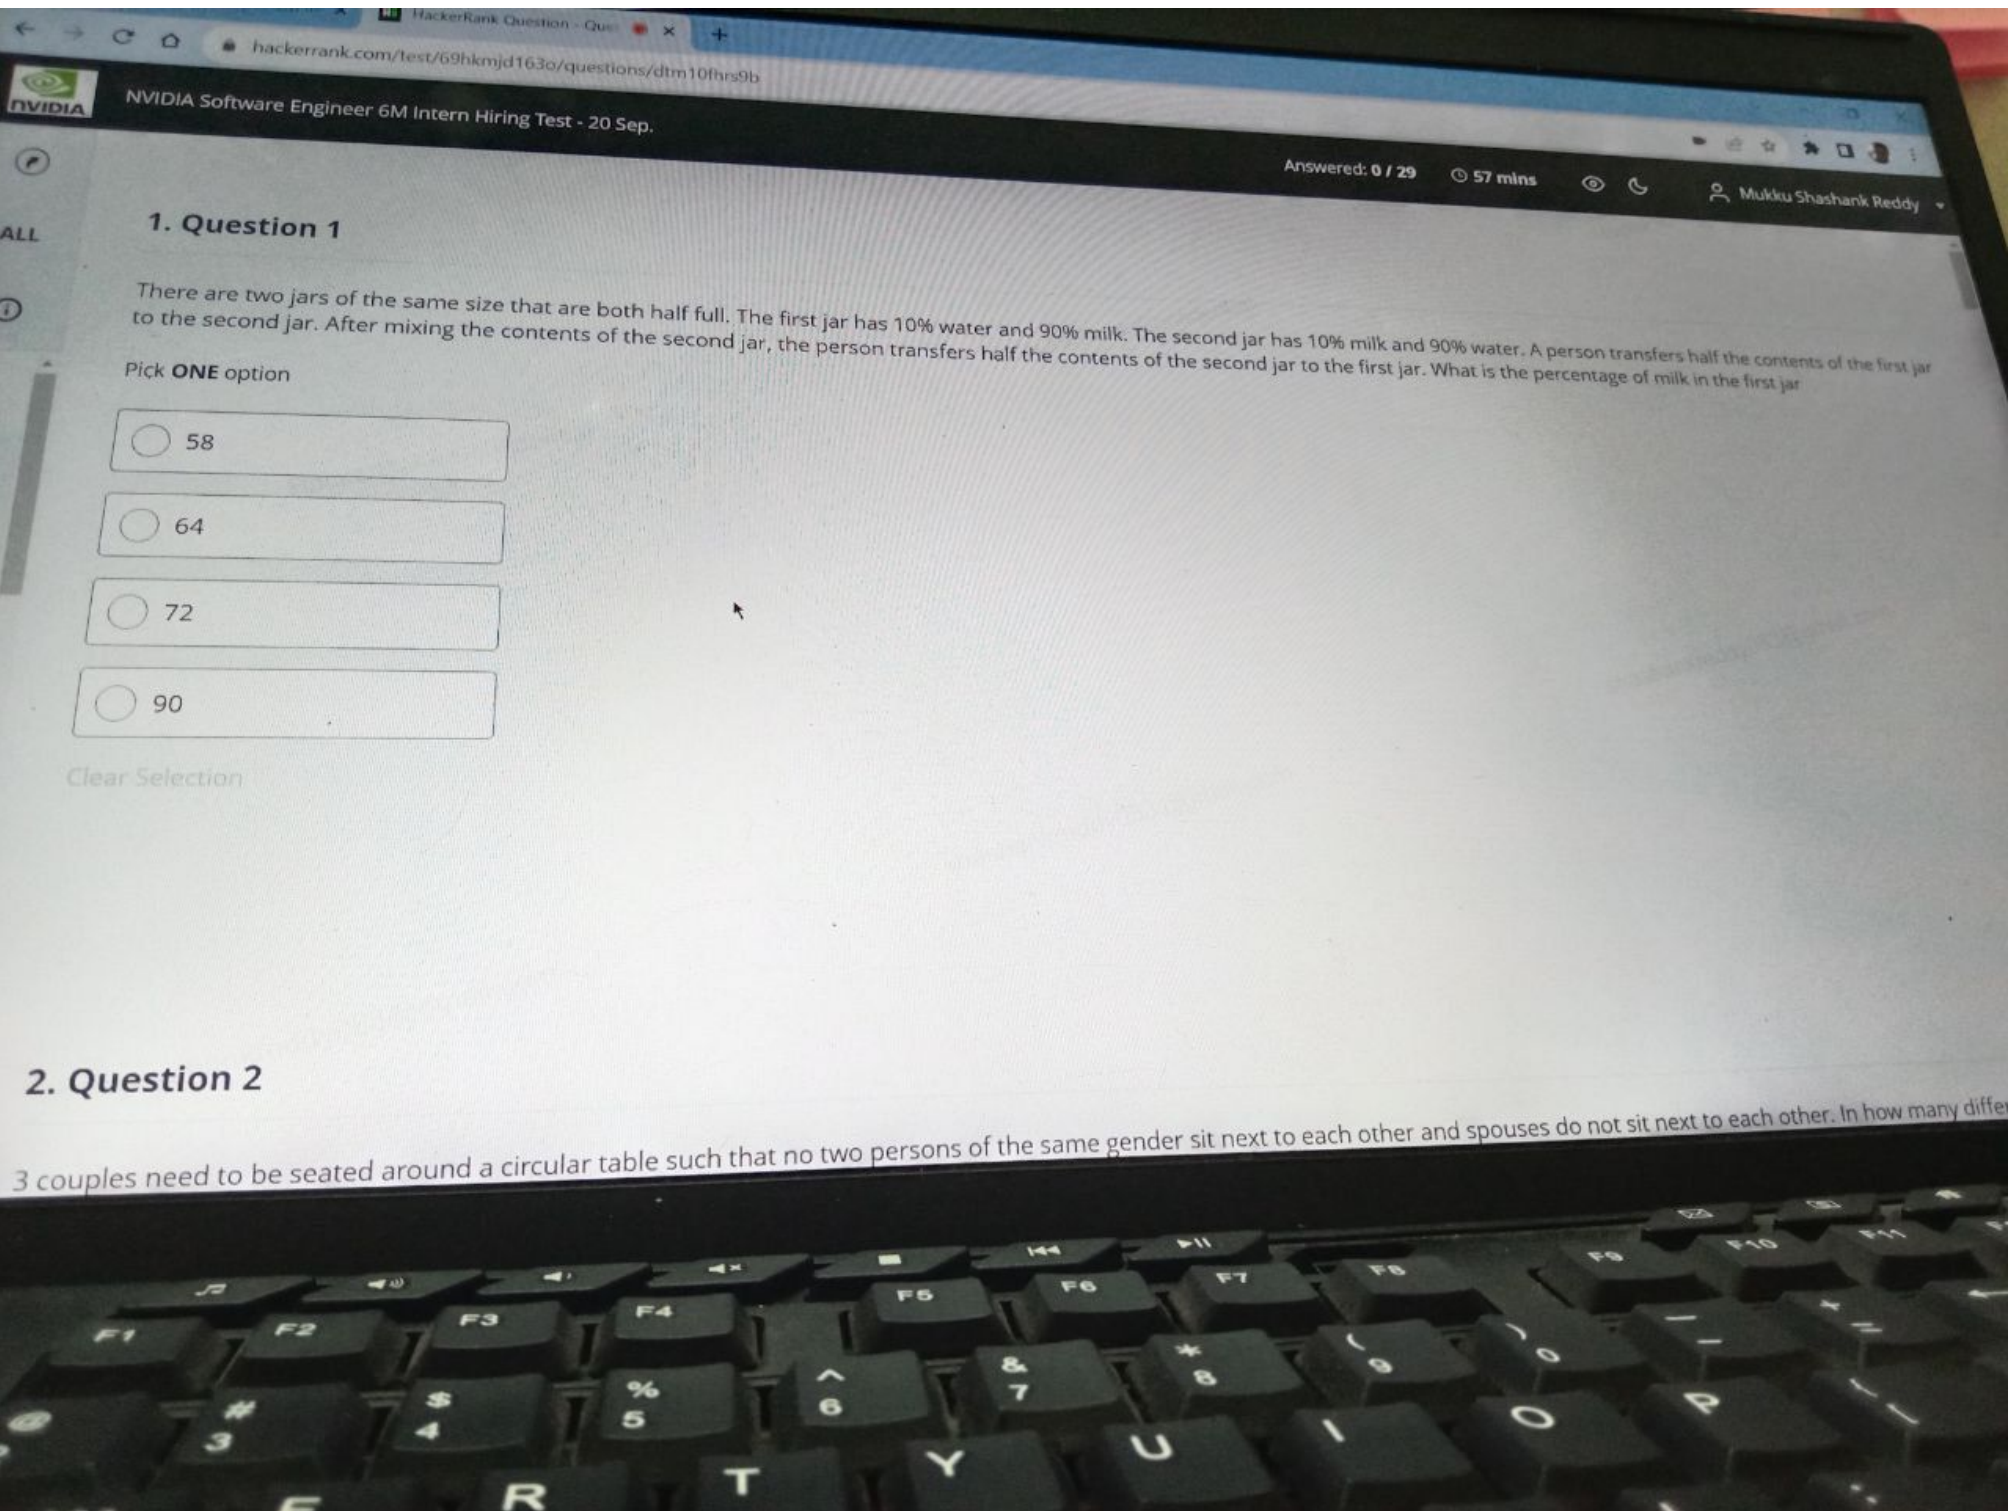

1. Question 1

There are two jars of the same size that are both half full. The first jar has 10% water and 90% milk. The second jar has 10% milk and 90% water. A person transfers half the contents of the first jar to the second jar. After mixing the contents of the second jar, the person transfers half the contents of the second jar to the first jar. What is the percentage of milk in the first jar

Pick **ONE** option

☐ 58

☐ 64

☐ 72

☐ 90

[Clear Selection](#)

2. Question 2

3 couples need to be seated around a circular table such that no two persons of the same gender sit next to each other and spouses do not sit next to each other. In how many differ

58m left

either one stone is left or none. If one of the stones have been smashed. Determine the weight of the last stone, or return 0 if there is none.

Example

weights = [1,2,3,6,7,7].

The worker always starts with the two largest stones. In this case, the two largest stones have equal weights of 7 so they both disintegrate when smashed. Next the worker smashes weights 3 and 6. The smaller one is destroyed and the larger weighs $6 - 3 = 3$ units. Then, weights 3 and 2 are smashed together, which leaves a stone of weight 1. This is smashed with the last remaining stone of weight 1. There are no stones left, so the remaining stone weight is 0.

Function Description

Complete the function *lastStoneWeight* in the editor below. The function must return an integer that denotes the weight of the last stone, or 0 if all stones shattered into dust.

```
1 > #include <
9
10 /*
11 * Comple
12 *
13 * The f
14 * The f
15 */
16
17 int lastStoneWeight(int* stones, int stonesSize)
18 {
19 }
20
21 > int main()
{
    int stonesSize;
    int* stones;
```

29. Question 29

ALL

Given a binary string, find a regex that checks whether that binary number when converted to a decimal number is a power of two or not.

i

Complete the code in the editor below by replacing the blank (i.e., "_____") with a regular expression that matches something according to the criterion above. Locked code in the editor prints *True* for each correct match and *False* for each incorrect match.

Example

s = '0101010'

This is 42 decimal which is not a power of 2. The regex should return a false value and the code stub will print 'False'.

Constraints

- Test strings consist only of ascii characters '0' or '1'

```
1  #include <map>
2  #include <set>
3  #include <list>
4  #include <cmath>
5  #include <ctime>
6  #include <deque>
7  #include <queue>
8  #include <stack>
9  #include <string>
10 #include <bitset>
11 #include <cstdio>
12 #include <limits>
13 #include <vector>
14 #include <climits>
15 #include <cstring>
16 #include <cstdlib>
17 #include <fstream>
18 #include <numeric>
19 #include <sstream>
20 #include <iostream>
21 #include <algorithm>
22 #include <unordered_map>
23
24 using namespace std;
25 int main() {
26     /* Enter your code here. Read input from STDIN. Write output to STDOUT. */
27     return 0;
28 }
```



1. Question 1

There are two jars of the same size that are both half full. The first jar has 10% water and 90% milk. The second jar has 10% milk and 90% water. A person transfers half the contents of the first jar to the second jar. After mixing the contents of the second jar, the person transfers half the contents of the second jar to the first jar. What is the percentage of milk in the first jar

Pick **ONE** option

☐ 58

☐ 64


☐ 72

☐ 90

Clear Selection

2. Question 2

3 couples need to be seated around a circular table such that no two persons of the same gender sit next to each other and spouses do not sit next to each other. In how many diff

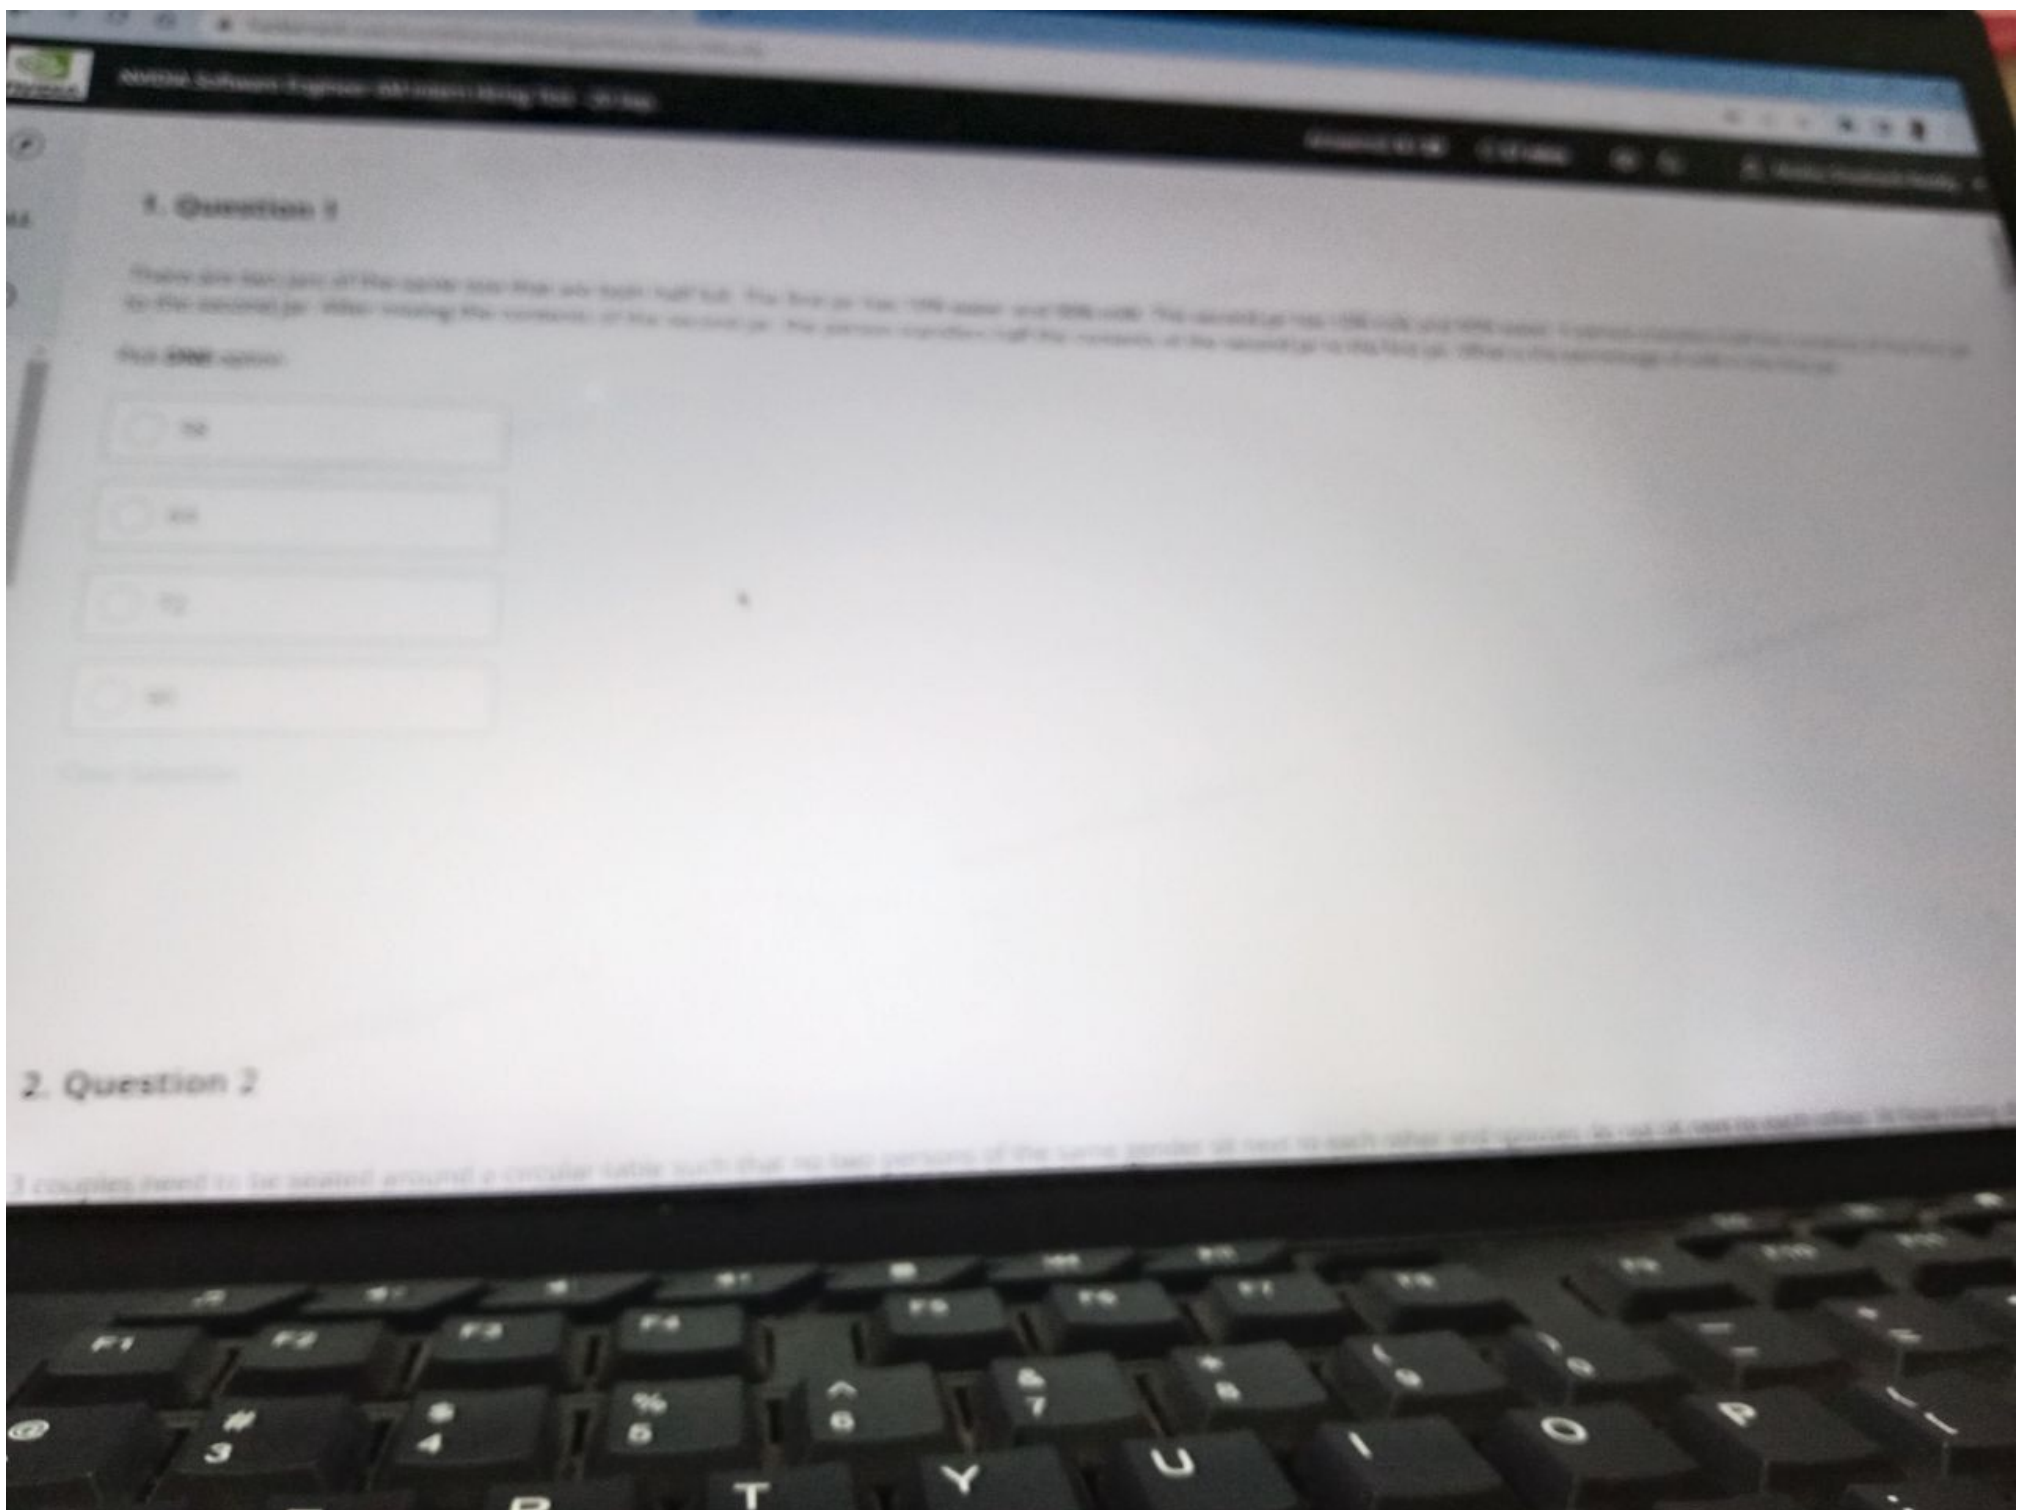

1. Question 1

Three dice are rolled. The sum of the numbers on the top faces is 10. The first die has 1, 2, 3, 4, 5, 6 on its faces. The second die has 1, 2, 3, 4, 5, 6 on its faces. The third die has 1, 2, 3, 4, 5, 6 on its faces. What is the probability that the sum of the numbers on the top faces is 10?

☒ 1/27

☐ 1/6

☐ 1/12

☐ 1/36

2. Question 2

3 couples need to be seated around a circular table such that no two persons of the same gender sit next to each other and spouses sit next to each other. In how many ways can they be seated?

28. Question 28

ALL

①

Each day a quarry-worker is given a pile of stones and told to reduce the larger stones into smaller ones. The worker must smash the stones together to reduce them, and is told to always pick up the largest two stones and smash them together. If the stones are of equal weight, they both disintegrate entirely. If one is larger, the smaller one is disintegrated and the larger one is reduced by the weight of the smaller one. Eventually, there is either one stone left that cannot be broken, or all of the stones have been smashed. Determine the weight of the last stone, or return 0 if there is none.

Example

weights = [1,2,3,6,7,7].

The worker always starts with the two largest stones. In this case, the two largest stones have equal weights of 7 so they both disintegrate when

```

1 > #include <bi
9
10 /*
11 * Complete
12 *
13 * The fun
14 * The fun
15 */
16
17 int lastS
18
19 }
20
21 > int mai

```