

14

15

16

17

18

19

20

21

☐ 1

☐ 2

☒ 3

☐ Error

[↶ Reset Answer](#)

[< Previous Question](#)

Options

1. spam 4
ham 8
Name 16

2. 4
16
64

3. 4
8
16

```
15 #from __future__ import print_function
16 registry={}
17 def register(obj):
18     registry[obj.__name__]=obj
19     return obj
20 @register
21 def spam(x):
22     return(x**2)
23 @register
24 def ham(x):
25     return(x**3)
26 @register
27 class Name:
28     def __init__(self,x):
29         self.data=x**4
30     def __str__(self):
31         return str(self.data)
32 print(spam(2))
33 print(ham(2))
34 X=Name(2)
```



```

@register
def spam(x):
    return(x**2)

@register
def ham(x):
    return(x**3)

@register
class Name:
    def __init__(self,x):
        self.data=x**4
    def __str__(self):
        return str(self.data)

print(spam(2))
print(ham(2))
X=Name(2)
print(X)

```

Options


```
print(d.get('926'))
```

Which of the following outputs will be the correct output if the above code is executed?

Options:

1. None
2. It raises the following error
NameError: name '926' is not defined
3. It raises the following error
KeyError: '926'
4. It raises the following error
AttributeError: 'dict' object has no attribute 'get'

Question 22

In Python, you are working on Dictionaries. Consider you are given the following Python code.

Code:

```
d={'fwa':81, 269:'729', 'wds':'392', '629':957}  
print(d.get('926'))
```

Which of the following outputs will be the correct output if the above code is executed?

Options:

1. None
2. It raises the following error
NameError: name '926' is not defined

Question 35

What is the output of the following C++ code?

Input:

2 6

Code:

```
#include <iostream>
using namespace std;
int main(){
    int var1=40,var2=80;
    try{
        cin>>var1>>var2;
        if(var2==0){
```


29

☐ 0

30

☐ 2

31

☐ 1

32

☐ 3

33

[↺ Reset Answer](#)

34

35

[Previous Question](#)

```
29
30
31
32
33
34
35
36
37

#include <iostream>
using namespace std;
int main(){
    int var1=40,var2=80;
    try{
        cin>>var1>>var2;
        if(var2==0){
            throw var2;
        }
        else{
            cout <<var2%var1;
        }
    }
    catch(exception e){
        e.what();
    }
    return 0;
}
```


What is the output of the following Python code:

Code

```
class Person(object):
    def __init__(self, name):
        self.name = name

    def getName(self):
        return self.name

    def isEmployee(self):
        return False

class Employee(Person):
    def __init__(self, name, eid):
        super(Employee, self).__init__(name)
        self.empID = eid

    def isEmployee(self):
```



```
29     def getName(self):
30         return self.name
31
32     def isEmployee(self):
33         return False
34
35 class Employee(Person):
36     def __init__(self, name, eid):
37         super(Employee, self).__init__(name)
38         self.empID = eid
39
40     def isEmployee(self):
41         return True
42
43     def getID(self):
44         return self.empID
45
46 emp = Employee("Person1", "E101")
47 print(emp.getName(), emp.isEmployee(), emp.getID())
```

```
emp = Employee('Person1', 'E101')  
print(emp.getName(), emp.isEmployee(), emp.getID())
```

☐ 'Person1', False, 'E101'

☐ Person1 True E101

☐ 'Person1', 'E101'

☐ Error

[↶ Reset Answer](#)

[< Previous Question](#)

```
try{
    cin>>var1>>var2;
    if(var2==0){
        throw var2;
    }
    else{
        cout <<var2%var1;
    }
}
catch(exception e){
    e.what();
}
return 0;
}
```

☐ 0

☐ 2

Question 35

00:14:07

What is the output of the following C++ code?

Input:

2 6

Code:

```
#include <iostream>
using namespace std;
int main(){
    int var1=40,var2=80;
    try{
        cin>>var1>>var2;
        if(var2==0){
            throw var2;
        }
    }
```

Question 4

What is the output of the following Python code:

Code

```
from pandas.tseries.offsets import MonthBegin
from pandas.tseries.offsets import WeekOfMonth
from datetime import datetime

offset1 = MonthBegin(n=4)
offset2 = WeekOfMonth(week=3, weekday=1)
dt = datetime(2022, 8, 22)

new_dt = dt + offset1 + offset2
print(new_dt)
```

Question 41

John, a programmer, is exploring Microsoft SQL Server Database Administration and is eager to learn about the Checkpoint Process in the SQL Server?

- ☐ To execute user-specified target recovery time.
- ☐ To perform syntax checking of queries.
- ☐ To create a roadmap for query execution.
- ☐ To reduce recovery time in the event of unexpected shutdown.

Question 41

John, a programmer, is exploring Microsoft SQL Server Database Administration and is eager to learn about the Checkpoint Process in the SQL Server?

- ☐ To execute user-specified target recovery time.
- ☐ To perform syntax checking of queries.
- ☐ To create a roadmap for query execution.
- ☐ To reduce recovery time in the event of unexpected shutdown.

 Reset Answer

Question 6

You are creating a Tkinter application that needs to display a message to the user and allow them to enter text in a text box. Which message box with the text box?

- ☐ `simpledialog.askstring()`
- ☐ `messagebox.askyesno()`
- ☐ `filedialog.askopenfilename()`
- ☐ `colorchooser.askcolor()`

Question 39

Anita is the Product Owner of a software development team. She has a new feature request from a customer and wants to create a user story. Which of the following best describes a user story?

- ☐ A technical description of how the feature will be implemented
- ☐ A high-level description of a feature from an end-user perspective
- ☐ A detailed plan for how to test the feature once it's developed
- ☐ A list of technical requirements needed to implement the feature

Answer

What is the output of the following Python code:

Code

```
from abc import ABCMeta, abstractmethod
class MetaClass(metaclass=ABCMeta):
    def __init__(self):
        self.s=842
    @abstractmethod
    def demo(num): pass
class DemoClass(MetaClass):
    def __init__(num):
        num.n=824
    pass
class SuperDemoClass(DemoClass):
    def demo(num):
        super().__init__()
        print(num.n)
s=SuperDemoClass()
s.demo()
```

Question 42

Alice is using the DESCRIBE DATABASE statement to return the metadata of an existing database in pyspark. Which of these the given context?

- ☐ Database name and Database location
- ☐ Database name and Database properties
- ☐ Database location and Database properties
- ☐ Database location

 Reset Answer

Output

1. 2022-12-27 00:00:00

2. 2022-12-27

3. 2022-11-27 00:00:00

4. 2022-11-27

☐ 1

☐ 2

☐ 3

Question 40

Anita is a product manager at a company that uses Confluence for documentation and project management. She is working on a new project and needs to gather feedback from the team. What is one way Anita can use Confluence to gather feedback and share work in progress with the team?

- ☐ Creating a dedicated search function to find past interviews
- ☐ Creating a page template that includes background information, company details, and problem observations
- ☐ Creating a list of popular topics for easy browsing of interviews
- ☐ Creating a table of contents for all problems observed in the interview

 Reset Answer

4
5
6
7
8
9
10
1
nslookup abc.com

3.

hostloopup abc.com

4.

netinfo abc.com

☐ 1

☐ 2

☐ 3

☐ 4

Question 46

00:35:30

Alice is working on the Linux DNS Servers. She has a network with the domain *abc.com*. Now, if she is required to find the IP address of the domain, the following commands should she perform such that the command should also be helpful for finding the hostname by providing the IP address.

Commands

1.

`netstat abc.com`

2.

`nslookup abc.com`

3.

`hostlookup abc.com`

4.

What is the output of the following Python code:

Code

```
from pandas.tseries.offsets import MonthBegin
from pandas.tseries.offsets import WeekOfMonth
from datetime import datetime

offset1 = MonthBegin(n=4)
offset2 = WeekOfMonth(week=3, weekday=1)
dt = datetime(2022, 8, 22)

new_dt = dt + offset1 + offset2
print(new_dt)
```

Question 25

In a city, there is one school. This school has 23,400 students. If the ratio of students studying in a school in Mathematics, Physics is 8:3:7 then the approx number of students studying Mathematics and Physics is?

☐ 10400☐ 11400☐ 14300☐ 13400[Reset Answer](#)[Previous Question](#)

Type here to search



Question 26

00:50:36

Bob is working as a data warehouse developer in an IT company that maintains massive data. He chooses to use varchar in the data type of nvarchar. Identify the correct reason why he chose that. Identify the correct option from the following according to

Options

1. To prevent the occurrence of errors
2. To prevent the possibility of lost data
3. To improve data performance
4. To mitigate the possibility of truncated data

☐ 1

☐ 2

☐ 3

re to search



Question 26

Bob is working as a data warehouse developer in an IT company that maintains massive data. He chooses to use varchar in the destination data type of nvarchar. Identify the correct reason why he chose that. Identify the correct option from the following according to the above scenario.

Options

1. To prevent the occurrence of errors
2. To prevent the possibility of lost data
3. To improve data performance
4. To mitigate the possibility of truncated data

☐ 1

☒ 2

☐ 3

Type here to search



35°C Haz

Options

1. To prevent the occurrence of errors
2. To prevent the possibility of lost data
3. To improve data performance
4. To mitigate the possibility of truncated data

☐ 1

☐ 2

☐ 3

☒ 4

[Reset Answer](#)



Type here to search



35°C

Question 24

John was trying to solve a problem in statistics. Help him to find the answer to the following question:

Find the mean and standard deviation for the following dataset: [14, 29, 34, 48, 59, 67]

☐ 45.58 and 18.54

☐ 41.83 and 18.10

☐ 43.27 and 17.14


☐ 44.34 and 19.45

 Reset Answer

 Previous Question

Type here to search



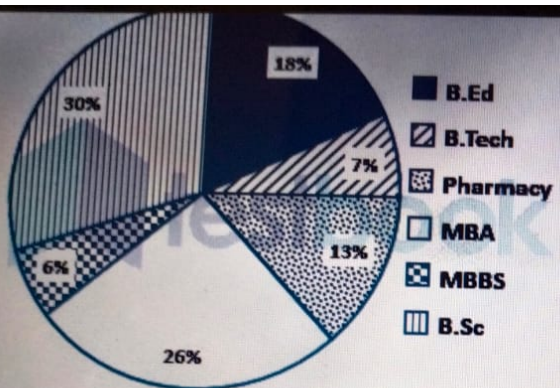

☐ 1336

☐ 4236

☐ 2720

☐ 10472

Type here to search



In Python, you are working on Dictionaries. Consider you are given the following Python code.

Code:

```
d={'fwa':81, 269:'729', 'wds':'392', '629':957}  
print(d.get('926'))
```

Which of the following outputs will be the correct output if the above code is executed?

Options:

1. None
2. It raises the following error
NameError: name '926' is not defined
3. It raises the following error
KeyError: '926'

Type here to search



19




Question 23

Study the following pie chart carefully which mentions the number of students who took courses in different fields .what is the students and the number of MBA students who took courses?


Pie chart

Total students: 34000

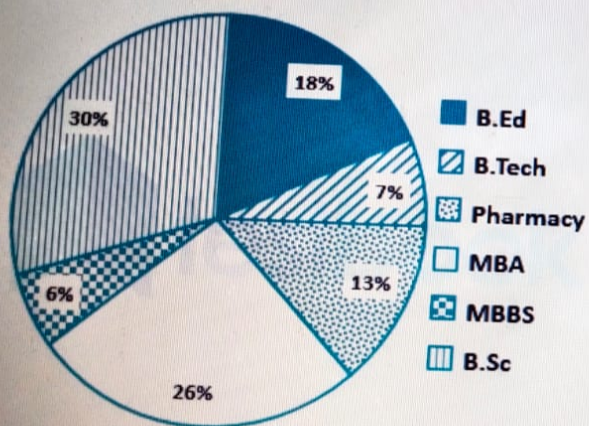

1336

Type here to search



18 Which of the following outputs will be the correct output if the above code is executed?

19 Options:

- 20 1. None
- 21 2. It raises the following error
NameError: name '926' is not defined
- 22 3. It raises the following error
KeyError: '926'
- 23 4. It raises the following error
AttributeError: 'dict' object has no attribute 'get'

24 ☐ 1

25 Type here to search



4. It raises the following error

AttributeError: 'dict' object has no attribute 'get'

☐ 1

☐ 2

☐ 3

☐ 4

[Reset Answer](#)

[< Previous Question](#)

Type here to search



Which R code will give the following output?

Output

```
[1] 2.0 2.3 2.6 2.9 3.2 3.5 3.8 4.1 4.4 4.7 5.0 5.3 5.6 5.9
```

Code

1.
`seq(2, 5.9, by=0.2)`

2.
`seq(2, 6, by=0.3)`

3.

Type here to search



Which of these options describes the line A in the following Android code:

```
public class MainActivity extends Activity {  
  
    .....  
    ListView simpleList;  
    String animallist[] = {"Lion","Tiger","Monkey","Elephant",  
"Dog","Cat","Camel"};  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(...);  
        simpleList = (ListView) findViewById(...);  
  
        ArrayAdapter<String>arrayAdapter = new ArrayAdapter<String>(this, R.layout.activity_list_v  
R.id.textView, animallist);  
    }  
}
```

Type here to search



4.
seq(2.0, 5.9)

☐ 1


☐ 2

☐ 3

☐ 4

[↶ Reset Answer](#)

[↶ Previous Question](#)



DELL

Code

1.
`seq(2, 5.9, by=0.2)`
2.
`seq(2, 6, by=0.3)`
3.
`seq(2, 6)`
4.
`seq(2.0, 5.9)`

☐ 1

☒ 2



Type here to search



DELL

```
simpleList = (ListView) findViewById(.....);

ArrayAdapter<String>arrayAdapter = new ArrayAdapter<String>(this, R.layout.activity_list_vie
R.id.textView, animallist);

/**Line A**/

}

.....

}
```

☒ simpleList.setActivated(arrayAdapter)

☐ simpleList.setEnabled(arrayAdapter)

Type here to search



☐ simpleList.setActivated(arrayAdapter)

☐ simpleList.setEnabled(arrayAdapter)

☐ simpleList.setAdapter(arrayAdapter)

☐ simpleList.setListAdapter(arrayAdapter)

[↶ Reset Answer](#)

[↶ Previous Question](#)



 Type here to search



Question 19

In Oracle, what is the format-mask used for generating the output for the following query:

```
SQL>SELECT sysdate FROM dual;
```

SYSDATE

WEDNESDAY, SEPTEMBER 16 2002 06:11PM

☐ MONTH, DAY DD YYYY HH24:MI

☒ DAY, MON DD RR HH:MIAM

☐ DD, MONTH DAY RRRR HH:MI

☐ DAY, MONTH DD YYYY HH:MIAM

Type here to search



Question 27

Bob is working on Data visualization in a company. When performing a simple linear regression, he wants to know what is the effect of an outlier on the distribution. Since he is new to this technology, help him to understand the correct statement from the following according to the distribution.

Options

1. The outlier would have no effect because outliers are neglected automatically.
2. The fit line would pass through the outlier point
3. The outlier would have no effect because the regression line only calculates whether the data points are above or below the mean.
4. The outlier would affect the slope of the fit line.

☐ 1

☒ 2

☐ 3

Type here to search



35°C

4. The outlier would affect the slope of the fit line.

☐ 1

☐ 2

☐ 3

☐ 4

[↶ Reset Answer](#)

[↶ Previous Question](#)

Type here to search



35°C

0 / 50 Completed

00:54:52

nyavug21 ce 0 nita

Question 38

Tara is the project manager of a software development team using Scrum methodology. She is leading a sprint planning meeting with Bob, Mary, and John. What should Tara do to ensure the team sets and understands the sprint goal and how success will be measured?

Options

1. Have the team members sketch out tasks for all stories, bugs, and tasks that come into the sprint.
2. Pull in too many stories and tasks that can't be completed in the sprint.
3. Ignore concerns from the team about velocity, low-certainty work, or work they think is bigger than what they estimated.
4. Ensure that the sprint goal is specific, measurable, attainable, relevant, and time-bound.

☐ 1

☐ 2

☐ 3

☐ 4

Type here to search



35°C

```
def s2(self):  
    return 40  
class Sub(Super):  
    def s2(self):  
        return 20  
var=MainClass()  
var2=Super()  
var3=Sub()  
print(var.s1() + var2.s2()+ var3.s2())
```

☐ 70

☐ 80

☐ 90

☐ Error

Type here to search



DELL

Question 28

What is the output of the following Python code:

Code

```
class MainClass:
    def s1(self):
        return 20
class Super(MainClass):
    def s1(self):
        return 30
    def s2(self):
        return 40
class Sub(Super):
    def s2(self):
        return 20
var=MainClass()
var2=Super()
var3=Sub()
```

Type here to search



```
        return self.empID  
emp = Employee("Person1", "E101")  
print(emp.getName(), emp.isEmployee(), emp.getID())
```

☐ 'Person1', False, 'E101'

☐ Person1 True E101

☐ 'Person1', 'E101'

☐ Error

[Reset Answer](#)

[Previous Question](#)

Type here to search



F. Write lengthy and complex code to achieve better performance and functionality.

☐ A, B, C, and E

☐ B, C, D, and E

☐ A, B, D, and E

☐ C, E, and F

[↶ Reset Answer](#)

[↶ Previous Question](#)



Question 29

What is the output of the following Python code:

Code

```
class Person(object):  
    def __init__(self, name):  
        self.name = name  
  
    def getName(self):  
        return self.name  
  
    def isEmployee(self):  
        return False  
class Employee(Person):  
    def __init__(self, name, eid):  
        super(Employee, self).__init__(name)  
        self.empID = eid  
    def isEmployee(self):
```



```
def __init__(self, name):
    self.name = name

def getName(self):
    return self.name

def isEmployee(self):
    return False

class Employee(Person):
    def __init__(self, name, eid):
        super(Employee, self).__init__(name)
        self.empID = eid
    def isEmployee(self):
        return True
    def getID(self):
        return self.empID
emp = Employee("Person1", "E101")
print(emp.getName(), emp.isEmployee(), emp.getID())
```



Type here to search



Question 30

John is working on SAP. While working on an application, he is required to learn about the coding guidelines in SAP. Help him to correct about the above-mentioned guidelines.

Statements

- A. Follow proper naming conventions for variables, functions, and classes.
- B. Minimize the use of global variables and prefer local variables for better encapsulation.
- C. Avoid using hard-coded values and utilize constants or configuration parameters instead.
- D. Use inline comments extensively to document every line of code for better understanding.
- E. Implement error handling and exception handling mechanisms to handle runtime errors.
- F. Write lengthy and complex code to achieve better performance and functionality.

☐ A, B, C, and E

☒ B, C, D, and E

☐ A, B, D, and E

Type here to search



35°C


```
class B extends A {  
    int x = 10;  
  
    void display() {  
        System.out.println(x + " " + super.x);  
    }  
}
```

☐ 10

☐ 5

☒ 10 5

☐ 5 10

[Reset Answer](#)



Type here to search



Question 31

What is the output of the following Java code:

Code

```
public class Main {  
    public static void main(String[] args) {  
        B b = new B();  
        b.display();  
    }  
}  
class A {  
    int x = 5;  
}  
class B extends A {  
    int x = 10;  
}  
void display() {
```

Type here to search




```
def __init__(self, regd_no, grades):  
    self.regd_no = regd_no  
    self.grades = grades  
    def display (self):  
        print("Regd no : ", self.regd_no, ", Grade: ", self.grades)  
student1 = student(42, 'S')  
student1.age=7  
student2=student(33,'S')  
student2.age=9  
print(hasattr(student2, 'age'))
```

☐ True☐ False☐ 9☐ Error

Type here to search



35°C

0 / 50 Completed

00:54:20

nyav.ug21.ce@m

Question 34

What is the output of the following Python code:

Code

```
class Number:
    def __init__(self, number):
        self.number=number
    def addition(self, number2):
        return self.number*number2.number
    def display(self):
        return self.number
    def update(self,num):
        self.number = num
num1=Number(20)
num2=num1
num2.update(10)
num2=Number(5)
print(num2.addition(num1))
```

Type here to search

35°C

Question 35

What is the output of the following C++ code?

Input:

2 6

Code:

```
#include <iostream>
using namespace std;
int main(){
    int var1=40,var2=80;
    try{
        cin>>var1>>var2;
        if(var2==0){
            throw var2;
        }
        else{
```

```
int main()
{
    int var1=40,var2=80;
    try{
        cin>>var1>>var2;
        if(var2==0){
            throw var2;
        }
        else{
            cout <<var2%var1;
        }
    }
    catch(exception e){
        e.what();
    }
    return 0;
}
```

0

2


```
self.number = num  
num1=Number(20)  
num2=num1  
num2.update(10)  
num2=Number(5)  
print(num2.addition(num1))
```

☐ 35☐ 50☐ 30☒ 25[Reset Answer](#)

Type here to search



Question 32

What is the output of the following Python code:

Code

```
from abc import ABCMeta, abstractmethod
class MetaClass(metaclass=ABCMeta):
    def __init__(self):
        self.s=842
    @abstractmethod
    def demo(num): pass
class DemoClass(MetaClass):
    def __init__(num):
        num.n=824
    pass
class SuperDemoClass(DemoClass):
    def demo(num):
        super().__init__()
        print(num.n)
```

Type here to search




```
class SuperDemoClass(DemoClass):  
    def demo(num):  
        super().__init__()  
        print(num.n)  
s=SuperDemoClass()  
s.demo()
```

☐ 842

☐ 824

☐ Error

☐ No Output

[Reset Answer](#)

Type here to search



Question 33

What is the output of the following Python code:

Code

```
class student:
    def __init__(self, regd_no, grades):
        self.regd_no = regd_no
        self.grades = grades
    def display (self):
        print("Regd no : ", self.regd_no, ", Grade: ", self.grades)
student1 = student(42, 'S')
student1.age=7
student2=student(33, 'S')
student2.age=9
print(hasattr(student2, 'age'))
```

☐ True

Type here to search



35°C

DELL


```
}  
catch(exception e){  
    e.what();  
}  
return 0;  
}
```

☐ 0

☐ 2

☐ 1

☒ 3

Reset Answer

Question 36

Observe the following Java code, and select the appropriate solution from the given options to get the below output.

Code:

```
public class Main extends Hack2{
    public static void main(String args[]){
        Main obj=new Main();
        obj.print1();}
}
class Hack1{
    void print1(){
        System.out.println("Good");}}
class Hack2{
    void print2(){
        System.out.println("Morning");
    }
}
```

Type here to search



35°C

0 / 50 Completed

00:54:34

nyaviug21.ce@nit

Output:

Good

☐ Replace class Main extends Hack2{ with class Main extends Hack1, Hack2{

☐ Replace class Main extends Hack2{ with class Main extends Hack1{

☐ Replace class Main extends Hack2{ with class Main{

☐ No error

[Reset Answer](#)

[< Previous Question](#)

Type here to search



35°C

```
};  
worker.doWork(5);  
}  
}
```

☐ 5

☐ 0 1 2 3 4

☐ 1 2 3 4 5

☐ Compilation Error

[Reset Answer](#)

[Previous Question](#)

Type here to search



35°C

Question 40

Anita is a product manager at a company that uses Confluence for documentation and project management. She is working on a new feature and needs to gather feedback from the team. What is one way Anita can use Confluence to gather feedback and share work in progress with the team?

- ☐ Creating a dedicated search function to find past interviews
- ☐ Creating a page template that includes background information, company details, and problem observations
- ☐ Creating a list of popular topics for easy browsing of interviews
- ☐ Creating a table of contents for all problems observed in the interview

Reset Answer

< Previous Question

Type here to search



35°C

Question 43

Ben is a programmer who has recently taken on the role of managing databases using Microsoft SQL Server Express edition. He is about the capabilities and limitations of this edition to make informed decisions regarding the size of the database. He would like to know the database allowed in SQL Server Express edition. Help him in this scenario.

☐ 1 GB

☐ 4 GB

☐ 10 GB

☐ Unlimited

Reset Answer

Question 48

Bob while working on a project using networking came across the concept of subnet masking. He came across a situation with a host with an IP address 172.16.66.0/21. Can you help him find the same?

☐ 172.16.36.0☐ 172.16.48.0☐ 172.16.64.0☐ 172.16.0.0[Reset Answer](#)[Previous Question](#)

Type here to search



Question 47

There are certain proclamations provided to you. Which among the following is/are valid in regard to ICMP packets?

Options:

1. ICMP ensures datagram conveyance.
2. ICMP can provide hosts with information about network problems.
3. ICMP is exemplified inside IP datagrams.
4. ICMP is exemplified inside UDP datagrams.

☐ Only 1

☒ 2 and 3

☐ 1 and 4

☐ All of the above

Question 45

In networking, Ben is required to use the Unified Diagnostic Services protocol to find the cause of a failure. The diagnostic test engine control units on the CAN network. Which of the following requests is sent by the diagnostic tester?

☐ Functional UDS

☐ Physical UDS

☐ Frame UDS

☐ Positive UDS

Reset Answer

< Previous Question

Type here to search



Question 42

Alice is using the DESCRIBE DATABASE statement to return the metadata of an existing database in pyspark. Which of these information is returned in the given context?

- ☐ Database name and Database location
- ☐ Database name and Database properties
- ☐ Database location and Database properties
- ☐ Database location

Reset Answer

< Previous Question

Type here to search



Question 41

John, a programmer, is exploring Microsoft SQL Server Database Administration and is eager to learn about the Checkpoint Process of the Checkpoint Process in the SQL Server?

- ☐ To execute user-specified target recovery time.
- ☐ To perform syntax checking of queries.
- ☐ To create a roadmap for query execution.
- ☐ To reduce recovery time in the event of unexpected shutdown.

Reset Answer

Previous Question

Type here to search



Question 37

What is the output of the following Java code:

Code

```
interface Worker {
    void doWork(int x);
}

public class Main {
    public static void main(String[] args) {
        Worker worker = x -> {
            for (int i = 0; i < x; i++) {
                System.out.print(i + " ");
            }
        };
        worker.doWork(5);
    }
}
```

Question 39

Anita is the Product Owner of a software development team. She has a new feature request from a customer and wants to create a user story. Which of the following best describes a user story?

- ☐ A technical description of how the feature will be implemented
- ☐ A high-level description of a feature from an end-user perspective
- ☐ A detailed plan for how to test the feature once it's developed
- ☐ A list of technical requirements needed to implement the feature

Reset Answer

< Previous Question

Type here to search



35°

Question 44

In Networking, what is the logical address of the IPv4?

- ☐ 16-bit
- ☐ 64-bit
- ☐ 32-bit
- ☒ None of these

Reset Answer

< Previous Question

Type here to search



Alice is working on the Linux DNS Servers. She has a network with the domain *abc.com*. Now, if she is required to find the IP address of the following commands should she perform such that the command should also be helpful for finding the hostname by providing

Commands

1.

```
netstat abc.com
```

2.

```
nslookup abc.com
```

3.

```
hostlookup abc.com
```

4.

```
netinfo abc.com
```


Question 50

In Networking, which of the following does the **WPA2** secure?

☐ LAN

☐ Bluetooth

☐ Wi-Fi

☐ WAN

[Reset Answer](#)

[Previous Question](#)

50

Type here to search



Question 49

Which one of the accompanying permits customers to refresh their DNS entry as their IP address changes?

1. Dynamic DNS
2. Mail transfer agent
3. Authoritative name server
4. None of the referenced

☐ 1

☐ 2

☐ 3

☐ 4

Reset Answer

Type here to search

