

2.8. Which of the following is false?

Which of the following is false?

Which of the following is false?

☐ 2-3 tree requires less storage than the BST

☐ lookup in 2-3 tree is more efficient than in BST

☐ 2-3 tree is shallower than BST

☐ 2-3 tree is a balanced tree

Clear Selection


Continue

<http://www.hackerrank.com/lex/5atrickp6r7/questions/82s2gdgk8gk>

88°F
Cloudy

Search

DELL

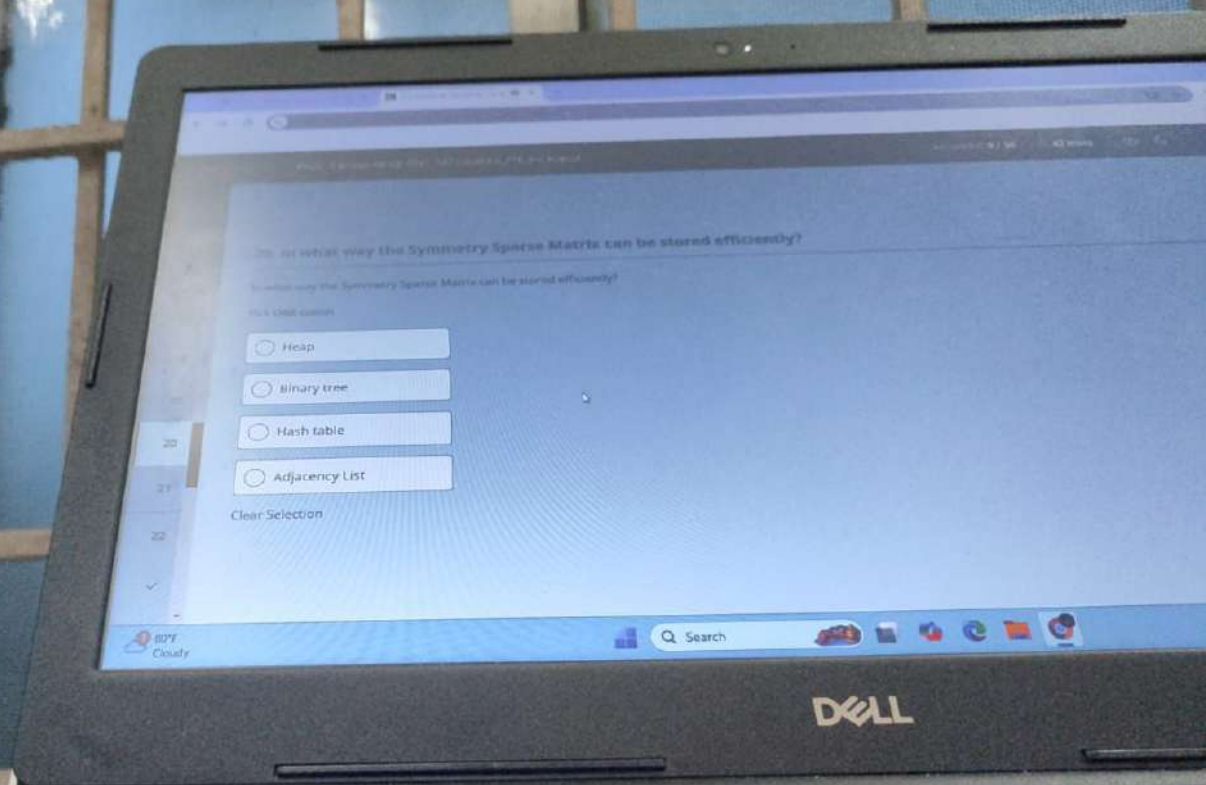

19. What is the purpose of ARP (Address Resolution Protocol) in computer networking?

What is the purpose of ARP (Address Resolution Protocol) in computer networking?

Pick ONE option.


- ☐ To convert IP addresses to MAC addresses
- ☐ To convert domain names to IP addresses
- ☐ To establish a secure connection between client and server
- ☐ To route packets between networks


Clear Selection


80°F
Cloudy


Search


DELL

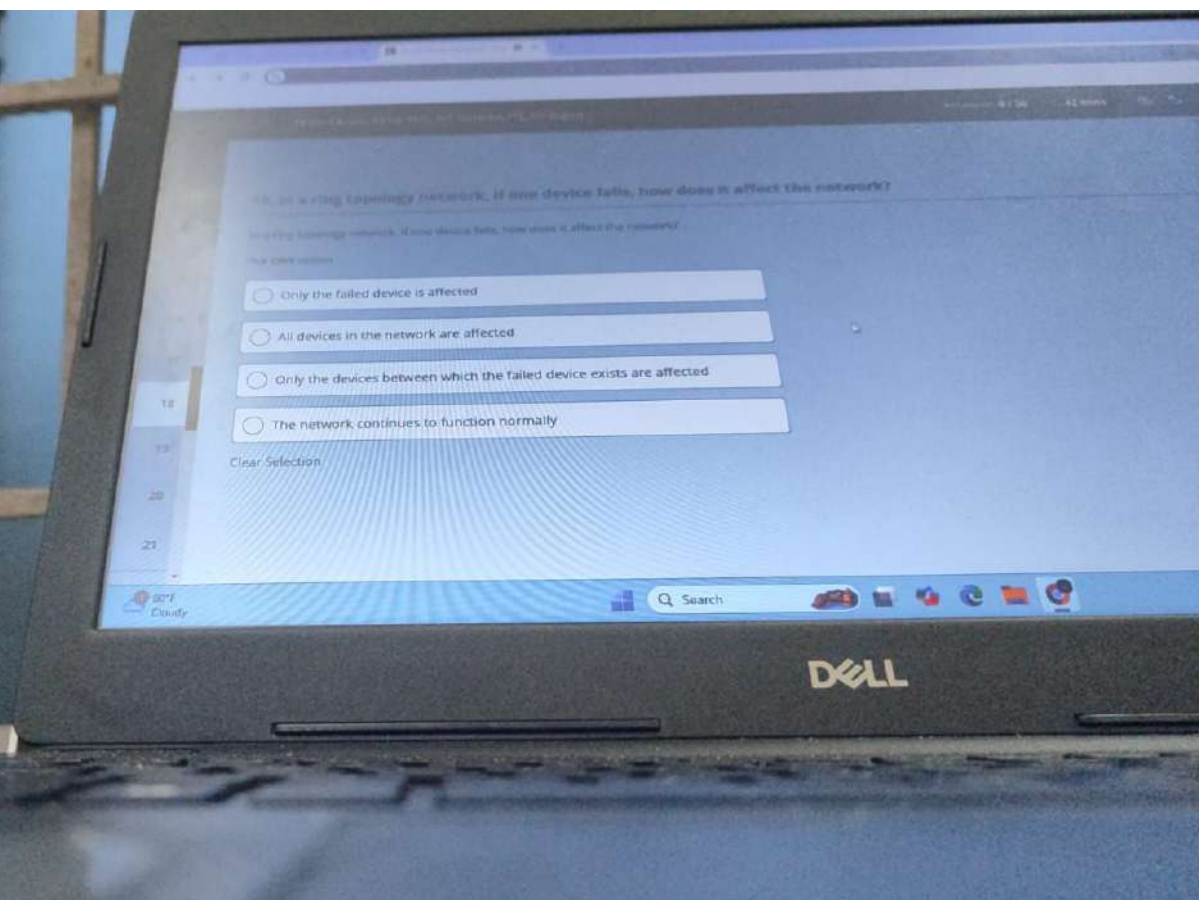

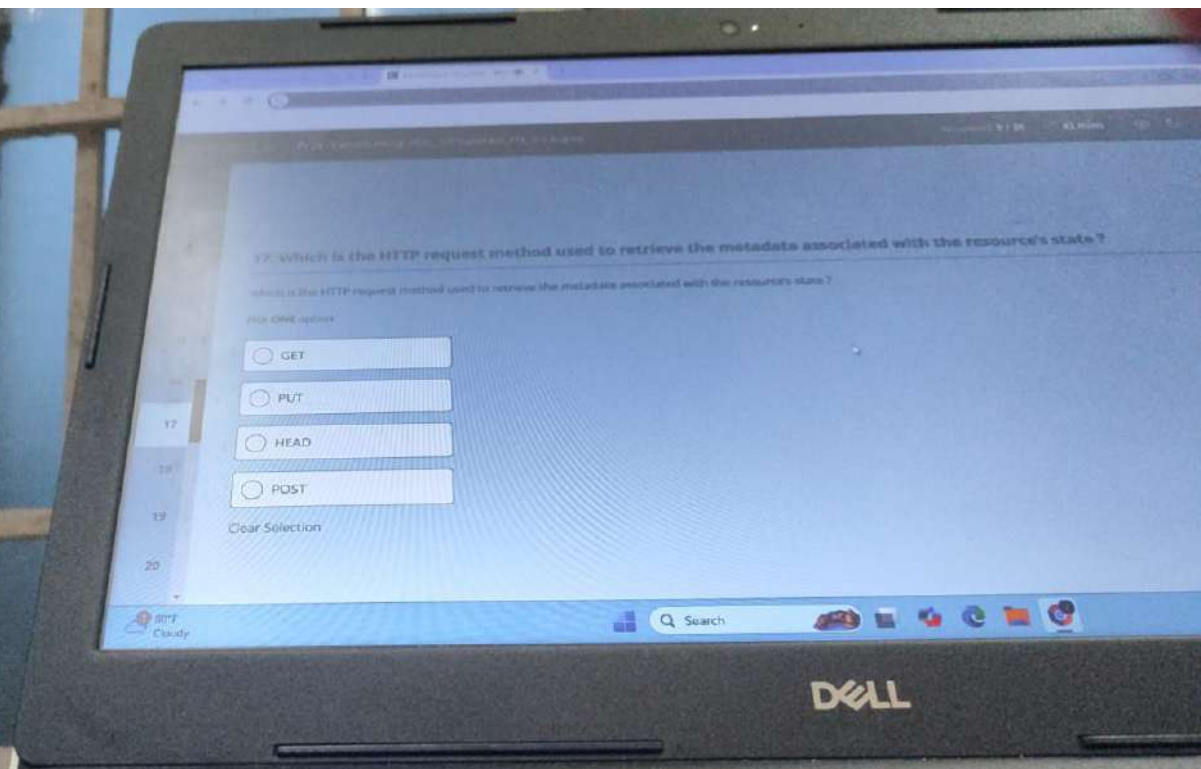

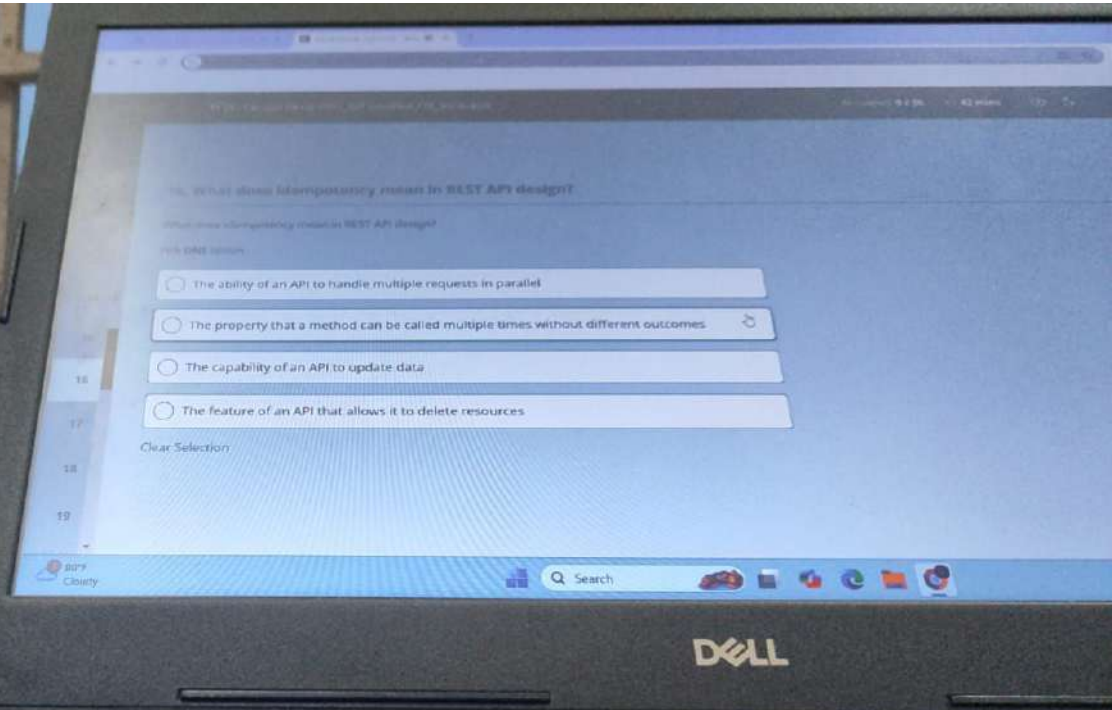

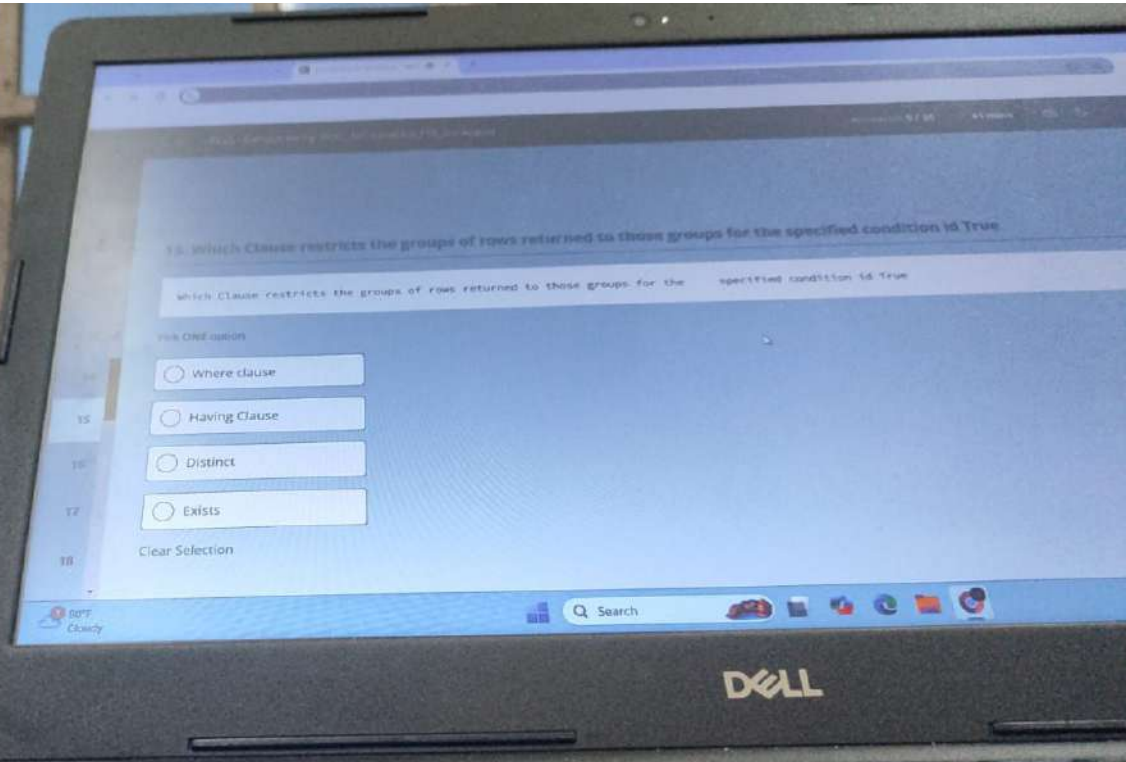

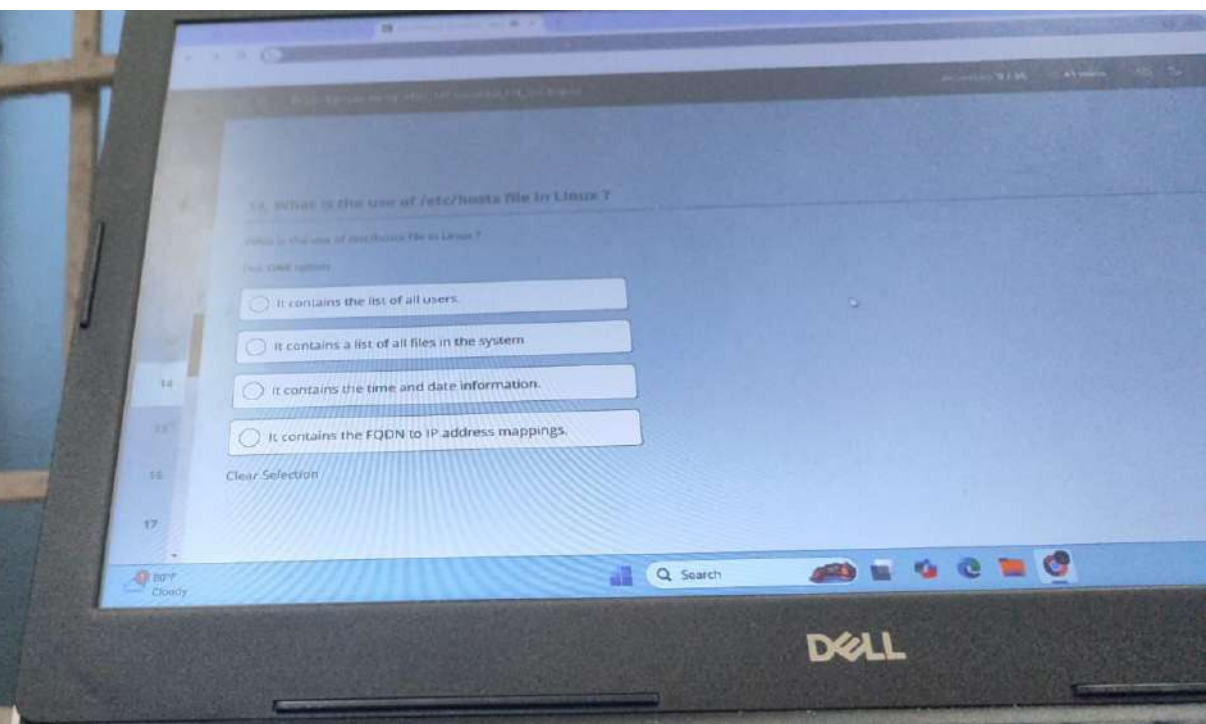

4. Which of the following design criteria are not valid/suitable for Non-Relational Databases?

- Which ONE option?
- ☐ Your application required super-low latency
 - ☐ Your data are unstructured without any relation between them
 - ☐ You only need to serialize & deserialize data (JSON, XML, YAML)
 - ☐ You need to store a very small amount of data

Clear Selection

DELL

Q2. What does CAP theorem describe with respect to System Design?

What does CAP theorem describe with respect to System Design?

pick ONE option

- ☐ The relationship between CPU and memory usage
- ☐ The trade-offs between consistency, availability, and partition tolerance
- ☐ The process of data encryption
- ☐ The principles of object-oriented programming

Clear Selection

DELL

There will be three arrays, each aligned by an index. The first array will contain a query type which will be either *Friend* or *Total*. The next two arrays, *student1* and *student2*, will each contain a student ID. If the query type is *Friend* the two students become friends. If the query type is *Total*, report the sum of the sizes of each group of friends for the two students.

Example

$p = 4$

queryType = ['Friend', 'Friend', 'Total']

student1 = [1, 2, 1]

student2 = [2, 3, 4]



The queries are assembled, aligned by index.

84
85
86

Return Result:

Test Results

Custom Input

No test case passed.

Run all test cases

X Test case 0

X Test case 1

X Test case 2


X Test case 3

Input (stdin)

```
1 3
2 2
3 Friend
4 Total
5 2
```

Search

DELL

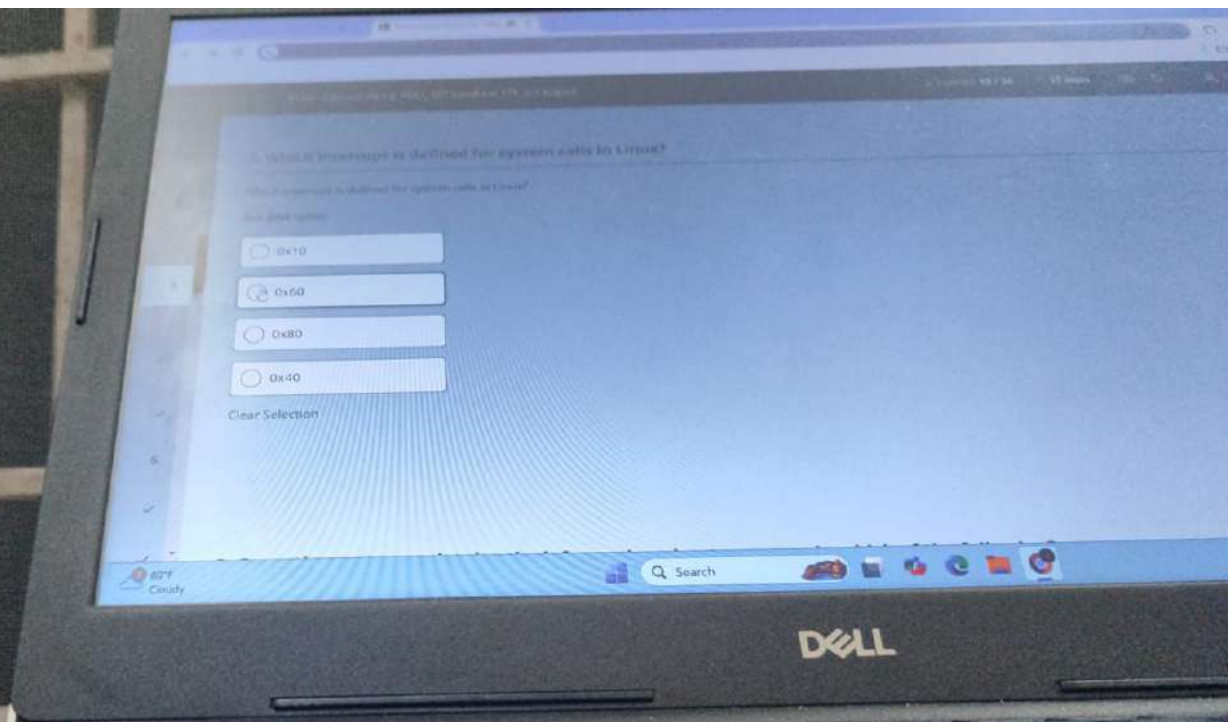


```

#include <stdio.h>
#define MAX(a,b) ((a) > (b) ? (a) : (b))
int main() { int x = 5, y = 10; printf(" %d %d %d\n", MAX(x++, y++), x, y); }

#include <stdio.h>
#define MAX(a,b) ((a) > (b) ? (a) : (b))

int main() {
    int x = 5, y = 10;
    printf(" %d %d %d\n", MAX(x++, y++), x, y);
    return 0;
}

```

Pick ONE option

☐ 11 6 12

☐ 12 6 12

☐ 11 7 12

☐ 12 7 12

DELL

9. Which of the following is a key-value store NoSQL database system?

Which of the following is a key-value store NoSQL database system?

PICK ONE option

☐ HBase

☐ MongoDB

☐ Redis

☐ Accumulo

Clear Selection

80%
Cloudy

Search

DELL

