


Drupal

Herhaling


Website bouwen

- Code
- Software (wysiwyg)
- CMS

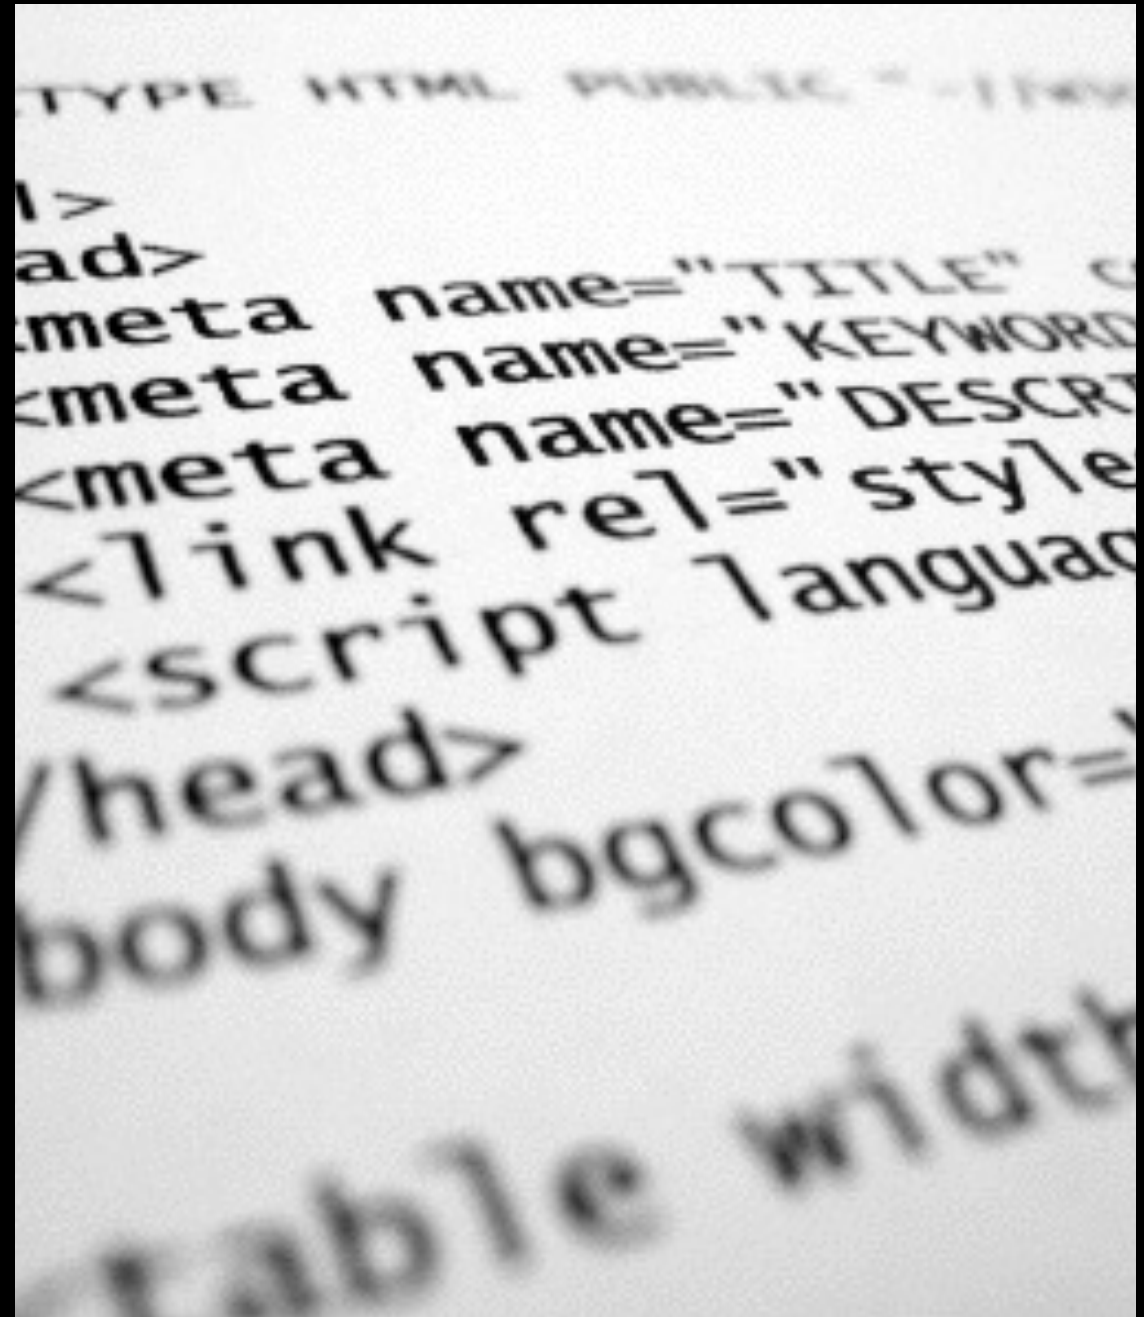

Website bouwen

- Code: XHTML, CSS, PHP, Mysql, JQuery
- Software (wysiwyg)
Dreamweaver, Frontpage
- CMS:
Wordpress, Joomla, Drupal

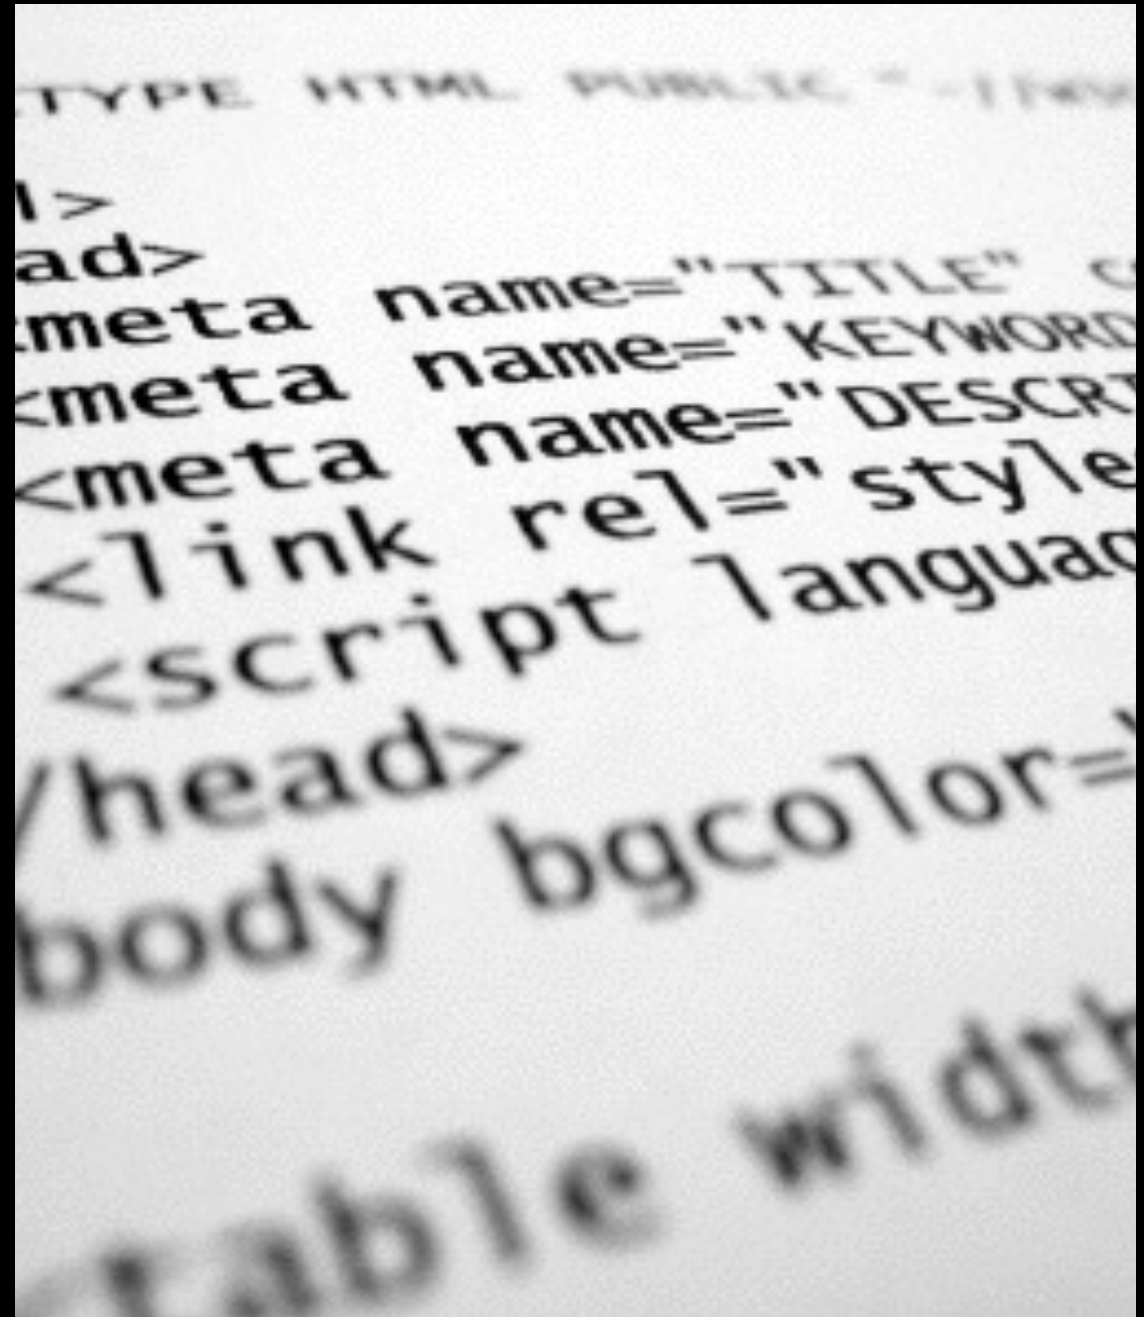

CMS

- CMS = Content Management System



Gratis!

- Open Source
- Ondersteund door community



Voorbeelden

- stubru.be
- een.be
- BBC.com
- whitehouse.gov
- ...



Drupal

- Verschillende versie
- Stabiel versie 7
- Toekomst versie 8
- Membership -> voor de DIEHARDS ;-)
- Ontwikkeld door een Belg -> Dries Buyaert



Drupal werkt met

- Apache
- PHP
- MySQL (database)



Localhost

- Drupal laten werken “local” op jouw computer



Localhost voorbeelden

- MAMP -> Mac & Windows
- XAMP
- LAMP



MAMP info

- Drupal map plaatsen we in htdocs
- Meerdere installatie zijn mogelijk
- PhpMyAdmin: Drupal vereist een database

Cursus

- Deze kan je bekijken op zelfstudie.be
usr: webdesigner
psw: ontwerp

Mac user beware!

- Standaard staan onzichtbare bestanden uit, deze moet je aanzetten via een commando line!
- [Deze link zal je helpen](#)

```
defaults write com.apple.Finder AppleShowAllFiles TRUE  
defaults write com.apple.Finder AppleShowAllFiles YES
```

Installatie Drupal

Maar daar gaan we
verandering in brengen :-)



Drupal

Les 3: Blokken en uiterlijk

Blockposities

- Beschikbare posities
- Bepaalde zaken plaatsen
- Winkelmandje, menu's, modules




Blockposities

- Waar liggen die posities ->
- Afhankelijk van theme

Demonstrate block regions (Bartik)

Een blok verplaatsen

- Met behulp van pijl icoon
- Met behulp van lijst

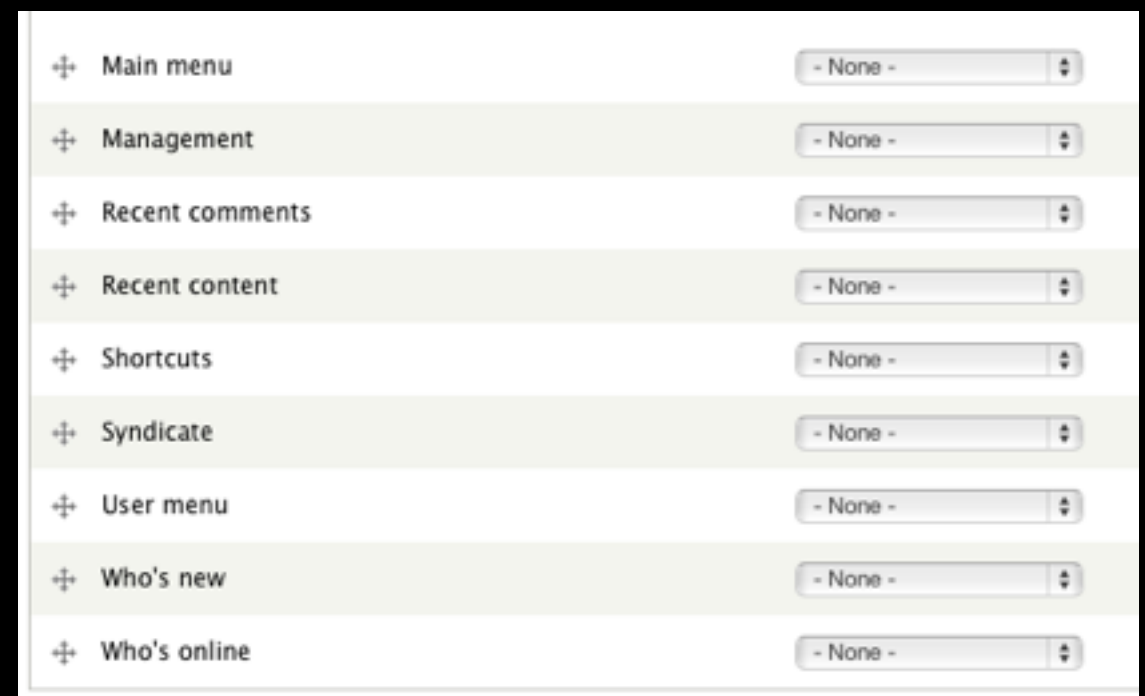

Blok toevoegen

- add block

[Home](#) » [Administration](#) » [Structure](#)

This page provides a drag-and-drop interface for assigning blocks to regions, or display regions in the same way, blocks are positioned at the bottom of the page. Click the *configure* link next to each block.

[Demonstrate block regions \(Bartik\)](#)

[+ Add block](#)

Blok toevoegen

- Blocks optie

Home » Administration » Structure » Blocks

Use this page to create a new custom block.

Block title

The title of the block as shown to the user.

Block description *

A brief description of your block. Used on the [Blocks administration page](#).

Block body *

Hier kan je content in zetten

Text format Filtered HTML

[More information about text formats](#)

- Web page addresses and e-mail addresses turn into links automatically.
- Allowed HTML tags: <a> <cite> <blockquote> <code> <dl> <dt> <dd>

- Lines and paragraphs break automatically.

Blok tonen op pagina

- `<front>` om op homepage te tonen
- maar je kan ook een url ingeven

Show block on specific pages

☒ All pages except those listed

☐ Only the listed pages

Specify pages by using their paths. Enter one path per line. The '*' character is a wildcard. Example paths are `blog` page and `blog/*` for every personal blog. `<front>` is the front page.

Blok tonen op pagina

- All pages expect
- Of only listed pages
- Hier maak je de keuze voor:
All pages of listed pages

Form titled "Show block on specific pages".

Options:

- ☒ All pages except those listed
- ☐ Only the listed pages

Text input field for specifying page paths.

Instructions: Specify pages by using their paths. Enter one path per line. The '*' character is a wildcard. Example paths are /page and blog/* for every personal blog. <front> is the front page.