


Practical Implementation of Storage as a Service

Hosting a static website in AWS using S3.


Prepare Screen shots file and also write down the steps.

Make single word or PDF file.


Step 1: Select the Storage Service and in that select S3 instance.

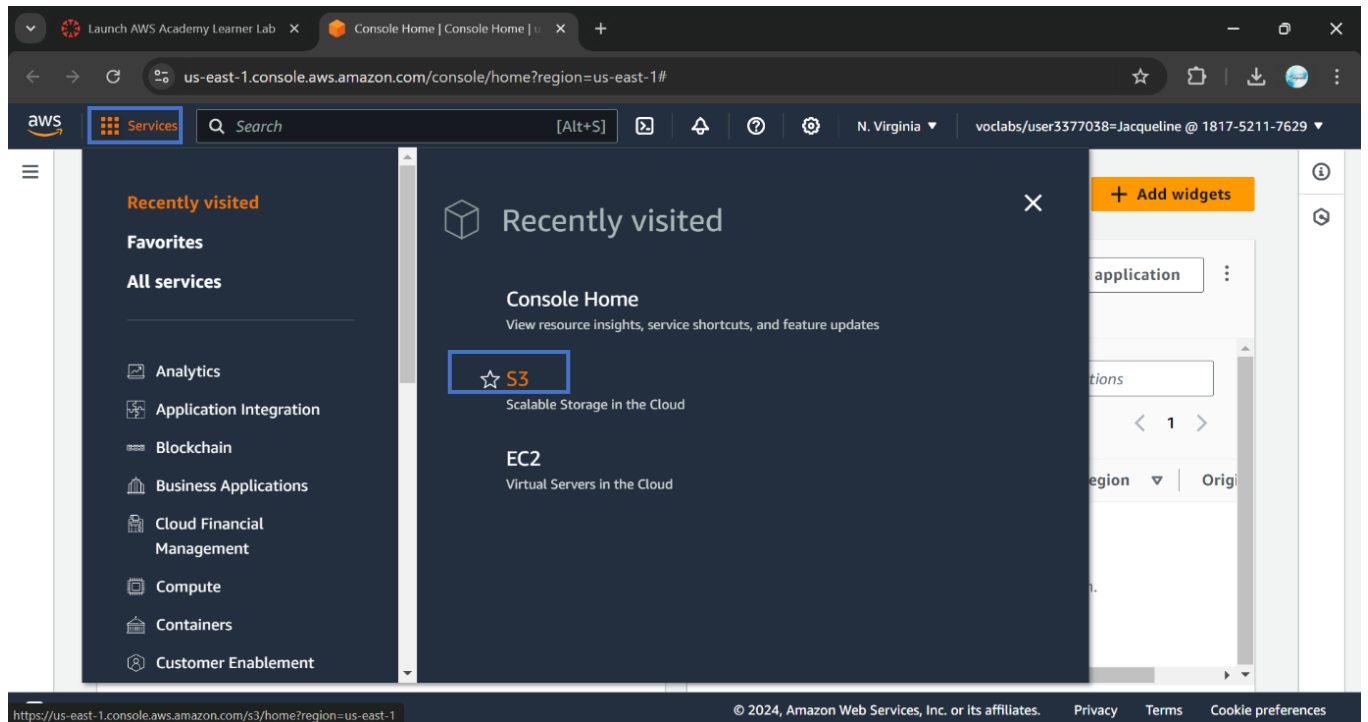


Step 2: It will show this page click on create a bucket.

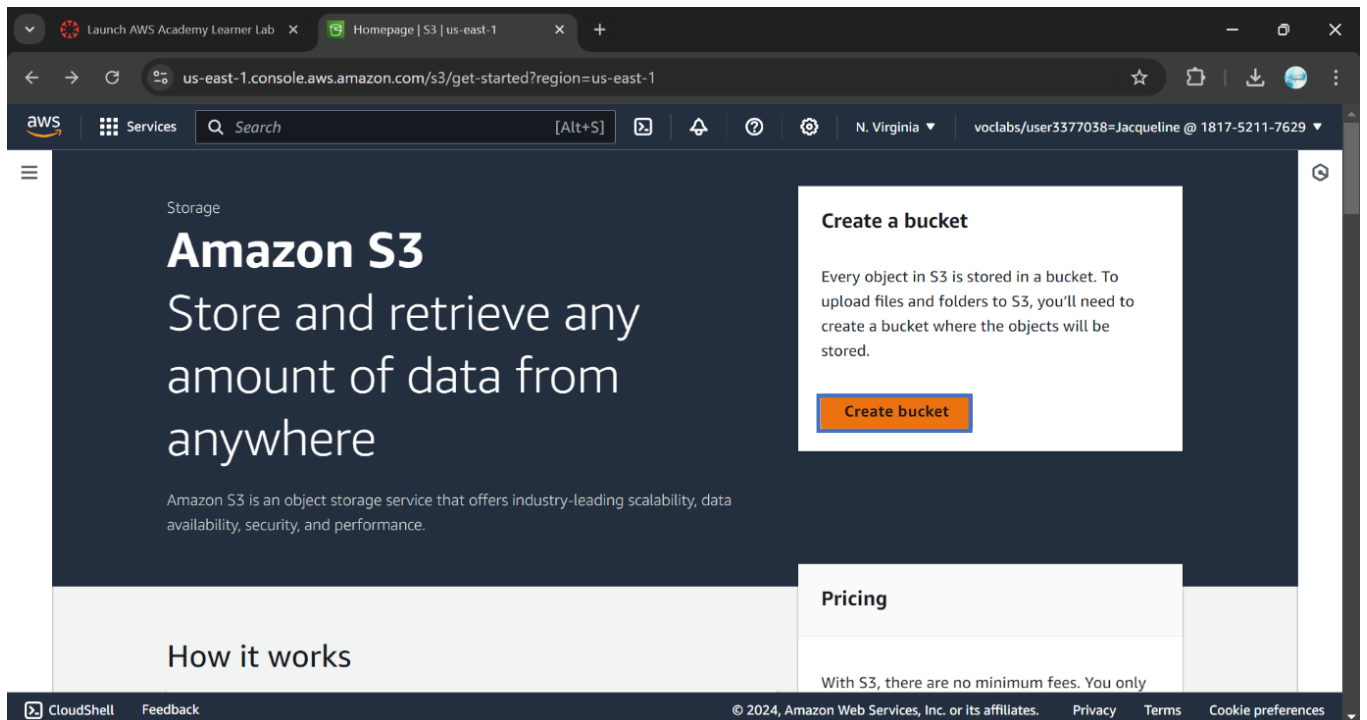


Step 3: Now give the name to the bucket and select ACLs enabled.

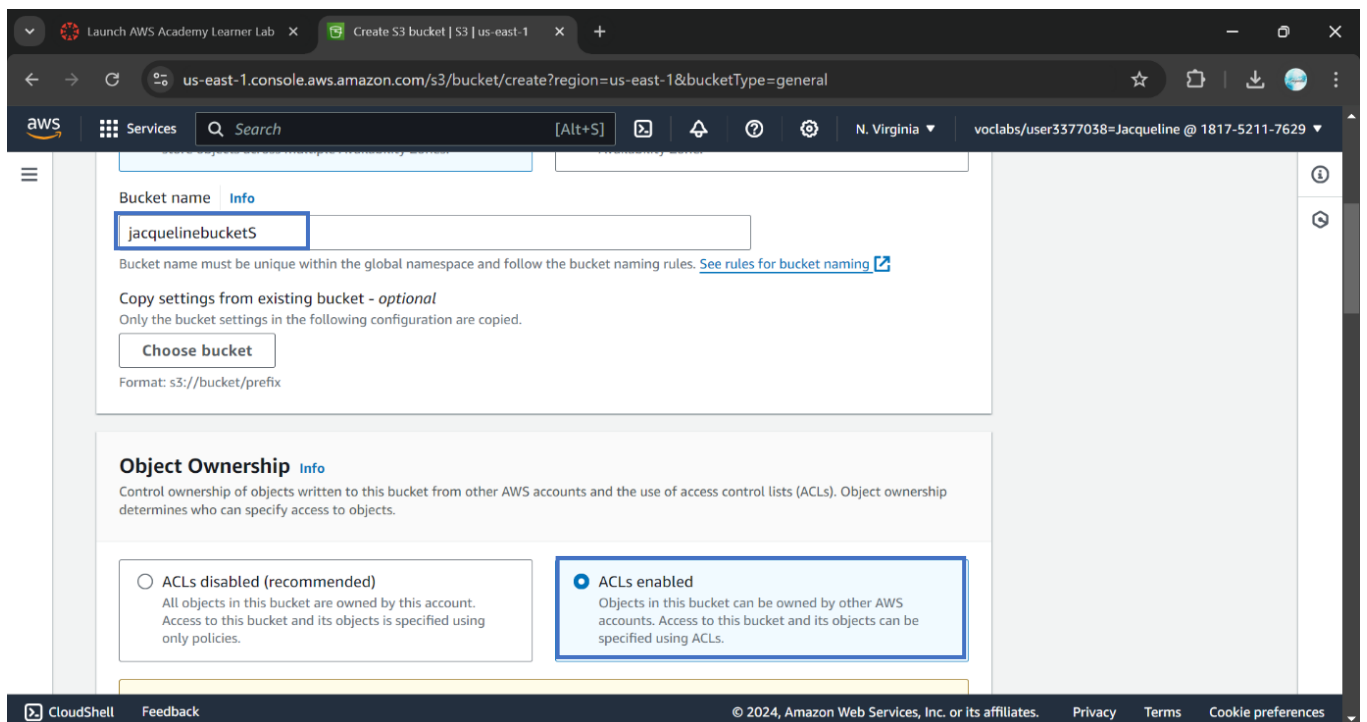


Step 4: Now say create bucket and after successful creation of bucket, click on bucket name.

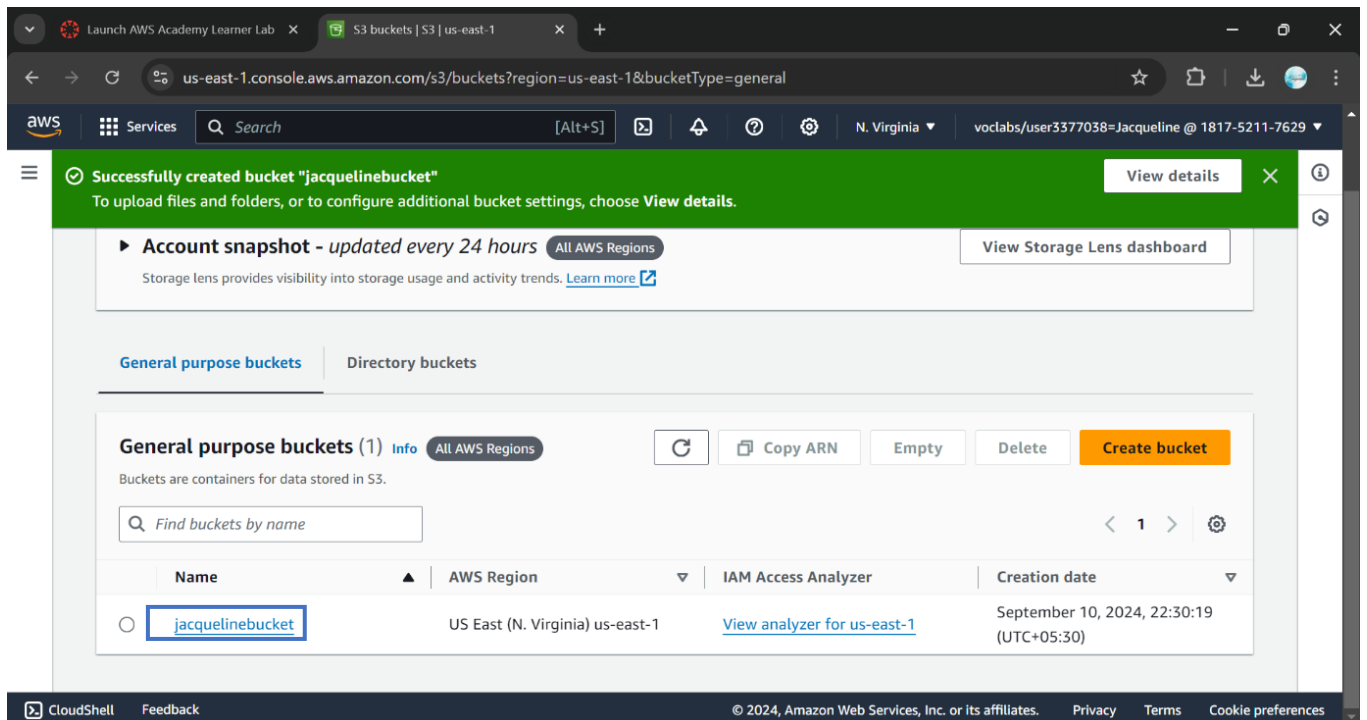


Step 5: Now click on upload and add files.

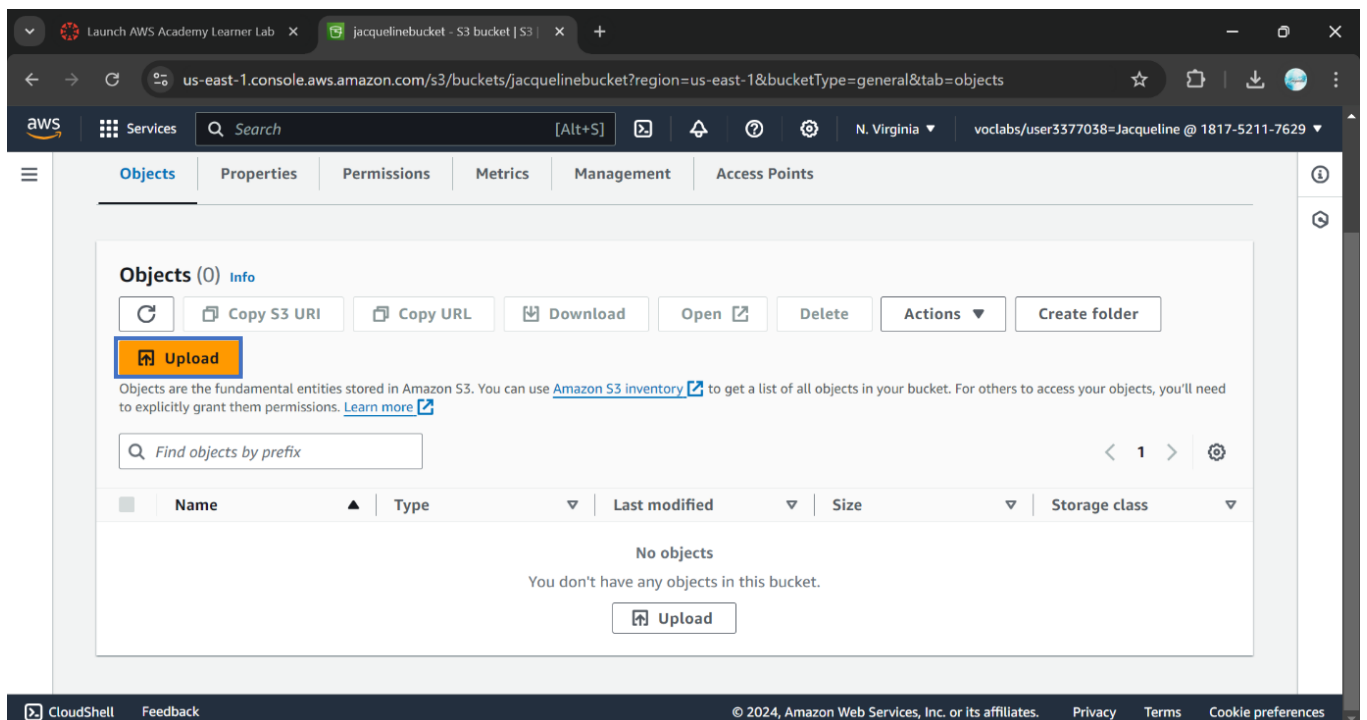


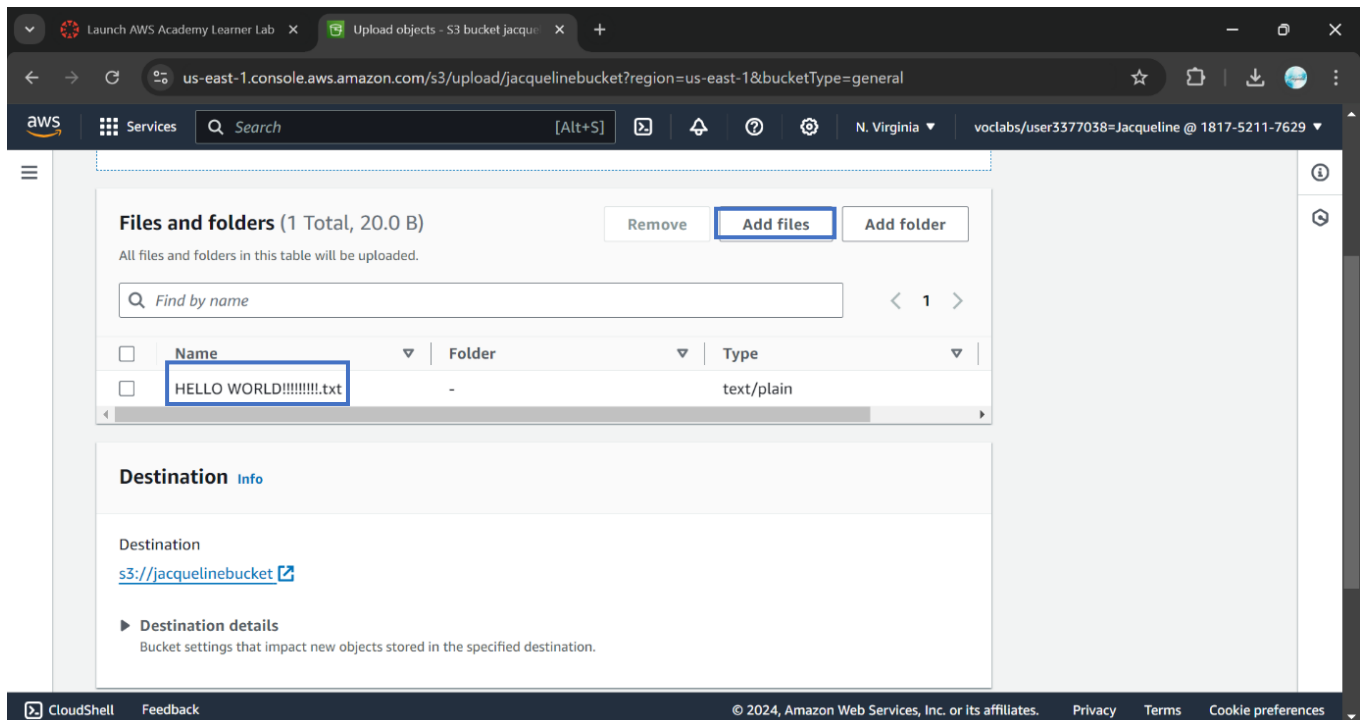


Step 6: Now click upload.

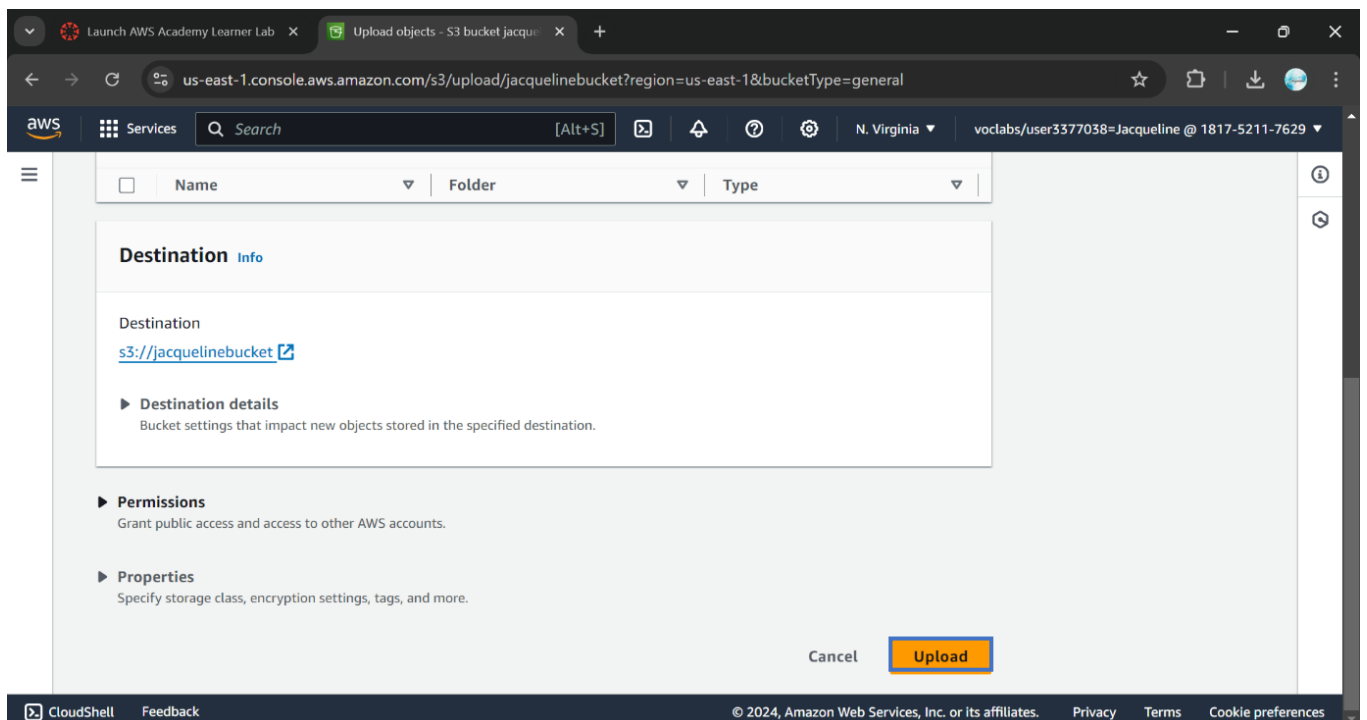


Step 7: Now click on the link as example.html

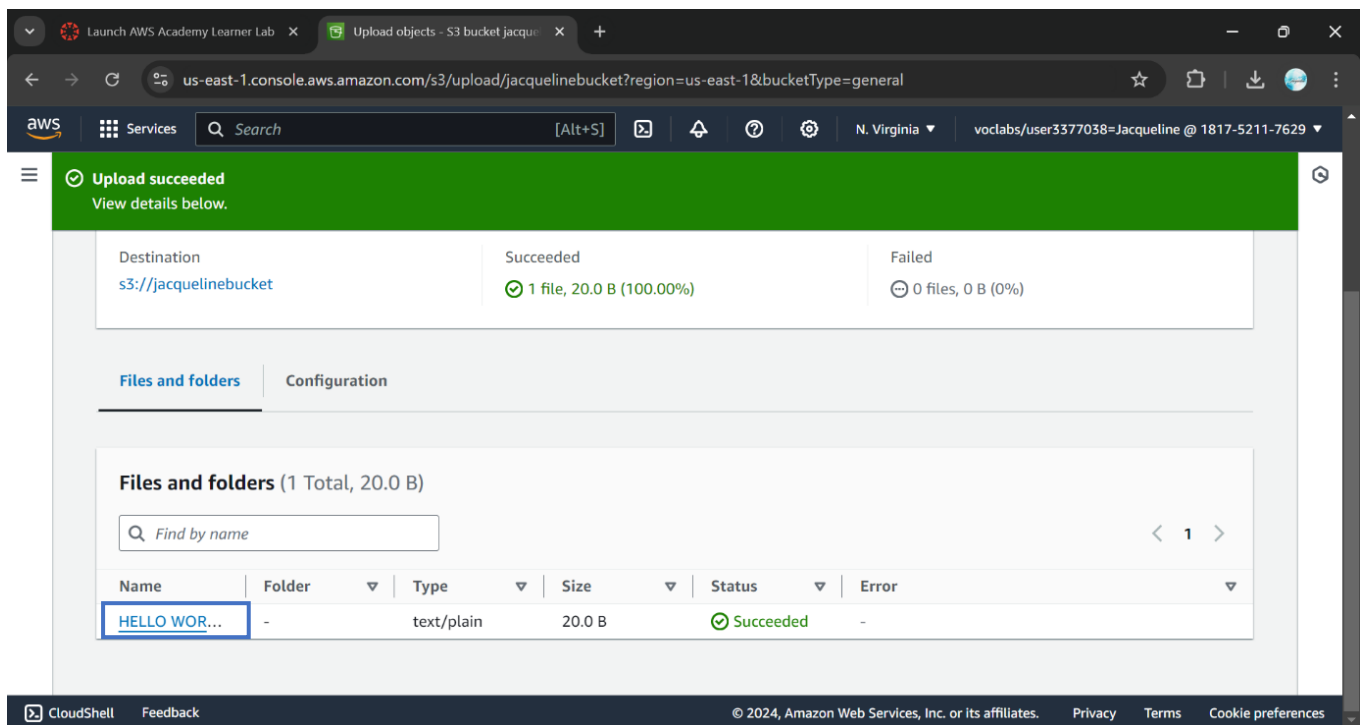


Step 8: Remove this from permissions and say save changes and enter 'confirm' to confirm.

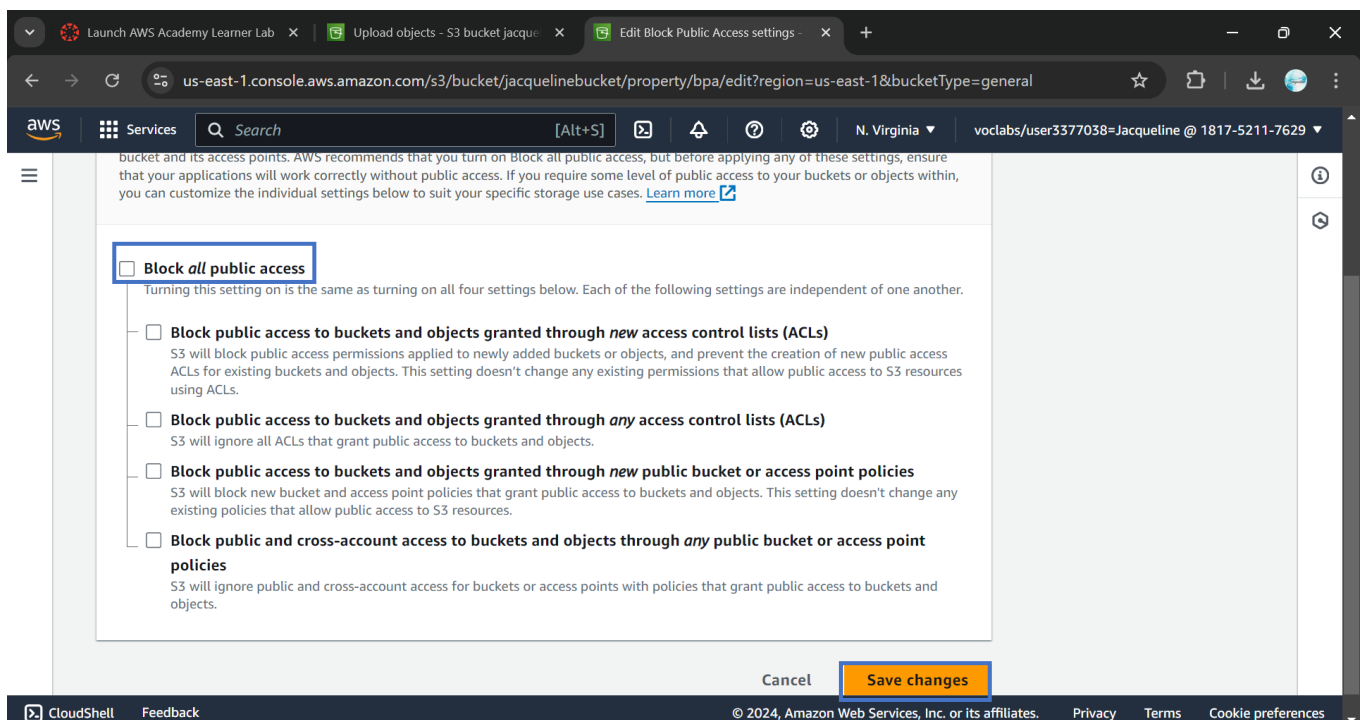


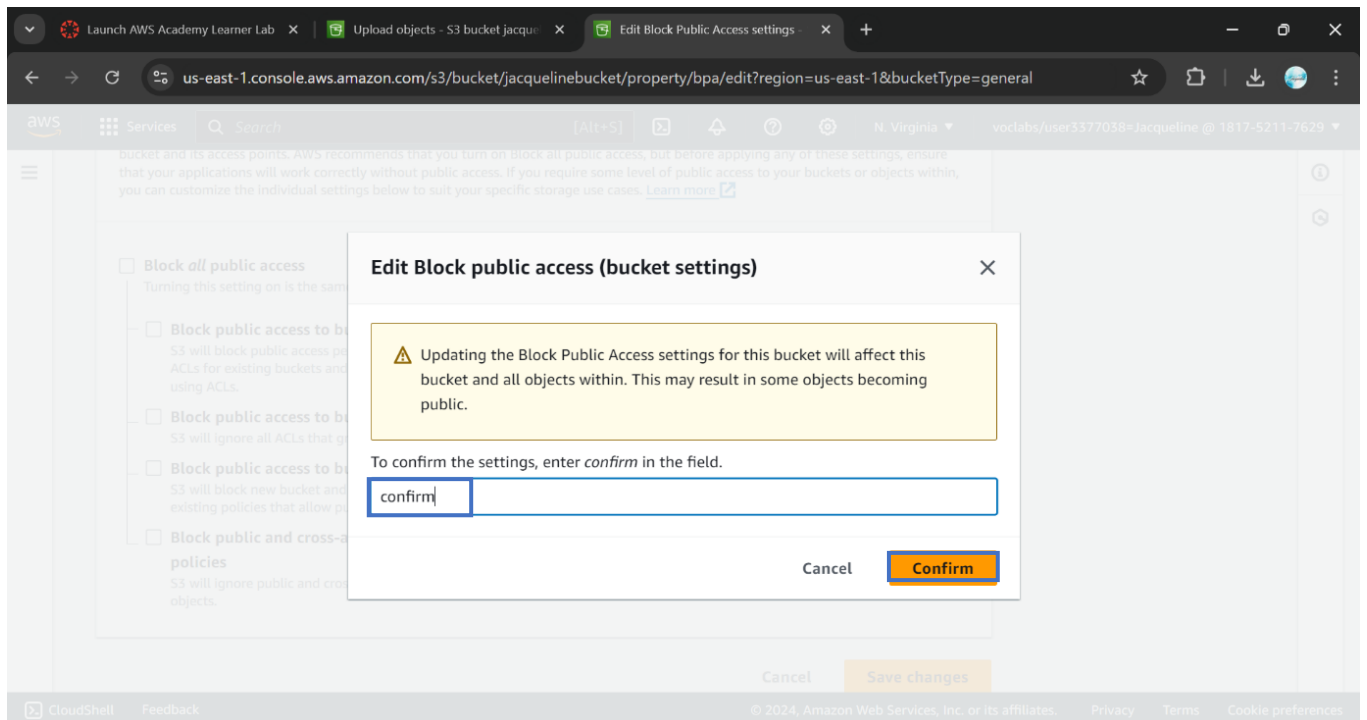

Step 9: Grant access from here and say 'I understand' and then say save changes.

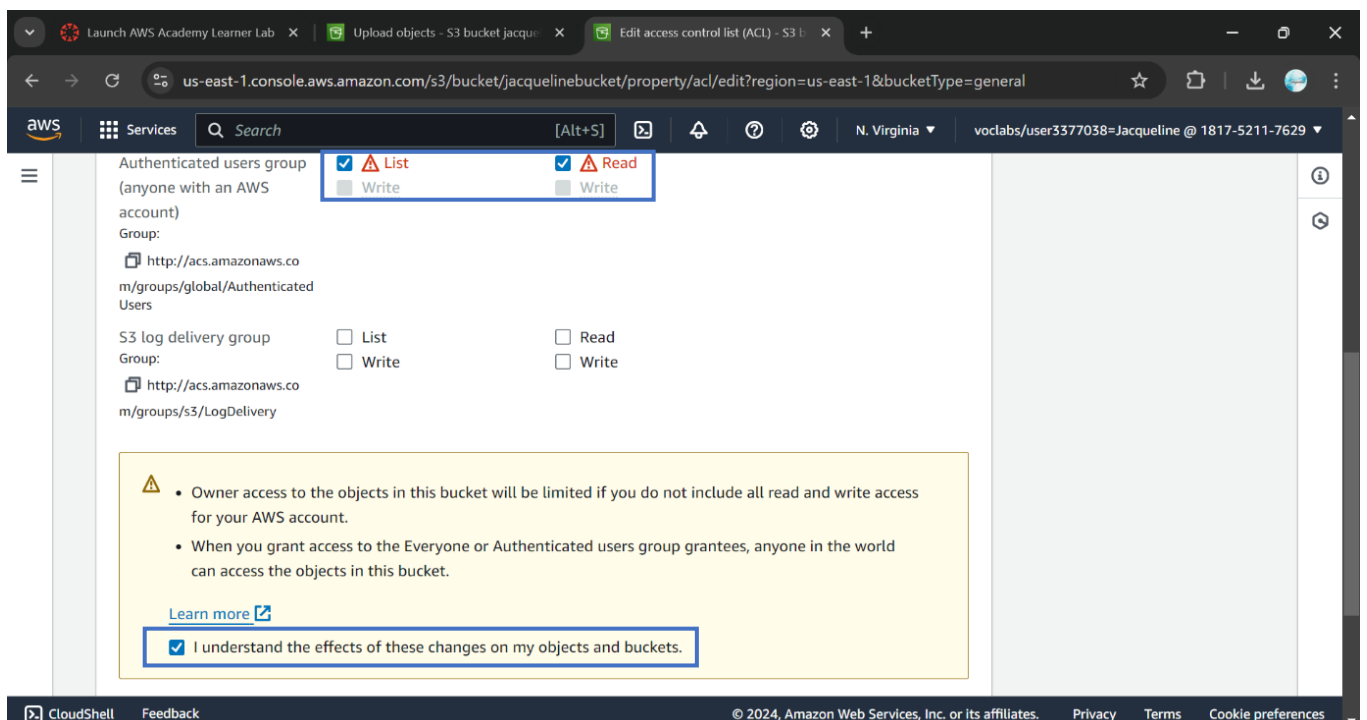

Step 10: Now click on the object url link.

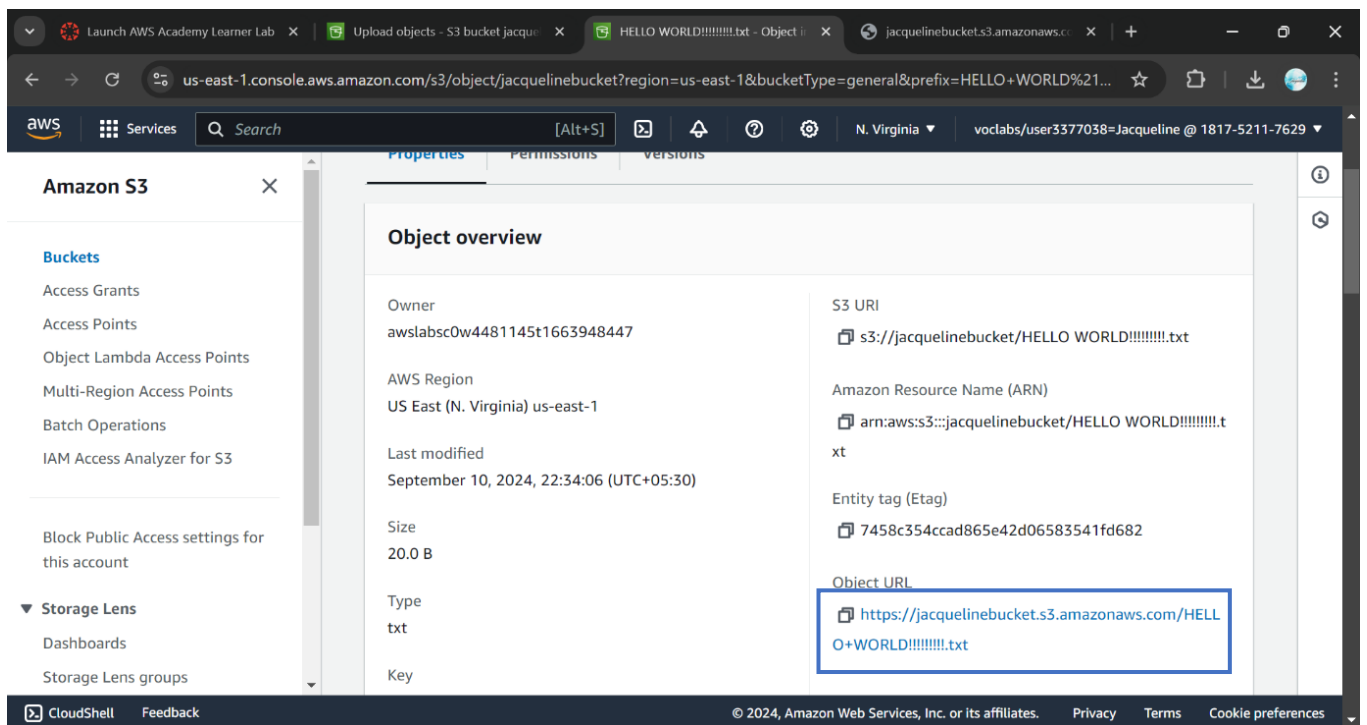

Step 11: This will appear.



Step 12: Now empty the bucket.

The screenshot shows the AWS Management Console for the 'us-east-1' region. The left sidebar displays the 'Amazon S3' service with a list of options including 'Buckets', 'Access Grants', 'Access Points', 'Object Lambda Access Points', 'Multi-Region Access Points', 'Batch Operations', 'IAM Access Analyzer for S3', 'Block Public Access settings for this account', 'Storage Lens', 'Dashboards', and 'Storage Lens groups'. The main content area is titled 'General purpose buckets (1)' and includes buttons for 'Copy ARN', 'Empty', 'Delete', and 'Create bucket'. Below these buttons is a search bar and a table listing the bucket 'jacquelinebucket' in the 'US East (N. Virginia) us-east-1' region, created on 'September 10, 2024, 22:30:19 (UTC+05:30)'. The 'Empty' button is highlighted with a blue border.

The screenshot shows the 'Empty bucket' confirmation dialog for the 'jacquelinebucket'. The URL in the browser is 'us-east-1.console.aws.amazon.com/s3/bucket/jacquelinebucket/empty?region=us-east-1&bucketType=general'. The dialog includes a warning box stating: 'Emptying the bucket deletes all objects in the bucket and cannot be undone. Objects added to the bucket while the empty bucket action is in progress might be deleted. To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket.' Below this is an information box about lifecycle rules. The main question is 'Permanently delete all objects in bucket "jacquelinebucket"?'. A text input field contains 'permanently delete'. At the bottom are 'Cancel' and 'Empty' buttons.

Step 13: Now delete the bucket.

The screenshot shows the AWS Management Console for the 'us-east-1' region. The 'Buckets' page is active, displaying a list of general purpose buckets. The bucket 'jacquelinebucket' is selected, and the 'Delete' button is highlighted. The console header shows the user 'voclabs/user3377038=Jacqueline @ 1817-5211-7629' and the region 'N. Virginia'.

Account snapshot - updated every 24 hours [View Storage Lens dashboard](#)

General purpose buckets (1) [Info](#) [All AWS Regions](#) [Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
jacquelinebucket	US East (N. Virginia) us-east-1	View analyzer for us-east-1	September 10, 2024, 22:30:19 (UTC+05:30)

CloudShell Feedback © 2024, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

The screenshot shows the 'Delete bucket' confirmation dialog in the AWS Management Console. The dialog title is 'Delete bucket "jacquelinebucket"?'. It contains a warning message and a text input field for confirming the deletion. The 'Delete bucket' button is highlighted.

Deleting a bucket cannot be undone.

- Bucket names are unique. If you delete a bucket, another AWS user can use the name.
- If this bucket is used with a Multi-Region Access Point in an external account, initiate failover before deleting the bucket.
- If this bucket is used with an access point in an external account, the requests made through those access points will fail after you delete this bucket.

[Learn more](#)

Delete bucket "jacquelinebucket"?

To confirm deletion, enter the name of the bucket in the text input field.

Cancel [Delete bucket](#)

CloudShell Feedback © 2024, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 14: Now sign out and end the lab.

