

System Protection

Instructor: Dr Tarunpreet Bhatia
Assistant Professor
CSED, TIET

Topics

- Goals of Protection
- Principles of Protection
- Domain of Protection
- Access Matrix

Goals of Protection


- In one protection model, computer consists of a collection of objects, hardware or software
- Each object has a unique name and can be accessed through a well-defined set of operations
- Protection problem - ensure that each object is accessed correctly and only by those processes that are allowed to do so

Principles of Protection

- Guiding principle – **principle of least privilege**
 - Programs, users and systems should be given just enough **privileges** to perform their tasks
 - Limits damage if entity has a bug, gets abused
 - Can be static (during life of system, during life of process)
 - Or dynamic (changed by process as needed) – **domain switching, privilege escalation**
 - “Need to know” a similar concept regarding access to data

Domain Structure

- Access-right = $\langle \text{object-name}, \text{rights-set} \rangle$
where *rights-set* is a subset of all valid operations that can be performed on the object
- Domain = set of access-rights

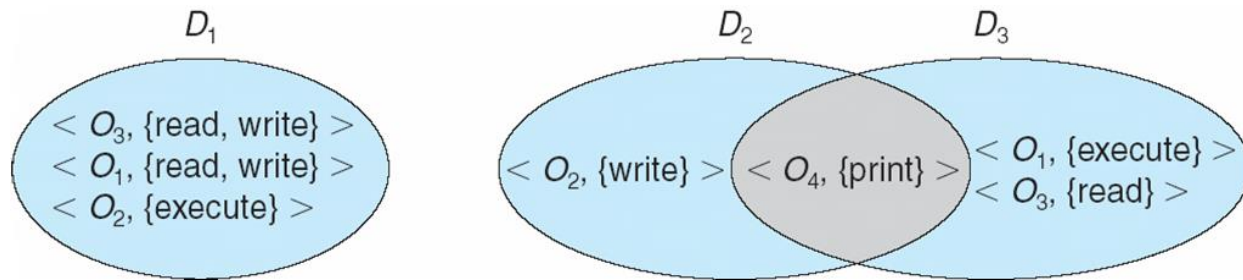

Access Matrix

- View protection as a matrix (**access matrix**)
- Rows represent domains
- Columns represent objects
- **Access(i, j)** is the set of operations that a process executing in Domain _{i} can invoke on Object _{j}

domain \ object	F_1	F_2	F_3	printer
D_1	read		read	
D_2				print
D_3		read	execute	
D_4	read write		read write	

Use of Access Matrix

- If a process in Domain D_i tries to do “op” on object O_j , then “op” must be in the access matrix
- User who creates object can define access column for that object
- Can be expanded to dynamic protection
 - Operations to add, delete access rights
 - Special access rights:
 - *owner of O_i*
 - *copy op from O_i to O_j (denoted by “*”)*
 - *control – D_i can modify D_j access rights*
 - *transfer – switch from domain D_i to D_j*
 - *Copy and Owner* applicable to an object
 - *Control* applicable to domain object

Access Matrix of Figure A with Domains as Objects

domain \ object	F_1	F_2	F_3	laser printer	D_1	D_2	D_3	D_4
D_1	read		read			switch		
D_2				print			switch	switch
D_3		read	execute					
D_4	read write		read write		switch			

Access Matrix with Copy Rights

object domain	F_1	F_2	F_3
D_1	execute		write*
D_2	execute	read*	execute
D_3	execute		

(a)

object domain	F_1	F_2	F_3
D_1	execute		write*
D_2	execute	read*	execute
D_3	execute	read	

(b)

Access Matrix With *Owner* Rights

object domain	F_1	F_2	F_3
D_1	owner execute		write
D_2		read* owner	read* owner write
D_3	execute		

(a)

object domain	F_1	F_2	F_3
D_1	owner execute		write
D_2		owner read* write*	read* owner write
D_3		write	write

(b)

Modified Access Matrix of Figure B

domain \ object	F_1	F_2	F_3	laser printer	D_1	D_2	D_3	D_4
D_1	read		read			switch		
D_2				print			switch	switch control
D_3		read	execute					
D_4	write		write		switch			