Content Menu ▼



7) pageContext implicit object



In JSP, pageContext is an implicit object of type PageContext class. pageContext object can be used to set, get or remove attribute from one the following scopes:

Create a facebook profile

- Sign up for free and page connect to the world.
- request
- session
- application

Sign Up

In JSP, page scope is the default scope.

Example of pageContext implicit object


index.html

```
<html>
<body>
<form action="welcome.jsp">
<input type="text" name="uname">
<input type="submit" value="go"><br/>
</form>
</body>
</html>
```



welcome.jsp

```
<html>
<body>
<%
String name=request.getParameter("uname");
out.print("Welcome "+name);
pageContext.setAttribute("user",name,PageContext.SESSION_SCOPE);
<a href="second.jsp">second jsp page</a>
```

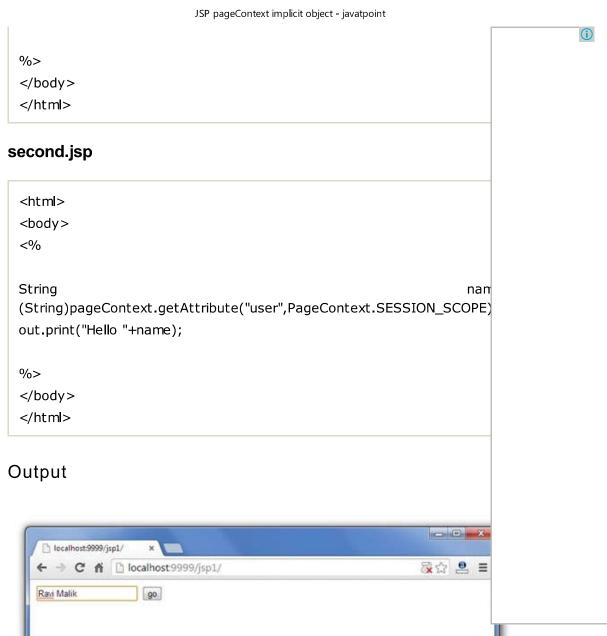





Other topics in JSP implicit Objects

Example of out implicit Object

Example of request implicit object

Example of Response implicit Object


Example of config implicit object

Example of application implicit object

Example of session implicit object

Example of page implicit object

Example of exception implicit object



next>>

Share 4