CoreLogic

CoreLogic – Print & Ship Integration Guide

Release 2.2

Disclaimer

The purpose of this document is to provide technical specifications to integrate with CoreLogic Print & Ship platform for document fulfillment. The information contained in this document is subject to change.

Table of Contents

Chapter 1 5
Introduction to the Integration Guide 5
Purpose 5
Conventions used in this guide 5
Production Support 6
CoreLogic Support 6
Schedule Maintenance 7
Chapter 2 8
Introduction to CoreLogic Print & Ship Integration 8
What is CoreLogic Print & Ship Integration 8
Benefits of Integration 8
Business Overview 9
Chapter 3 10
CoreLogic API Integration 10
AuthoMail API Integration 10
AuthoMail Fulfillment Callback 11
Test and Production Environments 11
CoreLogic – Authentication API 12
CoreLogic – Print & Ship API 13
Print & Ship Request: 13
Sample JSON Request 13
Data Dictionary - Request 16
Connectivity – Print & Ship Response 20
Response Code 20
Sample Success Response 20
Sample Error Response 20
Error Code 21
Sample Delivery Report Response 22
Sample Pulled Back Response 23

Data Dictionary – Response 24
CoreLogic - Print & Ship Response API: 29
Sample JSON Request 29
Response Format 29
Response Format 29
CoreLogic – Pullback API 32
Sample JSON Request 32
Pullback Response 32
Response Code 32
Pullback not requested messages 33
Sample Pullback requested Response 33
Sample Package Not Found Response 33
Sample Pullback not requested Response 34

Chapter 1

Introduction to the Integration Guide

Purpose

CoreLogic Print & Ship integration guide is a reference manual for Customers who can make print & ship request to CoreLogic and receive response with Shipping information from CoreLogic using API Integration.

Conventions used in this guide

The guide contains notes, tips and warning information to aid when using CL integration for print & ship requests.

Notes provide special information that may help you understand a concept.

	Note: A note look like this

Tips have helpful information or shortcuts that may help you.

	Tip: A tip look like this

Warnings offer cautionary advice to consider

!	Tip: A warning look like this

Production Support

CL integration for document fulfillment request is available to customers 24 hours a day 7 days a week. Production support is defined as efficient escalation, resolution of incidents identified within production environment. Production support applies to any groups that interface with CL print & ship platform. Questions or incidents may be reported by various groups including clients, vendors. General support is provided on a daily basis during regular business hours of operation.

CoreLogic Support

Regular Support Hours:

- Monday through Friday: 8:00 AM EST – 8 PM EST
- Saturday: 8:00 AM – 2 PM EST

Support Phone Number:

- Monday through Friday:
- Saturday:

	CL Support: For support during standard business hours please contact the support team via email at printandshipescalation.slx@corelogic.com

Schedule Maintenance

From time-to-time CoreLogic will be unavailable due to maintenance and will notify customers accordingly.

	Clients and partners will be notified in advance of any maintenance that will affect print & ship processing requests.

Technology Nomenclature

API – "application programming interface", which is a particular set of rules or codes and specifications that allow software programs to communicate with other software programs.

DTD – "document type definitions" which are a set of rules that define the structure of an XML document.

XML – an "extensible markup language" which is a set of standardized rules for marking-up documents that can be shared on the Internet. It provides data independence.

Chapter 2

Introduction to CoreLogic Print & Ship Integration

What is CoreLogic Print & Ship Integration

CL print & ship integration is an API based integration which allows customers to seamlessly send print & ship request to CoreLogic. CoreLogic accepts any print & ship request initiated by Customers. This integration also allows CoreLogic to send the shipping details back to the customers.

The data is exchanged via request & response JSON.


Benefits of Integration

Key Benefits of Integration include:

- With a click of a button initiate print & ship request
- Send the documents to print & ship within few minutes
- Get the tracking information and shipping details the same day of print & ship request initiation.
- Seamless Reporting.
- Best User Experience
- Pull-Back Request

Business Overview

The following diagram outlines the high – level business flow of CoreLogic Print & Ship integration

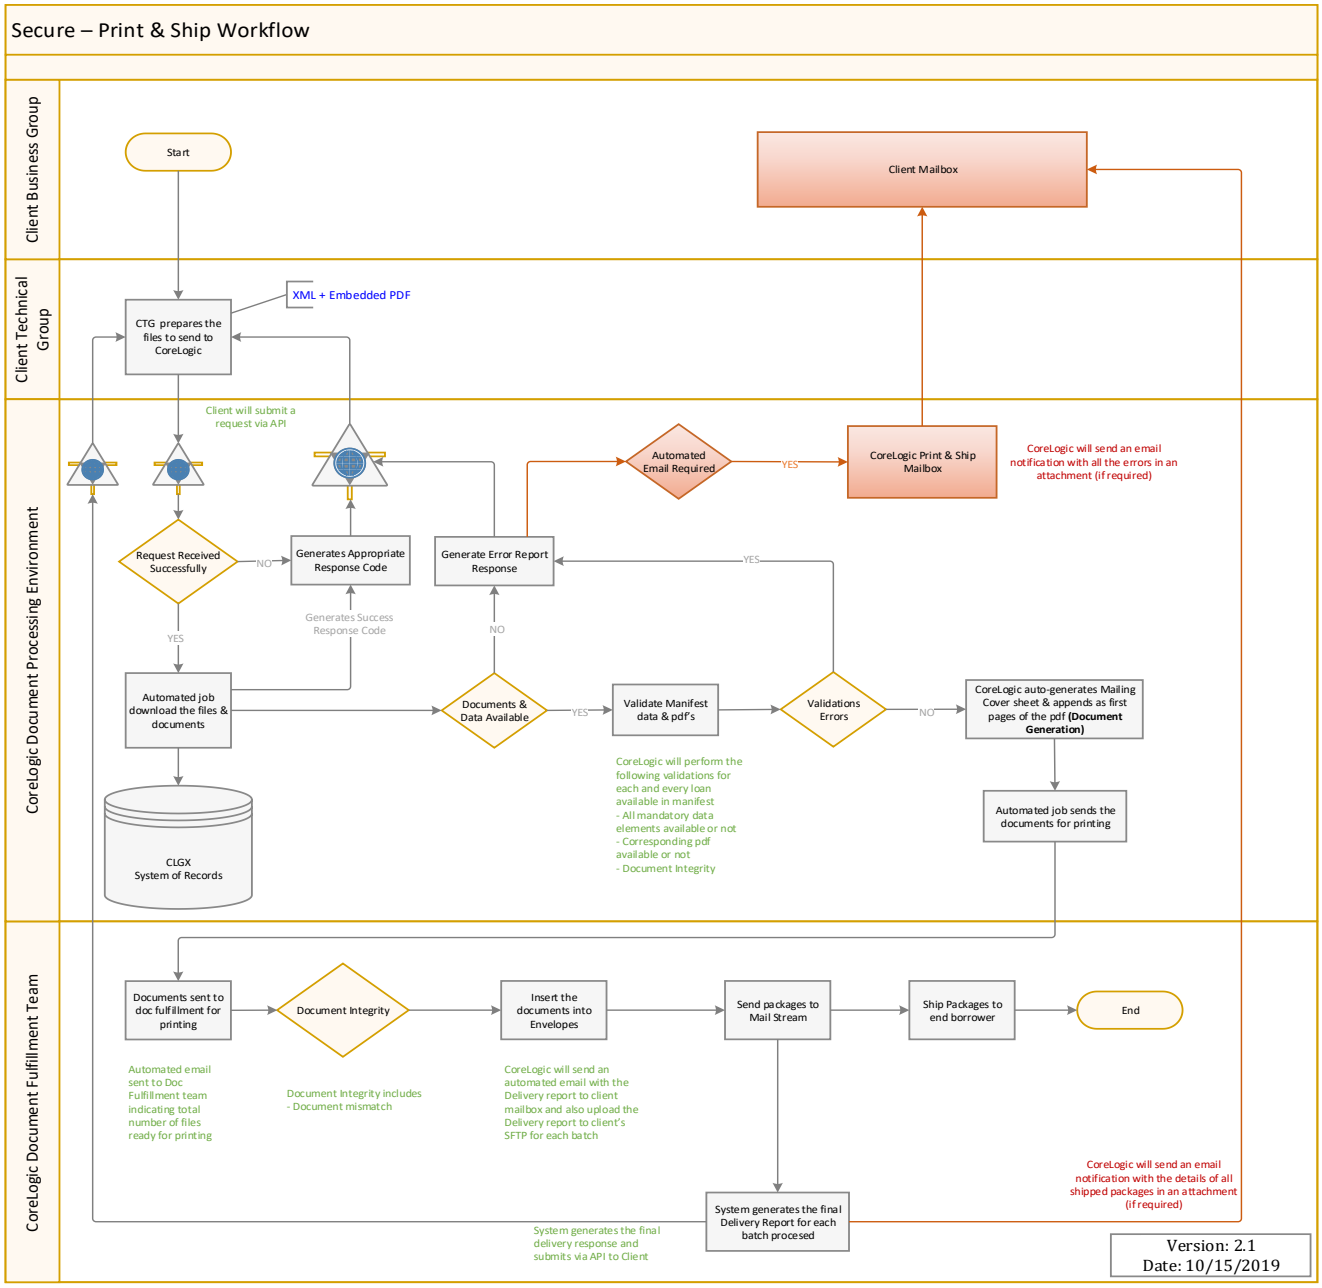

Chapter 3

CoreLogic API Integration

The following diagrams show standard way of integration with AuthoMail APIs and how AuthoMail submits delivery / errors (fulfillment) reports back to client's endpoints.

AuthoMail API Integration

1. Client posts API credentials to /token endpoint.
2. The endpoint responds with a token.
3. Client then includes this token in request header for all subsequent requests to an API resource (for print & ship /api/mailrequest, for pullback /api/requestpullback).
    a. The token should be reused until it expires.
4. API sends appropriate response to client. For example, print & ship request responds with an acknowledgement. The acknowledgement indicates whether the request was accepted / queued for further processing or rejected because of validation failures.

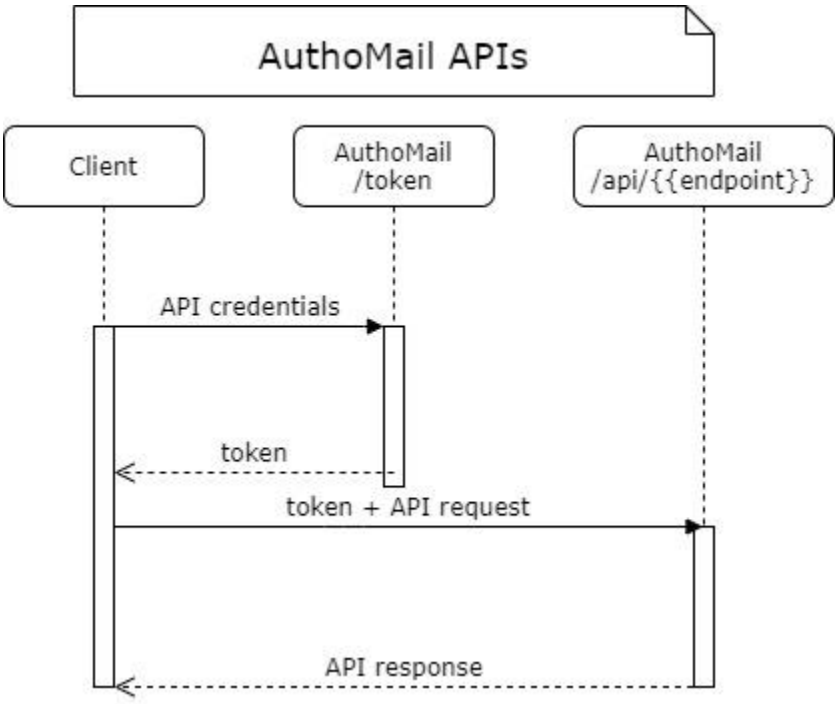


Figure 1

AuthoMail Fulfillment Callback

1. AuthoMail posts API credentials to the token endpoint provided by client.
2. The endpoint responds with a token.
3. AuthoMail then includes this token in request header for all subsequent requests to callback API
    a. The token is reused until it expires.
4. Client API must acknowledge the receipt of delivery / error report. This acknowledgement marks print & ship request as complete.

	The authentication scheme shown here is for illustration purposes only. Clients may use other authentication schemes. AuthoMail will make necessary changes to integrate with client specified authentication scheme.

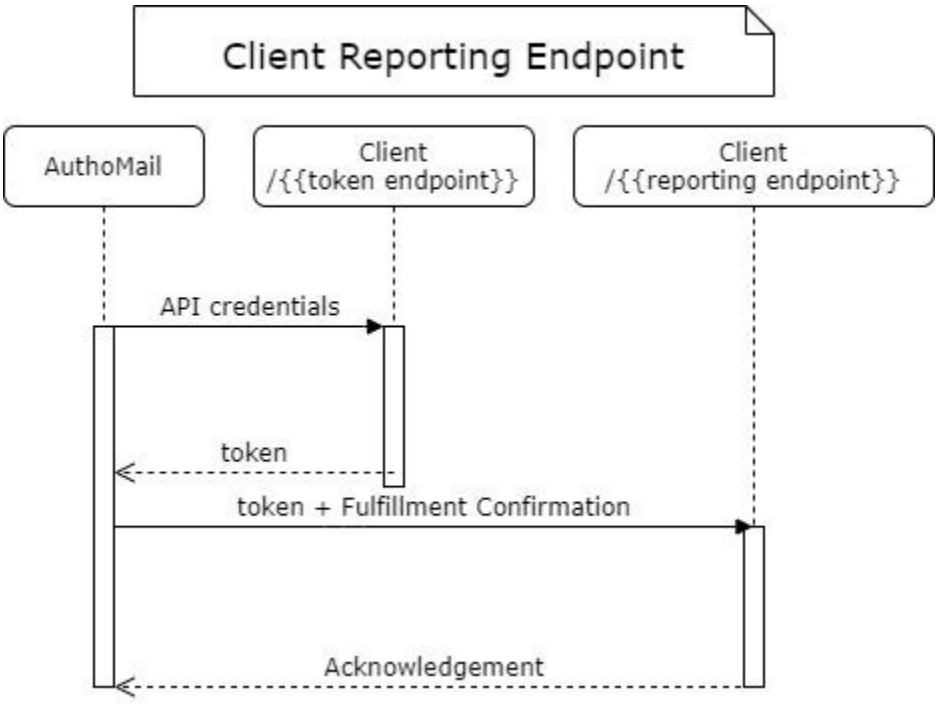


Figure 2

Test and Production Environments

The QA, Performance, Staging and Production endpoint URLs are maintained by CoreLogic and they will remain the same unless changed by CoreLogic. Here is the list of the base URLs:

Environment	Base URL	Endpoints
QA	https://authomailuat.corelogic.com	- Print & Ship Requests : /api/mailrequest - Responses : api/mailresponse - PullBack : /api/requestpullback
Performance	https://authomailperftest.corelogic.com	
Stage	https://authomailkittest.corelogic.com	
Production	https://authomail.corelogic.com	

CoreLogic – Authentication API

CoreLogin Print & Ship solution uses token-based authentication. Client app POST CL provided credentials to the auth endpoint as shown in Figure 1. The endpoint responds with a token. This token should be included as HTTP Header for subsequent requests to other APIs.

Token Request Endpoint:

Request : POST https://<host>/token

Body Text : grant_type=password&username={username}&password={password}

Token Sample Response :


```
{
    "access_token": "dsadsjreEDiOGrhd4EeqbipoxF-
ImnHHnFrdJfF8cRQCxn5i8bfnElrPmEkFOdbCGPuz6pxCmsgKhLZ7cJk8BhyERUadr3h2DrUkwiOesHY0sUT6wdT-
q5RVMT_4Nqf_Ld6QWjO0SR3yB-KXHjr7c0Jah_XqyBJBFG9gWQ0Ai6UBSo0EbN5u-Ehv8GH3h8bim4q3-
361ZtO3peMcIyYy5Up_a6CUAEnv7FQSBzOO0x2-wZZ28Y4JCMaS-
IytEhi4r6T_v1eLEK4abc4w8qyAbwSRrUn1GT_AdKWBca-Z4ot3gcAnPgE-Nck37TfuTqUk6Vi-
WnEv3ulx9fUcTk7ZXz6OyThUGCARMdwNlqlXb5jtf59FSChvhZR57jRZKUoJcq4VXXsO3GMSdDJK_GiNdxkJ5QKmGLCYnT
CLzjO5CIv4OBmYTHnuK1iddZA3EESFLQApGPW6bycZdKVH3iImI3w5kGK-g70OIqQ-
uCD5aRcBPPMA8qLWHfoVHCEbUQLBcurlsaTXAnjOIo3ZuhvS4FULBRZhfNpU3pqa-
B58YGoBemZO5Co1IlOwC26rUOObyfqSvWOVIF2iVqtiAO7ZKzI8Wn6ha135NB3i8eKko-
LBT9gNDL7KL9SoSFLXReQ_RjDFh",
    "token_type": "bearer",
    "expires_in": 899,
    "userName": "amtest",
    ".issued": "Tue, 17 Nov 2020 17:05:28 GMT",
    ".expires": "Tue, 17 Nov 2020 17:20:28 GMT"
}
```


Property	Comments
access_token	This is used for requesting as a Bearer key while requesting
expires_in	Expiry time in seconds
issued	Date time of token generated
expires	Date time of token when it will expire

CoreLogic – Print & Ship API

CoreLogic uses HTTP POST method for receiving the print & ship request. Request parameters must be present in HTTP headers, and the request payload must contain document metadata JSON along with actual documents. The documents and manifest JSON must be submitted as ***multipart/form-data*** request.

Print & Ship Request:

Below is the sample JSON manifest (document metadata) that needs to be submitted to CoreLogic endpoint for print & ship request.

Sample JSON Request

POST /api/mailrequest HTTP/1.1

Content Type: multipart/form-data

HTTP Headers:

Key	**Value**
Authorization	Bearer {access_token}
MailPieceId	00000000-0000-0000-0000-000000000000

Request Format


```
{
   "Id": "00000000-0000-0000-0000-000000000000",
   "ClientCode": "",
   "BusinessFriendlyIdName": "",
   "BusinessFriendlyIdValue": "",
   "DocumentOrPackageType": "",
   "DocumentOrPackage": {
         "Inserts": "",
         "Files": [],
         "Name": "",
  },
   "eDelivery": {
         "ExpiryDate": "0001-01-01",
         "PrintAndShipOnExpiry": false
   },
```

```
"RecipientInfo": {
   "Recipient": {
      "Organization": "",
      "Prefix": "",
      "FirstName": "",
      "MiddleName": "",
      "LastName": "",
      "Suffix": "",
      "Phone": "",
      "EmailAddress": ""
   },
   "Address": {
      "OptionalLine1AboveStreet": "",
      "OptionalLine2AboveStreet": "",
      "Street": "",
      "AptOrSuiteOrOther": "",
      "OptionalLine1BelowStreet": "",
      "OptionalLine2BelowStreet": "",
      "City": "",
      "State": "",
      "Zip": "",
      "Country": ""
   }
},
"ReturnInfo": {
   "Recipient": {
      "Organization": "",
      "Prefix": "",
```

```
            "FirstName": "",
            "MiddleName": "",
            "LastName": "",
            "Suffix": "",
            "Phone": ""
        },
        "Address": {
            "OptionalLine1AboveStreet": "",
            "OptionalLine2AboveStreet": "",
            "Street": "",
            "AptOrSuiteOrOther": "",
            "OptionalLine1BelowStreet": "",
            "OptionalLine2BelowStreet": "",
            "City": "",
            "State": "",
            "Zip": "",
            "Country": ""
        }
    },
    "CustomInfo": [
        {
            "Key": "",
            "DataType": 0,
            "Value": ""
        }
    ]
}
```

!	Production loans must not be submitted in the Test Environments. Test Loans must not be submitted in the Production Environment

Data Dictionary - Request

Parameter	Data Type	Comments	Conditionality
Id	String	Globally Unique Identifier (GUID)	Required
ClientCode	String		Required
BusinessFriendlyIdName	String		Required
BusinessFriendlyIdValue	String		Required
DocumentOrPackageType	String		Required
DocumentOrPackage	Object		Required
eDelivery	Object		Optional
RecipientInfo	Object		Optional
ReturnInfo	Object		Optional
MailPieceCustomInfo	Object		Optional

DocumentOrPackage

Parameter	Data Type	Comments	Optionality
Files	List<String>	If Inserts are passed then this can be optional	Conditional Required

Inserts	String	If Files are passed then this can be optional	Conditional Required
Name	String	Optional	

eDelivery

Parameter	Data Type	Comments	Optionality
ExpiryDate	Date	If E-Delivery object is passed, then ExpiryDate is required	Conditional Required
PrintAndShipOnExpiry	Boolean	If E-Delivery object is passed, then PrintAndShipOnExpiry is required	Conditional Required

RecipientInfo

Parameter	Data Type	Comments	Optionality
Recipient	Object		Required
Address	Object		Required

ReturnInfo

Parameter	Data Type	Comments	Optionality
Recipient	Object		Required
Address	Object		Optional

Recipient

Parameter	Data Type	Comments	Optionality

Organization	String		Optional
Prefix	String		Optional
FirstName	String		Optional
MiddleName	String		Optional
LastName	String		Optional
Suffix	String		Optional
Phone	String	Regex Pattern: ^\(?([2-9][0-8][0-9])\)?[-.]?([2-9][0-9]{2})[-.]?([0-9]{4})$ If ShippingMethod = FedEx, USPS Priority USPS Priority Express then Phone is required	Conditional Required
EmailAddress	String	If E-Delivery object is passed, then Recipient EmailAddress is required	Conditional Required

Address

Parameter	Data Type	Comments	Optionality
OptionalLine1AboveStreet	String		Optional
OptionalLine2AboveStreet	String		Optional
Street	String		Required

OptionalLine1BelowStreet	String		Optional
OptionalLine2BelowStreet	String		Optional
City	String		Required
State	String		Required
Zip	String	Regex Pattern: ^(?(^00000(|-0000))|\d{5}(?:|[-\s]+\d{4}))$	Required
Country	String		Optional

MailPieceCustomInfo

Parameter	Data Type	Comments	Optionality
Key	String	If MailPieceCustomInfo object is passed, then Key is required	Conditional Required
DataType	String	If MailPieceCustomInfo object is passed, then DataType is required Allowable Values: • String • DateTime • Boolean • Integer • Float	Conditional Required
Value	String	If MailPieceCustomInfo object is passed, then Value is required	Conditional Required

	In order to get the request successfully processed, the request xml should be sent as per agreed specifications.

Connectivity – Print & Ship Response

All response bodies are JSON-formatted with "Content-Type: application/json"
Below is the sample example of a response JSON that will be triggered by CoreLogic for print & ship response to Client EndPoint URL.

Response Code

Condition	Code
200	Success
400	Most Failures
401	Auth Failure
500	Misc. Server Issues or Service Unavailable
406	Previous instance of the request is being processed or Incomplete request
409	Duplicate Request (the “Id” field is used to check uniqueness)
413	Request size is above limits

Sample Success Response


```
{
   "UniqueId": "00000000-0000-0000-0000-000000000000",
   "MailingStatus": "Acknowledgement",
   "Message": "Your request is queued for processing."
}
```


Sample Error Response


```
{
     "Id": "00000000-0000-0000-0000-000000000000",
          "ReceivedOn": "0001-01-01T00:00:00",
          "ClientCode": "",
```

```
        "BusinessFriendlyIdName": "",
        "BusinessFriendlyIdValue": "",
        "DocumentOrPackageType": "",
        "DocumentOrPackage": {
        "Name": ""
        },
    "RecipientInfo": {
     "Recipient": {
        "FirstName": "",
        "LastName": ""
     },
     "Address": {
        "Street": "",
        "City": "",
        "State": "",
        "Zip": ""
     }
    },
        “MailingStatus”: "Error",
        "ErrorCode": "Mailing_Address_Missing_Or_Invalid",
        "ErrorDesc": "Mailing_Address_Missing_Or_Invalid"
}
```


Error Code
Mailing_Address_Missing_Or_Invalid
Recipient_Details_Missing_Or_Invalid

Unknown_Error
Invalid_PackageType
Invalid_ShippingDetail
Invalid_DuplicateKey
Invalid_PDF_File
Missing_PDF_File
Issue_In_EDelivery
SigningRoomExpired
Invalid_MailPieceId
NotAcceptable
MaxRetriesExceeded
RequestTooLarge
Manifest_Missing_Or_Invalid
Invalid_ClientCode
Missing_DocumentOrPackage
Missing_Files

Sample Delivery Report Response


```
{
    "Id": "00000000-0000-0000-0000-000000000000",
        "ReceivedOn": "0001-01-01T00:00:00",
        "ClientCode": "",
        "BusinessFriendlyIdName": "",
        "BusinessFriendlyIdValue": "",
        "DocumentOrPackageType": "",
        "DocumentOrPackage": {
```

```
        "Name": ""
        },
    "RecipientInfo": {
     "Recipient": {
        "FirstName": "",
        "LastName": ""
     },
     "Address": {
        "Street": "",
        "City": "",
        "State": "",
        "Zip": ""
     }
    },
        “MailingStatus”: "Shipped",
        "ShippedOn": "0001-01-01T00:00:00",
        "ShippingMethod": "USPS",
        "ShippingServiceType": "PRIORITY",
        "TrackingNumber": 0,
        "TotalPages": 0,
        "TotalSheets": 0
}
```


Sample Pulled Back Response


```
{
   "Id": "00000000-0000-0000-0000-000000000000",
        "ReceivedOn": "0001-01-01T00:00:00",
```

```
            "ClientCode": "",
            "BusinessFriendlyIdName": "",
             "BusinessFriendlyIdValue": "",
            "DocumentOrPackageType": "",
            "DocumentOrPackage": {
            "Name": ""
            },
    "RecipientInfo": {
     "Recipient": {
        "FirstName": "",
        "LastName": ""
     },
     "Address": {
        "Street": "",
        "City": "",
        "State": "",
        "Zip": ""
     }
    },
            “MailingStatus”:  "PulledBack",
            "PulledBackOn": "0001-01-01T00:00:00"
}
```


Data Dictionary – Response

Parameter	Data Type	Comments	Conditionality

<table>
<tr><td>Id</td><td>String</td><td>Globally Unique Identifier (GUID)</td><td>Required</td></tr>
<tr><td>ReceivedOn</td><td>DateTime</td><td></td><td></td></tr>
<tr><td>ClientCode</td><td>String</td><td></td><td>Required</td></tr>
<tr><td>BusinessFriendlyIdName</td><td>String</td><td></td><td>Optional</td></tr>
<tr><td>BusinessFriendlyIdValue</td><td>String</td><td></td><td>Optional</td></tr>
<tr><td>DocumentOrPackageType</td><td>String</td><td></td><td>Optional</td></tr>
<tr><td>DocumentOrPackage</td><td>Object</td><td></td><td>Optional</td></tr>
<tr><td>RecipientInfo</td><td>Object</td><td></td><td>Optional</td></tr>
<tr><td>MailingStatus</td><td>String</td><td>Allowable Value:<table><tr><td>Verifying</td><td>Request is still being processed by the endpoint.</td></tr><tr><td>Queued</td><td>Request passes all initial verifications and is now queued for our print services.</td></tr><tr><td>InProgress</td><td>Request is now picked up for further processing by our print services.</td></tr><tr><td>Shipped</td><td>Request is fulfilled.</td></tr><tr><td>Error</td><td>Manifest validation errors, Decryption errors, PDF errors, etc.</td></tr><tr><td>PulledBack</td><td>Package is pulled out of the workstream as requested.</td></tr></table></td><td>Required</td></tr>
<tr><td>ShippedOn</td><td>Date</td><td>Only Required If Mailing Status = SHIPPED</td><td>Conditional Required</td></tr>
</table>

ShippingMethod	String	Only Required If Mailing Status = SHIPPED	Conditional Required
ShippingServiceType	String	Only Required If Mailing Status = SHIPPED	Conditional Required
TrackingNumber	String	Only Required If Mailing Status = SHIPPED	Conditional Required
TotalPages	Integer	Only Required If Mailing Status = SHIPPED	Conditional Required
TotalSheets	Integer	Only Required If Mailing Status = SHIPPED	Conditional Required
Postage	Decimal		Optional
PulledBackOn	DateTime	Only Required If Mailing Status = PulledBack	Conditional Required
ErrorCode	String	Only Required If Mailing Status = Error	Conditional Required
ErrorDesc	String	Only Required If Mailing Status = Error	Conditional Required

RecipientInfo

Parameter	Data Type	Comments	Required
Recipient	Object		Required
Address	Object		Required

Recipient

Parameter	Data Type	Comments	Optionality
Organization	String		Optional
Prefix	String		Optional
FirstName	String		Optional
MiddleName	String		Optional
LastName	String		Optional
Suffix	String		Optional
Phone	String	Regex Pattern ^\(?([2-9][0-8][0-9])\)?[-.]?([2-9][0-9]{2})[-.]?([0-9]{4})$	Optional
EmailAddress	String	Not for ReturnInfo	Optional

DocumentOrPackage

Parameter	Data Type	Comments	Optionality
Name	String		Optional

Address

Parameter	Data Type	Implementation Notes	Optionality
OptionalLine1AboveStreet	String		Optional
OptionalLine2AboveStreet	String		Optional

Street	String		Optional
OptionalLine1BelowStreet	String		Optional
OptionalLine2BelowStreet	String		Optional
City	String		Optional
State	String		Optional
Zip	String	Regex Pattern: ^(?(^00000(|-0000))|\d{5}(?:|[-\s]+\d{4}))$	Optional
Country	String		Optional

CoreLogic - Print & Ship Response API:

Below is the sample JSON manifest (document metadata) that needs to be submitted to CoreLogic endpoint for print & ship response.

Sample JSON Request

GET /api/mailresponse HTTP/1.1

Params: mailPieceIds={comma separated ids}

Content Type: application/json

HTTP Headers:

Key	Value
Authorization	Bearer {token}

Response Format

/api/mailresponse?mailPieceIds={comma separated ids}

Example:

/api/mailresponse?mailPieceIds=00000000-0000-0000-0000-000000000000, 00000000-0000-0000-0000-000000000000

Response Format

All response bodies are JSON-formatted with "Content-Type: application/json"
Below is the sample example of a response.

Sample Response


```
[
  {
    "Id": "00000000-0000-0000-0000-000000000000",
    "ReceivedOn": "0001-01-01T00:00:00",
    "ClientCode": "",
    "BusinessFriendlyIdName": "",
    "BusinessFriendlyIdValue": "",
    "DocumentOrPackageType": "",
```

```
    "DocumentOrPackage": {
      "Name": ""
    },
    "RecipientInfo": {
      "Recipient": {
        "FirstName": "",
        "LastName": ""
      },
      "Address": {
        "Street": "",
        "City": "",
        "State": "",
        "Zip": ""
      }
    },
    "MailingStatus": "Error",
    "ErrorCode": "Mailing_Address_Missing_Or_Invalid",
    "ErrorDesc": "Mailing_Address_Missing_Or_Invalid"
  } ,
  {
    "Id": "00000000-0000-0000-0000-000000000000",
    "ReceivedOn": "0001-01-01T00:00:00",
    "ClientCode": "",
    "BusinessFriendlyIdName": "",
    "BusinessFriendlyIdValue": "",
    "DocumentOrPackageType": "",
    "DocumentOrPackage": {
      "Name": ""
    },
    "RecipientInfo": {
```

```
      "Recipient": {
        "FirstName": "",
        "LastName": ""
      },
      "Address": {
        "Street": "",
        "City": "",
        "State": "",
        "Zip": ""
      }
    },
    "MailingStatus": "Shipped",
    "ShippedOn": "0001-01-01T00:00:00",
    "ShippingMethod": "",
    "ShippingServiceType": "",
    "TrackingNumber": "",
    "TotalPages": 0,
    "TotalSheets": 0
  }
]
```

CoreLogic – Pullback API

The pullback API allows client applications to “request” pullback for specific package(s). Once a print & ship request is submitted, it can be anywhere in the process cycle. Depending on the current status, it may or may not be possible to execute pullback. Consider the following scenarios:

1. If a package is being processed by our job and yet to be submitted to our print team, pullback request should succeed within minutes.
2. If a package is delivered to print team for fulfillment, it must be manually aborted. In this case, pullback request should succeed but it will take longer to receive confirmation on pullback.
3. If a package is picked up by courier company, pullback is not entertained.

The outcome of pullback request is submitted with delivery report. If it succeeds, MailingStatus is reported as "PulledBack", otherwise, it is either “Shipped” or “Error”.

Sample JSON Request

POST /api/requestpullback HTTP/1.1

Content Type: application/json

HTTP Headers:

Key	Value
Authorization	Bearer {token}

Request Format

[Arrayof MailPieceIds]

Example:

["00000000-0000-0000-0000-000000000000", "00000000-0000-0000-0000-000000000000"]

Pullback Response

All response bodies are JSON-formatted with "Content-Type: application/json"
Below is the sample example of a response.

Response Code

Condition	Code
Success	200
Most Failures	400
Auth Failure	401
Misc. Server Issues	500

Pullback not requested messages
Mailpiece has an error, it is not going to be printed. Check error report for details.
Pullback is already requested for this mailpiece.
Mailpiece is already pulled back.
Mailpiece is already shipped, pullback cannot be requested.
Mailpiece is already EDelivered, pullback cannot be requested.
The requested mailpiece is yet to be received or validated.
Invitation for signing room is already sent to Borrower, pullback cannot be requested.

Sample Pullback requested Response


```
{
    "MailPieceId": "00000000-0000-0000-0000-000000000000",
    "Message": "Pullback request is recorded successfully.",
    "PullBackRequestedOn": "0001-01-01T00:00:00",
    "PulledBackRequestedBy": "",
    "MailingStatus": ""
}
```


Sample Package Not Found Response


```
{
    "MailPieceId": "00000000-0000-0000-0000-000000000000",
    "Message": "The requested mailpiece is yet to be received or validated ",
    "MailingStatus": "NotFound"
}
```

Sample Pullback not requested Response


```
{
    "MailPieceId": "00000000-0000-0000-0000-000000000000",
    "Message": "Mailpiece has an error, it is not going to be printed. Check error description for details.",
    "MailingStatus": "Error",
    "ErrorDescription": "Pdf file is not provided in package."
}
```