1)Design a railway booking app for travelling from bangalore, with inputs Name , phone number , email id , class and destination station with distance (Radio Button), and date . On pressing the submit button the user goes to the next screen and should be asked to enter the class(General,Sleeper & AC) and age of the traveler. With Assume Rs 1.5 per Kilometer for General, Rs 3 Per kilometer for Sleeper , Rs 6 per Kilometer for AC . Calculate the tikcet cost, If user is 60 or above ticket price should be half. Also print the details of the customer on the screen .

NOTE: Create Empty Views Activity for activity_travel_details.xml and TravelDetailsActivity.java

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
  android:layout_width="match_parent"
  android:layout_height="match_parent"
  android:orientation="vertical"
  android:padding="16dp">
  <EditText
    android:id="@+id/name"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Enter Name" />
  <EditText
    android:id="@+id/phoneNumber"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Enter Phone Number" />
  <EditText
    android:id="@+id/email"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Enter Email ID" />
  <RadioGroup
    android:id="@+id/destinationRadioGroup"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="vertical">
    <RadioButton
      android:id="@+id/destinationBangalore"
      android:layout_width="wrap_content"
      android:layout_height="wrap_content"
      android:text="Bangalore" />
    <RadioButton
      android:id="@+id/destinationMysore"
      android:layout_width="wrap_content"
      android:layout_height="wrap_content"
      android:text="Mysore" />
    <RadioButton
      android:id="@+id/destinationChennai"
      android:layout_width="wrap_content"
      android:layout_height="wrap_content"
      android:text="Chennai" />
  </RadioGroup>
  <DatePicker
    android:id="@+id/datePicker"
    android:layout_width="match_parent"
    android:layout_height="wrap_content" />
  <Button
```

```
    android:id="@+id/submitButton"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Submit" />
</LinearLayout>
```

MainActivity.java

```
package com.example.railwaybooking;
import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.RadioButton;
import android.widget.RadioGroup;
import android.widget.DatePicker;
import androidx.appcompat.app.AppCompatActivity;
public class MainActivity extends AppCompatActivity {
  EditText name, phoneNumber, email;
  RadioGroup destinationRadioGroup;
  DatePicker datePicker;
  Button submitButton;
  @Override
  protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
    name = findViewById(R.id.name);
    phoneNumber = findViewById(R.id.phoneNumber);
    email = findViewById(R.id.email);
    destinationRadioGroup = findViewById(R.id.destinationRadioGroup);
    datePicker = findViewById(R.id.datePicker);
    submitButton = findViewById(R.id.submitButton);
    submitButton.setOnClickListener(new View.OnClickListener() {
      @Override
      public void onClick(View v) {
        Intent intent = new Intent(MainActivity.this, TravelDetailsActivity.class);
        intent.putExtra("NAME", name.getText().toString());
        intent.putExtra("PHONE", phoneNumber.getText().toString());
        intent.putExtra("EMAIL", email.getText().toString());
        intent.putExtra("DESTINATION", ((RadioButton)
findViewById(destinationRadioGroup.getCheckedRadioButtonId())).getText().toString());
        intent.putExtra("DATE", datePicker.getDayOfMonth() + "/" + (datePicker.getMonth() + 1) + "/" +
datePicker.getYear());
        startActivity(intent);
      }
    });
  }
}
```

activity_travel_details.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
  android:layout_width="match_parent"
  android:layout_height="match_parent"
```

```
    android:orientation="vertical"
    android:padding="16dp">
    <RadioGroup
        android:id="@+id/classRadioGroupTravel"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:orientation="horizontal">
        <RadioButton
            android:id="@+id/generalTravelClass"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:text="General" />
        <RadioButton
            android:id="@+id/sleeperTravelClass"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:text="Sleeper" />
        <RadioButton
            android:id="@+id/acTravelClass"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:text="AC" />
    </RadioGroup>
    <EditText
        android:id="@+id/age"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:hint="Enter Age" />
    <Button
        android:id="@+id/calculateButton"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Calculate" />
    <TextView
        android:id="@+id/ticketDetails"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Ticket details will appear here" />
</LinearLayout>
```

TravelDetailsActivity.java

```
package com.example.railwaybooking;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.RadioButton;
import android.widget.RadioGroup;
import android.widget.TextView;
import androidx.appcompat.app.AppCompatActivity;
public class TravelDetailsActivity extends AppCompatActivity {
    RadioGroup classRadioGroupTravel;
    EditText age;
    Button calculateButton;
    TextView ticketDetails;
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_travel_details);
        classRadioGroupTravel = findViewById(R.id.classRadioGroupTravel);
        age = findViewById(R.id.age);
        calculateButton = findViewById(R.id.calculateButton);
        ticketDetails = findViewById(R.id.ticketDetails);
        calculateButton.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                String selectedClass = ((RadioButton)
findViewById(classRadioGroupTravel.getCheckedRadioButtonId())).getText().toString();
                int ageValue = Integer.parseInt(age.getText().toString());
                // Assume destination distance based on selected destination
                int distance = getDestinationDistance(getIntent().getStringExtra("DESTINATION"));
                double pricePerKm = getPricePerKm(selectedClass);
                double ticketPrice = calculateTicketPrice(distance, pricePerKm, ageValue);
                String details = "Name: " + getIntent().getStringExtra("NAME") +
                        "\nPhone: " + getIntent().getStringExtra("PHONE") +
                        "\nEmail: " + getIntent().getStringExtra("EMAIL") +
                        "\nDestination: " + getIntent().getStringExtra("DESTINATION") +
                        "\nDate: " + getIntent().getStringExtra("DATE") +
                        "\nClass: " + selectedClass +
                        "\nAge: " + ageValue +
                        "\nTicket Price: Rs. " + ticketPrice;
                ticketDetails.setText(details);
            }
        });
    }
    private int getDestinationDistance(String destination) {
        switch (destination) {
            case "Bangalore": return 200;
            case "Mysore": return 150;
            case "Chennai": return 350;
            default: return 0;
        }
    }
    private double getPricePerKm(String selectedClass) {
        switch (selectedClass) {
            case "General": return 1.5;
            case "Sleeper": return 3.0;
            case "AC": return 6.0;
            default: return 0;
        }
    }
    private double calculateTicketPrice(int distance, double pricePerKm, int age) {
        double ticketPrice = distance * pricePerKm;
        if (age >= 60) {
            ticketPrice /= 2; // 50% discount for senior citizens
        }
        return ticketPrice;
    }
}
```

OUTPUT:

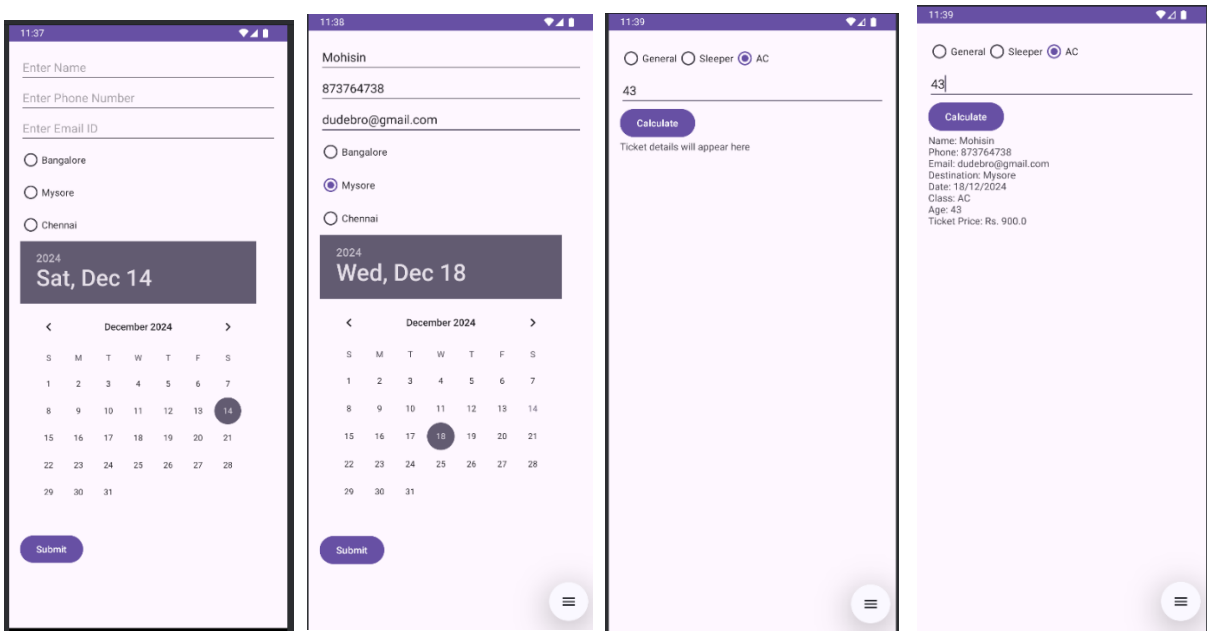

2)Design a Bookshop Application for selling books which dispalys books with price available (Drop Down Box) and takes inputs Name of customer , phone number , email id , address ,On pressing the submit button the new screen should ask for no of copies and date of delivery. print the customer and book details and calculate the total amount to be paid when pressing checkout .

NOTE: Create Empty Views Activity for activity_checkout.xml and CheckoutActivity.java

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
   android:layout_width="match_parent"
   android:layout_height="match_parent"
   android:padding="16dp">
   <Spinner
      android:id="@+id/bookSpinner"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:layout_alignParentTop="true"
      android:layout_marginTop="173dp" />
   <EditText
      android:id="@+id/nameEditText"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:hint="Customer Name"
      android:layout_below="@id/bookSpinner"
      android:layout_marginTop="20dp" />
   <EditText
      android:id="@+id/phoneEditText"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:hint="Phone Number"
      android:layout_below="@id/nameEditText"
      android:layout_marginTop="10dp" />
```

```
    <EditText
        android:id="@+id/emailEditText"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:hint="Email ID"
        android:layout_below="@id/phoneEditText"
        android:layout_marginTop="10dp" />
    <EditText
        android:id="@+id/addressEditText"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_below="@id/emailEditText"
        android:layout_marginTop="26dp"
        android:hint="Address" />
    <Button
        android:id="@+id/submitButton"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_below="@id/addressEditText"
        android:layout_marginTop="36dp"
        android:text="Submit" />
    <TextView
        android:id="@+id/textView"
        android:layout_width="143dp"
        android:layout_height="wrap_content"
        android:layout_alignParentStart="true"
        android:layout_alignParentTop="true"
        android:layout_alignParentEnd="true"
        android:layout_marginStart="139dp"
        android:layout_marginTop="79dp"
        android:layout_marginEnd="113dp"
        android:text="BOOK STORE APP" />
</RelativeLayout>
```

MainActivity.java

```
package com.example.bookshopapp;
import android.content.Intent;
import android.os.Bundle;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Spinner;
import android.widget.ArrayAdapter;
import android.widget.Toast;
import androidx.appcompat.app.AppCompatActivity;
public class MainActivity extends AppCompatActivity {
    Spinner bookSpinner;
    EditText nameEditText, phoneEditText, emailEditText, addressEditText;
    Button submitButton;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        bookSpinner = findViewById(R.id.bookSpinner);
        nameEditText = findViewById(R.id.nameEditText);
        phoneEditText = findViewById(R.id.phoneEditText);
        emailEditText = findViewById(R.id.emailEditText);
        addressEditText = findViewById(R.id.addressEditText);
        submitButton = findViewById(R.id.submitButton);
        // Populating spinner with book names and prices
        ArrayAdapter<String> adapter = new ArrayAdapter<>(this, android.R.layout.simple_spinner_item,
            new String[]{"Book 1 - $10", "Book 2 - $15", "Book 3 - $20"});
```

```
        adapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
        bookSpinner.setAdapter(adapter);
        submitButton.setOnClickListener(view -> {
            String name = nameEditText.getText().toString();
            String phone = phoneEditText.getText().toString();
            String email = emailEditText.getText().toString();
            String address = addressEditText.getText().toString();
            String selectedBook = bookSpinner.getSelectedItem().toString();
            if (name.isEmpty() || phone.isEmpty() || email.isEmpty() || address.isEmpty()) {
                Toast.makeText(this, "Please fill in all details", Toast.LENGTH_SHORT).show();
            } else {
                Intent intent = new Intent(MainActivity.this, CheckoutActivity.class);
                intent.putExtra("customerName", name);
                intent.putExtra("customerPhone", phone);
                intent.putExtra("customerEmail", email);
                intent.putExtra("customerAddress", address);
                intent.putExtra("selectedBook", selectedBook);
                startActivity(intent);
            }
        });
    }
}
```

activity_checkout.xml

```
<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:padding="16dp">
    <TextView
        android:id="@+id/bookDetailsTextView"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_alignParentTop="true"
        android:layout_marginTop="9dp"
        android:text="Book Details"
        android:textSize="18sp" />
    <!-- Date Picker for delivery date -->
    <EditText
        android:id="@+id/quantityEditText"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_below="@id/bookDetailsTextView"
        android:layout_marginTop="7dp"
        android:hint="Number of Copies" />
    <DatePicker
        android:id="@+id/deliveryDatePicker"
        android:layout_width="374dp"
        android:layout_height="394dp"
        android:layout_below="@id/quantityEditText"
        android:layout_marginTop="7dp" />
    <!-- TextView to display the result -->
    <Button
        android:id="@+id/checkoutButton"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_below="@id/deliveryDatePicker"
        android:layout_marginTop="3dp"
        android:text="Checkout" />
    <TextView
        android:id="@+id/resultTextView"
        android:layout_width="385dp"
```

```
    android:layout_height="169dp"
    android:layout_below="@id/checkoutButton"
    android:layout_alignParentBottom="true"
    android:layout_marginTop="-1dp"
    android:layout_marginBottom="0dp"
    android:padding="10dp"
    android:text=""
    android:textSize="16sp" />
</RelativeLayout>
```

CheckoutActivity.java

```
package com.example.bookshopapp;
import android.content.Intent;
import android.os.Bundle;
import android.widget.Button;
import android.widget.DatePicker;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;
import androidx.appcompat.app.AppCompatActivity;
public class CheckoutActivity extends AppCompatActivity {
  TextView bookDetailsTextView, resultTextView;
  EditText quantityEditText;
  DatePicker deliveryDatePicker;
  Button checkoutButton;
  @Override
  protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_checkout);
    bookDetailsTextView = findViewById(R.id.bookDetailsTextView);
    quantityEditText = findViewById(R.id.quantityEditText);
    deliveryDatePicker = findViewById(R.id.deliveryDatePicker);
    checkoutButton = findViewById(R.id.checkoutButton);
    resultTextView = findViewById(R.id.resultTextView);
    // Retrieve the data from MainActivity
    Intent intent = getIntent();
    String selectedBook = intent.getStringExtra("selectedBook");
    String customerName = intent.getStringExtra("customerName");
    String customerPhone = intent.getStringExtra("customerPhone");
    String customerEmail = intent.getStringExtra("customerEmail");
    String customerAddress = intent.getStringExtra("customerAddress");
    // Display selected book and customer name
    bookDetailsTextView.setText("Book: " + selectedBook + "\nCustomer: " + customerName);
    checkoutButton.setOnClickListener(view -> {
      String quantity = quantityEditText.getText().toString();
      // Get the delivery date from the DatePicker
      int day = deliveryDatePicker.getDayOfMonth();
      int month = deliveryDatePicker.getMonth() + 1; // Month is zero-based
      int year = deliveryDatePicker.getYear();
      String deliveryDate = day + "/" + month + "/" + year;
      // Validate input
      if (quantity.isEmpty()) {
        resultTextView.setText("Please enter the number of copies.");
      } else {
        // Parse book details and calculate total amount
        String[] bookDetails = selectedBook.split(" - ");
        int price = Integer.parseInt(bookDetails[1].replace("$", ""));
        int numCopies = Integer.parseInt(quantity);
        int totalAmount = price * numCopies;
        // Display the result in the TextView
        String confirmationMessage = "Customer: " + customerName + "\n" +
            "Phone: " + customerPhone + "\n" +
```

```
                "Email: " + customerEmail + "\n" +
                "Address: " + customerAddress + "\n" +
                "Book: " + selectedBook + "\n" +
                "Quantity: " + quantity + "\n" +
                "Delivery Date: " + deliveryDate + "\n" +
                "Total Amount: $" + totalAmount;
            resultTextView.setText(confirmationMessage);
        }
    });
  }
}
```

OUTPUT:

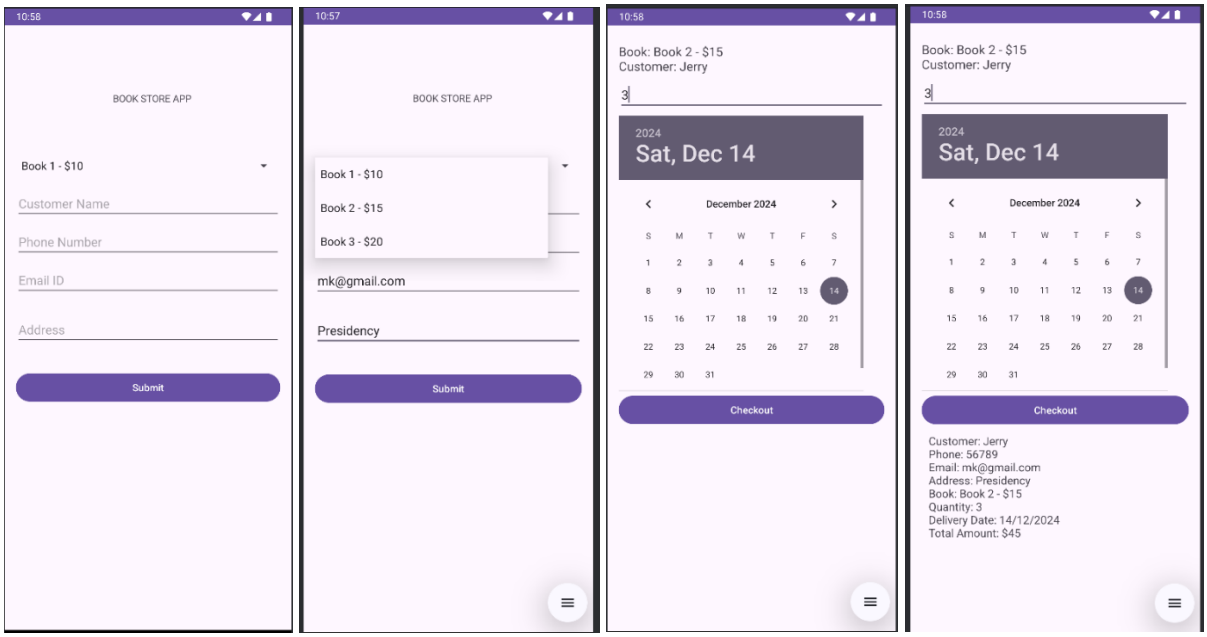

3)Design an application to submit the attendance details by the faculty. Faculty can input their ID, course name, number of students attended and date of lecture. Faculty can choose the course name from the auto suggestion and date of lecture using date picker dialog. On click of "submit" button, store all the details in the DB. Help the HOD to fetch the following details from DB and display it in next activity named "Result Activity".

1. Display the attendance details on a particular date.

2. Display the attendance details of a given course.

CANNOT EXECUTE

4) Design an app for vegetables and fruits selling market, which take the following inputs: customer mobile no., and minimum three fruits and vegetables. Toast the total amount to be paid by the customer and customer mobile.

Activity_main.xml

```
<ScrollView
  xmlns:android="http://schemas.android.com/apk/res/android"
  xmlns:tools="http://schemas.android.com/tools"
  android:layout_width="match_parent"
  android:layout_height="match_parent">
  <LinearLayou
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="vertical"
    android:padding="16dp">
    <!-- Mobile Number Input -->
    <EditText
      android:id="@+id/mobileNumber"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:hint="Enter Mobile Number"
      android:inputType="phone"
      tools:ignore="TextContrastCheck,TouchTargetSizeCheck" />
    <!-- Fruits Selection -->
    <TextView
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:paddingTop="8dp"
      android:text="Select Fruits and Quantities:" />
    <LinearLayout
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:orientation="vertical">
      <!-- Fruit 1 Dropdown -->
      <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:orientation="horizontal"
        android:weightSum="2">
        <Spinner
          android:id="@+id/fruit1"
          android:layout_width="0dp"
          android:layout_height="wrap_content"
          android:layout_weight="1"
          tools:ignore="TouchTargetSizeCheck" />
        <Spinner
          android:id="@+id/fruit1Qty"
          android:layout_width="0dp"
          android:layout_height="wrap_content"
          android:layout_weight="1"
          tools:ignore="TouchTargetSizeCheck" />
      </LinearLayout>
      <!-- Fruit 2 Dropdown -->
      <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
```

```
        android:orientation="horizontal"
        android:weightSum="2">
        <Spinner
            android:id="@+id/fruit2"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        <Spinner
            android:id="@+id/fruit2Qty"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
    </LinearLayout>
    <!-- Fruit 3 Dropdown -->
    <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:orientation="horizontal"
        android:weightSum="2">
        <Spinner
            android:id="@+id/fruit3"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        <Spinner
            android:id="@+id/fruit3Qty"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
    </LinearLayout>
</LinearLayout>
<!-- Vegetables Selection -->
<TextView
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:paddingTop="8dp"
    android:text="Select Vegetables and Quantities:" />
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="vertical">
    <!-- Vegetable 1 Dropdown -->
    <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:orientation="horizontal"
        android:weightSum="2">
        <Spinner
            android:id="@+id/vegetable1"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        <Spinner
```

```
            android:id="@+id/vegetable1Qty"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        </LinearLayout>
        <!-- Vegetable 2 Dropdown -->
        <LinearLayout
          android:layout_width="match_parent"
          android:layout_height="wrap_content"
          android:orientation="horizontal"
          android:weightSum="2">
          <Spinner
            android:id="@+id/vegetable2"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
          <Spinner
            android:id="@+id/vegetable2Qty"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        </LinearLayout>
        <!-- Vegetable 3 Dropdown -->
        <LinearLayout
          android:layout_width="match_parent"
          android:layout_height="wrap_content"
          android:orientation="horizontal"
          android:weightSum="2">
          <Spinner
            android:id="@+id/vegetable3"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
          <Spinner
            android:id="@+id/vegetable3Qty"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            tools:ignore="TouchTargetSizeCheck" />
        </LinearLayout>
      </LinearLayout>
      <!-- Calculate Button -->
      <Button
        android:id="@+id/calculateButton"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="16dp"
        android:text="Calculate Total" />
    </LinearLayout>
</ScrollView>
```

MainActivity.java

```
package com.example.vegetables;
import android.os.Bundle;
import android.view.View;
import android.widget.AdapterView;
import android.widget.ArrayAdapter;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Spinner;
import android.widget.Toast;
import androidx.appcompat.app.AppCompatActivity;
public class MainActivity extends AppCompatActivity {
   private Spinner fruit1Spinner, fruit2Spinner, fruit3Spinner;
   private Spinner fruit1QtySpinner, fruit2QtySpinner, fruit3QtySpinner;
   private Spinner vegetable1Spinner, vegetable2Spinner, vegetable3Spinner;
   private Spinner vegetable1QtySpinner, vegetable2QtySpinner, vegetable3QtySpinner;
   private Button calculateButton;
   private EditText mobileNumberEditText;
   private double[] fruitPrices = {80, 50, 60, 70, 90}; // Prices per kg
   private double[] vegetablePrices = {40, 30, 20, 50, 45}; // Prices per kg
   @Override
   protected void onCreate(Bundle savedInstanceState) {
      super.onCreate(savedInstanceState);
      setContentView(R.layout.activity_main);
      mobileNumberEditText = findViewById(R.id.mobileNumber);
      fruit1Spinner = findViewById(R.id.fruit1);
      fruit2Spinner = findViewById(R.id.fruit2);
      fruit3Spinner = findViewById(R.id.fruit3);
      fruit1QtySpinner = findViewById(R.id.fruit1Qty);
      fruit2QtySpinner = findViewById(R.id.fruit2Qty);
      fruit3QtySpinner = findViewById(R.id.fruit3Qty);
      vegetable1Spinner = findViewById(R.id.vegetable1);
      vegetable2Spinner = findViewById(R.id.vegetable2);
      vegetable3Spinner = findViewById(R.id.vegetable3);
      vegetable1QtySpinner = findViewById(R.id.vegetable1Qty);
      vegetable2QtySpinner = findViewById(R.id.vegetable2Qty);
      vegetable3QtySpinner = findViewById(R.id.vegetable3Qty);
      calculateButton = findViewById(R.id.calculateButton);
      // Setup spinners for fruits, vegetables, and quantities
      String[] fruits = {"Apple", "Banana", "Orange", "Mango", "Pineapple"};
      String[] vegetables = {"Carrot", "Tomato", "Potato", "Cucumber", "Spinach"};
      String[] quantities = {"1", "2", "3", "4", "5"};
      ArrayAdapter<String> fruitAdapter = new ArrayAdapter<>(this, android.R.layout.simple_spinner_item, fruits);
      fruitAdapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
      fruit1Spinner.setAdapter(fruitAdapter);
      fruit2Spinner.setAdapter(fruitAdapter);
      fruit3Spinner.setAdapter(fruitAdapter);
      ArrayAdapter<String> vegetableAdapter = new ArrayAdapter<>(this, android.R.layout.simple_spinner_item,
vegetables);
      vegetableAdapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
      vegetable1Spinner.setAdapter(vegetableAdapter);
      vegetable2Spinner.setAdapter(vegetableAdapter);
      vegetable3Spinner.setAdapter(vegetableAdapter);
      ArrayAdapter<String> quantityAdapter = new ArrayAdapter<>(this, android.R.layout.simple_spinner_item, quantities);
      quantityAdapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
      fruit1QtySpinner.setAdapter(quantityAdapter);
      fruit2QtySpinner.setAdapter(quantityAdapter);
      fruit3QtySpinner.setAdapter(quantityAdapter);
```

```
        vegetable1QtySpinner.setAdapter(quantityAdapter);
        vegetable2QtySpinner.setAdapter(quantityAdapter);
        vegetable3QtySpinner.setAdapter(quantityAdapter);
        // Set up button click listener
        calculateButton.setOnClickListener(v -> calculateTotalPrice());
    }
    private void calculateTotalPrice() {
        // Get selected fruit and vegetable positions
        int fruit1Position = fruit1Spinner.getSelectedItemPosition();
        int fruit2Position = fruit2Spinner.getSelectedItemPosition();
        int fruit3Position = fruit3Spinner.getSelectedItemPosition();
        int vegetable1Position = vegetable1Spinner.getSelectedItemPosition();
        int vegetable2Position = vegetable2Spinner.getSelectedItemPosition();
        int vegetable3Position = vegetable3Spinner.getSelectedItemPosition();
        // Get selected quantities
        int quantity1 = Integer.parseInt((String) fruit1QtySpinner.getSelectedItem());
        int quantity2 = Integer.parseInt((String) fruit2QtySpinner.getSelectedItem());
        int quantity3 = Integer.parseInt((String) fruit3QtySpinner.getSelectedItem());
        int quantity4 = Integer.parseInt((String) vegetable1QtySpinner.getSelectedItem());
        int quantity5 = Integer.parseInt((String) vegetable2QtySpinner.getSelectedItem());
        int quantity6 = Integer.parseInt((String) vegetable3QtySpinner.getSelectedItem());

// Get mobile number
        String mobileNumber = mobileNumberEditText.getText().toString();
        // Check mobile number validity
        if (mobileNumber.isEmpty() || mobileNumber.length() != 10) {
            Toast.makeText(this, "Please enter a valid 10-digit mobile number", Toast.LENGTH_LONG).show();
            return;
        }
        // Calculate total price
        double totalPrice = (fruitPrices[fruit1Position] * quantity1) +
                (fruitPrices[fruit2Position] * quantity2) +
                (fruitPrices[fruit3Position] * quantity3) +
                (vegetablePrices[vegetable1Position] * quantity4) +
                (vegetablePrices[vegetable2Position] * quantity5) +
                (vegetablePrices[vegetable3Position] * quantity6);
        // Display total price
        Toast.makeText(this, "Mobile: " + mobileNumber + "\nTotal Price: ₹" + totalPrice, Toast.LENGTH_LONG).show();
    }
}
```

OUTPUT:

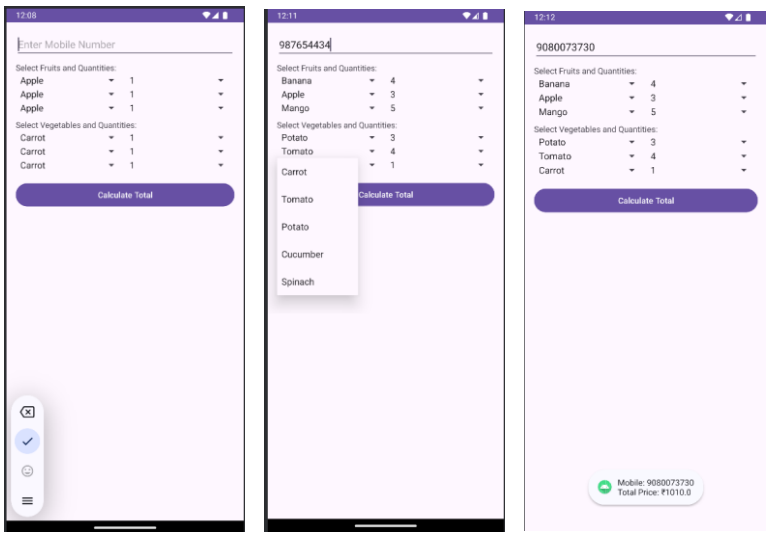

5)Create an android app to for checking the end term eligibility. Save the Test1 & Test2 marks of the Student using shared preferences. In the next activity, Print the marks of Test1 and Test2 and also print whether the student is eligible for the end term or not?

NOTE: In AndroidManifest.xml, remove everything and add the code given.
Path - " AndroidStudioProjects\endtermeligibility\app\src\main\AndroidManifest.xml "

Activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
   android:layout_width="match_parent"
   android:layout_height="match_parent"
   android:orientation="vertical"
   android:padding="16dp">
   <EditText
      android:id="@+id/test1Marks"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:hint="Enter Test 1 Marks"
      android:inputType="number" />
   <EditText
      android:id="@+id/test2Marks"
      android:layout_width="match_parent"
      android:layout_height="wrap_content"
      android:hint="Enter Test 2 Marks"
      android:inputType="number" />
   <Button
      android:layout_width="wrap_content"
      android:layout_height="wrap_content"
      android:onClick="saveMarks"
      android:text="Save Marks"
      android:layout_gravity="center" />
</LinearLayout>
```

MainActivity.java

```
package com.example.endtermeligibility;
import android.content.Intent;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.view.View;
import android.widget.EditText;
import android.widget.Toast;
import androidx.appcompat.app.AppCompatActivity;
public class MainActivity extends AppCompatActivity {
   private EditText test1Marks, test2Marks;
   @Override
   protected void onCreate(Bundle savedInstanceState) {
      super.onCreate(savedInstanceState);
      setContentView(R.layout.activity_main);
      test1Marks = findViewById(R.id.test1Marks);
      test2Marks = findViewById(R.id.test2Marks);
   }
   // Method to save marks using SharedPreferences
   public void saveMarks(View view) {
```

```
        String test1 = test1Marks.getText().toString();
        String test2 = test2Marks.getText().toString();
        if (test1.isEmpty() || test2.isEmpty()) {
            Toast.makeText(this, "Please enter marks for both tests", Toast.LENGTH_SHORT).show();
        } else {
            SharedPreferences sharedPreferences = getSharedPreferences("StudentMarks", MODE_PRIVATE);
            SharedPreferences.Editor editor = sharedPreferences.edit();
            editor.putInt("Test1", Integer.parseInt(test1));
            editor.putInt("Test2", Integer.parseInt(test2));
            editor.apply(); // Save data
            Toast.makeText(this, "Marks saved successfully!", Toast.LENGTH_SHORT).show();
            // Navigate to EligibilityActivity
            Intent intent = new Intent(MainActivity.this, EligibilityActivity.class);
            startActivity(intent);  // Start EligibilityActivity
        }
    }
}
```

activity_eligibility.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:padding="16dp">
    <TextView
        android:id="@+id/test1TextView"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Test 1 Marks:"
        android:textSize="18sp" />
    <TextView
        android:id="@+id/test2TextView"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Test 2 Marks:"
        android:textSize="18sp" />
    <TextView
        android:id="@+id/eligibilityTextView"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Eligibility Status:"
        android:textSize="18sp" />
</LinearLayout>
```

EligibilityActivity.java

```
package com.example.endtermeligibility;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.widget.TextView;
import androidx.appcompat.app.AppCompatActivity;
public class EligibilityActivity extends AppCompatActivity {
    private TextView test1TextView, test2TextView, eligibilityTextView;
```

```
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_eligibility);
        test1TextView = findViewById(R.id.test1TextView);
        test2TextView = findViewById(R.id.test2TextView);
        eligibilityTextView = findViewById(R.id.eligibilityTextView);
        SharedPreferences sharedPreferences = getSharedPreferences("StudentMarks", MODE_PRIVATE);
        int test1 = sharedPreferences.getInt("Test1", -1);
        int test2 = sharedPreferences.getInt("Test2", -1);
        if (test1 == -1 || test2 == -1) {
            eligibilityTextView.setText("Marks not available.");
        } else {
            test1TextView.setText("Test 1 Marks: " + test1);
            test2TextView.setText("Test 2 Marks: " + test2);
            // Eligibility check: Assuming eligibility is 40% or more in both tests
            if (test1 >= 40 && test2 >= 40) {
                eligibilityTextView.setText("Eligible for End-Term.");
            } else {
                eligibilityTextView.setText("Not Eligible for End-Term.");
            }
        }
    }
}
```

AndroidManifest.xml

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    package="com.example.endtermeligibility"> <!-- Add your package name here -->
    <application
        android:allowBackup="true"
        android:dataExtractionRules="@xml/data_extraction_rules"
        android:fullBackupContent="@xml/backup_rules"
        android:icon="@mipmap/ic_launcher"
        android:label="@string/app_name"
        android:roundIcon="@mipmap/ic_launcher_round"
        android:supportsRtl="true"
        android:theme="@style/Theme.Endtermeligibility"
        tools:targetApi="31">
        <!-- MainActivity: The entry point of the app -->
        <activity
            android:name=".MainActivity"
            android:exported="true">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />
                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
        <!-- EligibilityActivity: The second activity for displaying eligibility -->
        <activity
            android:name=".EligibilityActivity"
            android:exported="false" />
    </application>
</manifest>
```

OUTPUT:

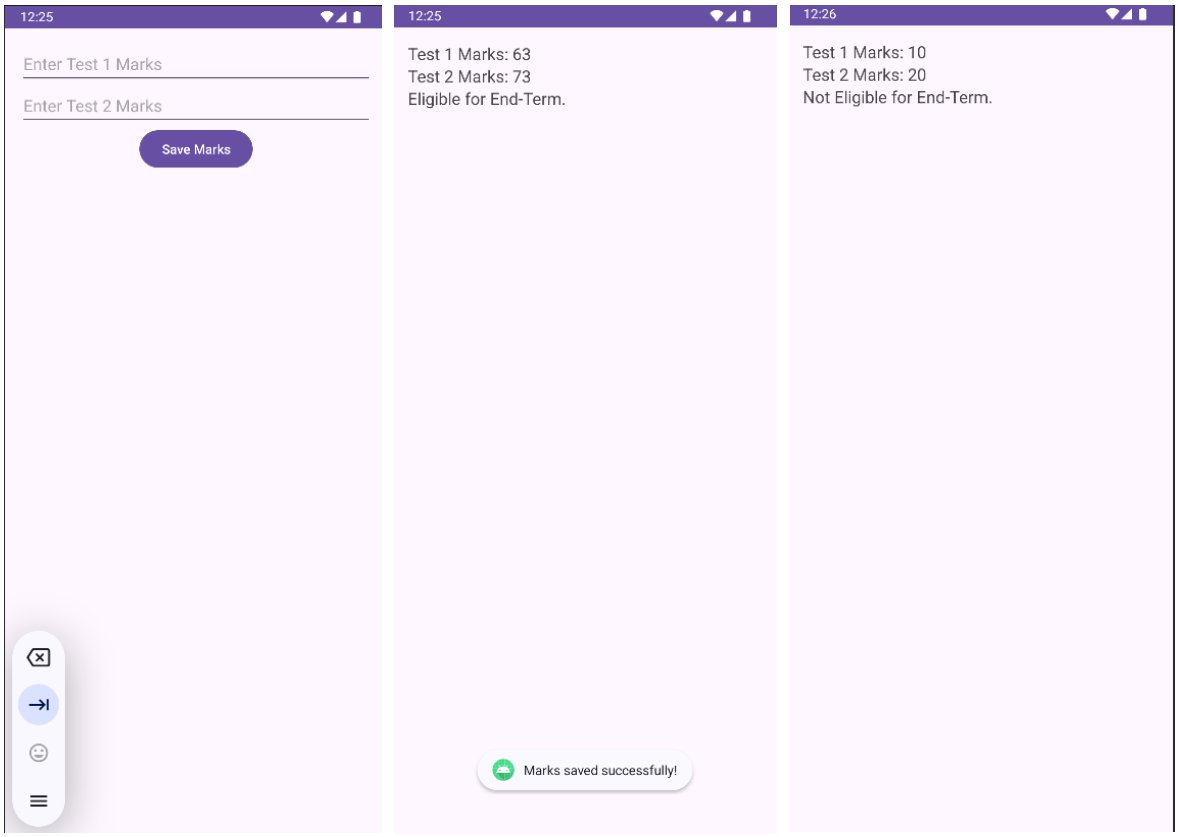

6)Design an app to book movies that are going to release in this winter holidays. Read the name, mobile number from the user & choose the movie of your interest and the tentative plan to watch the movie. [Use Date Picker Dialog]. Set all the details in a TextView placed at the bottom of the screen.

Activity_main.xml

```
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.com/apk/res/android"
   xmlns:app="http://schemas.android.com/apk/res-auto"
   xmlns:tools="http://schemas.android.com/tools"
   android:layout_width="match_parent"
   android:layout_height="match_parent"
   tools:context=".MainActivity">
   <EditText
      android:id="@+id/nameEditText"
      android:layout_width="0dp"
      android:layout_height="wrap_content"
      android:hint="Enter your name"
      android:layout_marginTop="50dp"
      android:layout_marginStart="16dp"
      android:layout_marginEnd="16dp"
      app:layout_constraintTop_toTopOf="parent"
      app:layout_constraintStart_toStartOf="parent"
      app:layout_constraintEnd_toEndOf="parent" />
   <EditText
      android:id="@+id/mobileEditText"
```

```
        android:layout_width="0dp"
        android:layout_height="wrap_content"
        android:hint="Enter your mobile number"
        android:layout_marginTop="16dp"
        android:layout_marginStart="16dp"
        android:layout_marginEnd="16dp"
        app:layout_constraintTop_toBottomOf="@id/nameEditText"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintEnd_toEndOf="parent" />
    <Spinner
        android:id="@+id/movieSpinner"
        android:layout_width="0dp"
        android:layout_height="wrap_content"
        android:layout_marginTop="16dp"
        app:layout_constraintTop_toBottomOf="@id/mobileEditText"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintEnd_toEndOf="parent" />
    <Button
        android:id="@+id/pickDateButton"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Pick a Date"
        android:layout_marginTop="16dp"
        app:layout_constraintTop_toBottomOf="@id/movieSpinner"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintEnd_toEndOf="parent" />
    <Button
        android:id="@+id/submitButton"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Submit"
        android:layout_marginTop="16dp"
        app:layout_constraintTop_toBottomOf="@id/pickDateButton"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintEnd_toEndOf="parent" />
    <TextView
        android:id="@+id/resultTextView"
        android:layout_width="0dp"
        android:layout_height="wrap_content"
        android:layout_marginTop="32dp"
        android:text="Booking details will appear here"
        android:textSize="16sp"
        android:gravity="center"
        app:layout_constraintTop_toBottomOf="@id/submitButton"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintEnd_toEndOf="parent" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.java

```
package com.example.moviebooking;
import android.app.DatePickerDialog;
import android.os.Bundle;
import android.view.View;
import android.widget.ArrayAdapter;
import android.widget.Button;
import android.widget.EditText;
```

```
import android.widget.Spinner;
import android.widget.TextView;
import androidx.appcompat.app.AppCompatActivity;
import java.util.Calendar;
public class MainActivity extends AppCompatActivity {
    private EditText nameEditText, mobileEditText;
    private Spinner movieSpinner;
    private Button pickDateButton, submitButton;
    private TextView resultTextView;
    private int selectedYear, selectedMonth, selectedDay;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        nameEditText = findViewById(R.id.nameEditText);
        mobileEditText = findViewById(R.id.mobileEditText);
        movieSpinner = findViewById(R.id.movieSpinner);
        pickDateButton = findViewById(R.id.pickDateButton);
        submitButton = findViewById(R.id.submitButton);
        resultTextView = findViewById(R.id.resultTextView);
        // Movie options defined in the Java code
        String[] movies = {"Movie 1", "Movie 2", "Movie 3", "Movie 4"};
        ArrayAdapter<String> adapter = new ArrayAdapter<>(this, android.R.layout.simple_spinner_item, movies);
        adapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
        movieSpinner.setAdapter(adapter);
        // Get current date
        Calendar calendar = Calendar.getInstance();
        selectedYear = calendar.get(Calendar.YEAR);
        selectedMonth = calendar.get(Calendar.MONTH);
        selectedDay = calendar.get(Calendar.DAY_OF_MONTH);
        // Date picker dialog
        pickDateButton.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                DatePickerDialog datePickerDialog = new DatePickerDialog(
                        MainActivity.this, (view, year, month, dayOfMonth) -> {
                    selectedYear = year;
                    selectedMonth = month;
                    selectedDay = dayOfMonth;
                }, selectedYear, selectedMonth, selectedDay
                );
                datePickerDialog.show();
            }
        });
        // Submit button action
        submitButton.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                String name = nameEditText.getText().toString();
                String mobile = mobileEditText.getText().toString();
                String movie = movieSpinner.getSelectedItem().toString();
                String selectedDate = selectedDay + "/" + (selectedMonth + 1) + "/" + selectedYear;

                String bookingDetails = "Name: " + name + "\nMobile: " + mobile +
                        "\nMovie: " + movie + "\nDate: " + selectedDate;
                resultTextView.setText(bookingDetails);
            }
        });
```

```
    }
}
```

OUTPUTS:

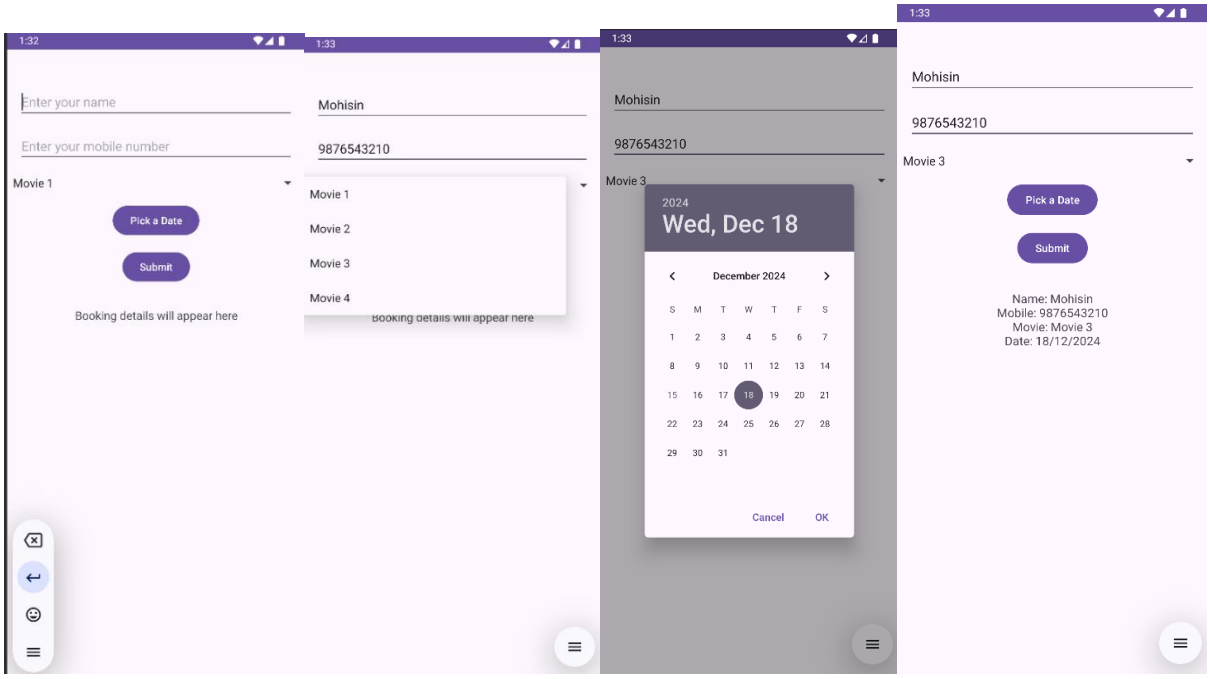

7)Design an app for a textile shop billing. The biller will input the customer name, mobile number, and total amount. Save all the details in the data base. Use auto increment feature to save the bill number in the DB. Help the shop keeper to fetch the following details from the DB.

[A] Find all the billing details of the customers.
[B]. Find the total amount billed by all customers.
[C] Find the detail of a payment with the bill number.
[D] Find the total number of customers registered with the shop.

Activity_main.xml

```
<ScrollView xmlns:android="http://schemas.android.com/apk/res/android"
  android:layout_width="match_parent"
  android:layout_height="match_parent"
  android:padding="16dp">
  <LinearLayout android:orientation="vertical"
    android:layout_width="match_parent"
    android:layout_height="wrap_content">
    <EditText android:id="@+id/customerName"
      android:hint="Customer Name" android:layout_width="match_parent"
      android:layout_height="wrap_content"/>
    <EditText android:id="@+id/mobileNumber"
      android:hint="Mobile Number" android:layout_width="match_parent"
```

```
        android:layout_height="wrap_content"/>
    <EditText android:id="@+id/totalAmount"
        android:hint="Total Amount" android:layout_width="match_parent"
        android:layout_height="wrap_content"/>
    <Button android:id="@+id/saveButton"
        android:text="Save Bill" android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>
    <Button android:id="@+id/viewAllButton"
        android:text="View All Bills" android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>
    <Button android:id="@+id/viewTotalButton"
        android:text="View Total Amount" android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>
    <EditText android:id="@+id/searchBillId"
        android:hint="Search Bill Number" android:layout_width="match_parent"
        android:layout_height="wrap_content"/>
    <Button android:id="@+id/searchBillButton"
        android:text="Search Bill" android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>
    <Button android:id="@+id/totalCustomersButton"
        android:text="View Total Customers" android:layout_width="wrap_content"
        android:layout_height="wrap_content"/>
    <TextView android:id="@+id/resultView"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"/>
  </LinearLayout>
</ScrollView>
```

MainActivity.java

```
package com.example.textileshopbilling;
import android.database.Cursor;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;
import androidx.appcompat.app.AppCompatActivity;
public class MainActivity extends AppCompatActivity {
  EditText customerName, mobileNumber, totalAmount, searchBillId;
  Button saveButton, viewAllButton, viewTotalButton, searchBillButton, totalCustomersButton;
  TextView resultView;
  DatabaseHelper db;
  @Override
  protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
    // Initialize UI components
    customerName = findViewById(R.id.customerName);
    mobileNumber = findViewById(R.id.mobileNumber);
    totalAmount = findViewById(R.id.totalAmount);
    searchBillId = findViewById(R.id.searchBillId);
    saveButton = findViewById(R.id.saveButton);
    viewAllButton = findViewById(R.id.viewAllButton);
    viewTotalButton = findViewById(R.id.viewTotalButton);
    searchBillButton = findViewById(R.id.searchBillButton);
    totalCustomersButton = findViewById(R.id.totalCustomersButton);
    resultView = findViewById(R.id.resultView);
```

```
        db = new DatabaseHelper(this);
        // Save billing details
        saveButton.setOnClickListener(view -> {
            String name = customerName.getText().toString();
            String mobile = mobileNumber.getText().toString();
            double amount = Double.parseDouble(totalAmount.getText().toString());
            boolean success = db.insertBillingDetails(name, mobile, amount);
            Toast.makeText(MainActivity.this, success ? "Bill Saved" : "Error Saving Bill", Toast.LENGTH_SHORT).show();
        });
        // View all billing details
        viewAllButton.setOnClickListener(view -> {
            Cursor cursor = db.getAllBillingDetails();
            StringBuilder result = new StringBuilder("All Billing Details:\n");
            while (cursor.moveToNext()) {
                result.append("Bill No: ").append(cursor.getInt(0))
                        .append(", Name: ").append(cursor.getString(1))
                        .append(", Mobile: ").append(cursor.getString(2))
                        .append(", Amount: $").append(cursor.getDouble(3))
                        .append("\n");
            }
            resultView.setText(result.toString());
        });
        // View total amount billed
        viewTotalButton.setOnClickListener(view -> {
            Cursor cursor = db.getTotalAmountBilled();
            if (cursor.moveToFirst()) {
                resultView.setText("Total Amount Billed: $" + cursor.getDouble(0));
            }
        });
        // Search by bill number
        searchBillButton.setOnClickListener(view -> {
            int billId = Integer.parseInt(searchBillId.getText().toString());
            Cursor cursor = db.getBillingByBillNumber(billId);
            if (cursor.moveToFirst()) {
                String result = "Bill No: " + cursor.getInt(0) + "\n" +
                                "Name: " + cursor.getString(1) + "\n" +
                                "Mobile: " + cursor.getString(2) + "\n" +
                                "Amount: $" + cursor.getDouble(3);
                resultView.setText(result);
            } else {
                resultView.setText("No record found for Bill No: " + billId);
            }
        });
        // Get total customers count
        totalCustomersButton.setOnClickListener(view -> {
            Cursor cursor = db.getTotalCustomerCount();
            if (cursor.moveToFirst()) {
                resultView.setText("Total Registered Customers: " + cursor.getInt(0));
            }
        });
    }
}
```

DatabaseHelper.java

```
package com.example.textileshopbilling;
import android.content.ContentValues;
import android.content.Context;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.database.sqlite.SQLiteOpenHelper;
public class DatabaseHelper extends SQLiteOpenHelper {
```

```
    // Database name and table details
    private static final String DATABASE_NAME = "TextileShop.db";
    private static final String TABLE_NAME = "billing";
    private static final String COL_BILL_ID = "bill_id";
    private static final String COL_CUSTOMER_NAME = "customer_name";
    private static final String COL_MOBILE = "mobile_number";
    private static final String COL_AMOUNT = "total_amount";
    public DatabaseHelper(Context context) {
        super(context, DATABASE_NAME, null, 1);
    }
    @Override
    public void onCreate(SQLiteDatabase db) {
        String createTable = "CREATE TABLE " + TABLE_NAME + " (" +
                COL_BILL_ID + " INTEGER PRIMARY KEY AUTOINCREMENT, " +
                COL_CUSTOMER_NAME + " TEXT, " +
                COL_MOBILE + " TEXT, " +
                COL_AMOUNT + " REAL)";
        db.execSQL(createTable);
    }
    @Override
    public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion) {
        db.execSQL("DROP TABLE IF EXISTS " + TABLE_NAME);
        onCreate(db);
    }
    // Insert billing details
    public boolean insertBillingDetails(String name, String mobile, double amount) {
        SQLiteDatabase db = this.getWritableDatabase();
        ContentValues values = new ContentValues();
        values.put(COL_CUSTOMER_NAME, name);
        values.put(COL_MOBILE, mobile);
        values.put(COL_AMOUNT, amount);
        long result = db.insert(TABLE_NAME, null, values);
        return result != -1; // Return true if insert is successful
    }

    // Fetch all billing details
    public Cursor getAllBillingDetails() {
        SQLiteDatabase db = this.getReadableDatabase();
        return db.rawQuery("SELECT * FROM " + TABLE_NAME, null);
    }
    // Get total amount billed
    public Cursor getTotalAmountBilled() {
        SQLiteDatabase db = this.getReadableDatabase();
        return db.rawQuery("SELECT SUM(" + COL_AMOUNT + ") AS TotalAmount FROM " + TABLE_NAME, null);
    }
    // Get details by bill number
    public Cursor getBillingByBillNumber(int billId) {
        SQLiteDatabase db = this.getReadableDatabase();
        return db.rawQuery("SELECT * FROM " + TABLE_NAME + " WHERE " + COL_BILL_ID + " = ?", new
String[]{String.valueOf(billId)});
    }
    // Get total number of customers
    public Cursor getTotalCustomerCount() {
        SQLiteDatabase db = this.getReadableDatabase();
        return db.rawQuery("SELECT COUNT(DISTINCT " + COL_MOBILE + ") AS TotalCustomers FROM " + TABLE_NAME, null);
    }
}
```

OUTPUT:

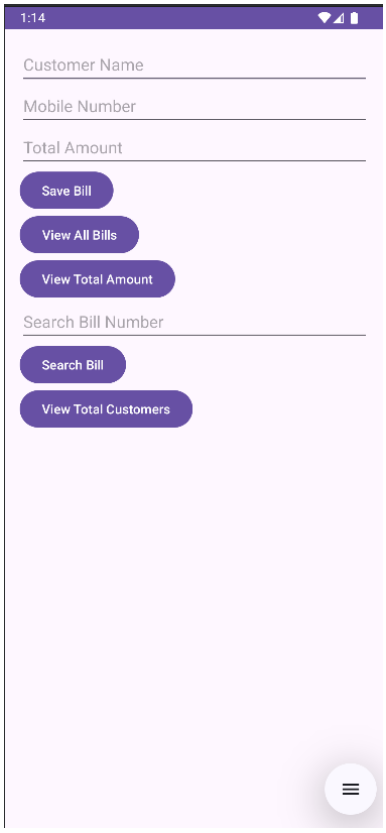
1:14
Customer Name
Mobile Number
Total Amount
Save Bill
View All Bills
View Total Amount
Search Bill Number
Search Bill
View Total Customers

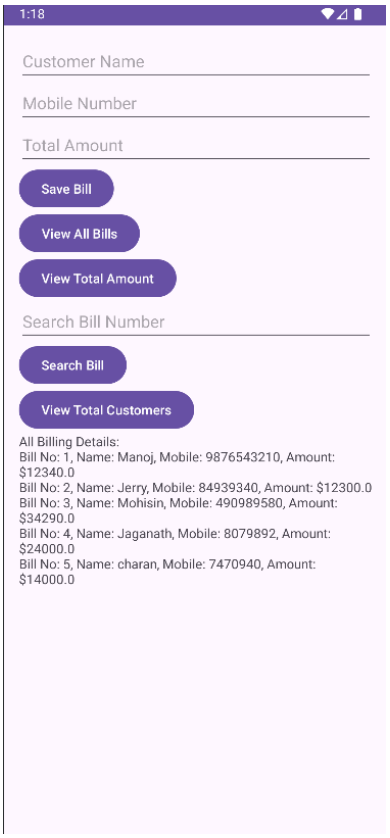
1:18
Customer Name
Mobile Number
Total Amount
Save Bill
View All Bills
View Total Amount
Search Bill Number
Search Bill
View Total Customers
All Billing Details:
Bill No: 1, Name: Manoj, Mobile: 9876543210, Amount: $12340.0
Bill No: 2, Name: Jerry, Mobile: 84939340, Amount: $12300.0
Bill No: 3, Name: Mohisin, Mobile: 490989580, Amount: $34290.0
Bill No: 4, Name: Jaganath, Mobile: 8079892, Amount: $24000.0
Bill No: 5, Name: charan, Mobile: 7470940, Amount: $14000.0

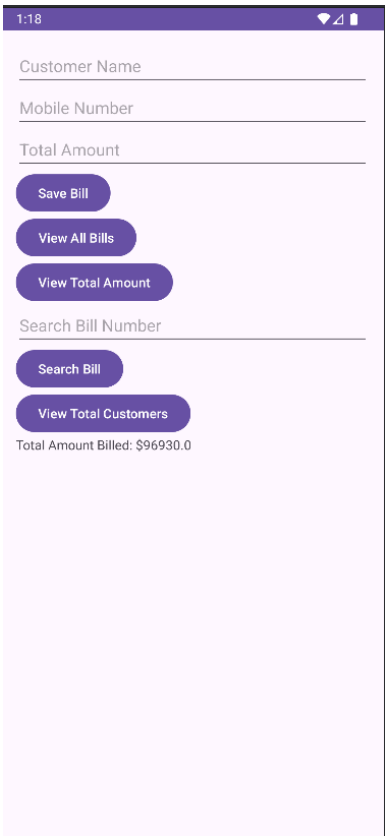
1:18
Customer Name
Mobile Number
Total Amount
Save Bill
View All Bills
View Total Amount
Search Bill Number
Search Bill
View Total Customers
Total Amount Billed: $96930.0

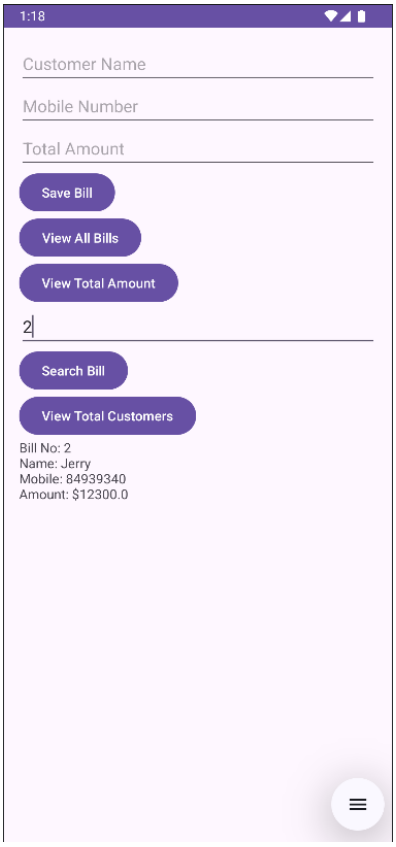
1:18
Customer Name
Mobile Number
Total Amount
Save Bill
View All Bills
View Total Amount
2
Search Bill
View Total Customers
Bill No: 2
Name: Jerry
Mobile: 84939340
Amount: $12300.0

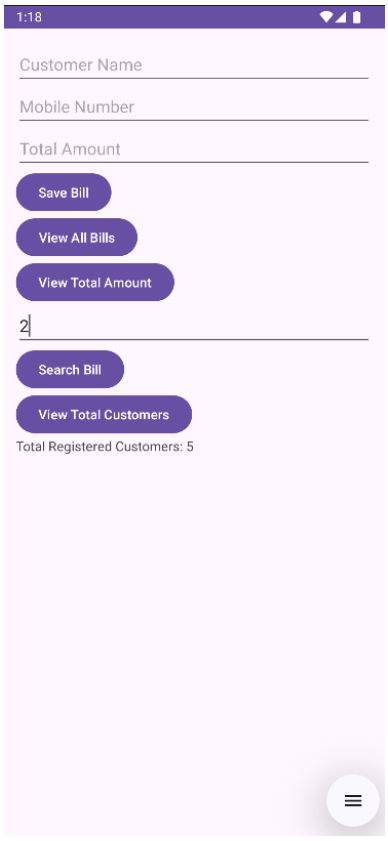
1:18
Customer Name
Mobile Number
Total Amount
Save Bill
View All Bills
View Total Amount
2
Search Bill
View Total Customers
Total Registered Customers: 5