



WhatsyITC

META SETUP GUIDE

Create WhatsApp credentials and connect Meta webhooks.

A visual, user-friendly setup guide for creating a Meta app, finding the Phone Number ID and access token, adding credentials in WhatsyITC, and configuring the webhook callback URL so buyer replies reach the AI agent.

● ● ● Meta + WhatsyITC connection

Meta App
Create Business app and add WhatsApp product.

Credentials
Phone Number ID, access token, optional WABA ID.

Webhook
Callback URL + verify token + messages subscription.

Who should read this?
Admin users setting up WhatsApp sending and inbound replies.

What is required?
Meta Developer account, WhatsApp Business access, public HTTPS backend URL.

What is the result?
WhatsyITC can send templates and receive buyer replies.

CHECKLIST

What you need before starting.

Gather these items first. The setup becomes much easier when the admin has the correct Meta account and public backend URL ready.

ACCOUNT

Meta Login

Access to developers.facebook.com and business assets.

PRODUCT

WhatsApp

WhatsApp product added to a Meta app.

BACKEND

HTTPS URL

Public callback URL pointing to backend port.

ADMIN

Settings

WhatsyITC admin login to save credentials.

Values you will copy from Meta

- Phone Number ID.
- Temporary access token or permanent system user token.
- WhatsApp Business Account ID, optional but useful.
- Test phone number list for development mode.
- Approved template name for production sending.

Values you will create in WhatsyITC



- Verify token, any private string you choose.
- Webhook callback URL path.
- Credential name or notes if your UI asks for it.
- Template records that match Meta template names.
- Test message plan after saving credentials.

Never paste real access tokens into screenshots, documents, chats, or support tickets. Treat Meta access tokens like passwords.

STEP 1

Create or open your Meta app.

The Meta app is where WhatsApp Cloud API is enabled. In development, Meta also gives you a test sender and temporary token.

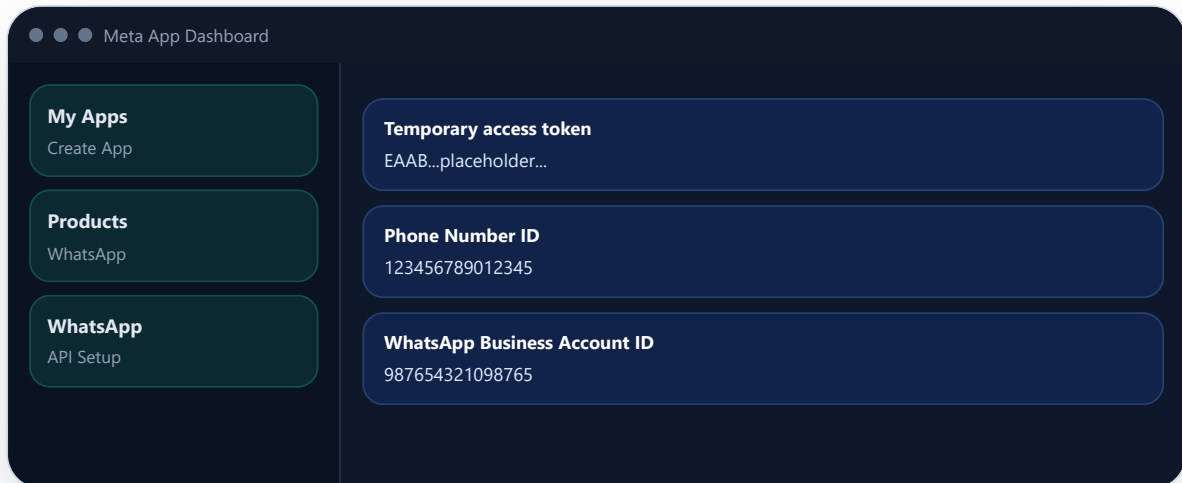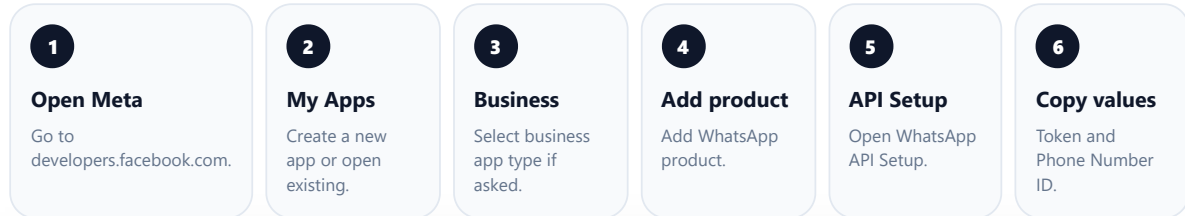

Official starting point: <https://developers.facebook.com/>. Meta UI labels can change slightly, but the values you need remain the same: token, Phone Number ID, WABA ID, and webhook settings.

STEP 2

Find the Phone Number ID and access token.

These two values are the minimum required for WhatsyITC to send WhatsApp messages through Meta Cloud API.

Phone Number ID

This identifies the WhatsApp sender number. It is different from the visible phone number.

- Found on WhatsApp API Setup page.
- Usually a long numeric value.
- Used by the backend send endpoint.
- Used to route inbound webhook payloads to the right admin.

Access token

This authorizes the backend to call Meta APIs. Temporary tokens are useful for testing; production should use a stable system user token.

- Temporary token can expire quickly.
- Permanent token should be rotated safely.
- Save it only in WhatsyITC Settings.
- If WhatsApp returns 401, re-check this token first.

VALUE	EXAMPLE FORMAT	WHERE TO PASTE IN WHATSYITC
Phone Number ID	1025607483965144	Settings - WhatsApp Business credentials - Phone Number ID.
Access Token	EAAB...long-token...	Settings - WhatsApp Business credentials - Access Token.
WABA ID	987654321098765	Optional field if available.
Verify Token	my-private-verify-token	Create in WhatsyITC, then paste same value in Meta webhook.

STEP 3

Add credentials inside WhatsyITC.

WhatsyITC stores WhatsApp credentials per admin user. That allows different admins to connect different WhatsApp Business accounts.

WhatsyITC Settings - WhatsApp credentials

Settings
Sidebar item

Credentials
WhatsApp Business

Test
Verify connection

Phone Number ID
Paste numeric sender ID from Meta.

Access Token
Paste token from Meta. It will be encrypted at rest.

Verify Token
Create a private string and reuse it in Meta webhook.

WABA ID
Optional, paste if available.

After saving

- Click Test connection.
- Expect a verified or success status.
- If failed, check token and phone number ID.
- Keep the same verify token for webhook setup.

Security note

- Do not store tokens in PDFs or screenshots.
- Do not commit tokens into Git.
- Rotate tokens when someone leaves the team.
- Remove old credentials instead of leaving them active.

STEP 4

Create the public webhook callback URL.

Meta must reach your backend over public HTTPS. Localhost cannot be used directly in Meta webhook configuration.

Local development

Use a tunneling service such as ngrok to expose backend port 8082.

```
ngrok http 8082
```

Copy the generated HTTPS URL and add the webhook path.

Production

Use your real public backend domain with HTTPS.

```
https://api.yourdomain.com/webhook/whatsapp
```

This URL must route to the Go backend webhook handler.

WhatsyITC webhook path

Use this exact path after your public backend domain or tunnel URL:

```
/webhook/whatsapp
```

Examples:

```
https://abc-123.ngrok-free.app/webhook/whatsapp  
https://your-backend-domain.com/webhook/whatsapp
```

If Meta cannot verify the URL, confirm the backend is running, the URL is public HTTPS, the path is correct, and the verify token matches exactly.

STEP 5

Configure the webhook in Meta.

The webhook lets WhatsyITC receive buyer messages and message status updates. Without it, AI follow-ups cannot react to incoming WhatsApp replies.

The screenshot shows the 'Meta WhatsApp - Configuration - Webhook' interface. On the left, there are three tabs: 'WhatsApp Configuration', 'Webhook Edit callback URL', and 'Fields Subscribe messages'. The main area displays the 'Webhook' configuration with the following fields:

- Callback URL:** `https://your-domain.com/webhook/whatsapp`
- Verify token:** Same value saved in WhatsyITC Settings.
- Webhook fields:** Select messages and message status events.

Below the screenshot is a 6-step setup guide:

- 1 Open config**
WhatsApp product configuration.
- 2 Edit webhook**
Paste callback URL.
- 3 Verify token**
Paste exact token.
- 4 Verify**
Meta sends a challenge.
- 5 Subscribe**
Select messages/statuses.
- 6 Test**
Send and reply.

STEP 6

Add test phone numbers.

In development mode, Meta only allows messages to phone numbers you add and verify in the test list.

Where in Meta

- Open WhatsApp API Setup.
- Find Send messages with the API.
- Click Manage phone number list near the To field.
- Add your test phone number.
- Verify the phone using OTP.

How to test

- Send a test message from Meta first.
- Confirm it arrives on WhatsApp.
- Reply from that phone.
- Check backend logs for webhook hit.
- Open Chats and AI Conversations in WhatsyITC.

For real customer numbers outside the test list, complete production WhatsApp setup and use approved message templates.

STEP 7

Create and match message templates.

WhatsApp usually requires approved templates when starting a conversation with a customer. Template names in Meta must match the template records in WhatsyITC.

TEMPLATE SETTING	WHAT TO USE	WHY IT MATTERS
Name	<code>billing_summary_v1</code> or your exact internal template name.	Backend sends by template name; mismatch causes failures.
Language	<code>en</code> or the approved language code.	Meta validates language with template.
Category	Utility, Marketing, or Authentication depending on use case.	Category affects approval and policy rules.
Body	Approved message body with variables like <code>{{1}}</code> .	Variables must match payload order.
Sample values	Realistic sample text for Meta approval.	Helps Meta reviewers understand the template.

Example body


Hello `{{1}}`, your billing summary for `{{2}}`. Invoice: `{{3}}`. Amount: INR `{{4}}`. Due Date: `{{5}}`. For billing queries contact `{{6}}`.

If WhatsyITC says template not active or Meta rejects the send, compare name, language, body variables, and approval status in Meta.

VALIDATION

How to confirm the setup works.

Use this exact test path after saving credentials and configuring webhook.

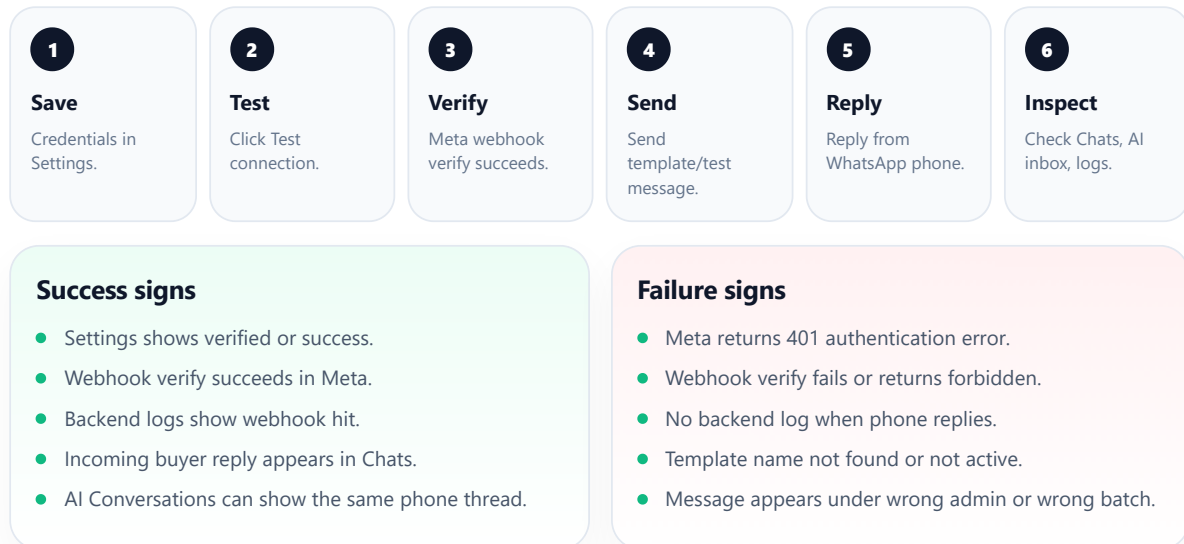

TROUBLESHOOTING

Common problems and fixes.

Most Meta setup issues come from mismatched tokens, expired access, wrong callback URL, or template mismatch.

PROBLEM	LIKELY CAUSE	FIX
401 Authentication Error	Access token expired, revoked, or saved for wrong sender.	Generate/rotate token in Meta and re-save in Settings.
Webhook verify fails	Verify token mismatch or backend URL not reachable.	Paste exact same verify token and confirm HTTPS URL reaches backend.
No inbound messages	Webhook fields not subscribed or wrong phone number ID routing.	Subscribe messages/statuses and confirm phone number ID in Settings.
Only test numbers work	App is in development/test mode.	Add test numbers or complete production business setup.
Template send fails	Template not approved, wrong name, wrong language, or wrong variables.	Match Meta template exactly with WhatsyITC template record.
Wrong admin receives webhook	Multiple admins share callback but phone number ID not claimed correctly.	Save unique phone number ID for each admin credential.

Do not fix token issues by pasting tokens into code or `.env` if the product is using Settings-based per-user credentials. Save the token in the admin Settings screen.

FINAL CHECKLIST

Ready for AI Sales Agent follow-ups.

Once this checklist is complete, the AI sales agent can receive real buyer replies and respond through WhatsApp when batch AI is enabled.

Meta complete

- Meta app created.
- WhatsApp product added.
- Phone Number ID copied.
- Access token generated.
- Test numbers verified.

WhatsyITC complete

- Credentials saved.
- Connection test passes.
- Verify token created.
- Templates match Meta.
- Backend running.

Webhook complete

- Public HTTPS URL ready.
- Callback path is `/webhook/whatsapp`.
- Meta verification succeeds.
- Messages field subscribed.
- Reply appears in Chats.

What to do next

After credentials and webhook are working, configure the AI sales agent, add knowledge, upload a small test batch, send a template, reply from the phone, and confirm the conversation appears in Chats, AI Conversations, Human Review, and AI CRM.