

Индивидуальный проект

Часть 4

Казначеев С. И.

24 апреля 2026

Российский университет дружбы народов, Москва, Россия

Информация


..... {.columns align=center} ::: {.column width="70%"}

- Казначеев Сергей Ильич
- Студент
- Российский университет дружбы народов
- [1132240693@pfur.ru]

::: ::: {.column width="30%"}

Использовать nikto

Для начала откроем терминал и установим nikto

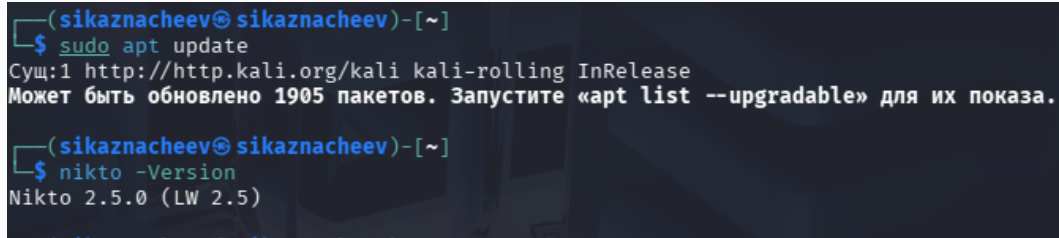

```
(sikaznacheev@sikaznacheev)-[~]  
$ sudo apt update  
Сущ:1 http://http.kali.org/kali kali-rolling InRelease  
Может быть обновлено 1905 пакетов. Запустите «apt list --upgradable» для их показа.  
  
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -Version  
Nikto 2.5.0 (LW 2.5)
```

Рис. 1: 1

После чего проверим сканирование веб-сервера

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://example.com  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3122:8000::, 2a06:98c1:3123:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-04-24 12:22:11 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/  
+ No CGI Directories found (use '-C all' to force check all possible dirs)
```

Рис. 2: 2

Далее проверим детальное сканирование с выводом в файл

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://example.com -o result_nikto.txt -Format txt  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3122:8000::, 2a06:98c1:3123:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-04-24 12:22:52 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/  
+ No CGI Directories found (use '-C all' to force check all possible dirs)  
^C
```

Рис. 3: 3

Затем сделаем сканирование с игнорированием ошибок SSL

```
(sikaznacheev@sikaznacheev)-[~]
$ nikto -h https://example.com -ssl -nointeractive
- Nikto v2.5.0


+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3123:8000::, 2a06:98c1:3122:8000::
+ Target IP:      8.47.69.0
+ Target Hostname: example.com
+ Target Port:    443

+ SSL Info:      Subject: /CN=example.com
                  Ciphers: TLS_AES_256_GCM_SHA384
                  Issuer:  /C=US/O=CLOUDFLARE, INC./CN=Cloudflare TLS Issuing ECC CA 1
+ Start Time:    2026-04-24 12:23:39 (GMT3)

+ Server: cloudflare
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options
+ /: The site uses TLS and the Strict-Transport-Security HTTP header is not defined. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Strict-Transport-Security
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/
+ No CGI Directories found (use '-C all' to force check all possible dirs)
+ ERROR: Error limit (20) reached for host, giving up. Last error: opening stream: can't connect: SSL negotiation failed: error:0A000410:SSL routines::ssl/tls alert handshake failure at /var/lib/nikto/plugins/LW2.pm line 5254.
    at /var/lib/nikto/plugins/LW2.pm line 5254.
; at /var/lib/nikto/plugins/LW2.pm line 5254.
+ Scan terminated: 20 error(s) and 3 item(s) reported on remote host
+ End Time:      2026-04-24 12:24:18 (GMT3) (39 seconds)
```

Рис. 4: 4

После чего сделаем сканирование конкретного порта, я выбрал 8080

A terminal window with a dark background. The prompt is `(sikaznacheev@sikaznacheev)-[~]`. The user enters `$ nikto -h http://example.com -p 8080`. The output shows `- Nikto v2.5.0` followed by a horizontal line and then `- ERROR: The -port option cannot be used with a full URI`.

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://example.com -p 8080  
- Nikto v2.5.0  
-----  
- ERROR: The -port option cannot be used with a full URI
```

Рис. 5: 5

Далее сделаем ускоренное сканирование

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://example.com -maxtime 60  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3122:8000::, 2a06:98c1:3123:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-04-24 12:24:55 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/  
+ No CGI Directories found (use '-C all' to force check all possible dirs)  
+ ERROR: Host maximum execution time of 60 seconds reached  
+ Scan terminated: 0 error(s) and 2 item(s) reported on remote host  
+ End Time: 2026-04-24 12:25:56 (GMT3) (61 seconds)  
  
+ 1 host(s) tested
```

Рис. 6: 6

Затем сделаем проверку конкретной уязвимости или файла

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://example.com -Tuning 4  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3122:8000::, 2a06:98c1:3123:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-04-24 12:26:31 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type  
  . See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/  
+ No CGI Directories found (use '-C all' to force check all possible dirs)  
+ 871 requests: 0 error(s) and 2 item(s) reported on remote host  
+ End Time: 2026-04-24 12:27:04 (GMT3) (33 seconds)  
  
+ 1 host(s) tested
```

Рис. 7: 7

И в последней проверке отсканируем конкретный сервер, сохраним отчет в формате html и максимально время 120

```
(sikaznacheev@sikaznacheev)-[~]  
$ nikto -h http://192.168.1.100 -o project_scan.html -Format html -maxtime 120  
- Nikto v2.5.0  
  
+ 0 host(s) tested  
  
(sikaznacheev@sikaznacheev)-[~]  
$
```

Рис. 8: 8

В результате выполнения лабораторной работы я получил навыки работы с nikto