

Работа с burpsuite

Часть 5

Казначеев С. И.

2 мая 2026

Российский университет дружбы народов, Москва, Россия

Информация

..... {.columns align=center} ::: {.column width="70%"}

- Казначеев Сергей Ильич
- Студент
- Российский университет дружбы народов
- [1132240693@pfur.ru]


::: ::: {.column width="30%"}

Вводная часть

Использовать Burp Suite

Выполнение индивидуального проекта

Для начала откроем терминал и запустим Burp Suite

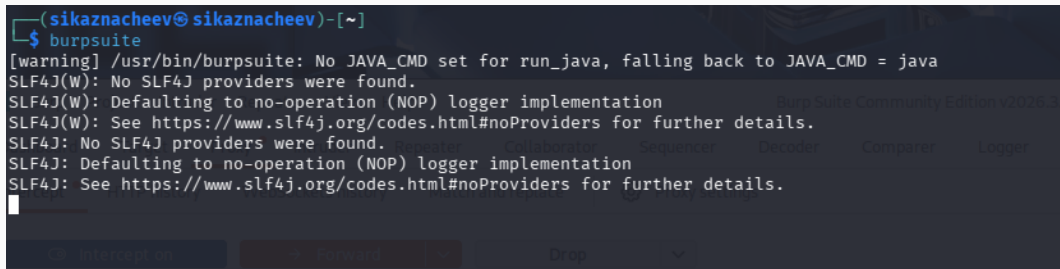A terminal window with a dark background. The prompt is (sikaznacheev@sikaznacheev)-[~]. The user has entered 'burpsuite'. The output shows several warning messages from SLF4J about missing providers and defaulting to a no-operation logger. In the background, the Burp Suite interface is visible, showing the 'Repeater' tab and various tool buttons like 'Intercept on', 'Forward', and 'Drop'.

```
(sikaznacheev@sikaznacheev)-[~]  
$ burpsuite  
[warning] /usr/bin/burpsuite: No JAVA_CMD set for run_java, falling back to JAVA_CMD = java  
SLF4J(W): No SLF4J providers were found.  
SLF4J(W): Defaulting to no-operation (NOP) logger implementation  
SLF4J(W): See https://www.slf4j.org/codes.html#noProviders for further details.  
SLF4J: No SLF4J providers were found.  
SLF4J: Defaulting to no-operation (NOP) logger implementation  
SLF4J: See https://www.slf4j.org/codes.html#noProviders for further details.  
█
```

Рис. 1: 1

После чего настроим его

⚡ Burp Suite Community Edition v2026.3.2

— □ ×

?

Welcome to Burp Suite Community Edition. Use the options below to create or open a project.

Note: Disk-based projects are only supported on Burp Suite Professional.

☒ Temporary project in memory

☐ New project on disk

Name:

File:

Choose file...

☐ Open existing project

Name	File	Last Accessed
------	------	---------------


File:

Choose file...

☒ Trust this project file



Затем проверим запустился ли burp suite или нет

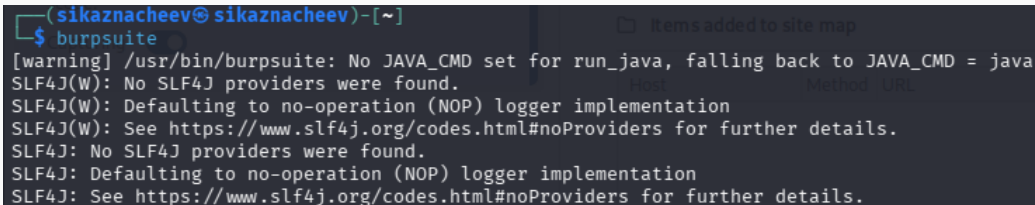

```
(sikaznacheev@ sikaznacheev)-[~]  
$ burpsuite  
[warning] /usr/bin/burpsuite: No JAVA_CMD set for run_java, falling back to JAVA_CMD = java  
SLF4J(W): No SLF4J providers were found.  
SLF4J(W): Defaulting to no-operation (NOP) logger implementation  
SLF4J(W): See https://www.slf4j.org/codes.html#noProviders for further details.  
SLF4J: No SLF4J providers were found.  
SLF4J: Defaulting to no-operation (NOP) logger implementation  
SLF4J: See https://www.slf4j.org/codes.html#noProviders for further details.
```

Items added to site map

Host	Method	URL
------	--------	-----

Рис. 3: 3

Далее настроим Proxy включив перехват запросов

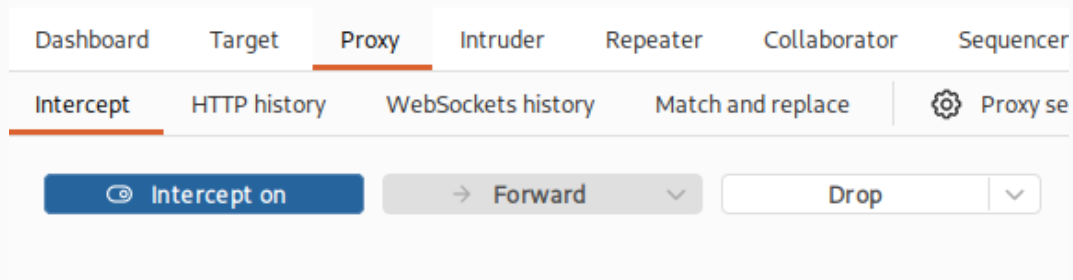



Рис. 4: 4


После чего запустим браузер с прокси burp

A terminal window with a dark background. The prompt is `(sikaznacheev@sikaznacheev)-[~]`. The command entered is `$ firefox --proxy-server="http://127.0.0.1:8080"`. A white cursor is visible at the end of the command line.

```
(sikaznacheev@sikaznacheev)-[~]  
$ firefox --proxy-server="http://127.0.0.1:8080"
```

Рис. 5: 5

Затем проверим работу прокси и убедимся что запрос перехватили

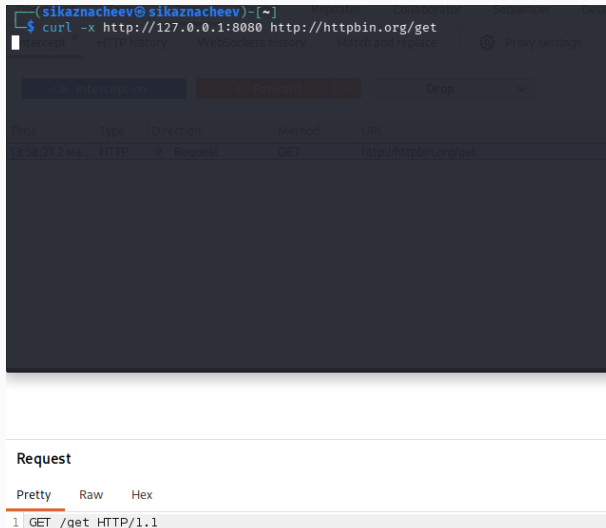

В результате выполнения индивидуального проекта часть 5, я получил навыки работы с burp suite