

Figure 1 Query pipeline

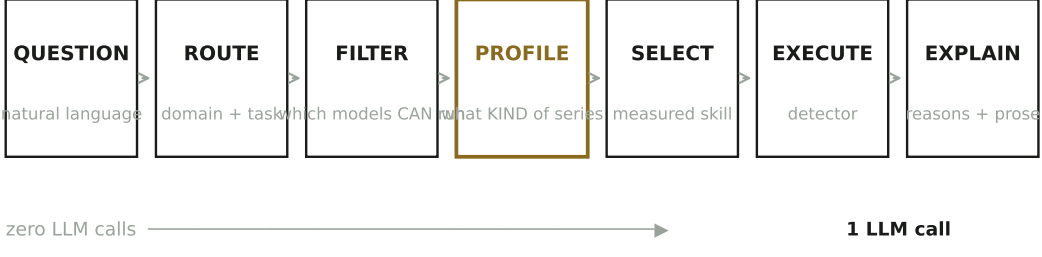


PROFILE is the only step that reasons about data it has never seen; every other choice is a lookup against measured skill.

Figure 2 Detector comparison, held-out

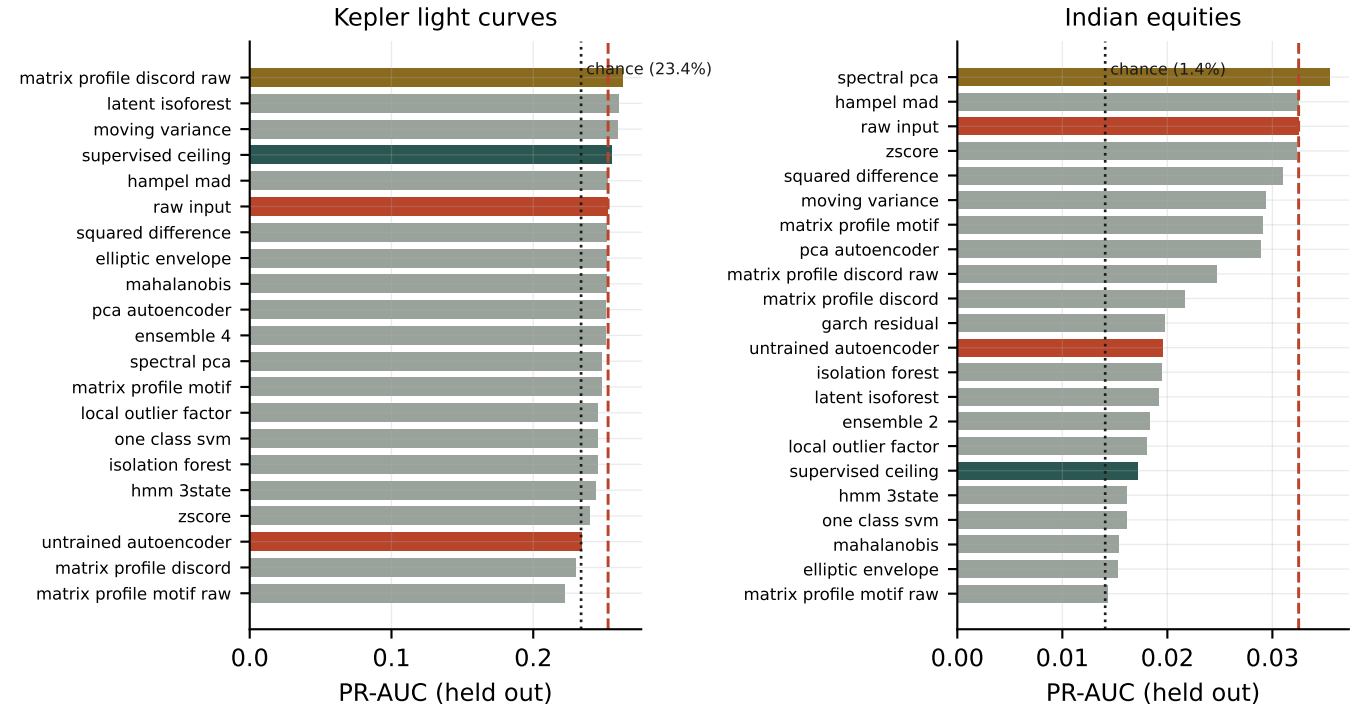


red dashed = best no-skill floor; dotted = chance. On Kepler every detector lies within 0.04 of a rule that learned nothing.

Figure 3 How much each detector's in-sample score overstates it

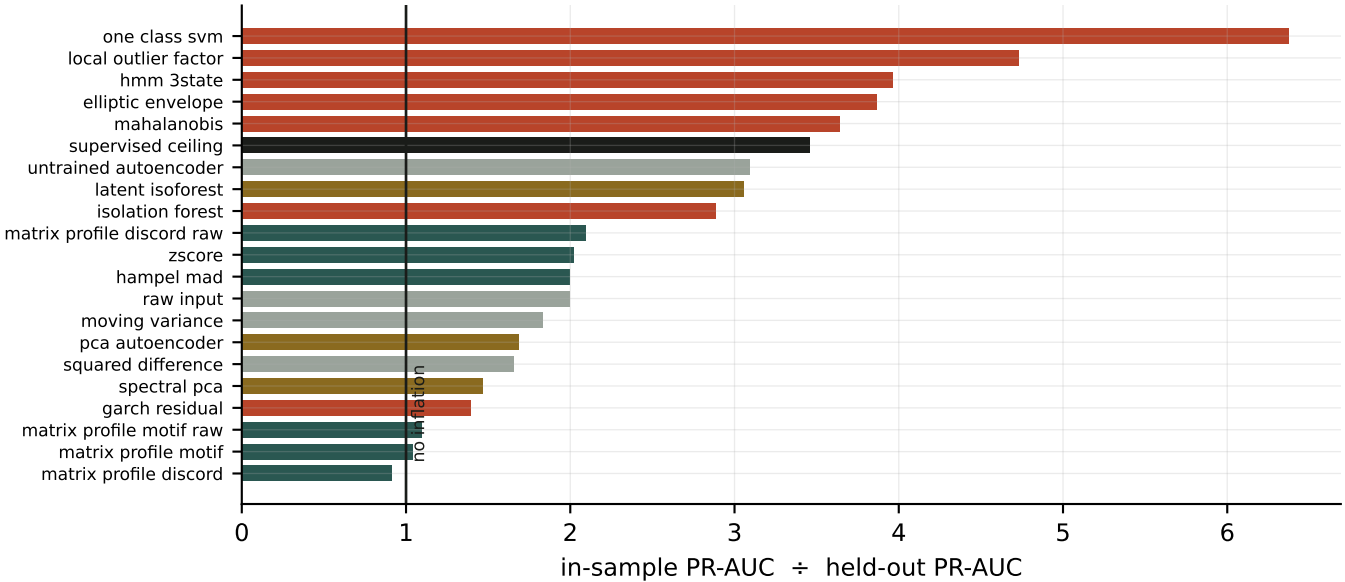


Inflation rises with model capacity: parameter-free methods sit near 1.0, a one-class SVM at 6.4x.

Figure 4 Why a period search succeeds where anomaly detection fails

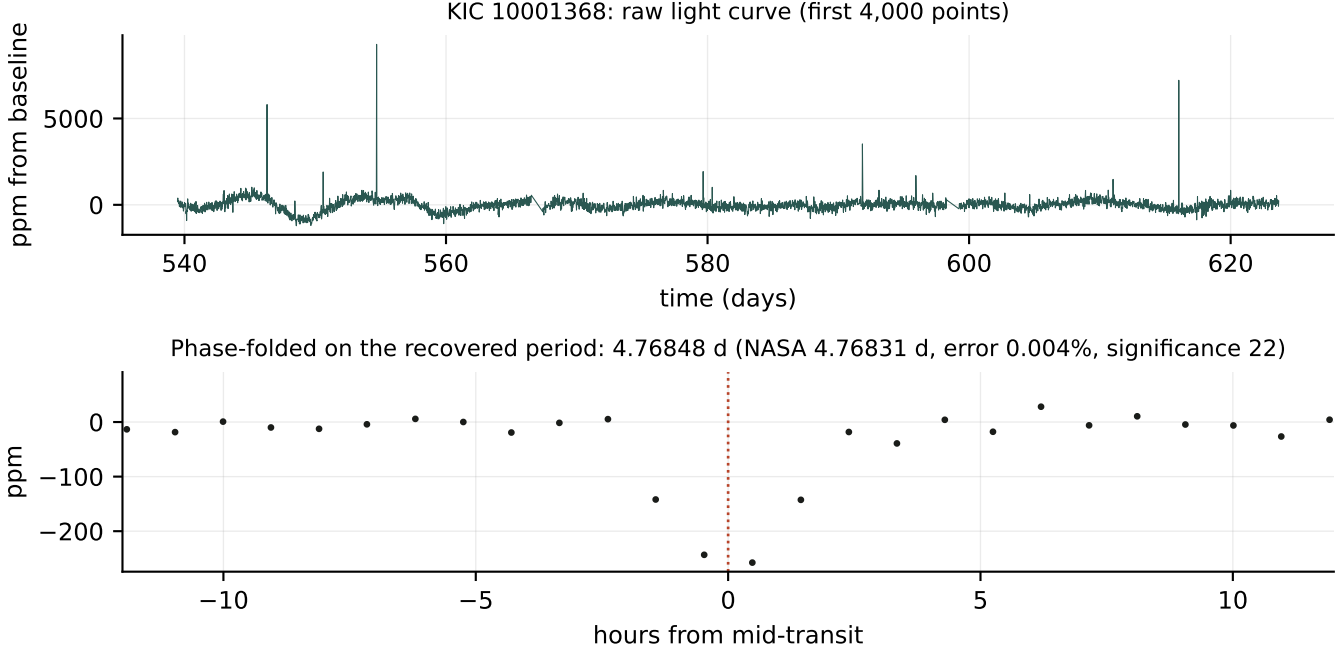

Individually every transit is invisible. Folded on the right period, 221 of them stack and the dip appears.

Figure 5 Model selection: measured skill beats asking a language model

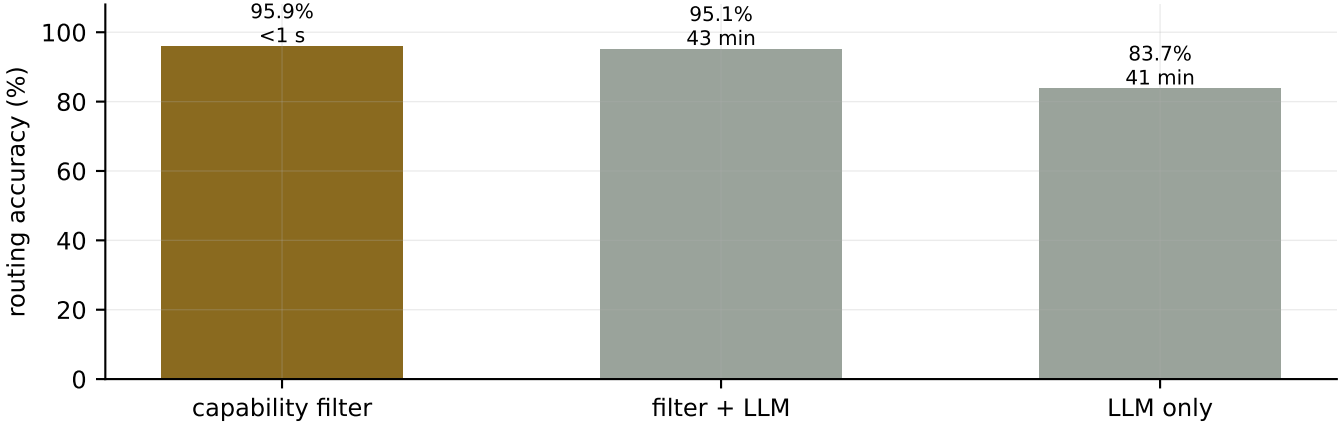

123 labelled queries. Adding the LLM to the filter made it slightly worse and four orders of magnitude slower.