

RAJALAKSHMI ENGINEERING COLLEGE

(An Autonomous Institution)

RAJALAKSHMI NAGAR, THANDALAM- 602 105



**RAJALAKSHMI
ENGINEERING
COLLEGE**

CS19P18 - DEEP LEARNING CONCEPTS LABORATORY

LABORATORY RECORD NOTEBOOK

NAME: KAVIBALAN P

YEAR/SEMESTER: FOUR/SEVEN

BRANCH: COMPUTER SCIENCE AND ENGINEERING

REGISTER NO:220701121

COLLEGE ROLL NO:2116220701121

ACADEMIC YEAR: 2025 -2026



RAJALAKSHMI ENGINEERING COLLEGE

(An Autonomous Institution)

RAJALAKSHMI NAGAR, THANDALAM- 602 105

BONAFIDE CERTIFICATE

NAME: P.KAVIBALAN **BRANCH/SECTION:** COMPUTER SCIENCE AND
ENGINEERING **ACADEMIC YEAR:** 2025 -2026 **SEMESTER:** SEVEN

REGISTER NO: 220701121

Certified that this is a Bonafide record of work done by the above student in the **CS19P18 - DEEP LEARNING CONCEPTS** during the year 2025 - 2026

Signature of Faculty In-charge

Submitted for the Practical Examination Held on:

Internal Examiner

External Examiner

INDEX

| EX.NO | DATE | NAME OF THE EXPERIMENT | PAGE NO | STAFF SIGN |
|--------------|-------------|---|----------------|---|
| 1 | 14/07/2025 | Create a neural network to recognize handwritten digits using MNIST dataset | 5 |  |
| 2 | 21/07/2025 | Build a Convolutional Neural Network with Keras/TensorFlow | 8 |  |
| 3 | 28/07/2025 | Image Classification on CIFAR-10 Dataset using CNN | 11 |  |
| 4 | 04/08/2025 | Transfer learning with CNN and Visualization | 13 |  |
| 5 | 25/08/2025 | Build a Recurrent Neural Network using Keras/Tensorflow | 17 |  |
| 6 | 15/09/2025 | Sentiment Classification of Text using RNN | 19 |  |
| 7 | 22/09/2025 | Build autoencoders with keras/tensorflow | 21 |  |
| 8 | 29/09/2025 | Object detection with yolo3 | 24 |  |
| 9 | 29/09/2025 | Build GAN with Keras/TensorFlow | 27 |  |
| 10 | 06/10/2025 | Mini Project | 31 |  |

INSTALLATION AND CONFIGURATION OF TENSORFLOW

Aim:

To install and configure TensorFlow in anaconda environment in Windows 10.

Procedure:

1. Download Anaconda Navigator and install.
2. Open Anaconda prompt
3. Create a new environment dlc with python 3.7 using the following command:
`conda create -n dlc python=3.7`
4. Activate newly created environment dlc using the following command:
`conda activate dlc`
5. In dlc prompt, install tensorflow using the following command:
`pip install tensorflow`
6. Next install Tensorflow-datasets using the following command:
`pip install tensorflow-datasets`
7. Install scikit-learn package using the following command:
`pip install scikit-learn`
8. Install pandas package using the following command:
`pip install pandas`
9. Lastly, install jupyter notebook
`pip install jupyter notebook`
10. Open jupyter notebook by typing the following in dlc prompt:
`jupyter notebook`
11. Click create new and then choose python 3 (ipykernel)
12. Give the name to the file
13. Type the code and click Run button to execute (eg. Type `import tensorflow` and then run)

**EX NO: 1 CREATE A NEURAL NETWORK TO RECOGNIZE HANDWRITTEN
DATE:14/07/2025 DIGITS USING MNIST DATASET**

Aim:

To build a handwritten digit's recognition with MNIST dataset.

Procedure:

1. Download and load the MNIST dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
import numpy as np
import tensorflow as tf
from tensorflow import keras

from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.metrics import accuracy_score
# Generate a synthetic dataset

X, y = make_classification(n_samples=1000, n_features=20, random_state=42)
# Split the dataset into training and testing sets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)
# Standardize features (optional but often beneficial)
scaler = StandardScaler()

X_train = scaler.fit_transform(X_train)
```

```

X_test = scaler.transform(X_test)
# Define the model
model = keras.Sequential([
    keras.layers.Input(shape=(X_train.shape[1],)), # Input layer
    keras.layers.Dense(64, activation='relu'), # Hidden layer with 64 neurons and ReLU activation
    keras.layers.Dense(1, activation='sigmoid') # Output layer with 1 neuron and sigmoid activation
])

# Train the model

history = model.fit(X_train, y_train, epochs=10, batch_size=32, validation_split=0.1)
# Evaluate the model on the test set
y_pred = model.predict(X_test)
y_pred_classes = (y_pred > 0.5).astype(int)
# Calculate accuracy on the test set
accuracy = accuracy_score(y_test, y_pred_classes)
# Calculate test loss
test_loss = model.evaluate(X_test, y_test)
print(f"Test accuracy: {accuracy * 100:.2f}%")
print(f"Test loss: {test_loss[0]:.4f}")

```

Output:

```

Epoch 1/10
192/192 [=====] - 5s 17ms/step - loss: 0.3739 - accuracy: 0.8950 - val_loss: 0.1801 - val_accuracy: 0.
9480
Epoch 2/10
192/192 [=====] - 3s 14ms/step - loss: 0.1492 - accuracy: 0.9562 - val_loss: 0.1261 - val_accuracy: 0.
9635
Epoch 3/10
192/192 [=====] - 2s 13ms/step - loss: 0.0980 - accuracy: 0.9714 - val_loss: 0.1129 - val_accuracy: 0.
9676
Epoch 4/10
192/192 [=====] - 2s 11ms/step - loss: 0.0711 - accuracy: 0.9795 - val_loss: 0.0962 - val_accuracy: 0.
9709
Epoch 5/10
192/192 [=====] - 2s 10ms/step - loss: 0.0543 - accuracy: 0.9844 - val_loss: 0.0914 - val_accuracy: 0.
9725
Epoch 6/10
192/192 [=====] - 2s 11ms/step - loss: 0.0402 - accuracy: 0.9888 - val_loss: 0.0866 - val_accuracy: 0.
9737
Epoch 7/10
192/192 [=====] - 2s 12ms/step - loss: 0.0301 - accuracy: 0.9920 - val_loss: 0.0871 - val_accuracy: 0.
9750
Epoch 8/10
192/192 [=====] - 2s 12ms/step - loss: 0.0245 - accuracy: 0.9931 - val_loss: 0.0840 - val_accuracy: 0.
9762
Epoch 9/10
192/192 [=====] - 2s 12ms/step - loss: 0.0180 - accuracy: 0.9956 - val_loss: 0.0878 - val_accuracy: 0.
9760
Epoch 10/10
192/192 [=====] - 2s 11ms/step - loss: 0.0149 - accuracy: 0.9963 - val_loss: 0.0858 - val_accuracy: 0.
9755

```

Jupyter Exp-1 Last Checkpoint: 3 hours ago (autosaved)

File Edit View Insert Cell Kernel Widgets Help Trusted Python 3 (ipykernel) Logout

```
In [1]: import numpy as np
import matplotlib.pyplot as plt
import tensorflow as tf
from tensorflow.keras.datasets import mnist
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Dense
from tensorflow.keras.utils import to_categorical

In [2]: feature_vector_length = 784
num_classes=10

In [3]: (x_train, y_train), (x_test, y_test) = mnist.load_data()


Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/mnist.npz
11490434/11490434 [=====] - 2s 0us/step

In [4]: input_shape = (feature_vector_length)
print(f'Feature shape: {input_shape}')

Feature shape: 784

In [5]: x_train = x_train.reshape(x_train.shape[0], feature_vector_length)
x_test = x_test.reshape(x_test.shape[0], feature_vector_length)

In [6]: x_train = x_train.astype('float32') / 255
x_test = x_test.astype('float32') / 255
y_train = to_categorical(y_train, num_classes)
y_test = to_categorical(y_test, num_classes)
```

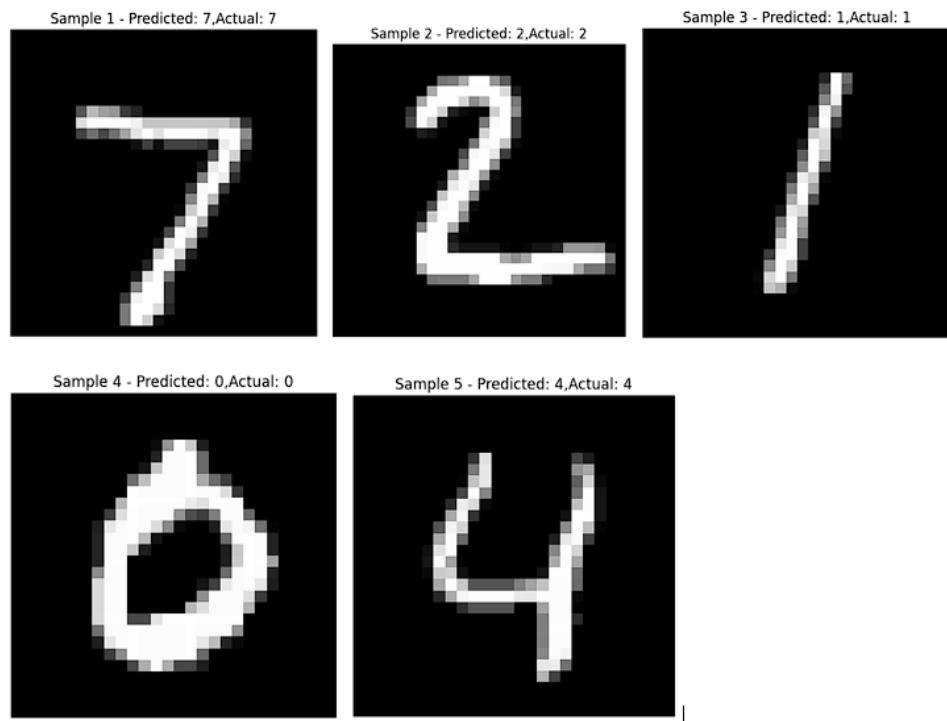

Result:

Thus, the implementation to build a simple neural network using Keras/TensorFlow has been successfully executed.

EX NO:2 **BUILD A CONVOLUTIONAL NEURAL NETWORK**
DATE:21/07/2025 **USING KERAS/TENSORFLOW**

Aim:

To implement a Convolutional Neural Network (CNN) using Keras/TensorFlow to recognize and classify handwritten digits from the MNIST dataset with high accuracy.

Procedure:

1. Import required libraries (TensorFlow/Keras, NumPy, etc.).
2. Load the MNIST dataset from Keras.
3. Normalize and reshape the image data.
4. Convert labels to one-hot encoded vectors.
5. Build a CNN model with Conv2D, MaxPooling, Flatten, and Dense layers.
6. Compile the model using categorical crossentropy and Adam optimizer.
7. Train the model on training data.
8. Evaluate the model on test data.
9. Display accuracy and predictions.

Code:

```
import tensorflow as tf
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Conv2D, MaxPooling2D, Flatten, Dense, Dropout
from tensorflow.keras.datasets import mnist
import matplotlib.pyplot as plt
import numpy as np

(train_images, train_labels), (test_images, test_labels) = mnist.load_data()
train_images = train_images / 255.0
test_images = test_images / 255.0
train_images = train_images.reshape(-1, 28, 28, 1)
test_images = test_images.reshape(-1, 28, 28, 1)
model = Sequential([
    Conv2D(32, (3, 3), activation='relu', input_shape=(28, 28, 1)),
    MaxPooling2D((2, 2)),
    Conv2D(64, (3, 3), activation='relu'),
    MaxPooling2D((2, 2)),
    Flatten(),
    Dense(64, activation='relu'),
    Dropout(0.5),
    Dense(10, activation='softmax')
])
```

```
model.compile(optimizer='adam',
loss='sparse_categorical_crossentropy',
metrics=['accuracy'])

history = model.fit(train_images, train_labels,
epochs=5,
batch_size=64,
validation_split=0.2)

test_loss, test_acc = model.evaluate(test_images, test_labels)
print(f"\n Test accuracy: {test_acc:.4f}")
print(f" Test loss: {test_loss:.4f}")

plt.figure(figsize=(12, 5))
plt.subplot(1, 2, 1)
plt.plot(history.history['accuracy'], label='Train Accuracy', marker='o')
plt.plot(history.history['val_accuracy'], label='Validation Accuracy', marker='o')
plt.title('Training and Validation Accuracy')
plt.xlabel('Epoch')
plt.ylabel('Accuracy')
plt.legend()
plt.grid(True)

plt.subplot(1, 2, 2)
plt.plot(history.history['loss'], label='Train Loss', marker='o')
plt.plot(history.history['val_loss'], label='Validation Loss', marker='o')
plt.title('Training and Validation Loss')
plt.xlabel('Epoch')
plt.ylabel('Loss')
plt.legend()
plt.grid(True)
plt.tight_layout()
plt.show()

predictions = model.predict(test_images)
predicted_labels = np.argmax(predictions, axis=1)

num_samples = 10
plt.figure(figsize=(15, 4))

for i in range(num_samples):
    plt.subplot(1, num_samples, i + 1)
    plt.imshow(test_images[i].reshape(28, 28), cmap='gray')
    plt.title(f"Pred: {predicted_labels[i]}\nTrue: {test_labels[i]}")
```

```

plt.axis('off')
plt.suptitle("Sample Predictions on Test Images", fontsize=16)
plt.show()

```


Output:

```

Epoch 1/5
750/750 [=====] - 30s 39ms/step - loss: 0.3961 - accuracy: 0.8765 - val_loss: 0.0806 - val_accuracy: 0.9756
Epoch 2/5
750/750 [=====] - 26s 35ms/step - loss: 0.1538 - accuracy: 0.9548 - val_loss: 0.0606 - val_accuracy: 0.9824
Epoch 3/5
750/750 [=====] - 30s 39ms/step - loss: 0.1163 - accuracy: 0.9652 - val_loss: 0.0495 - val_accuracy: 0.9862
Epoch 4/5
750/750 [=====] - 27s 36ms/step - loss: 0.0937 - accuracy: 0.9725 - val_loss: 0.0472 - val_accuracy: 0.9872
Epoch 5/5
750/750 [=====] - 26s 35ms/step - loss: 0.0840 - accuracy: 0.9748 - val_loss: 0.0460 - val_accuracy: 0.9867
313/313 [=====] - 2s 5ms/step - loss: 0.0390 - accuracy: 0.9880

Test accuracy: 0.9880
Test loss: 0.0390

```

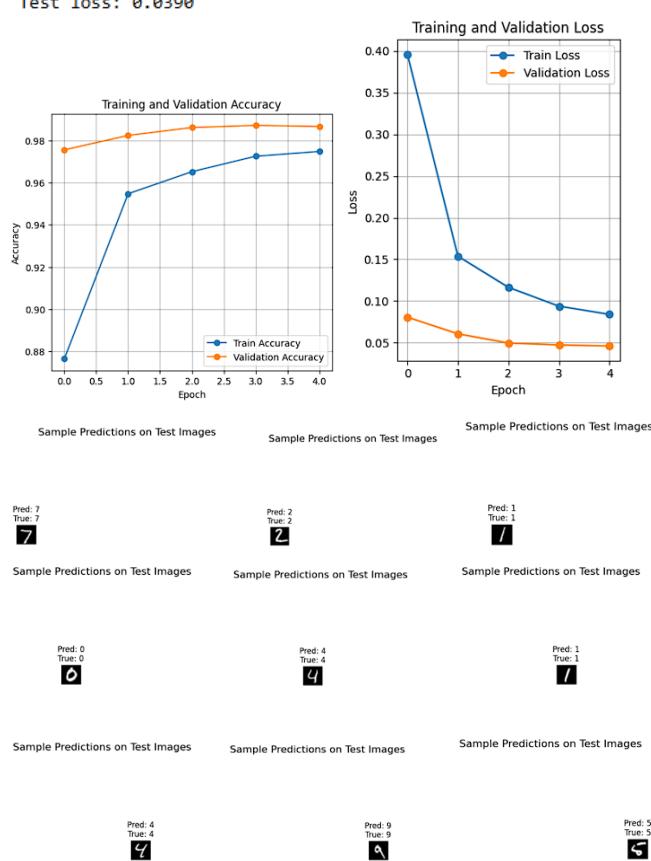

Result:

Thus, the Convolution Neural Network (CNN) using Keras / Tensorflow to recognize and classify handwritten digits from MNIST dataset has been implemented successfully.

EX NO: 3 IMAGE CLASSIFICATION ON CIFAR-10 DATASET USING CNN

DATE:28/07/2025

Aim:

To build a Convolutional Neural Network (CNN) model for classifying images from the CIFAR-10 dataset into one of the ten categories such as airplanes, cars, birds, cats, etc.

Procedure:

1. Download and load the CIFAR-10 dataset using Keras/TensorFlow.
2. Visualize and analyze sample images from the dataset.
3. Preprocess the data:
 - Normalize the pixel values (divide by 255)
 - Convert class labels to one-hot encoded format
4. Build a CNN model using Keras/TensorFlow:
 - Include convolutional, pooling, flatten, and dense layers.
5. Compile the model with suitable loss function and optimizer.
6. Train the model using training data and validate using test data.
7. Evaluate the model using accuracy and loss on test dataset.
8. Perform predictions on new/unseen CIFAR-10 images.
9. Visualize prediction results with sample images and predicted labels.

Code:

```
import tensorflow as tf
import numpy as np
import matplotlib.pyplot as plt
(x_train, y_train), (x_test, y_test) = tf.keras.datasets.cifar10.load_data()
x_train = x_train.astype('float32') / 255.0
x_test = x_test.astype('float32') / 255.0
y_train = tf.keras.utils.to_categorical(y_train, 10)
y_test = tf.keras.utils.to_categorical(y_test, 10)
model = tf.keras.Sequential()
model.add(tf.keras.layers.Conv2D(32, (3,3), activation='relu', input_shape=(32,32,3)))
model.add(tf.keras.layers.MaxPooling2D((2,2)))
model.add(tf.keras.layers.Conv2D(64, (3,3), activation='relu'))
model.add(tf.keras.layers.MaxPooling2D((2,2)))
model.add(tf.keras.layers.Conv2D(64, (3,3), activation='relu'))
model.add(tf.keras.layers.Flatten())
model.add(tf.keras.layers.Dense(64, activation='relu'))
model.add(tf.keras.layers.Dense(10, activation='softmax'))
model.compile(optimizer='adam', loss='categorical_crossentropy', metrics=['accuracy'])
model.fit(x_train, y_train, epochs=10, batch_size=64, validation_split=0.2)
class_names = ['airplane', 'automobile', 'bird', 'cat', 'deer',
```

```

'dog', 'frog', 'horse', 'ship', 'truck']
index = int(input("Enter an index (0 to 9999) for test image: "))
if index < 0 or index >= len(x_test):
    print("Invalid index. Using index 0 by default.")
index = 0
test_image = x_test[index]
true_label = np.argmax(y_test[index])
prediction = model.predict(np.expand_dims(test_image, axis=0))
predicted_label = np.argmax(prediction)
plt.figure(figsize=(4, 4))
resized_image = tf.image.resize(test_image, [128, 128])
plt.imshow(resized_image)
plt.axis('off')
plt.title(f"Predicted: {class_names[predicted_label]}\nActual: {class_names[true_label]}")
plt.show()

```


Output:

```

Epoch 1/10
625/625 [=====] - 58s 87ms/step - loss: 1.6801 - accuracy: 0.3846 - val_loss: 1.4341 - val_accuracy:
0.4803
Epoch 2/10
625/625 [=====] - 37s 60ms/step - loss: 1.3153 - accuracy: 0.5284 - val_loss: 1.3005 - val_accuracy:
0.5388
Epoch 3/10
625/625 [=====] - 36s 58ms/step - loss: 1.1663 - accuracy: 0.5846 - val_loss: 1.1370 - val_accuracy:
0.6014
Epoch 4/10
625/625 [=====] - 38s 61ms/step - loss: 1.0629 - accuracy: 0.6249 - val_loss: 1.0984 - val_accuracy:
0.6178
Epoch 5/10
625/625 [=====] - 41s 65ms/step - loss: 0.9991 - accuracy: 0.6480 - val_loss: 1.0476 - val_accuracy:
0.6379
Epoch 6/10
625/625 [=====] - 38s 61ms/step - loss: 0.9348 - accuracy: 0.6720 - val_loss: 0.9795 - val_accuracy:
0.6598
Epoch 7/10
625/625 [=====] - 38s 60ms/step - loss: 0.8764 - accuracy: 0.6970 - val_loss: 1.0013 - val_accuracy:
0.6547
Epoch 8/10
625/625 [=====] - 38s 61ms/step - loss: 0.8338 - accuracy: 0.7096 - val_loss: 0.9313 - val_accuracy:
0.6770
Epoch 9/10
625/625 [=====] - 39s 62ms/step - loss: 0.7943 - accuracy: 0.7242 - val_loss: 0.9243 - val_accuracy:
0.6856
Epoch 10/10
625/625 [=====] - 37s 60ms/step - loss: 0.7588 - accuracy: 0.7362 - val_loss: 0.8994 - val_accuracy:
0.6986

```

Predicted: frog
 Actual: frog

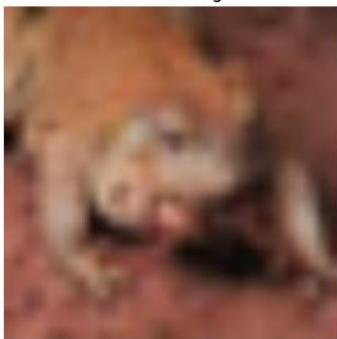

Result

Thus, the Convolution Neural Network (CNN) model for classifying images from CIFAR-10 dataset is implemented successfully.

Ex No: 4 TRANSFER LEARNING WITH CNN AND VISUALIZATION

DATE:04/08/2025

Aim:

To build a convolutional neural network with transfer learning and perform visualization

Procedure:

1. Download and load the dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
conda install -c conda-forge python-graphviz -y
import tensorflow as tf
from tensorflow.keras.applications import VGG16
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Dense, Flatten, Dropout
from tensorflow.keras.optimizers import Adam
from tensorflow.keras.datasets import cifar10
from tensorflow.keras.utils import plot_model
import matplotlib.pyplot as plt
import numpy as np
(x_train, y_train), (x_test, y_test) = cifar10.load_data()
x_train = x_train / 255.0
x_test = x_test / 255.0
vgg_base = VGG16(weights='imagenet', include_top=False, input_shape=(32, 32, 3))
for layer in vgg_base.layers:
    layer.trainable = False
model = Sequential()
model.add(vgg_base)
model.add(Flatten())
model.add(Dense(512, activation='relu'))
model.add(Dropout(0.5))
model.add(Dense(10, activation='softmax'))
model.compile(optimizer=Adam(learning_rate=0.0001),
              loss='sparse_categorical_crossentropy',
              metrics=['accuracy'])
plot_model(model, to_file='cnn.png', show_shapes=True,
```

```

show_layer_names=True, dpi=300)
plt.figure(figsize=(20, 20))
img = plt.imread('cnn.png')
plt.imshow(img)
plt.axis('off')
plt.show()
history = model.fit(x_train, y_train,
epochs=10,
batch_size=32,
validation_split=0.2)

test_loss, test_acc = model.evaluate(x_test, y_test)
print(f'Test Loss: {test_loss:.4f}')
print(f'Test Accuracy: {test_acc * 100:.2f}%')
plt.figure(figsize=(12, 5))

plt.subplot(1, 2, 1)
plt.plot(history.history['accuracy'], label='Train Accuracy')
plt.plot(history.history['val_accuracy'], label='Validation Accuracy')
plt.title('Model Accuracy')
plt.xlabel('Epoch')
plt.ylabel('Accuracy')
plt.legend()


plt.subplot(1, 2, 2)
plt.plot(history.history['loss'], label='Train Loss')
plt.plot(history.history['val_loss'], label='Validation Loss')
plt.title('Model Loss')
plt.xlabel('Epoch')
plt.ylabel('Loss')
plt.legend()
plt.tight_layout()
plt.show()

class_names = ['airplane', 'automobile', 'bird', 'cat', 'deer',
'dog', 'frog', 'horse', 'ship', 'truck']
sample = x_test[0].reshape(1, 32, 32, 3)
prediction = model.predict(sample)
predicted_class = class_names[np.argmax(prediction)]

plt.imshow(x_test[0])
plt.title(f"Predicted: {predicted_class}")
plt.axis('off')
plt.show()

```


Output:

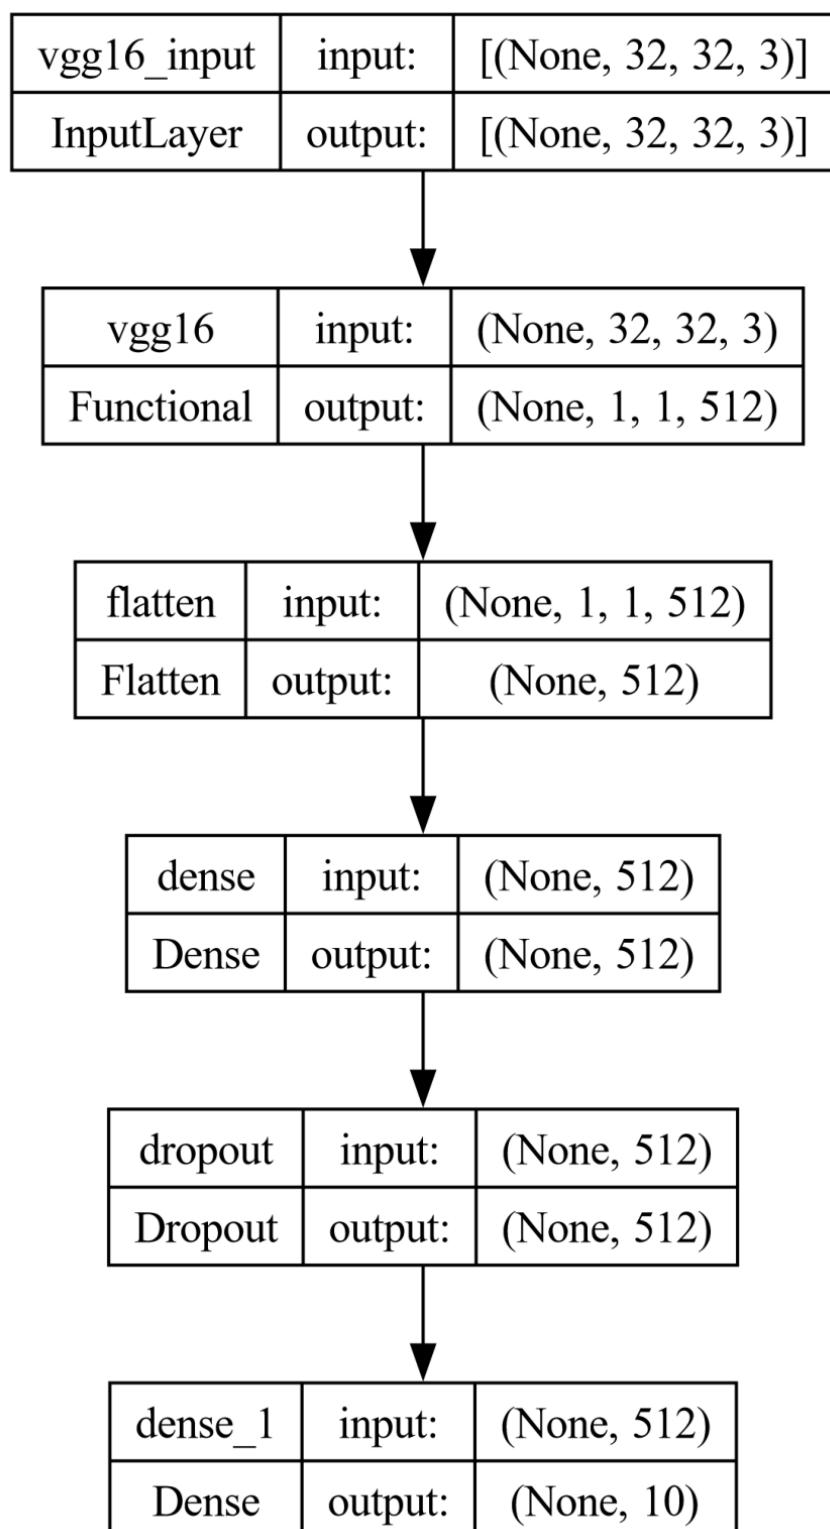

```

Epoch 1/10
1250/1250 [=====] - 231s 182ms/step - loss: 1.7748 - accuracy: 0.3727 - val_loss: 1.4674 - val_accuracy: 0.4959
Epoch 2/10
1250/1250 [=====] - 193s 154ms/step - loss: 1.4665 - accuracy: 0.4920 - val_loss: 1.3556 - val_accuracy: 0.5322
Epoch 3/10
1250/1250 [=====] - 187s 150ms/step - loss: 1.3733 - accuracy: 0.5264 - val_loss: 1.2966 - val_accuracy: 0.5512
Epoch 4/10
1250/1250 [=====] - 189s 151ms/step - loss: 1.3197 - accuracy: 0.5386 - val_loss: 1.2610 - val_accuracy: 0.5621
Epoch 5/10
1250/1250 [=====] - 191s 153ms/step - loss: 1.2777 - accuracy: 0.5551 - val_loss: 1.2352 - val_accuracy: 0.5739
Epoch 6/10
1250/1250 [=====] - 190s 152ms/step - loss: 1.2474 - accuracy: 0.5683 - val_loss: 1.2154 - val_accuracy: 0.5759
Epoch 7/10
1250/1250 [=====] - 187s 150ms/step - loss: 1.2269 - accuracy: 0.5741 - val_loss: 1.1981 - val_accuracy: 0.5830
Epoch 8/10
1250/1250 [=====] - 183s 146ms/step - loss: 1.2039 - accuracy: 0.5834 - val_loss: 1.1839 - val_accuracy: 0.5864
Epoch 9/10
1250/1250 [=====] - 177s 142ms/step - loss: 1.1866 - accuracy: 0.5887 - val_loss: 1.1735 - val_accuracy: 0.5900
Epoch 10/10
1250/1250 [=====] - 175s 140ms/step - loss: 1.1699 - accuracy: 0.5943 - val_loss: 1.1672 - val_accuracy: 0.5910

```

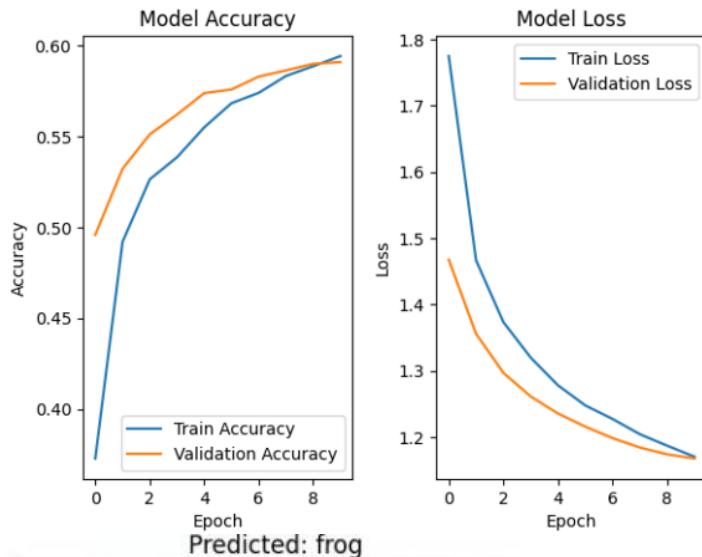

Result

Thus, the Convolution Neural Network (CNN) with transfer learning and perform visualization has been implemented successfully

**EX NO: 5 BUILD A RECURRENT NEURAL NETWORK (RNN) USING
DATE:25/08/2025 KERAS/TENSORFLOW**

Aim:

To build a recurrent neural network with Keras/TensorFlow.

Procedure:

1. Download and load the dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
import numpy as np
import tensorflow as tf
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import SimpleRNN, Dense
from sklearn.metrics import r2_score
np.random.seed(0)
seq_length = 10
num_samples = 1000
X = np.random.randn(num_samples, seq_length, 1)
y = X.sum(axis=1) + 0.1 * np.random.randn(num_samples, 1)
split_ratio = 0.8
split_index = int(split_ratio * num_samples)
X_train, X_test = X[:split_index], X[split_index:]
y_train, y_test = y[:split_index], y[split_index:]
model = Sequential()
model.add(SimpleRNN(units=50, activation='relu', input_shape=(seq_length, 1)))
model.add(Dense(units=1))
model.compile(optimizer='adam', loss='mean_squared_error')
model.summary()
batch_size = 30
epochs = 50 # Reduced epochs for quick demonstration
history = model.fit(
    X_train, y_train,
    batch_size=batch_size,
    epochs=epochs,
    validation_split=0.2
)
test_loss = model.evaluate(X_test, y_test)
print(f'Test Loss: {test_loss:.4f}')
```

```

y_pred = model.predict(X_test)
r2 = r2_score(y_test, y_pred)
print(f'Test Accuracy (R^2): {r2:.4f}')

new_data = np.random.randn(5, seq_length, 1)
predictions = model.predict(new_data)
print("Predictions for new data:")
print(predictions)

```

Output:

```

Model: "sequential"

Layer (type)          output shape         Param #
=====
simple_rnn (SimpleRNN)    (None, 50)           2600
dense (Dense)           (None, 1)            51
=====
Total params: 2,651
Trainable params: 2,651
Non-trainable params: 0

Epoch 1/50
22/22 [=====] - 2s 23ms/step - loss: 8.7454
- val_loss: 6.3263
Epoch 2/50
22/22 [=====] - 0s 4ms/step - loss: 5.8837
- val_loss: 3.7798
Epoch 3/50
22/22 [=====] - 0s 5ms/step - loss: 3.7728
- val_loss: 2.3105
Epoch 4/50
22/22 [=====] - 0s 5ms/step - loss: 1.7141
- val_loss: 0.5373
Epoch 5/50
22/22 [=====] - 0s 4ms/step - loss: 0.2878
- val_loss: 0.2417
Epoch 6/50
22/22 [=====] - 0s 4ms/step - loss: 0.1304
- val_loss: 0.1146
Epoch 7/50

1/1 [=====] - 0s 20ms/step
Predictions for new data:
[[ 1.5437698]
 [ 0.4290885]
 [-2.1180325]
 [-0.5443404]
 [-3.8416493]]

```

Result:

Thus, the Recurrent Neural Network (RNN) has been implemented using Tensorflow.

EX NO: 6 SENTIMENT CLASSIFICATION OF TEXT USING RNN**DATE:15/09/2025****Aim:**

To implement a Recurrent Neural Network (RNN) using Keras/TensorFlow for classifying the sentiment of text data (e.g., movie reviews) as positive or negative.

Procedure:

1. Import necessary libraries.
2. Load and preprocess the text dataset (e.g., IMDb).
3. Pad sequences and prepare labels.
4. Build an RNN model with Embedding and SimpleRNN layers.
5. Compile the model with loss and optimizer.
6. Train the model on training data.
7. Evaluate the model on test data.
8. Predict sentiment for new inputs

Code:

```
import numpy as np
from tensorflow.keras.datasets import imdb
from tensorflow.keras.preprocessing.sequence import pad_sequences
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Embedding, SimpleRNN, Dense
max_words = 5000
max_len = 200
(x_train, y_train), (x_test, y_test) = imdb.load_data(num_words=max_words)
X_train = pad_sequences(x_train, maxlen=max_len)
X_test = pad_sequences(x_test, maxlen=max_len)
model = Sequential()
model.add(Embedding(input_dim=max_words, output_dim=32, input_length=max_len))
model.add(SimpleRNN(32))
model.add(Dense(1, activation='sigmoid'))
model.compile(optimizer='adam', loss='binary_crossentropy', metrics=['accuracy'])
print("Training...")
model.fit(X_train, y_train, epochs=2, batch_size=64, validation_split=0.2)
loss, acc = model.evaluate(X_test, y_test)
print(f"\nTest Accuracy: {acc:.4f}")
word_index = imdb.get_word_index()
reverse_word_index = {v: k for (k, v) in word_index.items()}
```

```

def decode_review(review):
    return " ".join([reverse_word_index.get(i - 3, "?") for i in review])
sample_review = X_test[0]
prediction = model.predict(sample_review.reshape(1, -1))[0][0]
print("\nReview text:", decode_review(x_test[0]))
print("Predicted Sentiment:", "Positive " if prediction > 0.5 else "Negative ")

```

Output:

```

→ Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/imdb.npz
17464789/17464789 ━━━━━━━━ 0s 0us/step
Training...
Epoch 1/2
/usr/local/lib/python3.12/dist-packages/keras/src/layers/core/embedding.py:97: UserWarning: Argument `input_length` is deprecated. Just remove it.
warnings.warn(
313/313 ━━━━━━━━ 21s 59ms/step - accuracy: 0.6479 - loss: 0.6143 - val_accuracy: 0.6644 - val_loss: 0.6085
Epoch 2/2
313/313 ━━━━━━━━ 17s 53ms/step - accuracy: 0.7939 - loss: 0.4496 - val_accuracy: 0.8186 - val_loss: 0.4121
782/782 ━━━━━━ 10s 13ms/step - accuracy: 0.8237 - loss: 0.4115

Test Accuracy: 0.8230
Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/imdb\_word\_index.json
1641221/1641221 ━━━━━━━━ 0s 0us/step

```

```

▶ def decode_review(review):
    return " ".join([reverse_word_index.get(i - 3, "?") for i in review])
sample_review = X_test[0]
prediction = model.predict(sample_review.reshape(1, -1))[0][0]
print("\nReview text:", decode_review(x_test[0]))
print("Predicted Sentiment:", "Positive " if prediction > 0.5 else "Negative ")

→ 1/1 ━━━━━━ 0s 195ms/step

```

Review text: ? please give this one a miss br br ? ? and the rest of the cast ? terrible performances the show is flat flat flat br br i don't know how michael
Predicted Sentiment: Negative

Result

Thus, the Recurrent Neural Network (RNN) using Keras has been implemented for classifying sentiment of text successfully.

Ex No: 7 BUILD AUTOENCODERS WITH KERAS/TENSORFLOW**DATE:22/09/2025****Aim:**

To build autoencoders with Keras/TensorFlow.

Procedure:

1. Download and load the dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
import numpy as np
import matplotlib.pyplot as plt
from keras.layers import Input, Dense
from keras.models import Model
from keras.datasets import mnist
(x_train, _), (x_test, _) = mnist.load_data()
x_train = x_train.astype('float32') / 255.
x_test = x_test.astype('float32') / 255.
x_train = x_train.reshape((len(x_train), np.prod(x_train.shape[1:])))
x_test = x_test.reshape((len(x_test), np.prod(x_test.shape[1:])))
input_img = Input(shape=(784,))
encoded = Dense(32, activation='relu')(input_img)
decoded = Dense(784, activation='sigmoid')(encoded)
autoencoder = Model(input_img, decoded)
autoencoder.compile(optimizer='adam', loss='binary_crossentropy')
autoencoder.fit(x_train, x_train,
epochs=50,
batch_size=256,
shuffle=True,
validation_data=(x_test, x_test))
test_loss = autoencoder.evaluate(x_test, x_test)
decoded_imgs = autoencoder.predict(x_test)
threshold = 0.5
correct_predictions = np.sum(
np.where(x_test >= threshold, 1, 0) ==
np.where(decoded_imgs >= threshold, 1, 0))
total_pixels = x_test.shape[0] * x_test.shape[1]
test_accuracy = correct_predictions / total_pixels
print("Test Loss:", test_loss)
```

```

print("Test Accuracy:", test_accuracy)
n = 10
plt.figure(figsize=(20, 4))
for i in range(n):
    # Display original
    ax = plt.subplot(2, n, i + 1)
    plt.imshow(x_test[i].reshape(28, 28))
    plt.gray()
    ax.get_xaxis().set_visible(False)
    ax.get_yaxis().set_visible(False)
    # Display reconstruction with threshold
    ax = plt.subplot(2, n, i + 1 + n)
    reconstruction = decoded_imgs[i].reshape(28, 28)
    plt.imshow(np.where(reconstruction >= threshold, 1.0, 0.0))
    plt.gray()
    ax.get_xaxis().set_visible(False)
    ax.get_yaxis().set_visible(False)
plt.show()

```

Output:

```

Epoch 1/50
235/235 ━━━━━━━━━━ 6s 18ms/step - loss: 0.3805 - val_loss: 0.1906
Epoch 2/50
235/235 ━━━━━━━━ 5s 19ms/step - loss: 0.1808 - val_loss: 0.1547
Epoch 3/50
235/235 ━━━━━━ 5s 19ms/step - loss: 0.1501 - val_loss: 0.1342
Epoch 4/50
235/235 ━━━━ 3s 10ms/step - loss: 0.1321 - val_loss: 0.1221
Epoch 5/50
235/235 ━━ 2s 9ms/step - loss: 0.1210 - val_loss: 0.1138
Epoch 6/50
235/235 ━ 3s 11ms/step - loss: 0.1134 - val_loss: 0.1081
Epoch 7/50
235/235 5s 9ms/step - loss: 0.1079 - val_loss: 0.1039
Epoch 8/50
235/235 2s 9ms/step - loss: 0.1042 - val_loss: 0.1006
Epoch 9/50
235/235 3s 9ms/step - loss: 0.1011 - val_loss: 0.0981
Epoch 10/50
235/235 3s 11ms/step - loss: 0.0989 - val_loss: 0.0963
Epoch 11/50
235/235 3s 12ms/step - loss: 0.0972 - val_loss: 0.0951
Epoch 12/50
235/235 3s 11ms/step - loss: 0.0964 - val_loss: 0.0943
Epoch 13/50
235/235 2s 10ms/step - loss: 0.0954 - val_loss: 0.0938
Epoch 14/50
235/235 2s 10ms/step - loss: 0.0950 - val_loss: 0.0934
Epoch 15/50
235/235 3s 11ms/step - loss: 0.0944 - val_loss: 0.0932

```

```
→ Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/mnist.npz
11490434/11490434 1s 0us/step
```

```
→ Test Loss: 0.09166844934225082
Test Accuracy: 0.9712756377551021
```



```
# Display reconstruction with threshold
ax = plt.subplot(2, n, i + 1 + n)
reconstruction = decoded_imgs[i].reshape(28, 28)
plt.imshow(np.where(reconstruction >= threshold, 1.0, 0.0))
plt.gray()
ax.get_xaxis().set_visible(False)
ax.get_yaxis().set_visible(False)
plt.show()
```



Result

Thus, an Autoencoder has been implemented using Keras / Tensorflow.

Ex No:8

OBJECT DETECTION WITH YOLO3

DATE:29/09/2025

Aim:

To build an object detection model with YOLO3 using Keras/TensorFlow.

Procedure:

1. Download and load the dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
import cv2
import matplotlib.pyplot as plt
import numpy as np

# Define the paths to the YOLOv3 configuration, weights, and class names files
cfg_file = '/content/yolov3.cfg'
weight_file = '/content/yolov3.weights'
namesfile = '/content/coco.names'

# Load the YOLOv3 model
net = cv2.dnn.readNet(weight_file, cfg_file)

# Load class names
with open(namesfile, 'r') as f:
    classes = f.read().strip().split('\n')

# Load an image for object detection
image_path = '/content/hit.jpg'
image = cv2.imread(image_path)

# Get the height and width of the image
height, width = image.shape[:2]

# Create a blob from the image
blob = cv2.dnn.blobFromImage(image, 1/255.0, (416, 416), swapRB=True, crop=False)
net.setInput(blob)

# Get the names of the output layers
layer_names = net.getUnconnectedOutLayersNames()

# Run forward pass
```

```

outs = net.forward(layer_names)

# Initialize lists to store detected objects' information
class_ids = []
confidences = []
boxes = []

# Define a confidence threshold for object detection
conf_threshold = 0.5

# Loop over the detections
for out in outs:
    for detection in out:
        scores = detection[5:]
        class_id = np.argmax(scores)
        confidence = scores[class_id]
        if confidence > conf_threshold:
            # Object detected
            center_x = int(detection[0] * width)
            center_y = int(detection[1] * height)
            w = int(detection[2] * width)
            h = int(detection[3] * height)

            # Rectangle coordinates
            x = int(center_x - w / 2)
            y = int(center_y - h / 2)

            class_ids.append(class_id)
            confidences.append(float(confidence))
            boxes.append([x, y, w, h])

# Apply non-maximum suppression to eliminate overlapping boxes
nms_threshold = 0.4
indices = cv2.dnn.NMSBoxes(boxes, confidences, conf_threshold, nms_threshold)

# Draw bounding boxes and labels on the image
for i in indices.flatten(): # flatten for compatibility
    x, y, w, h = boxes[i]
    label = str(classes[class_ids[i]])
    confidence = confidences[i]

    cv2.rectangle(image, (x, y), (x + w, y + h), (0, 255, 0), 2)
    cv2.putText(image, f'{label} {confidence:.2f}', (x, y - 10),
               cv2.FONT_HERSHEY_SIMPLEX, 0.8, (0, 255, 0), 2)

```

```
# Display the result in Jupyter Notebook
plt.figure(figsize=(10, 8))
plt.imshow(cv2.cvtColor(image, cv2.COLOR_BGR2RGB))
plt.axis('off')
plt.show()
```

Output:


```
cfg_file=r"C:\Users\agaki\Downloads\yolov3.cfg"
weight_file=r"C:\Users\agaki\Downloads\yolov3.weights"
names_file=r"C:\Users\agaki\Downloads\coco.names"

for out in outs:
    for detection in out:
        scores=detection[5:]
        class_id=np.argmax(scores)
        confidence=scores[class_id]
        if confidence>conf_threshold:

            center_x=int(detection[0]*width)
            center_y=int(detection[1]*height)
            w=int(detection[2]*width)
            h=int(detection[3]*height)

            x=int(center_x-w/2)
            y=int(center_y-h/2)

            class_ids.append(class_id)
            confidences.append(float(confidence))
            boxes.append([x,y,w,h])
```

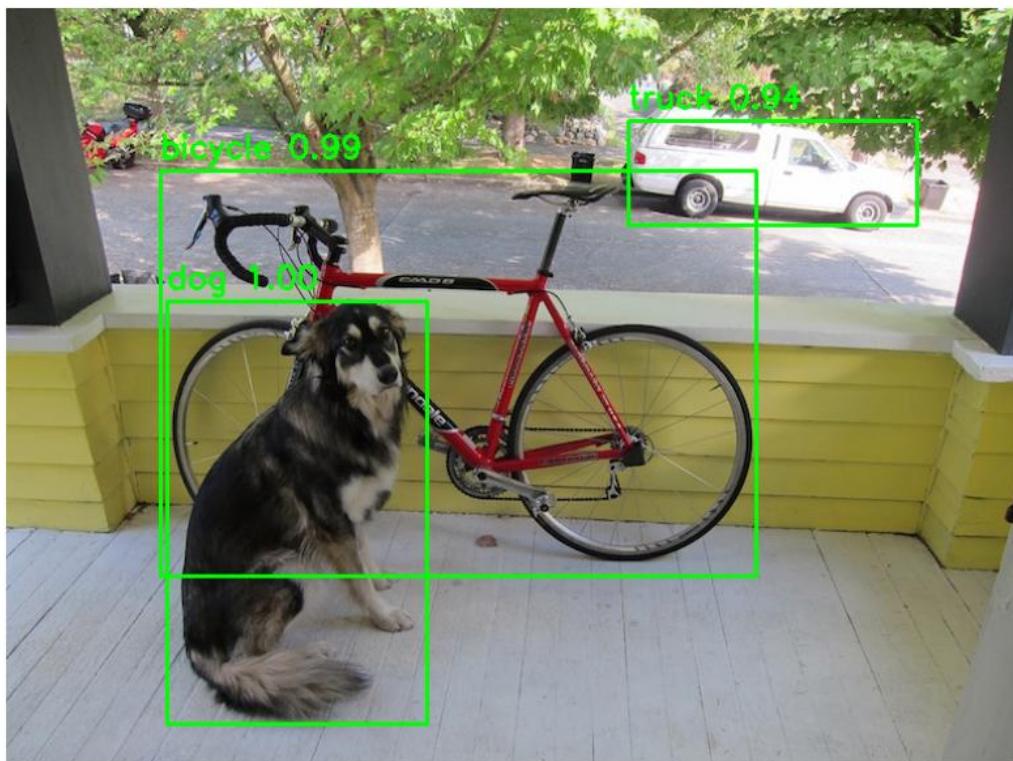

Result

Thus, object detection using YOLOV5 has been implemented successfully.

Ex No: 9 BUILD GENERATIVE ADVERSARIAL NEURAL NETWORK**DATE:29/09/2025****Aim:**

To build a generative adversarial neural network using Keras/TensorFlow.

Procedure:

1. Download and load the dataset.
2. Perform analysis and preprocessing of the dataset.
3. Build a simple neural network model using Keras/TensorFlow.
4. Compile and fit the model.
5. Perform prediction with the test dataset.
6. Calculate performance metrics.

Code:

```
import numpy as np
import tensorflow as tf
from tensorflow.keras.layers import Dense
from tensorflow.keras.models import Sequential
from tensorflow.keras.optimizers import Adam
from sklearn.datasets import load_iris
import matplotlib.pyplot as plt

# Load and Preprocess the Iris Dataset
iris = load_iris()
x_train = iris.data

# Build the GAN model
def build_generator():
    model = Sequential()
    model.add(Dense(128, input_shape=(100,), activation='relu'))
    model.add(Dense(4, activation='linear')) # Output 4 features
    return model

def build_discriminator():
    model = Sequential()
    model.add(Dense(128, input_shape=(4,), activation='relu'))
    model.add(Dense(1, activation='sigmoid'))
    return model

def build_gan(generator, discriminator):
    discriminator.trainable = False
    model = Sequential()
    model.add(generator)
    model.add(discriminator)
```

```

return model

generator = build_generator()
discriminator = build_discriminator()
gan = build_gan(generator, discriminator)

# Compile the Models
generator.compile(loss='mean_squared_error', optimizer=Adam(0.0002, 0.5))
discriminator.compile(loss='binary_crossentropy', optimizer=Adam(0.0002, 0.5),
metrics=['accuracy'])
gan.compile(loss='binary_crossentropy', optimizer=Adam(0.0002, 0.5))

# Training Loop
epochs = 200
batch_size = 16

for epoch in range(epochs):
    # Train discriminator
    idx = np.random.randint(0, x_train.shape[0], batch_size)
    real_samples = x_train[idx]
    fake_samples = generator.predict(np.random.normal(0, 1, (batch_size, 100)), verbose=0)

    real_labels = np.ones((batch_size, 1))
    fake_labels = np.zeros((batch_size, 1))

    d_loss_real = discriminator.train_on_batch(real_samples, real_labels)
    d_loss_fake = discriminator.train_on_batch(fake_samples, fake_labels)

    # Train generator
    noise = np.random.normal(0, 1, (batch_size, 100))
    g_loss = gan.train_on_batch(noise, real_labels)

    # Print progress
    print(f"Epoch {epoch}/{epochs} | Discriminator Loss: {0.5 * (d_loss_real[0] + d_loss_fake[0])} | Generator Loss: {g_loss}")

    # Generating Synthetic Data
    synthetic_data = generator.predict(np.random.normal(0, 1, (150, 100)), verbose=0)

    # Create scatter plots for feature pairs
    plt.figure(figsize=(12, 8))
    plot_idx = 1

    for i in range(4):
        for j in range(i + 1, 4):
            plt.subplot(2, 3, plot_idx)

```

```

plt.scatter(x_train[:, i], x_train[:, j], label='Real Data', c='blue', marker='o', s=30)
plt.scatter(synthetic_data[:, i], synthetic_data[:, j], label='Synthetic Data', c='red', marker='x', s=30)
plt.xlabel(f'Feature {i + 1}')
plt.ylabel(f'Feature {j + 1}')
plt.legend()
plot_idx += 1

plt.tight_layout()
plt.show()

```

Output:

| Epoch | Discriminator Loss | Generator Loss |
|--------|--------------------|---------------------|
| 0/200 | 0.8773080408573151 | 0.764731228351593 |
| 1/200 | 0.9332943856716156 | 0.7988691329956055 |
| 2/200 | 0.9277275502681732 | 0.8127573728561401 |
| 3/200 | 0.8921994566917419 | 0.7757299542427063 |
| 4/200 | 0.913447916507721 | 0.7737997174263 |
| 5/200 | 0.8916181325912476 | 0.8003895282745361 |
| 6/200 | 0.9026078879833221 | 0.814433217048645 |
| 7/200 | 0.9135120809078217 | 0.8237183690071106 |
| 8/200 | 0.879832923412323 | 0.7563657760620117 |
| 9/200 | 0.9439513385295868 | 0.7623365521430969 |
| 10/200 | 0.9355685114860535 | 0.7924684286117554 |
| 11/200 | 0.9386743903160095 | 0.7614541053771973 |
| 12/200 | 0.96055225610733 | 0.7792538404464722 |
| 13/200 | 0.9134297668933868 | 0.792992115020752 |
| 14/200 | 0.8851655125617981 | 0.7628173232078552 |
| 15/200 | 0.9505723416805267 | 0.7851851582527161 |
| 16/200 | 0.92226842045784 | 0.769191563129425 |
| 17/200 | 0.8982412815093994 | 0.768597722053278 |
| 18/200 | 0.9125983119010925 | 0.7730982899665833 |
| 19/200 | 0.9367325305938721 | 0.7837406396865845 |
| 20/200 | 0.9531015455722809 | 0.7827053070068359 |
| 21/200 | 0.9306998252868652 | 0.76667914032936096 |
| 22/200 | 0.8887360095977783 | 0.7845874428749084 |
| 23/200 | 0.9426513016223907 | 0.746765673160553 |
| 24/200 | 0.9331325888633728 | 0.761589765548706 |
| 25/200 | 0.9080778360366821 | 0.7709233164787292 |
| 26/200 | 0.9232879281044006 | 0.7773635387420654 |
| 27/200 | 0.9102294743061066 | 0.7809370756149292 |
| 28/200 | 0.9312145709991455 | 0.7647197246551514 |
| 29/200 | 0.9415165781974792 | 0.7561923861503601 |
| 30/200 | 0.930676281452179 | 0.7709008455276489 |
| 31/200 | 0.9495892226696014 | 0.7595088481903076 |


```


In [33]: synthetic_data = generator.predict(np.random.normal(0,1,(150,100)),verbose=0)
plt.figure(figsize=(12,8))
plot_idx1

for i in range(4):
    for j in range(i+1,4):
        plt.subplot(2,2,plot_idx1)
        plt.scatter(x_train[:,i],x_train[:,j],label='Real Data',c='blue',marker='o',s=30)
        plt.scatter(synthetic_data[:,i],synthetic_data[:,j],label='Synthetic Data',c='red',marker='x',s=30)
        plt.xlabel(f'Feature{i+1}')
        plt.ylabel(f'Feature{j+1}')
        plt.legend()
        plot_idx1+=1

plt.tight_layout()
plt.show()

```

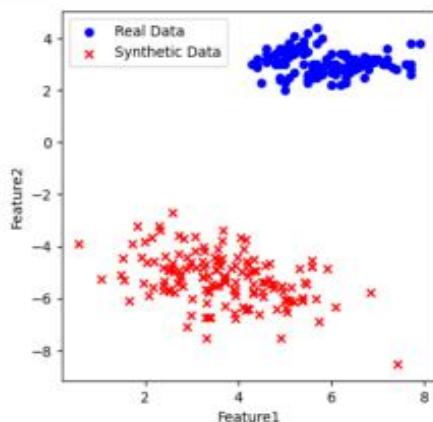

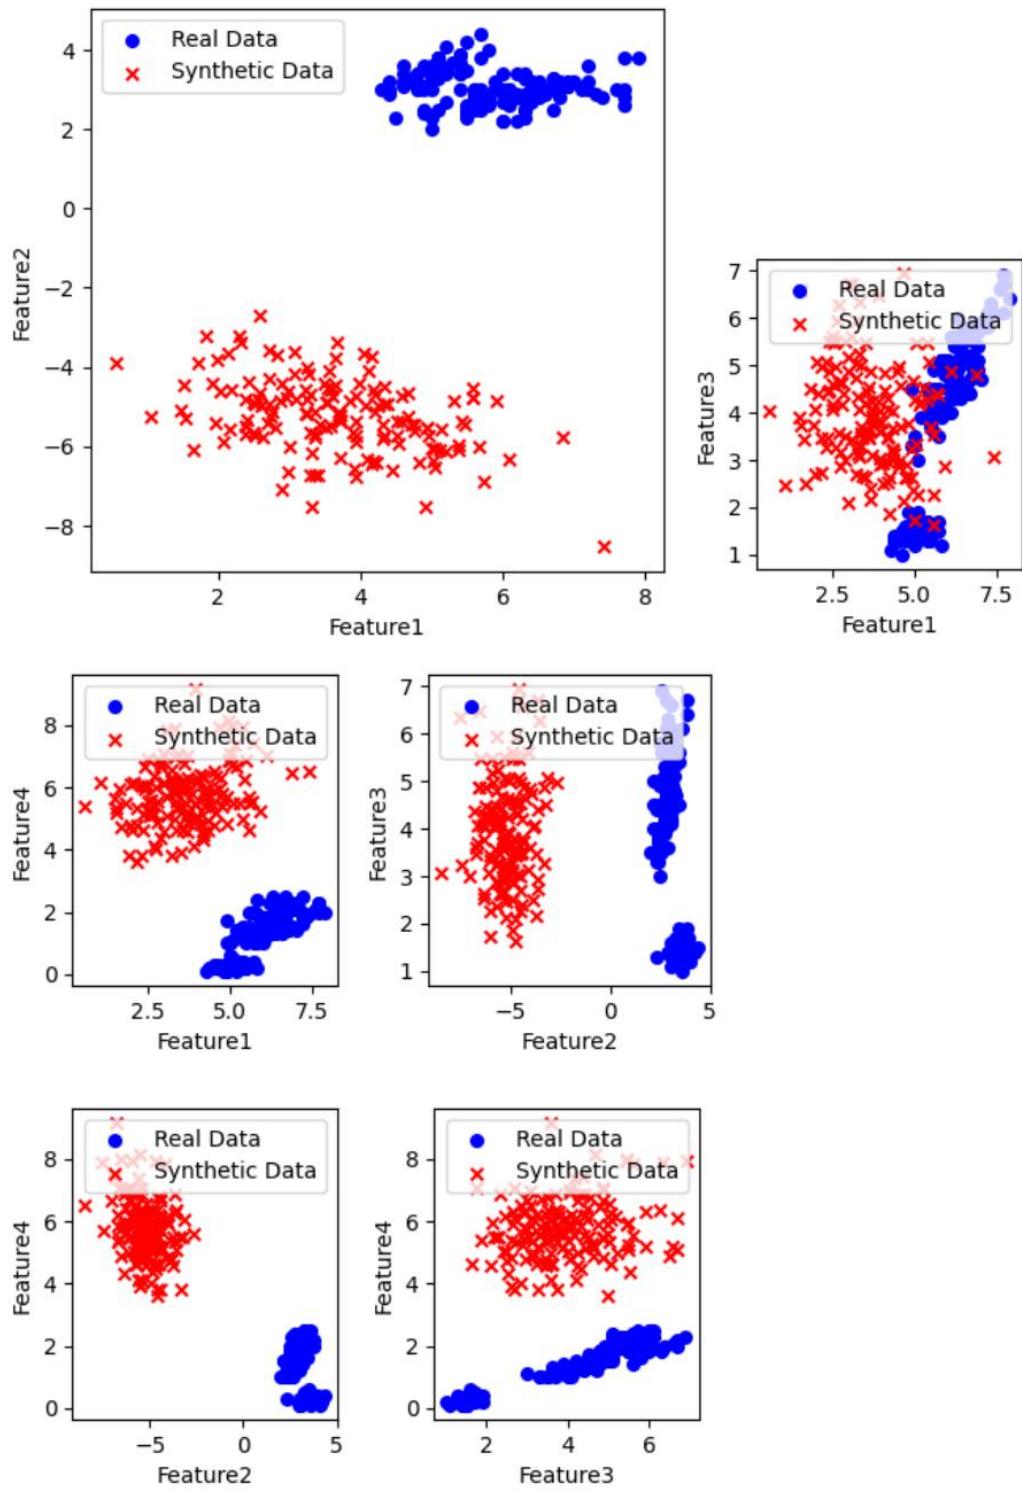

Result

Thus, a generative adversarial neural network using Keras / Tensorflow has been implemented successfully.

Ex No: 10

MINI PROJECT

FloraSight

Aim:

To develop an intelligent flower recognition system using Convolutional Neural Networks (CNN) that can accurately classify different flower species from images and provide detailed botanical information such as common name, botanical name, family, type, and uses from an integrated botanical database.

Code:

```
import os
import cv2
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
from sklearn.model_selection import train_test_split
from tensorflow.keras.utils import to_categorical
from tensorflow.keras.models import Sequential, load_model
from tensorflow.keras.layers import Conv2D, MaxPooling2D, Flatten,
Dense, Dropout
from tensorflow.keras.preprocessing.image import ImageDataGenerator
data_dir = r"C:\Users\kavi0\Downloads\archive (3)\flowers"
img_size = 128
X, y = [], []
labels = os.listdir(data_dir)
for idx, label in enumerate(labels):
    folder = os.path.join(data_dir, label)
    for file in os.listdir(folder):
        path = os.path.join(folder, file)
        try:
            img = cv2.imread(path)
```

```
    img = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)
    img = cv2.resize(img, (img_size, img_size))
    X.append(img)
    y.append(idx)

except:
    pass

X = np.array(X) / 255.0
y = to_categorical(y, num_classes=len(labels))
print(" ✅ Dataset loaded successfully!")
print("Total images:", X.shape[0])
print("Classes:", labels)
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.2, random_state=42)
datagen = ImageDataGenerator(rotation_range=25,
                             width_shift_range=0.1,
                             height_shift_range=0.1,
                             shear_range=0.2,
                             zoom_range=0.2,
                             horizontal_flip=True)

model = Sequential([
    Conv2D(32, (3, 3), activation='relu', input_shape=(img_size, img_size, 3)),
    MaxPooling2D(2, 2),
    Conv2D(64, (3, 3), activation='relu'),
    MaxPooling2D(2, 2),
```

```
Conv2D(128, (3, 3), activation='relu'),  
MaxPooling2D(2, 2),  
  
Flatten(),  
Dense(256, activation='relu'),  
Dropout(0.5),  
Dense(len(labels), activation='softmax')  
])  
model.compile(optimizer='adam', loss='categorical_crossentropy',  
metrics=['accuracy'])  
model.summary()  
history = model.fit(datagen.flow(X_train, y_train, batch_size=32),  
                     epochs=15,  
                     validation_data=(X_test, y_test))  
loss, acc = model.evaluate(X_test, y_test)  
print(f" ✅ Model Accuracy: {acc*100:.2f}%")  
plt.figure(figsize=(8, 4))  
plt.plot(history.history['accuracy'], label='Train')  
plt.plot(history.history['val_accuracy'], label='Validation')  
plt.title('Training Accuracy')  
plt.legend()  
plt.show()  
model.save("plant_name_detector.h5")  
print(" ✅ Model saved as plant_name_detector.h5")  
def predict_image(img_path):
```

```
img = cv2.imread(img_path)
if img is None:
    print(f"⚠️ Image not found at: {img_path}")
    return

img = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)
img = cv2.resize(img, (img_size, img_size))
img = np.expand_dims(img, axis=0) / 255.0

prediction = np.argmax(model.predict(img))
print("🌿 Predicted Plant:", labels[prediction])

plt.imshow(cv2.cvtColor(cv2.imread(img_path),
cv2.COLOR_BGR2RGB))
plt.title(f"Predicted: {labels[prediction]}")
plt.axis('off')
plt.show()

# ✅ Now call the function like this:
predict_image(r"C:\Users\kavi0\Downloads\lily.jpeg")
```

Output:

```
✓ Dataset loaded successfully!
Total images: 15740
Classes: ['astilbe', 'bellflower', 'black_eyed_susan', 'calendula', 'california_poppy', 'carnation', 'common_daisy', 'coreopsis',
```

```
✓ Dataset split into training and testing sets.
Training set size: 12592
Testing set size: 3148
```

Model: "sequential"

| Layer (type) | Output Shape | Param # |
|---------------------------------|----------------------|---------|
| conv2d (Conv2D) | (None, 126, 126, 32) | 896 |
| max_pooling2d (MaxPooling2D) | (None, 63, 63, 32) | 0 |
| conv2d_1 (Conv2D) | (None, 61, 61, 64) | 18496 |
| max_pooling2d_1 (MaxPooling 2D) | (None, 30, 30, 64) | 0 |
| conv2d_2 (Conv2D) | (None, 28, 28, 128) | 73856 |
| max_pooling2d_2 (MaxPooling 2D) | (None, 14, 14, 128) | 0 |
| flatten (Flatten) | (None, 25088) | 0 |
| dense (Dense) | (None, 256) | 6422784 |
| dropout (Dropout) | (None, 256) | 0 |
| ... | | |
| Total params: | 6,520,144 | |
| Trainable params: | 6,520,144 | |
| Non-trainable params: | 0 | |

Output is truncated. View as a [scrollable element](#) or open in a [text editor](#). Adjust cell output [settings](#)...

Model loaded successfully!

99/99 [=====] - 15s 119ms/step - loss: 0.7434 - accuracy: 0.7503


Model Accuracy on Test Set: 75.03%

```
→ Epoch 1/10
192/192 4s 14ms/step - accuracy: 0.8076 - loss: 0.6957 - val_accuracy: 0.9515 - val_loss: 0.1733
Epoch 2/10
192/192 5s 16ms/step - accuracy: 0.9543 - loss: 0.1573 - val_accuracy: 0.9636 - val_loss: 0.1233
Epoch 3/10
192/192 3s 15ms/step - accuracy: 0.9715 - loss: 0.0995 - val_accuracy: 0.9691 - val_loss: 0.0998
Epoch 4/10
192/192 5s 13ms/step - accuracy: 0.9802 - loss: 0.0669 - val_accuracy: 0.9732 - val_loss: 0.0910
Epoch 5/10
192/192 3s 13ms/step - accuracy: 0.9864 - loss: 0.0494 - val_accuracy: 0.9748 - val_loss: 0.0867
Epoch 6/10
192/192 4s 19ms/step - accuracy: 0.9881 - loss: 0.0410 - val_accuracy: 0.9736 - val_loss: 0.0861
Epoch 7/10
192/192 4s 13ms/step - accuracy: 0.9914 - loss: 0.0298 - val_accuracy: 0.9737 - val_loss: 0.0871
Epoch 8/10
192/192 2s 13ms/step - accuracy: 0.9942 - loss: 0.0223 - val_accuracy: 0.9744 - val_loss: 0.0852
Epoch 9/10
192/192 2s 13ms/step - accuracy: 0.9956 - loss: 0.0181 - val_accuracy: 0.9755 - val_loss: 0.0862
Epoch 10/10
192/192 3s 18ms/step - accuracy: 0.9963 - loss: 0.0146 - val_accuracy: 0.9760 - val_loss: 0.0867
<keras.src.callbacks.history.History at 0x79bec29966d0>
```

```
predict_image_explain(r"C:\Users\kavi0\Downloads\archive (3)\flowers\coreopsis\152836377_a990f2023f_c.jpg")
```

1.3s

```
1/1 [=====] - 0s 60ms/step
1/1 [=====] - 0s 76ms/step
```

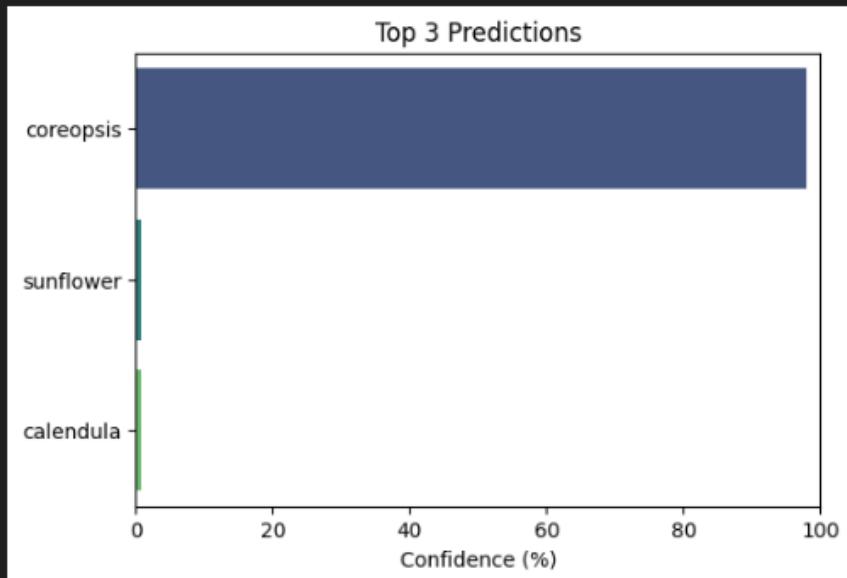

```
model.save("plant_name_detector.h5")
print("✓ Model saved as plant_name_detector.h5")
```

✓ 0.4s

✓ Model saved as plant_name_detector.h5

✿ Predicted Flower: coreopsis (97.92%)

■ Botanical Information:

Common Name: coreopsis

Botanical Name: Coreopsis lanceolata

Family: Asteraceae


Type: Perennial

Uses / Significance: Ornamental plant; attracts pollinators; symbolizes cheerfulness.

Predicted: coreopsis (97.92%)



Grad-CAM Overlay

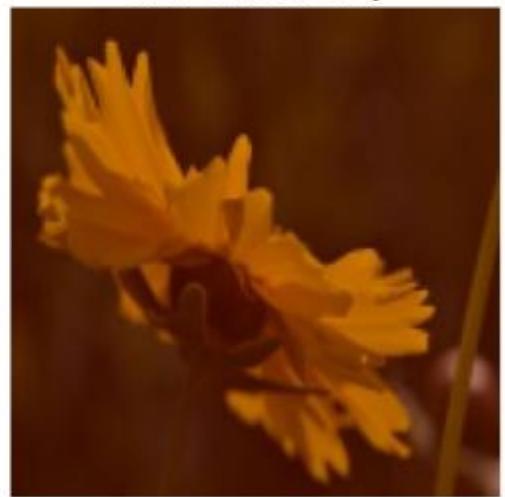

Result:

Thus, an Deep Learning Model to identify different flower has been implemented and output is verified successfully