Exp. - 13

PING Program using Socket

Aim:

To implement a simple -ping program using socket programming to check the connectivity between the sources and destination hosts.

ALGORITHM:

1. Start the program.
2. Get the destination IP address from the users.
3. Create a raw socket
4. construct an ICMP echo request packet.
5. Send the packet for an ICMP echo replay
6. If a reply is recieved - display reply recieved
7. If no reply is recieved within the timeout
8. display request timedout.
9. Stop the program.

Code:

```
import socket
import struct
import time
host = input ("Enter IP address")
s= socket.socket( Socket.AF_time; Socket, SOCK_RAN,
                                    Socket, IPRATO ICMP)
s. settlement (e)
Packet = Struct pack ("!BBHH", 8, 8, 8, 1>1)
s. send to (packet, (host, 0))
try:
    date, add = s. recfrom(1024)
    Print ("Reply recieved form", addr[0])
except socket. timeout:
    Print ("Request timed out")
s. close ()
```

Aim:

To implement

Programming

sources and

ALGORITHM.

1. Start

2. Get

3. Create

4. Construct

5. Send


6. If a

7. If

8. display

9. S

Code:

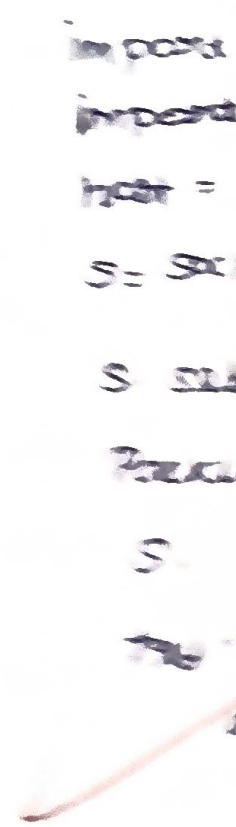

Result:

Thus the ping program was successfully implemented using socket programming and the connectivity between the source and destination.