

AKTIVITAS MANDIRI 3 — Membuat Layout Master & Halaman-Halaman

1. Buat layout master: resources/views/layouts/app.blade.php dengan navbar, main content area (@yield('content')), dan footer

```
<!DOCTYPE html>
<html lang="id">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width,
initial-scale=1.0">
    <title>@yield('title', 'Jokss Cihuyy')</title>
    <link rel="stylesheet" href="{{ asset('css/style.css') }}">
    @stack('styles')
</head>
<body>
    @include('partials.navbar')

    @if(session('success'))
        <div class="alert-success" style="padding: 15px; background:
#d4af37; color: #000; text-align: center;">
            {{ session('success') }}
        </div>
    @endif

    <main>
        @yield('content')
    </main>

    <footer class="footer">
        <div class="footer-col">
            <h4>Jokss Santuy Cihuyy</h4>
            <p>Layanan joki MLBB paling aman, cepat, dan terpercaya
sejak 2026.</p>
        </div>
    </footer>

    @stack('scripts')
</body>
</html>
```

2. Buat partial: resources/views/partials/navbar.blade.php dan sisipkan dengan @include di layout

```

<nav class="navbar">
    <div class="logo">Jokss Cihuyy</div>
    <ul class="nav-links">
        <li><a href="/">Beranda</a></li>
        <li><a href="/order-rank">Layanan</a></li>
        <li><a href="/pengelolaan">Admin Panel</a></li>
    </ul>
    <div>Masuk / Daftar</div>
</nav>

```

3. Buat halaman dashboard: resources/views/dashboard.blade.php yang @extends('layouts.app')

```

@extends('layouts.app')

@section('title', 'Jokss Santuy Cihuyy - Manajemen Joki MLBB')

@section('content')
    <section class="hero">
        <div class="hero-content">
            <h1>Joki Mobile Legends Terpercaya</h1>
            <p>Push rank MLBB lebih santuy, biar kami yang urus sisanya!</p>
        </div>
    </section>

    <div class="container layout-wrapper">

        <aside class="sidebar">
            <h3>Kategori Joki</h3>
            <label class="custom-checkbox">
                <input type="checkbox" class="filter-chk" value="Joki Rank">
                <span class="checkmark"></span>
                Joki Rank
            </label>
            <label class="custom-checkbox">
                <input type="checkbox" class="filter-chk" value="Joki Hero">
                <span class="checkmark"></span>
                Joki Hero
            </label>
            <label class="custom-checkbox">

```

```

        <input type="checkbox" class="filter-chk" value="Joki
Gendong">
        <span class="checkmark"></span>
        Joki Gendong
    </label>
</aside>

<select id="kategori-filter" class="search-input">
    <option value="">Pilih Kategori...</option>
    <option value="Joki Rank">Joki Rank</option>
    <option value="Joki Hero">Joki Hero</option>
    <option value="Joki Gendong">Joki Gendong</option>
</select>

<main class="main-content">

    <form class="search-form"
onsubmit="event.preventDefault()">
        <input type="text" id="search-input" placeholder="Cari
paket joki (misal: Mythic atau ML-01)..." class="search-input">
    </form>

    <div class="card form-card">
        <h3 style="margin-bottom: 15px; color: #e94560;">⚙️
Kelola Paket Joki MLBB (Admin)</h3>

        <form id="form-joki" class="form-grid" method="POST"
action="/simpan-paket">
            @csrf

            <input type="text" id="kode" name="kode"
placeholder="Kode (cth: ML-01)" class="search-input">
            <input type="text" id="nama" name="nama"
placeholder="Nama Paket (cth: Epic-Mythic)" class="search-input">
            <select id="kategori" name="kategori"
class="search-input">
                <option value="Mobile Legends" selected>Mobile
Legends</option>
            </select>
            <input type="number" id="stok" name="stok"
placeholder="Sisa Slot Pengerjaan" class="search-input">
            <input type="number" id="harga" name="harga"
placeholder="Harga (Rp)" class="search-input">

```

```

        <input type="date" id="tanggal" name="tanggal"
class="search-input">

        <div style="grid-column: 1 / -1;">
            <span id="error-msg" class="error-msg">Semua
kolom wajib diisi ya jir!</span>
        </div>
        <button type="submit" id="btn-submit"
class="btn-order" style="grid-column: 1 / -1;">Simpan Paket
Baru</button>
    </form>
</div>

<div class="stats-container">
    <div class="stat-box">Total Paket: <br><span
id="stat-total" class="stat-value">0</span></div>
    <div class="stat-box">Potensi Pendapatan: <br><span
class="stat-value">Rp <span id="stat-nilai">0</span></span></div>
    <div class="stat-box">Slot Menipis (<5>): <br><span
id="stat-menipis" class="stat-value" style="color: red;">0</span></div>
</div>

<h3 class="table-title">Daftar Harga & Slot Tersedia</h3>
<div class="table-responsive">
    <table class="data-table">
        <thead>
            <tr>
                <th>Kode</th>
                <th>Paket Joki</th>
                <th>Kategori Game</th>
                <th>Slot</th>
                <th>Harga</th>
                <th>Tgl Update</th>
                <th style="text-align: center;">Aksi</th>
            </tr>
        </thead>
        <tbody id="table-body">
        </tbody>
    </table>
</div>

</main>
</div>

```

```
@endsection

@push('scripts')
    <script src="{{ asset('js/script.js') }}"></script>
@endpush
```

4. Tampilkan flash session message di layout: @if(session('success')) ... @endif

```
@if(session('success'))
    <div class="alert-success" style="padding: 15px; background:
#d4af37; color: #000; text-align: center;">
        {{ session('success') }}
    </div>
@endif
```

5. Buat komponen: resources/views/components/stat-card.blade.php (kartu statistik dengan props: judul, nilai, ikon, warna)

```
<div class="stat-box" style="border-left: 4px solid {{ $warna ??
'#1a1a2e' }}">
    {{ $judul }}: <br>
    <span class="stat-value" style="color: {{ $warna ?? '#e94560' }}">
        {{ $ikon ?? '' }} {{ $nilai }}
    </span>
</div>
```

6. Gunakan @forelse di dashboard untuk loop array data dummy (jumlah mahasiswa, mata kuliah, dll)

```
<?php

namespace App\Http\Controllers;
use Illuminate\Http\Request;

class DashboardController extends Controller
{
    public function index()
    {
        $paketJoki = [
            ['kode' => 'ML-01', 'nama' => 'Epic ke Mythic', 'kategori'
=> 'Joki Rank', 'slot' => 5, 'harga' => 150000, 'tanggal' =>
'2026-05-01'],
            ['kode' => 'ML-02', 'nama' => 'Push Supreme Ling',
'kategori' => 'Joki Hero', 'slot' => 2, 'harga' => 300000, 'tanggal' =>
'2026-05-03'],
```

```

        ['kode' => 'ML-03', 'nama' => 'Mabar 10 Bintang',
'kategori' => 'Joki Gendong', 'slot' => 0, 'harga' => 90000, 'tanggal'
=> '2026-05-05'],
        ];

        return view('dashboard', compact('paketJoki'));
    }

    public function orderRank()
    {
        return view('order');
    }

    public function orderHero()
    {
        return view('order-hero');
    }

    public function orderGendong()
    {
        return view('order-gendong');
    }
}

```

7. Buat halaman 'Tentang' dan 'Kontak' yang @extends layout yang sama 'Tentang'

```

@extends('layouts.app')

@section('title', 'Tentang Kami - Jokss Cihuyy')

@section('content')
<div class="container" style="min-height: 50vh; margin-top: 80px;">
    <div class="content-box">
        <div class="box-header">Tentang Jokss Santuy Cihuyy</div>
        <div class="box-body">
            <p>Jokss Santuy Cihuyy adalah platform penyedia layanan
joki Mobile Legends yang berdiri untuk membantu para player keluar dari
zona merah Epic dan Legends.</p>
        </div>
    </div>
</div>
@endsection

```

'Kontak'

```
@extends('layouts.app')

@section('title', 'Kontak - Jokss Cihuyy')

@section('content')
<div class="container" style="min-height: 50vh; margin-top: 80px;">
  <div class="content-box">
    <div class="box-header">Hubungi Kami</div>
    <div class="box-body">
      <p>Ada kendala soal orderan joki? Hubungi admin kami</p>
      <ul>
        <li>WhatsApp: 0812-3456-7890</li>
        <li>Email: admin@joksscihuyy.com</li>
      </ul>
    </div>
  </div>
</div>
@endsection
```

8. Gunakan `@push('scripts')` dan `@stack('scripts')` untuk menambahkan JavaScript spesifik per halaman


```
</div>
</footer>

@stack('scripts')
</body>
</html>
```

```
95 | </div>
96 | @endsection
97 |
98 | @push('scripts')
99 |   <script src="{ asset('js/script.js') }"></script>
100 | @endpush
```

🧑‍🎓 AKTIVITAS MANDIRI 4 — Migration, Model & Seeder

1. Buat Model dan Migration sekaligus: php artisan make:model Mahasiswa -m

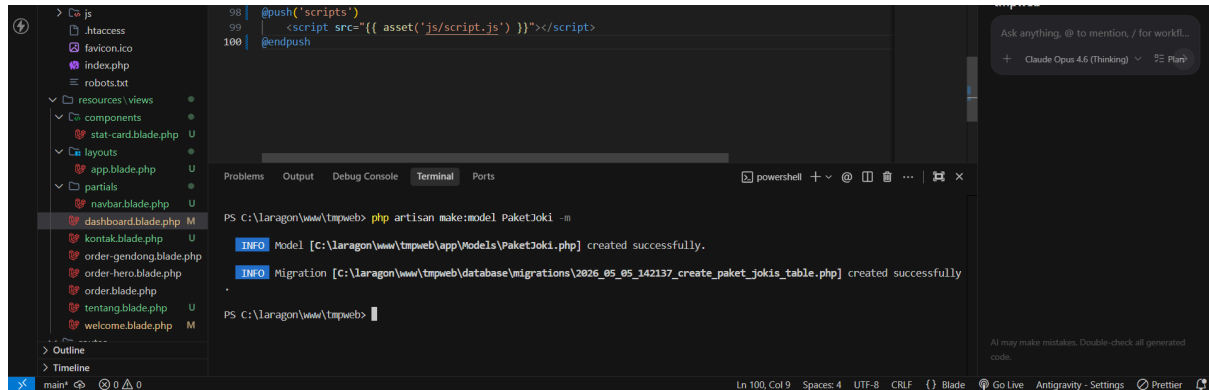


The screenshot shows the VS Code interface with the file explorer on the left displaying the project structure. The main editor shows the terminal output of the command `php artisan make:model PaketJoki -m`. The output indicates that the model `PaketJoki.php` and the migration `2026_05_05_142137_create_paket_jokis_table.php` were created successfully.

```
PS C:\laragon\www\tmpweb> php artisan make:model PaketJoki -m

INFO Model [C:\laragon\www\tmpweb\app\Models\PaketJoki.php] created successfully.
INFO Migration [C:\laragon\www\tmpweb\database\migrations\2026_05_05_142137_create_paket_jokis_table.php] created successfully

PS C:\laragon\www\tmpweb>
```


2. Edit file migration: tambahkan kolom nim, nama, email, jurusan (enum), ipk (decimal), semester, aktif (boolean), foto (nullable)

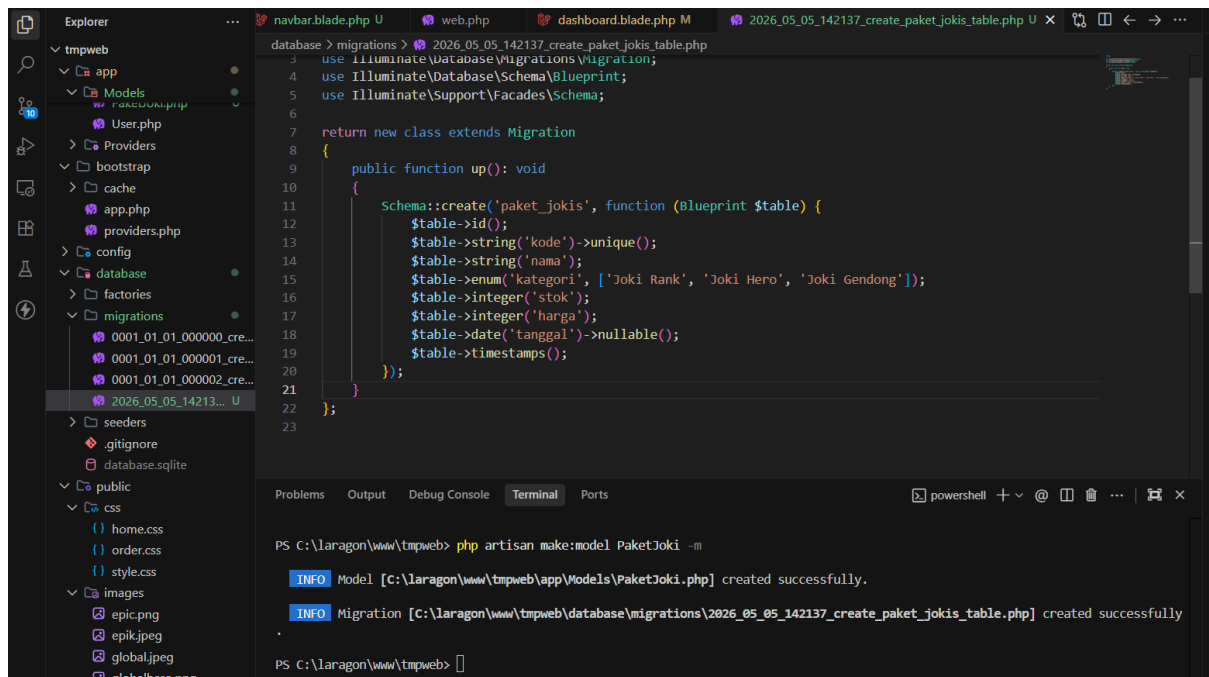

The screenshot shows the VS Code interface with the file explorer on the left. The main editor shows the migration file `2026_05_05_142137_create_paket_jokis_table.php` being edited. The code defines the schema for the `paket_jokis` table, including columns for `id`, `kode`, `nama`, `kategori` (enum), `stok`, `harga`, `tanggal`, and `timestamps`.

```
database > migrations > 2026_05_05_142137_create_paket_jokis_table.php
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9     public function up(): void
10     {
11         Schema::create('paket_jokis', function (Blueprint $table) {
12             $table->id();
13             $table->string('kode')->unique();
14             $table->string('nama');
15             $table->enum('kategori', ['Joki Rank', 'Joki Hero', 'Joki Gendong']);
16             $table->integer('stok');
17             $table->integer('harga');
18             $table->date('tanggal')->nullable();
19             $table->timestamps();
20         });
21     }
22 };
23
```

3. Jalankan migration: php artisan migrate — cek di phpMyAdmin bahwa tabel sudah terbuat

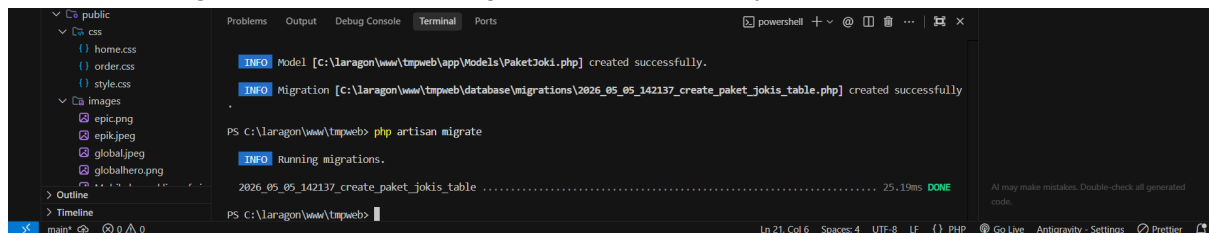

The screenshot shows the VS Code interface with the file explorer on the left. The main editor shows the terminal output of the command `php artisan migrate`. The output indicates that the migration `2026_05_05_142137_create_paket_jokis_table.php` was run successfully.

```
PS C:\laragon\www\tmpweb> php artisan migrate

INFO Model [C:\laragon\www\tmpweb\app\Models\PaketJoki.php] created successfully.
INFO Migration [C:\laragon\www\tmpweb\database\migrations\2026_05_05_142137_create_paket_jokis_table.php] created successfully

PS C:\laragon\www\tmpweb> php artisan migrate

INFO Running migrations.

2026_05_05_142137_create_paket_jokis_table ..... 25.19ms DONE

PS C:\laragon\www\tmpweb>
```

4. Edit Model Mahasiswa: isi \$fillable, tambahkan \$casts, dan buat local scope scopeAktif()



The screenshot shows the VS Code interface with the file explorer on the left. The main editor shows the model file `PaketJoki.php` being edited. The code defines the `PaketJoki` model, including the `$fillable` property, the `$casts` property, and the `scopeAktif()` method.

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class PaketJoki extends Model
{
    use HasFactory;

    protected $fillable = [
        'kode',
        'nama',
        'kategori',
        'stok',
        'harga',
        'tanggal',
    ];

    protected $casts = [
        'kategori' => 'string',
    ];

    public function scopeAktif($query)
    {
        return $query->where('aktif', true);
    }
}
```



```

class PaketJoki extends Model
{
    use HasFactory;

    protected $fillable = ['kode', 'nama', 'kategori', 'stok', 'harga',
'tanggal'];

    protected $casts = [
        'tanggal' => 'date',
    ];

    public function scopeTersedia($query)
    {
        return $query->where('stok', '>', 0);
    }
}

```

5. Buat seeder: php artisan make:seeder MahasiswaSeeder — isi dengan 5-10 data dummy

```

<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;
use App\Models\PaketJoki;

class PaketJokiSeeder extends Seeder
{
    public function run()
    {
        PaketJoki::create(['kode' => 'ML-01', 'nama' => 'Epic ke
Mythic', 'kategori' => 'Joki Rank', 'stok' => 5, 'harga' => 150000,
'tanggal' => '2026-05-01']);
        PaketJoki::create(['kode' => 'ML-02', 'nama' => 'Push Supreme
Ling', 'kategori' => 'Joki Hero', 'stok' => 2, 'harga' => 300000,
'tanggal' => '2026-05-03']);
        PaketJoki::create(['kode' => 'ML-03', 'nama' => 'Mabar 10
Bintang', 'kategori' => 'Joki Gendong', 'stok' => 0, 'harga' => 90000,
'tanggal' => '2026-05-05']);
    }
}

```

6. Daftarkan seeder di DatabaseSeeder.php dan jalankan: php artisan db:seed

```

<?php

```

```

namespace Database\Seeders;

use App\Models\User;
use Illuminate\Database\Seeder;

class DatabaseSeeder extends Seeder
{
    public function run(): void
    {
        $this->call(PaketJokiSeeder::class);
    }
}

```

```

PS C:\laragon\www\tmpweb> php artisan make:seeder PaketJokiSeeder

INFO Seeder [c:\laragon\www\tmpweb\database\seeders\PaketJokiSeeder.php] created successfully.

PS C:\laragon\www\tmpweb> php artisan db:seed

INFO Seeding database.

Database\Seeders\PaketJokiSeeder ..... RUNNING
Database\Seeders\PaketJokiSeeder ..... 53 ms DONE

```

7. Buka php artisan tinker dan coba query: Mahasiswa::all(),
Mahasiswa::where('jurusan','SI')->get(), Mahasiswa::avg('ipk')

```

PS C:\laragon\www\tmpweb> php artisan tinker

Psy Shell v0.12.22 (PHP 8.3.30 - cli) by Justin Hileman

```

> App\Models\PaketJoki::all();

= Illuminate\Database\Eloquent\Collection {#8068}

all: [

App\Models\PaketJoki {#8065}

id: 1,

kode: "ML-01",

nama: "Epic ke Mythic",

kategori: "Joki Rank",

stok: 5,

harga: 150000,

tanggal: "2026-05-01 00:00:00",

created_at: "2026-05-05 14:27:24",

updated_at: "2026-05-05 14:27:24",

},

App\Models\PaketJoki {#8064}

id: 2,

```

      kode: "ML-02",
      nama: "Push Supreme Ling",
      kategori: "Joki Hero",
      stok: 2,
      harga: 300000,
      tanggal: "2026-05-03 00:00:00",
      created_at: "2026-05-05 14:27:24",
      updated_at: "2026-05-05 14:27:24",
    },
    App\Models\PaketJoki {#8067
      id: 3,
      kode: "ML-03",
      nama: "Mabar 10 Bintang",
      kategori: "Joki Gendong",
      stok: 0,
      harga: 90000,
      tanggal: "2026-05-05 00:00:00",
      created_at: "2026-05-05 14:27:24",
      updated_at: "2026-05-05 14:27:24",
    },
  ],
}

```

```
> App\Models\PaketJoki::where('kategori', 'Joki Rank')->get();
```

```

= Illuminate\Database\Eloquent\Collection {#7370
  all: [
    App\Models\PaketJoki {#7374
      id: 1,
      kode: "ML-01",
      nama: "Epic ke Mythic",
      kategori: "Joki Rank",
      stok: 5,
      harga: 150000,
      tanggal: "2026-05-01 00:00:00",
      created_at: "2026-05-05 14:27:24",
      updated_at: "2026-05-05 14:27:24",
    },
  ],
}

```

```
> App\Models\PaketJoki::avg('harga');
```

```
= 180000.0
```

8. Coba buat relasi: buat tabel mata_kuliahs dan tabel pivot krs, lalu definisikan relasi belongsToMany di Model

The image shows a development environment with a file explorer, a code editor, and a terminal. The file explorer on the left shows the project structure, including folders like 'seeder', 'public', 'css', and 'database'. The code editor in the center shows the migration file '2026_05_05_143031_create_metode_paket_table.php' with the following code:

```
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    public function up(): void
    {
        Schema::create('metode_paket', function (Blueprint $table) {
            $table->id();
            $table->foreignId('paket_joki_id')->constrained()->onDelete('cascade');
            $table->foreignId('metode_pembayaran_id')->constrained()->onDelete('cascade');
            $table->timestamps();
        });
    }
};
```

The terminal at the bottom shows the commands and output for creating the migration and running it:

```
PS C:\laragon\www\tmpweb> php artisan make:migration create_metode_paket_table
INFO: Migration [C:\laragon\www\tmpweb\database\Migrations\2026_05_05_143031_create_metode_paket_table.php] created successfully.

PS C:\laragon\www\tmpweb> php artisan migrate
INFO: Running migrations.

2026_05_05_143031_create_metode_pembayaran_table ..... 17.28ms DONE
2026_05_05_143031_create_metode_paket_table ..... 14.20ms DONE
```

The code editor also shows the 'MetodePembayaran' model with the following code:

```
public function scopePaket($query)
{
    return $query->where('stok', '>', 0);
}

public function metodePembayaran()
{
    return $this->belongsToMany(MetodePembayaran::class, 'metode_paket');
}
```