

create e-r diagram for previous scenario

TODAY WE WILL ADD NEW MODULES

we need to create Login module

inside Models folder add `LoginModel`

```
public class LoginModel
{
    public int id { get; set; }

    public string ?username { get; set; }

    public string ?password { get; set; }
}
```

inside Inside table create logintab

CREATE TABLE logintab

```
(
    Id INT PRIMARY KEY IDENTITY(1,1),
    Username NVARCHAR(50),
    Password NVARCHAR(50)
);
```

ADD DATA INTO LOGINTAB TABLE

for admin

INSERT INTO logintab VALUES('admin','12345');

for student

INSERT INTO logintab VALUES('mycodingproject','myc546');

for Librarian

INSERT INTO logintab VALUES('my','myc');

CHECK THE DATA FOR logintab TABLE

100 %
No issues found

ResultsMessages

	Id	Username	Password
1	1	admin	12345
2	3	mycodingproject	myc546

we will do for dashboard

Model folder add `DashboardModel`

```
public class DashboardModel
{
    public int TotalStudents { get; set; }
    public int TotalBooks { get; set; }
    public int TotalLibrarians { get; set; }
}
```

we will do for librarian model

inside Model folder add LibrarianModel

```
public class LibrarianModel
{
    public int LibrarianId { get; set; }
    public string ?Name { get; set; }
    public int Age { get; set; }
    public string ?Phone { get; set; }
}
```

ADD DATA INTO Librarians TABLE

```
INSERT INTO librarians (Name, Age, Phone)
VALUES
('Sarah Connor', 34, '555-0201'),
('John Doe', 28, '555-0202'), (
'Michael Scott', 45, '555-0203'),
('Ellen Ripley', 39, '555-0204'),
('James Bond', 40, '555-0205');
```

inside Model folder add StudentModel

```
public class StudentModel
{
    public int StudentId { get; set; }
    public string ?StudentName { get; set; }
    public string ?Email { get; set; }
    public string ?Phone { get; set; }
}
```

ADD DATA INTO STUDENT TABLE

```
INSERT INTO students (Student_Name, Gender, Email, Phone_Number, Address)
VALUES
('Alice Johnson', 'Female', 'alice.j@email.com', '555-0101', '123 Maple Street'),
('Bob Smith', 'Male', 'bob.smith@email.com', '555-0102', '456 Oak Avenue'),
('Charlie Brown', 'Male', 'charlie.b@email.com', '555-0103', '789 Pine Road'),
('Diana Prince', 'Female', 'diana.p@email.com', '555-0104', '101 Bay Drive'),
('Evan Wright', 'Male', 'evan.w@email.com', '555-0105', '202 Cedar Lane');
```

Login controller working

now create LoginController as empty controller in controller folder

initially will see login and student and dashboard controller then letter on next

```
using LMSysystem.Models;
using Microsoft.AspNetCore.Mvc;

namespace LMSysystem.Controllers
{
    public class LoginController : Controller
    {
        public IActionResult Index()
        {
            return View();
        }

        public List<LoginModel> PutValue()
        {
            var users = new List<LoginModel>
            {
                new LoginModel{id=1,username="admin",password="12345"},
                new LoginModel{id=2,username="mycodingproject",password="myc546"},

            };

            return users;
        }

        [HttpPost]
```

```

public IActionResult Verify(LoginModel usr)
{
    var u = PutValue();

    var ue = u.Where(u => u.username.Equals(usr.username));
    var up = ue.Where(p => p.password.Equals(usr.password));

    if (up.Count() == 1)
    {
        TempData["message"] = "Login Success";
        return RedirectToAction("Index", "Dashboard");
    }
    else
    {
        ViewBag.message = "Login Failed";
        return View("Index");
    }
}
}
}

```

then create Login view for same controller

login view




-----Index.cshtml-----

now do change in program.cs

```
app.MapControllerRoute(  
    name: "default",  
    pattern: "{controller=Login}/{action=Index}/{id?}");
```

```
app.Run();
```

now run the application

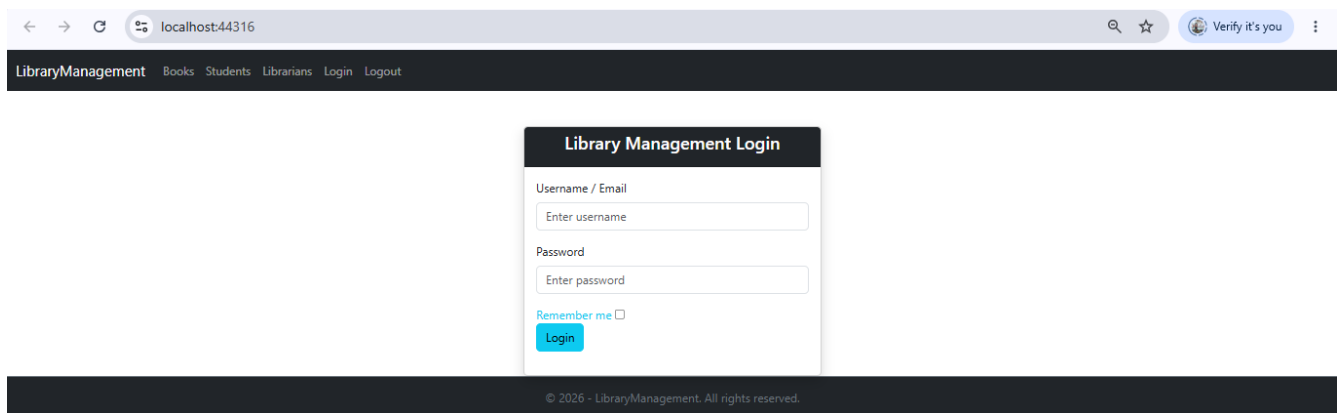


use login credential to see other pages

in this page validation is also applied

so put both values properly

correct username :- admin

password :- 12345



This localhost page can't be found

No webpage was found for the web address: <https://localhost:7209/Dashboard>

HTTP ERROR 404

Reload

code for layout page

kaha per hoga Shared folder

do the change in layout page

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>@ViewData["Title"] - LibraryManagement</title>
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css"
rel="stylesheet" />
  <link rel="stylesheet" href="~/css/site.css" />
</head>
<body>

  <header>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark">
    <div class="container-fluid">
```

```
<a class="navbar-brand" href="/">LibraryManagement</a>
<button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarNav">
    <span class="navbar-toggler-icon"></span>
</button>
<div class="collapse navbar-collapse" id="navbarNav">
    <ul class="navbar-nav">
        <li class="nav-item">
            <a class="nav-link" href="/Books/Index">Books</a>
        </li>
        <li class="nav-item">
            <a class="nav-link" href="/Student/Index">Students</a>
        </li>
        <li class="nav-item">
            <a class="nav-link" href="/Librarian/Index">Librarians</a>
        </li>
        <li class="nav-item">
            <a class="nav-link" href="/Login/Index">Login</a>
        </li>
        <li class="nav-item">
            <a class="nav-link" href="/Login">Logout</a>
        </li>
    </ul>
</div>
</nav>
</header>

<main>
```

```
<div class="container mt-4">
    @RenderBody()
</div>
</main>

<footer class="footer mt-auto py-3 bg-dark text-light border-top border-secondary">
    <div class="container text-center">
        <span class="text-secondary">&copy; @DateTime.Now.Year - LibraryManagement. All
rights reserved.</span>
    </div>
</footer>

<!-- jQuery -->
<script src="~/lib/jquery/dist/jquery.min.js"></script>
@RenderSection("Scripts", required: false)
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>

</body>
</html>
```



```

        StudentName = reader["Student_Name"].ToString(),
        Email = reader["Email"].ToString(),
        Phone = reader["Phone_Number"].ToString()
    });
}

return View(students);
}

public IActionResult Create()
{
    return View();
}

[HttpPost]
public IActionResult Create(StudentModel model)
{
    if (!ModelState.IsValid)
        return View(model);

    using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));

    var cmd = new SqlCommand("INSERT INTO Students (Student_Name, Email,
Phone_Number) VALUES (@Name, @Email, @Phone)", con);

    cmd.Parameters.AddWithValue("@Name", model.StudentName);
    cmd.Parameters.AddWithValue("@Email", model.Email);
    cmd.Parameters.AddWithValue("@Phone", model.Phone);

    con.Open();

    cmd.ExecuteNonQuery();

    return RedirectToAction("Index");
}

public IActionResult Edit(int id)
{
    StudentModel student = new();

```

```

        using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));

        var cmd = new SqlCommand("SELECT * FROM Students WHERE StudentId=@id", con);
        cmd.Parameters.AddWithValue("@id", id);

        con.Open();

        using var reader = cmd.ExecuteReader();

        if (reader.Read())
        {
            student.StudentId = (int)reader["StudentId"];
            student.StudentName = reader["Student_Name"].ToString();
            student.Email = reader["Email"].ToString();
            student.Phone = reader["Phone_Number"].ToString();
        }

        return View(student);
    }
}

```

[HttpPost]

```
public IActionResult Edit(StudentModel model)
```

```

{
    if (!ModelState.IsValid)
        return View(model);
}

```

```

        using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));

        var cmd = new SqlCommand("UPDATE Students SET Student_Name=@Name,
Email=@Email, Phone_Number=@Phone WHERE StudentId=@id", con);

        cmd.Parameters.AddWithValue("@Name", model.StudentName);
        cmd.Parameters.AddWithValue("@Email", model.Email);
        cmd.Parameters.AddWithValue("@Phone", model.Phone);
        cmd.Parameters.AddWithValue("@id", model.StudentId);

        con.Open();

        cmd.ExecuteNonQuery();


        return RedirectToAction("Index");
    }
}

```

```
public IActionResult Delete(int id)
{
    using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));
    var cmd = new SqlCommand("DELETE FROM Students WHERE StudentId=@id", con);
    cmd.Parameters.AddWithValue("@id", id);
    con.Open();
    cmd.ExecuteNonQuery();
    return RedirectToAction("Index");
}
}
```

NEXT VIEWS RELATED Students

student view

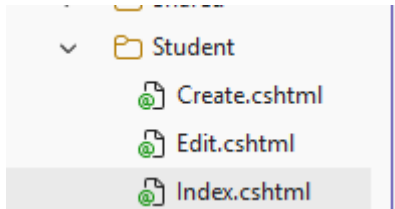

-----index.cshtml-----

```
@model List<LMSysstem.Models.StudentModel>
```

```
@{  
    ViewData["Title"] = "Students";  
}
```

```
<a class="btn btn-primary mt-3 ms-2" href="/Student/Create">Add New Student</a>
```

```
<table class="table table-bordered mt-3">  
    <thead>  
        <tr>  
            <th>StudentID</th> <!-- Add this line -->  
            <th>StudentName</th>  
            <th>Email</th>  
            <th>Phone</th>  
        </tr>  
    </thead>  
    <tbody>  
        @foreach (var item in Model)  
        {  
            <tr>  
                <td>@item.StudentId</td> <!-- Add this line -->  
                <td>@item.StudentName</td>  
                <td>@item.Email</td>  
                <td>@item.Phone</td>
```



```

        <td>

            <a class="btn btn-warning btn-sm"
href="/Student/Edit/@item.StudentId">Edit</a>

            <a class="btn btn-danger btn-sm"
href="/Student/Delete/@item.StudentId" onclick="return confirm('Are you sure?')">Delete</a>

        </td>

    </tr>

}

</tbody>

</table>

```

-----Create.cshtml-----

```

@model LMSysstem.Models.StudentModel
@{
    ViewData["Title"] = "Add Student";
}

<h2>Add Student</h2>

<form asp-action="Create" method="post" onsubmit="return validateForm();">
    <div class="mb-3">
        <label>StudentName</label>

        <input asp-for="StudentName" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Email</label>

        <input asp-for="Email" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Phone</label>

        <input asp-for="Phone" class="form-control" />
    </div>
    <button type="submit" class="btn btn-success">Add</button>

    <a asp-action="Index" class="btn btn-secondary">Cancel</a>
</form>

```

```

<script>
    function validateForm() {
        const studentname = document.querySelector('[name="StudentName"]').value.trim();
        const email = document.querySelector('[name="Email"]').value.trim();
        const phone = document.querySelector('[name="Phone"]').value.trim();

        if (!studentname || !email || !phone) {
            alert("All fields are required: StudentName, Email, and Phone.");
            return false; // prevent form submission
        }

        return true; //allow submission
    }
</script>

```

-----Edit.cshtml-----

```

@model LMSysstem.Models.StudentModel
@{
    ViewData["Title"] = "Edit StudentModel";
}
<h2>Edit Student</h2>

<form asp-action="Edit" method="post">
    <input type="hidden" asp-for="StudentId" />
    <div class="mb-3">
        <label>StudentName</label>
        <input asp-for="StudentName" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Email</label>
        <input asp-for="Email" class="form-control" />
    </div>

```

```
<div class="mb-3">
  <label>Phone</label>
  <input asp-for="Phone" class="form-control" />
</div>
<button type="submit" class="btn btn-primary">Update</button>
<a asp-action="Index" class="btn btn-secondary">Cancel</a>
</form>
```

done

now for LibrarianController code

```
using LMSysystem.Models;
using Microsoft.AspNetCore.Mvc;
using Microsoft.Data.SqlClient;

namespace LMSysystem.Controllers
{
    public class LibrarianController : Controller
    {
        private readonly IConfiguration _config;

        public LibrarianController(IConfiguration config)
        {
            _config = config;
        }

        public IActionResult Index()
        {
            var librarians = new List<LibrarianModel>();
            using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));
            var cmd = new SqlCommand("SELECT * FROM Librarians", con);
            con.Open();
            using var reader = cmd.ExecuteReader();
            while (reader.Read())
            {
                librarians.Add(new LibrarianModel
                {
                    LibrarianId = (int)reader["LibrarianId"],
                    Name = reader["Name"].ToString(),
                    Age = (int)reader["Age"],

                    Phone = reader["Phone"].ToString()
                });
            }
            return View(librarians);
        }

        public IActionResult Create()
        {
            return View();
        }
    }
}
```

```

[HttpPost]
public IActionResult Create(LibrarianModel model)
{
    if (!ModelState.IsValid)
        return View(model);

    using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));
    var cmd = new SqlCommand("INSERT INTO Librarians (Name, Age, Phone) VALUES
(@Name, @Age, @Phone)", con);
    cmd.Parameters.AddWithValue("@Name", model.Name);
    cmd.Parameters.AddWithValue("@Age", model.Age);
    cmd.Parameters.AddWithValue("@Phone", model.Phone);
    con.Open();
    cmd.ExecuteNonQuery();
    return RedirectToAction("Index");
}

public IActionResult Edit(int id)
{
    LibrarianModel librarian = new();
    using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));
    var cmd = new SqlCommand("SELECT * FROM Librarians WHERE LibrarianId=@id",
con);
    cmd.Parameters.AddWithValue("@id", id);
    con.Open();
    using var reader = cmd.ExecuteReader();
    if (reader.Read())
    {
        librarian.LibrarianId = (int)reader["LibrarianId"];
        librarian.Name = reader["Name"].ToString();
        librarian.Age = (int)reader["Age"];
        librarian.Phone = reader["Phone"].ToString();
    }
    return View(librarian);
}

[HttpPost]
public IActionResult Edit(LibrarianModel model)
{
    if (!ModelState.IsValid)
        return View(model);

    using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));

```

```

        var cmd = new SqlCommand("UPDATE Librarians SET Name=@Name, Age=@Age,
Phone=@Phone WHERE LibrarianId=@id", con);
        cmd.Parameters.AddWithValue("@Name", model.Name);
        cmd.Parameters.AddWithValue("@Age", model.Age);
        cmd.Parameters.AddWithValue("@Phone", model.Phone);
        cmd.Parameters.AddWithValue("@id", model.LibrarianId);
        con.Open();
        cmd.ExecuteNonQuery();
        return RedirectToAction("Index");
    }

    public IActionResult Delete(int id)
    {
        using var con = new
SqlConnection(_config.GetConnectionString("DefaultConnection"));
        var cmd = new SqlCommand("DELETE FROM Librarians WHERE LibrarianId=@id",
con);

        cmd.Parameters.AddWithValue("@id", id);
        con.Open();
        cmd.ExecuteNonQuery();
        return RedirectToAction("Index");
    }
}
}

```

views for Librarian

now for Librarian view code

now create Folder Librarian inside View Folder
add three views

```

-----Index.cshtml-----
@model List<LMSystem.Models.LibrarianModel>

@{
    ViewData["Title"] = "Librarians";
}

<a class="btn btn-primary mt-3 ms-2" href="/Librarian/Create">Add New Librarian</a>

<table class="table table-bordered mt-3">
    <thead>
        <tr>
            <th>LibrarianID</th> <!-- Add this line -->
            <th>Name</th>
            <th>Age</th>
            <th>Phone</th>
        </tr>
    </thead>
    <tbody>

```

```

@foreach (var item in Model)
{
    <tr>
        <td>@item.LibrarianId</td> <!-- Add this line -->
        <td>@item.Name</td>
        <td>@item.Age</td>
        <td>@item.Phone</td>
        <td>
            <a class="btn btn-warning btn-sm"
href="/Librarian/Edit/@item.LibrarianId">Edit</a>
            <a class="btn btn-danger btn-sm"
href="/Librarian/Delete/@item.LibrarianId" onclick="return confirm('Are you
sure?')">Delete</a>
        </td>
    </tr>
}
</tbody>
</table>

```

-----Edit.cshtml-----

```

@model LMSysTem.Models.LibrarianModel
@{
    ViewData["Title"] = "Edit Library";
}
<h2>Edit Library</h2>

<form asp-action="Edit" method="post">
    <input type="hidden" asp-for="LibrarianId" />
    <div class="mb-3">
        <label>Name</label>
        <input asp-for="Name" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Age</label>
        <input asp-for="Age" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Phone</label>
        <input asp-for="Phone" class="form-control" />
    </div>
    <button type="submit" class="btn btn-primary">Update</button>
    <a asp-action="Index" class="btn btn-secondary">Cancel</a>
</form>

```

-----Create.cshtml-----

```
@model LMSysSystem.Models.LibrarianModel
@{
    ViewData["Title"] = "Add Librarian";
}
<h2>Add Librarian</h2>

<form asp-action="Create" method="post" onsubmit="return validateForm();">
    <div class="mb-3">
        <label>Name</label>
        <input asp-for="Name" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Age</label>
        <input asp-for="Age" class="form-control" />
    </div>
    <div class="mb-3">
        <label>Phone</label>
        <input asp-for="Phone" class="form-control" />
    </div>
    <button type="submit" class="btn btn-success">Add</button>
    <a asp-action="Index" class="btn btn-secondary">Cancel</a>
</form>

<script>
    function validateForm() {
        const name = document.querySelector('[name="Name"]').value.trim();
        const age = document.querySelector('[name="Age"]').value.trim();
        const phone = document.querySelector('[name="Phone"]').value.trim();

        if (!name || !age || !phone) {
            alert("All fields are required: Name, Age, Phone.");
            return false; // prevent form submission
        }

        return true; // allow submission
    }
</script>
```



```
}  
</script>
```

then Dashboard Controller

```
using LMSysystem.Models;  
using Microsoft.AspNetCore.Mvc;  
using Microsoft.Data.SqlClient;  
  
namespace LMSysystem.Controllers  
{  
    public class DashboardController : Controller  
    {  
        private readonly string _connectionString = "Data Source=(localdb)\\  
\\MSSQLLocalDB;Initial  
Catalog=LMS;Encrypt=False;TrustServerCertificate=False;ApplicationIntent=ReadWrite;MultiSubn  
etFailover=False";  
  
        public IActionResult Index()  
        {  
  
            var model = new DashboardModel();  
  
            using (var connection = new SqlConnection(_connectionString))  
            {  
                connection.Open();  
  
                // Count Students  
                using (var cmd = new SqlCommand("SELECT COUNT(*) FROM Students",  
connection))  
                {  
                    model.TotalStudents = (int)cmd.ExecuteScalar();  
                }  
            }  
        }  
    }  
}
```

```

        // Count Books
        using (var cmd = new SqlCommand("SELECT COUNT(*) FROM Books", connection))
        {
            model.TotalBooks = (int)cmd.ExecuteScalar();
        }


        // Count Librarians
        using (var cmd = new SqlCommand("SELECT COUNT(*) FROM Librarians",
connection))
        {
            model.TotalLibrarians = (int)cmd.ExecuteScalar();
        }

        // Count Borrowings
        // using (var cmd = new SqlCommand("SELECT COUNT(*) FROM Borrowings",
connection))
        // {
        //     model.TotalBorrowings = (int)cmd.ExecuteScalar();
        // }
    }

    return View(model);
}
}
}

```

view for dashboard



```

@model LMSysSystem.Models.DashboardModel
@{
    ViewData["Title"] = "Dashboard";
}

@if (TempData["message"] != null)
{
    <div class="alert alert-success alert-dismissible fade show" role="alert">
        @TempData["message"]
        <button type="button" class="btn-close" data-bs-dismiss="alert" aria-
label="Close"></button>
    </div>
}

<div class="container mt-5">
    <!-- Header Title -->
    <div class="row mb-4">
        <div class="col-12 text-center text-md-start">
            <h2 class="fw-bold border-bottom pb-2 text-dark">Admin Dashboard</h2>
        </div>
    </div>

    <!-- Dashboard Stat Cards Grid -->
    <div class="row g-4">
        <!-- Total Students -->
        <div class="col-12 col-sm-6 col-lg-3">
            <div class="card h-100 border-0 shadow-sm text-white" style="background-color:
#4e73df;">
                <div class="card-body d-flex flex-column justify-content-between p-4">
                    <div>
                        <h6 class="text-uppercase fw-semibold opacity-75 mb-1">Total
Students</h6>
                        <h2 class="display-6 fw-bold mb-0">@Model.TotalStudents</h2>
                    </div>
                </div>
            </div>

            <!-- Total Books -->
            <div class="col-12 col-sm-6 col-lg-3">
                <div class="card h-100 border-0 shadow-sm text-white" style="background-color:
#1cc88a;">
                    <div class="card-body d-flex flex-column justify-content-between p-4">
                        <div>
                            <h6 class="text-uppercase fw-semibold opacity-75 mb-1">Total
Books</h6>
                            <h2 class="display-6 fw-bold mb-0">@Model.TotalBooks</h2>
                        </div>
                    </div>
                </div>

                <!-- Total Librarians -->
                <div class="col-12 col-sm-6 col-lg-3">
                    <div class="card h-100 border-0 shadow-sm text-white" style="background-color:
#36b9cc;">

```


```

        <div class="card-body d-flex flex-column justify-content-between p-4">
            <div>
                <h6 class="text-uppercase fw-semibold opacity-75 mb-1">Total
Librarians</h6>
                <h2 class="display-6 fw-bold mb-0">@Model.TotalLibrarians</h2>
            </div>
        </div>
    </div>
</div>

<!-- Total Borrowings -->
<div class="col-12 col-sm-6 col-lg-3">
    <div class="card h-100 border-0 shadow-sm text-white" style="background-color:
#f6c23e;">
        <div class="card-body d-flex flex-column justify-content-between p-4">
            <div>
                <h6 class="text-uppercase fw-semibold opacity-75 mb-1">Total
Borrowings</h6>
                <h2 class="display-6 fw-bold mb-0">@Model.TotalBorrowings</h2>
            </div>
        </div>
    </div>
</div>
</div>
</div>
</div>


```

now if we run application

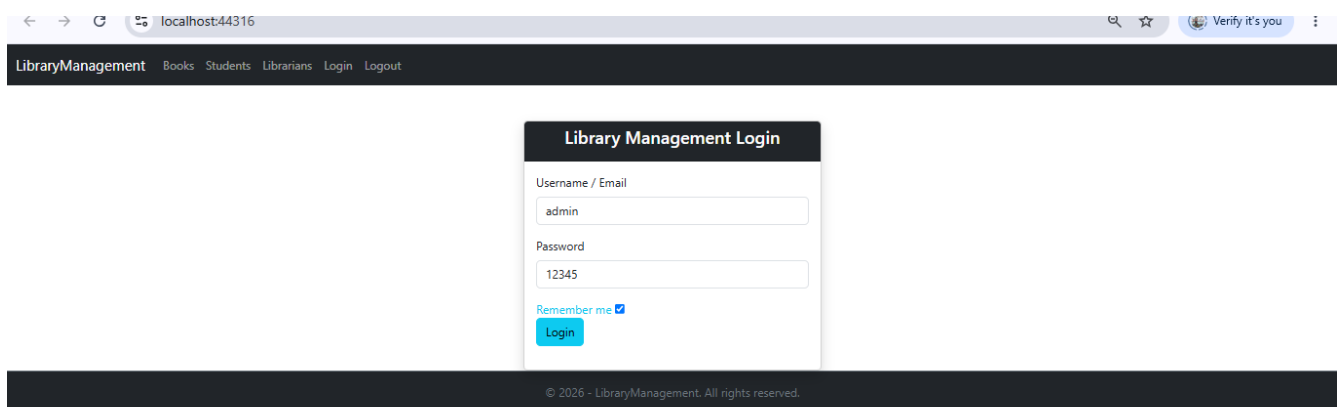

admin

12345

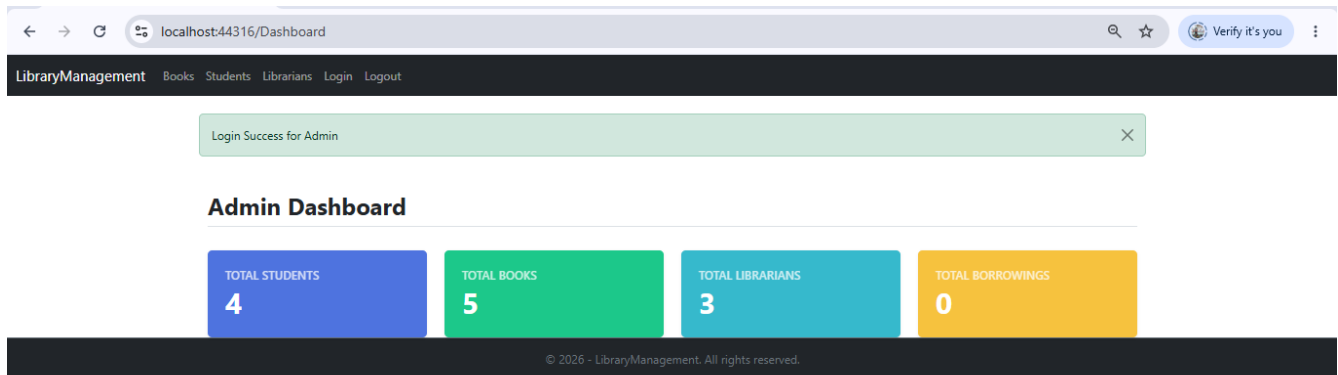

IT WILL SHOW ACCORDING TO MY DATA

NOW AGAIN CHANGE PROGRAM.CS FILE

```
pattern: "{controller=Books}/{action=Index}/{id?}");
```

now run the application will get layout with working student and librarian and logout module

Books List - LibraryManagement

Ask Gemini

localhost:7209

LibraryManagementBooksStudentsLibrariansLogout

Books List

Title	Author	ISBN	Published Date	Availability	Actions
database	helbert	978-0201616224	2026-07-21	Available	Details Edit Delete Borrow
bootstrap	raju	978-0201616224	2026-07-08	Available	Details Edit Delete Borrow
angular	rajat	978-0201616224	2026-07-03	Available	Details Edit Delete Borrow
c programming	rajat	978-0201616224	2026-07-22	Available	Details Edit Delete Borrow

Add New Book

© 2026 - LibraryManagement. All rights reserved.

https://localhost:7209/Home/Index

Home Page - LibraryManagement

Ask Gemini

localhost:7209/Home/Index

LibraryManagementBooksStudentsLibrariansLogout

Welcome

Learn about [building Web apps with ASP.NET Core](#).

© 2026 - LibraryManagement. All rights reserved.

when I click students I will get this we can perform Crud related student

localhost:7209/Student

Ask Gemini

LibraryManagementBooksStudentsLibrariansLogout

Add New Student

StudentID	StudentName	Email	Phone	
2	Bob Smith	bob.smith@email.com	555-0102	Edit Delete
3	Charlie Brown	charlie.b@email.com	555-0103	Edit Delete
4	Diana Prince	diana.p@email.com	555-0104	Edit Delete
5	Evan Wright	evan.w@email.com	555-0105	Edit Delete

© 2026 - LibraryManagement. All rights reserved.

when I click librarians I will get this we can perform Crud related librarian

← → ↻ 🌐 localhost:7209/Librarian/Index 🔍 ☆ 👤 Verify it's you ⋮

LibraryManagement Books Students Librarians Logout

Add New Librarian

LibrarianID	Name	Age	Phone	
3	Michael Scott	45	555-0203	EditDelete
4	Ellen Ripley	39	555-0204	EditDelete
5	James Bond	40	555-0205	EditDelete

© 2026 - LibraryManagement. All rights reserved.

when I click logout

I will get this

LibraryManagement Books Students Librarians Login Logout

Library Management Login

Username / Email

Enter username

Password

Enter password

Remember me

☐

Login

© 2026 - LibraryManagement. All rights reserved.

future scope next part tomorrow we will see

searching and pagination for Book module

searching and pagination for librarian module

searching and pagination for students module