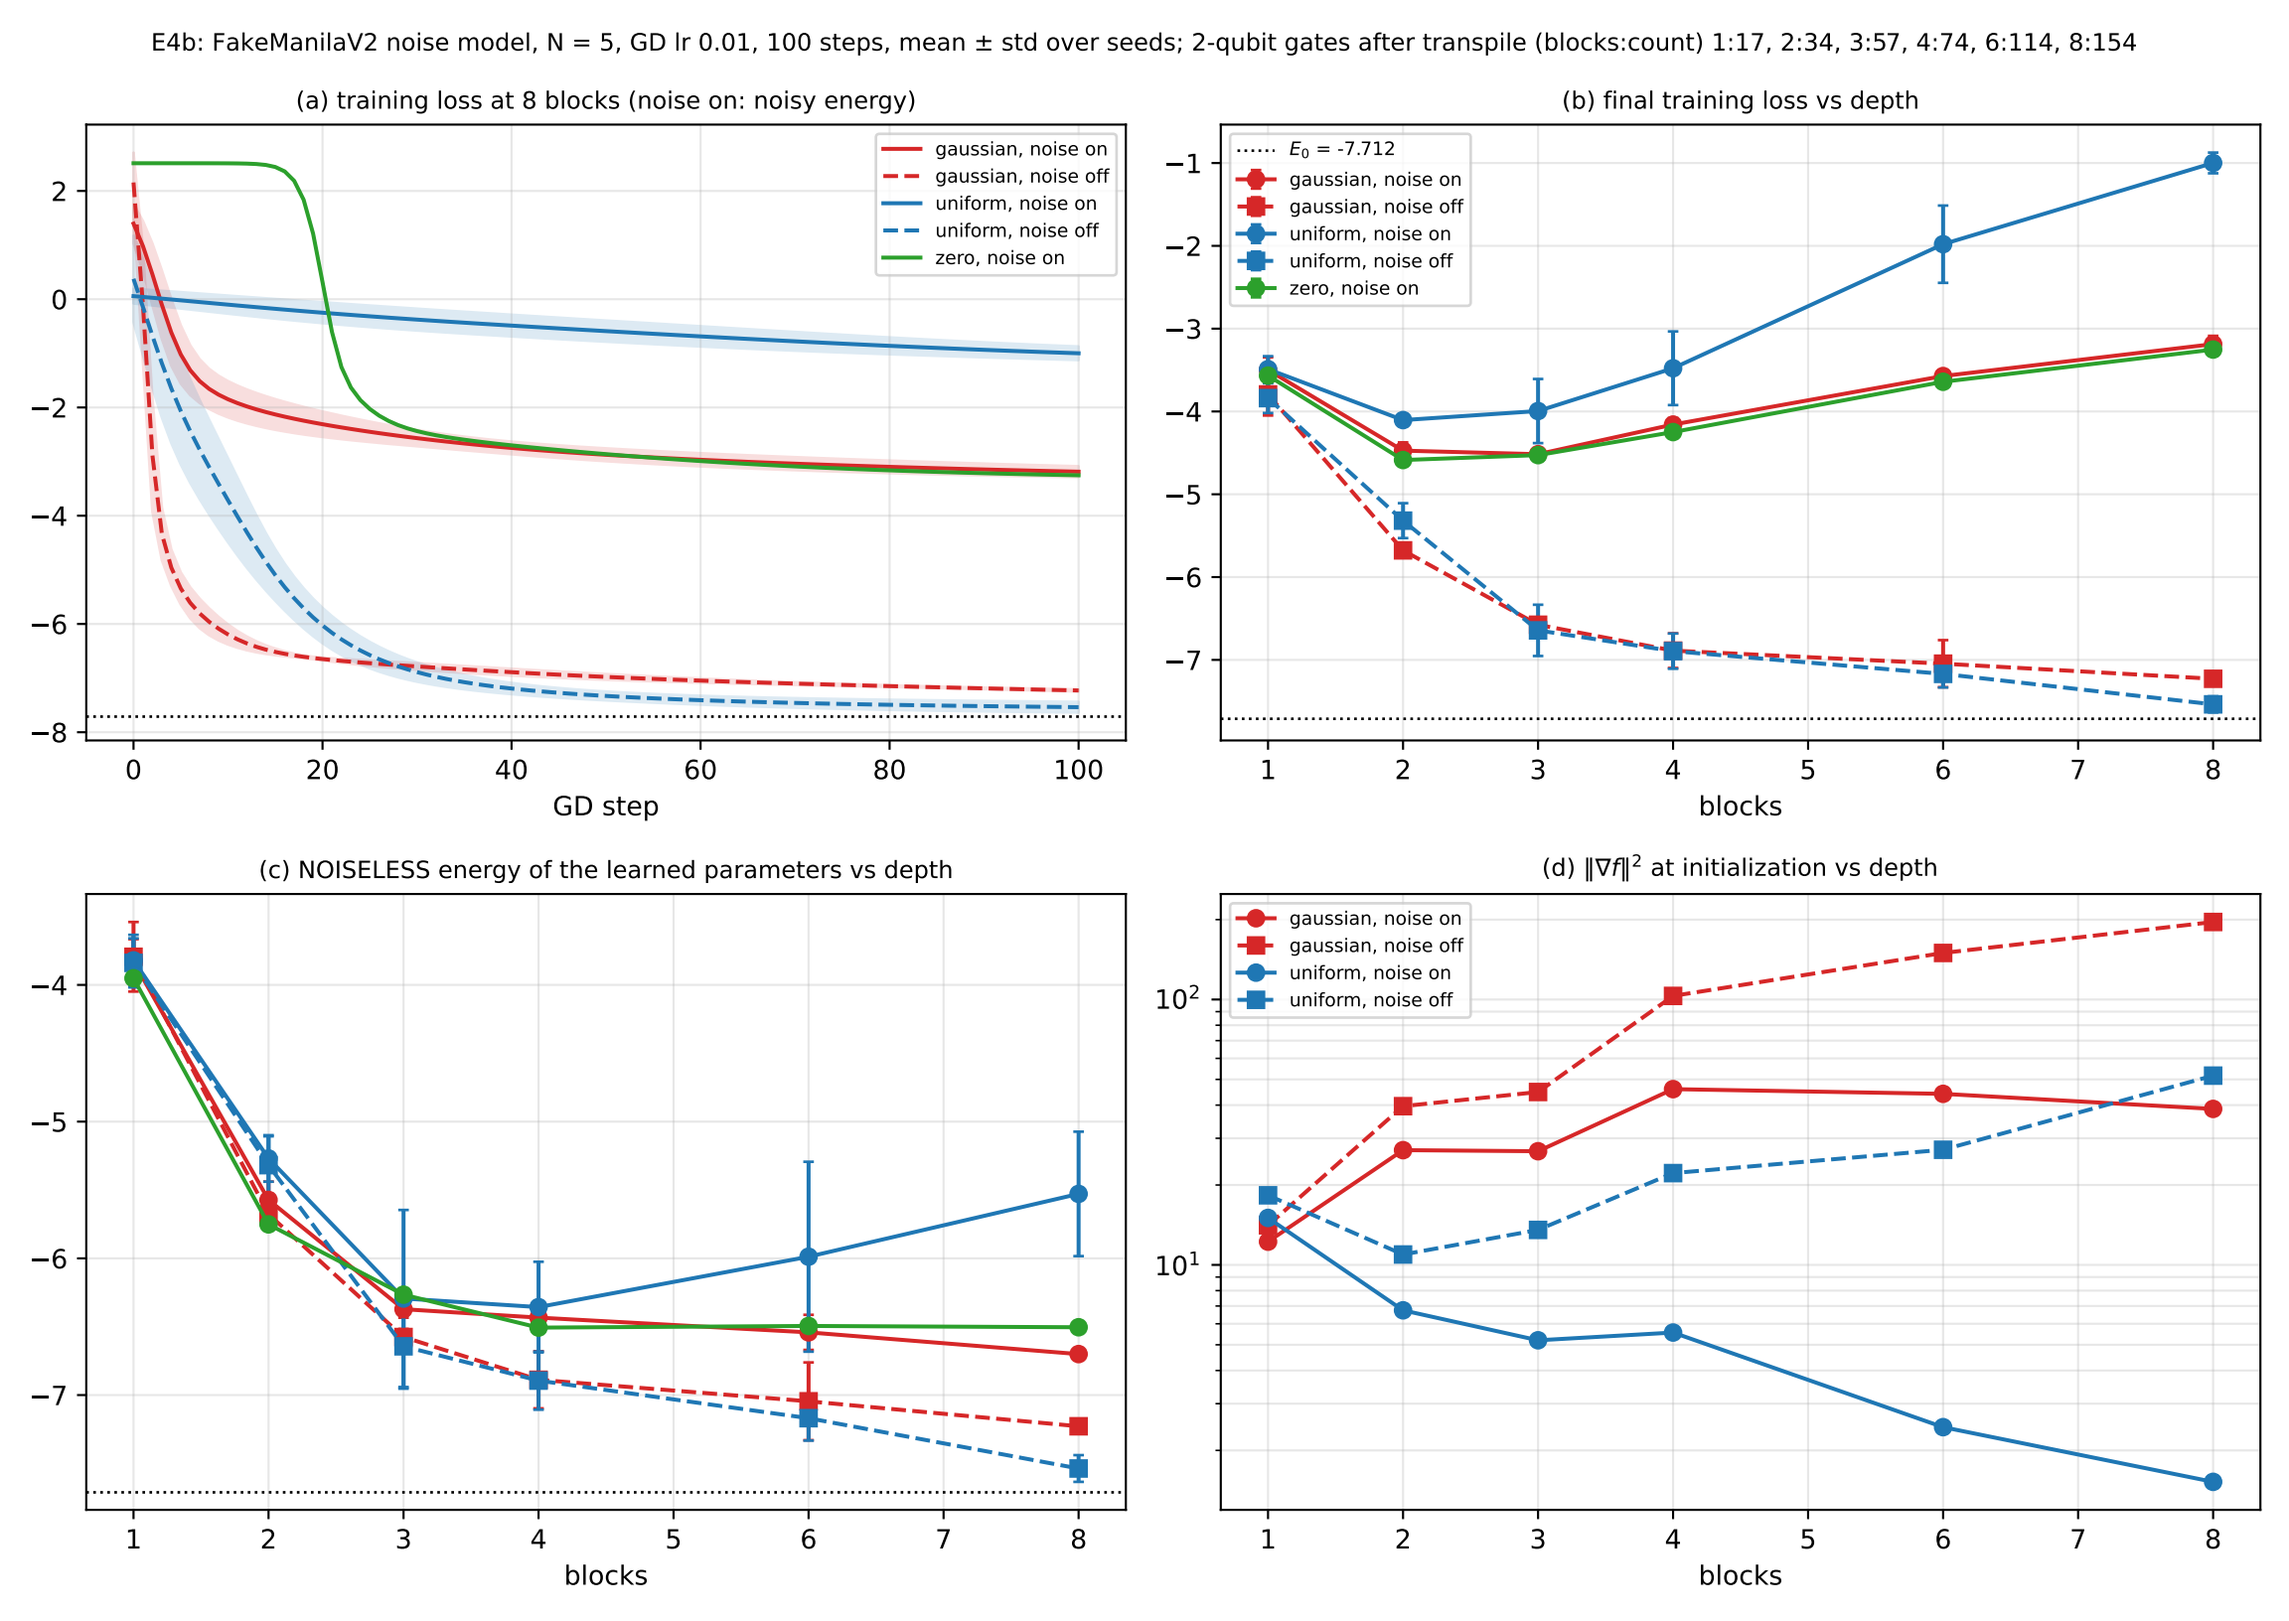
E4b: FakeManilaV2 noise model, N = 5, GD lr 0.01, 100 steps, mean ± std over seeds; 2-qubit gates after transpile (blocks:count) 1:17, 2:34, 3:57, 4:74, 6:114, 8:154
(a) training loss at 8 blocks (noise on: noisy energy)
gaussian, noise on
gaussian, noise off
uniform, noise on
uniform, noise off
zero, noise on
GD step
(b) final training loss vs depth
E_0 = -7.712
blocks
(c) NOISELESS energy of the learned parameters vs depth
blocks
(d) $\|\nabla f\|^2$ at initialization vs depth
blocks