

REST Server Quick Start

April 10, 2026

Purpose:

This document provides the basic steps to setup the 10.8A PL/B Web Server and 10.8A PLBWIN to demonstrate the PWS RESTAPI Services.

Requirements:

1. 10.8A PL/B Web Server.
2. 10.8A PLBWIN, PLBNET, or PLB (Unix) runtime.

Demo Programs:

When the PL/B Web Server is configured to support the RESTAPI services, it executes a configuration command line the invokes a PLB runtime to process an HTTP request received from a client browser executing an HTML web page with JavaScript routines.

PHONEMSG

This program processes a RESTAPI request by using the RUNTIME object 'CgiString' method to access CGI keyword data. Depending on the type of RESTAPI request received, the program uses DBxxxxx statements to access a SQLite test database. Once the request data is properly processed, an HTTP response is returned using the RUNTIME object 'HttpResponse' method. This program is implemented to do simple manipulation of a SQLite test database to fetch, write, and delete messages.

PHONEFCGI

This program executes in a similar manner as the RESTAPI program 'phonemsg.pls'. However, the 'phonefcgi.pls' program continues to execute in an endless LOOP while executing the 'Runtime.HttpRequest' method to detect a queued RestApi request. Once the request is detected/processed, a response is sent back to the client and the program continues to loop waiting for another request to be detected.

Depending on the type of RESTAPI request received, the program uses DBxxxxx statements to access a SQLite test database. Once the request data is properly processed, a HTTP response is returned using the RUNTIME object 'HttpResponse' method. This program is implemented to do simple manipulation of a SQLite test database to fetch, write, and delete messages.

Also, the 'phonefcgi.pls' program is a demonstration program that DISPLAYs each received RestApi request to the PL/B runtime main window.

Html Web Pages, CSS, and Javascript Demo:

restmain.html - Main page with description of supported REST methods.

restentry.html - Page to allow entry of a phone message.

restquery.html - Page to allow query of messages. Messages can be filtered by To name.

restsupp.css - CSS support file.

resetsupp.js - Javascript support file to be modified by user.

fcgimain.html - Main page with description of supported REST methods.

fcgientry.html - Page to allow entry of a phone message.

fcgiquery.html - Page to allow query of messages. Messages can be filtered by name.

fcgisupp.css - CSS support file.

fcgisupp.js - Javascript support file to be modified by user.

Configurations and Setup:

1. Copy the plbwebsrv_rest.ini file to the c:\sunbelt\plbwebsrv.108A\code directory
2. Copy the plbwin_rest.ini file to the c:\sunbelt\plbwebsrv.108A\code directory
3. Copy the phonemsg.plc file to the c:\sunbelt\plbwebsrv.108A\code directory
4. Copy the phonefgci.plc file to the c:\sunbelt\plbwebsrv.108A\code directory

Steps to Run RESTAPI Demo Using Customer 10.8A PWS:

1. Start PWS Server in the c:\sunbelt\plbwebsrv.108A\code directory using the command line:

plbwebsrv plbwebsrv_rest.ini -s


2. Using any Browser, enter and execute the URL command as follows:

file:///C:/Sunbelt/sunbelt-plb-samples/rest_server/webpages/restmain.html


Or

file:///C:/Sunbelt/sunbelt-plb-samples/rest_server/webpages/fcgitmain.html

3. The Sunbelt RestCli Main Web Page Appears as follows:

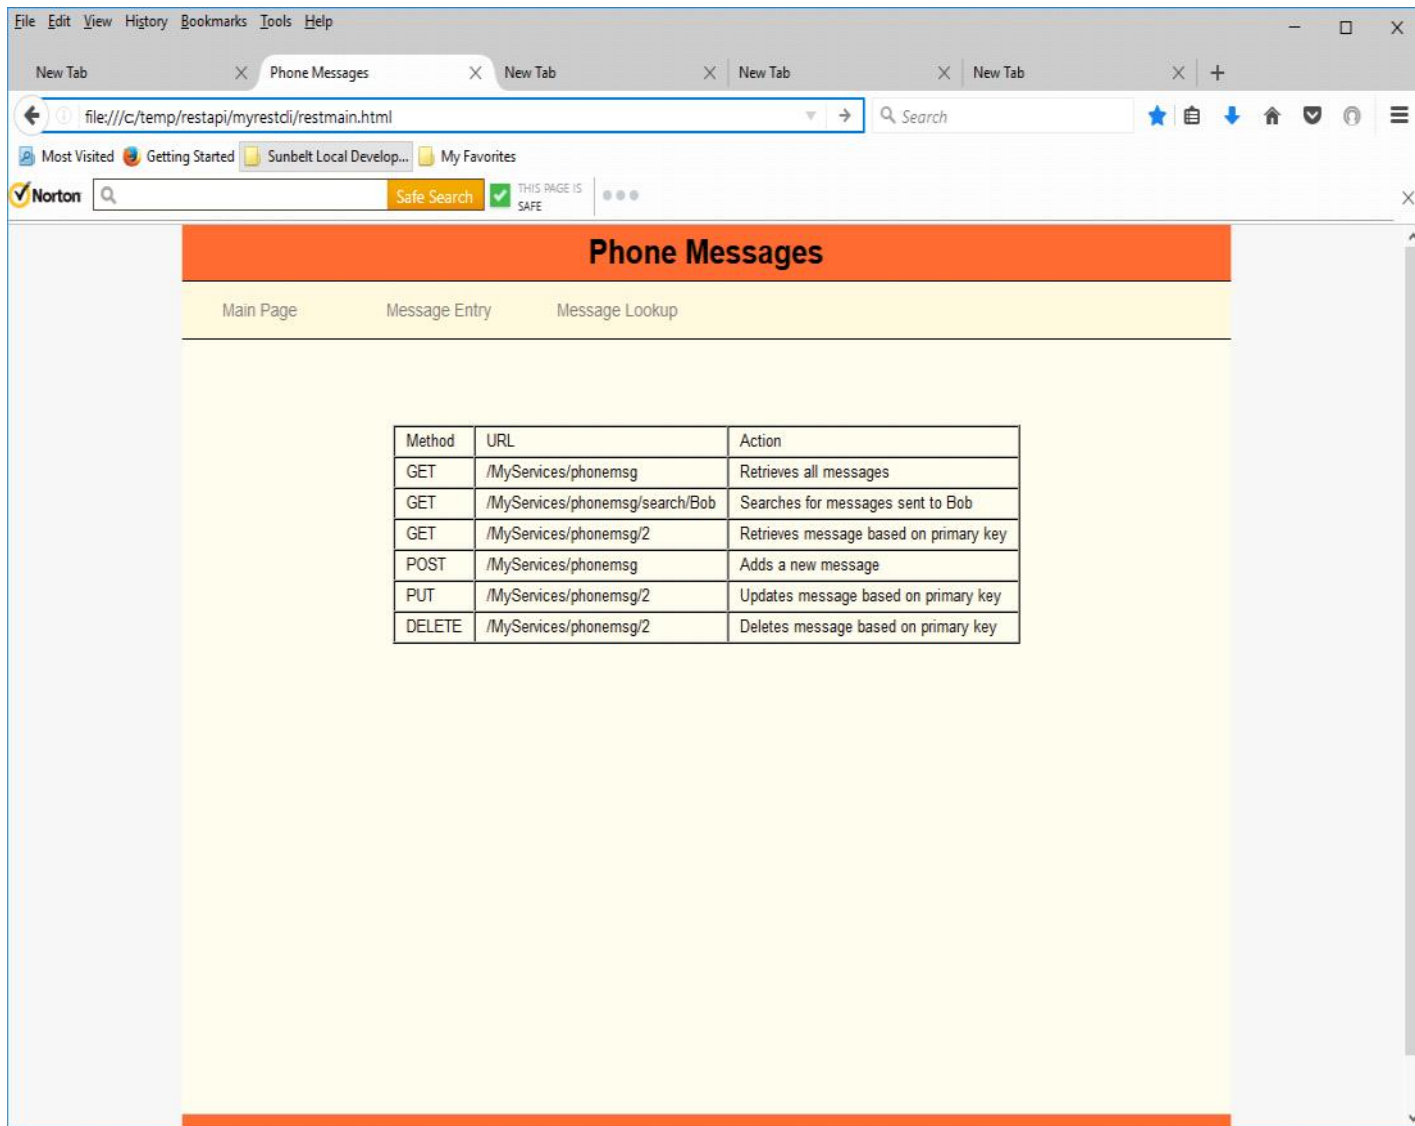

1. Use Menu Items to select the 'Message Lookup'. Then click on 'Fetch All Messages' to see the following:

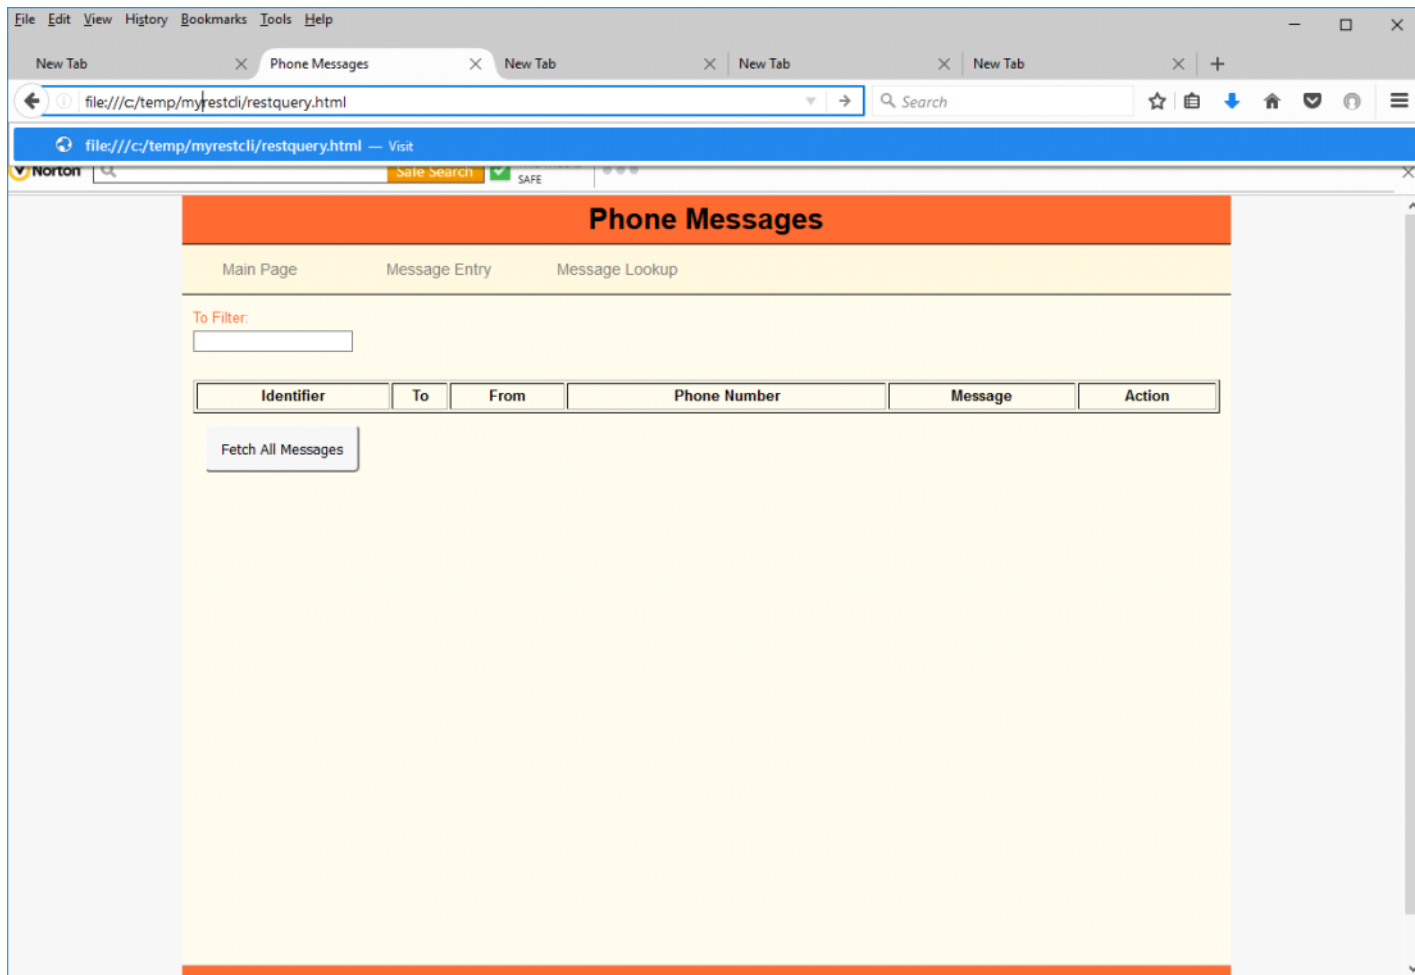

1. Various RestApi Service requests can be executed.