


🚩 Flag 0 — Create Your Feature Branch

Objective: Create a new feature branch before adding conditional UI.

Create:

`feature/conditional-ui`

Screenshot:

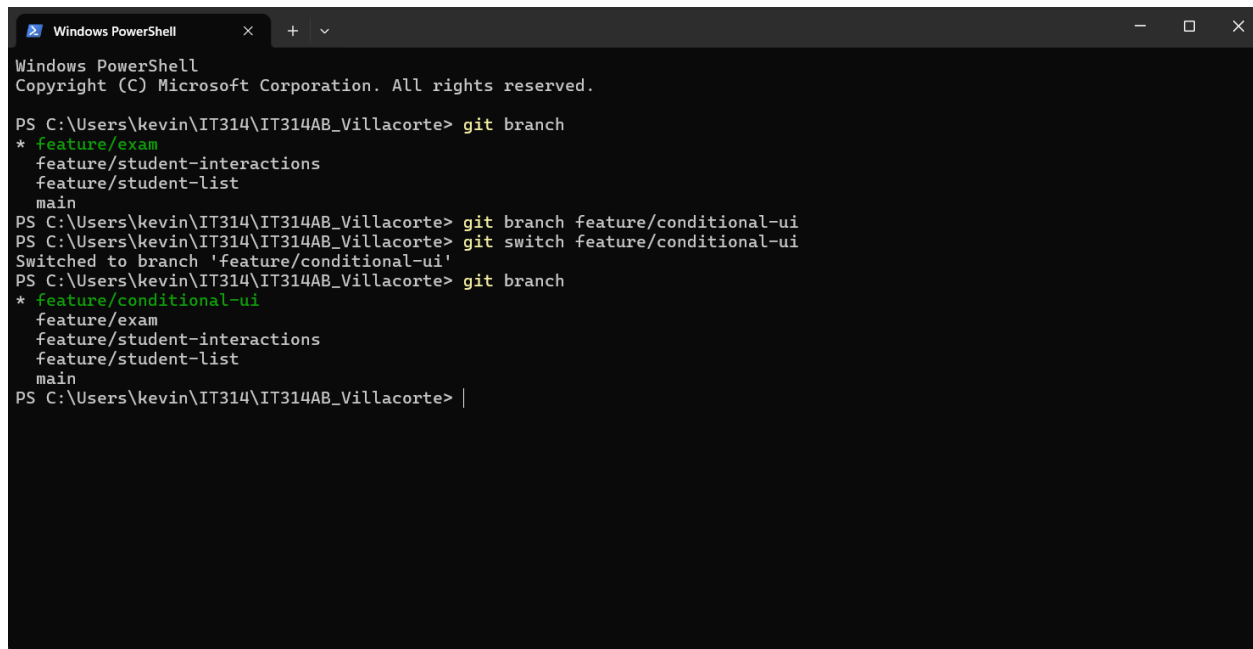

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\kevin\IT314\IT314AB_Villacorte> git branch
* feature/exam
  feature/student-interactions
  feature/student-list
  main
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git branch feature/conditional-ui
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git switch feature/conditional-ui
Switched to branch 'feature/conditional-ui'
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git branch
* feature/conditional-ui
  feature/exam
  feature/student-interactions
  feature/student-list
  main
PS C:\Users\kevin\IT314\IT314AB_Villacorte> |
```

- Terminal showing your current branch

🚩 Flag 1 — Show Active or Inactive

Objective: Change the Student Card based on whether a student is active or inactive.

Add an `active` status to your student data.

Research how Flutter uses **conditional expressions** to display different widgets.

Example states:


- Active
- Inactive

Test


Active students should display an Active indicator.

Inactive students should display an Inactive indicator.

Screenshot:

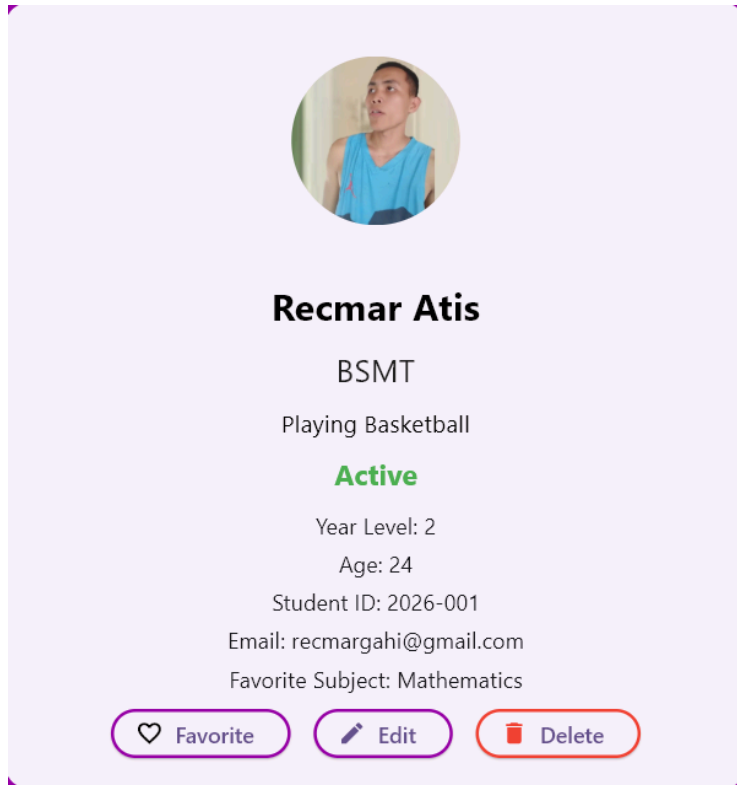

- Active Student Card

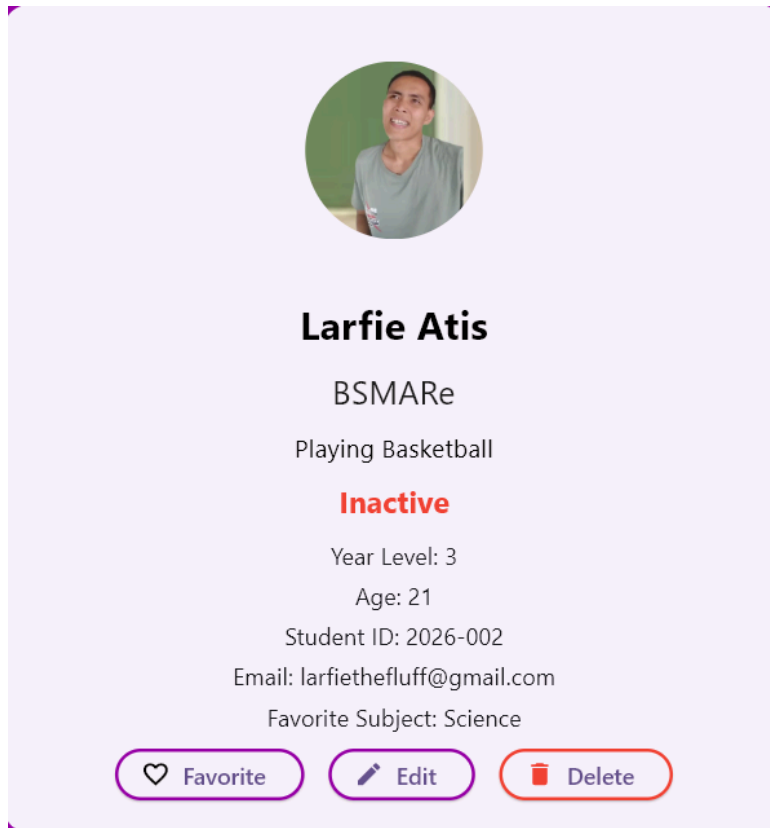

- Inactive Student Card

```
if (friends[index].active)
  const Text(
    'Active',
    style: TextStyle(
      color: Colors.green,
      fontWeight: FontWeight.bold,
      fontSize: 18,
    ), // TextStyle
  ) // Text
else
  const Text(
    'Inactive',
    style: TextStyle(
      color: Colors.red,
      fontWeight: FontWeight.bold,
      fontSize: 18,
    ), // TextStyle
  ), // Text
```

- Conditional logic in your code

🚩 Flag 2 — Show or Hide

Objective: Display certain UI elements only when a condition is true.

Add a conditional element to the Student Card.

Examples:

- Favorite badge appears only when favorited
- Warning appears only when inactive
- Delete action appears only if active


Research ways to conditionally include or exclude widgets from the widget tree.


Test

When the condition is true, the element appears.

When the condition is false, the element disappears.

Screenshot:

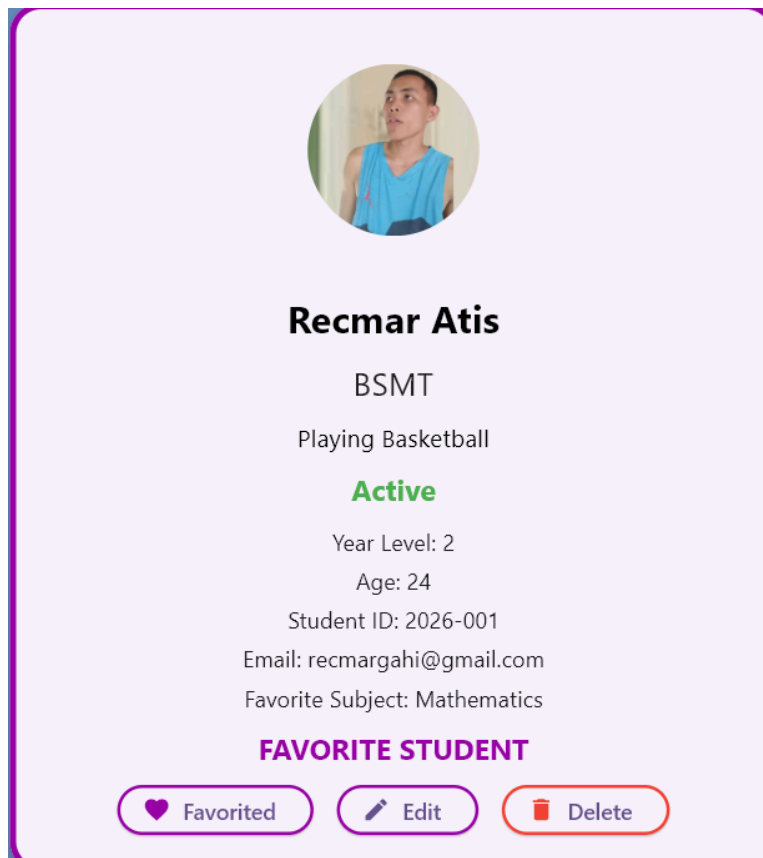

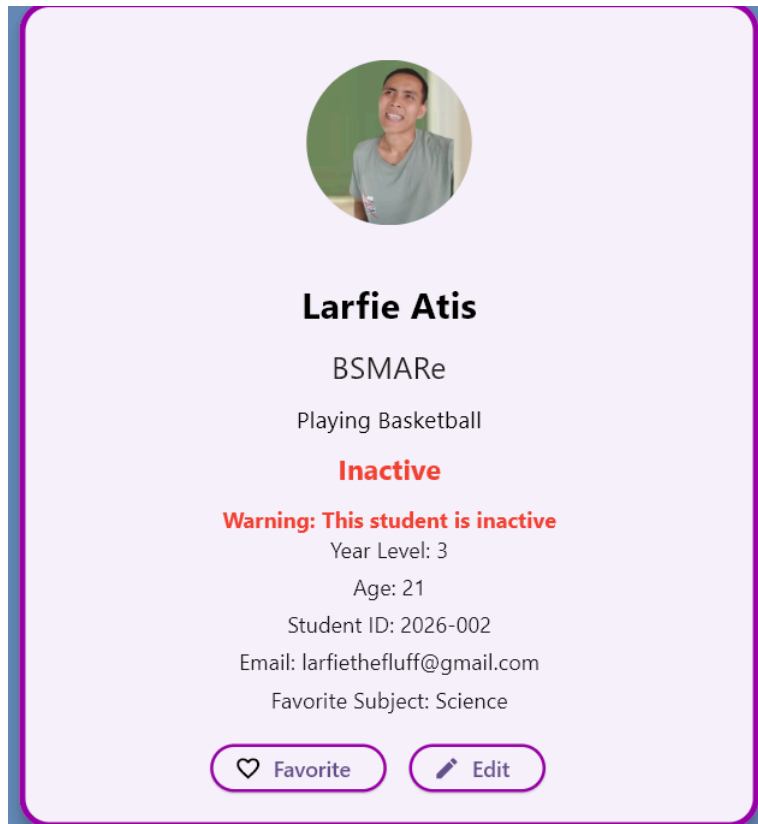

- UI with the element visible
- UI with the element hidden

```
if (friends[index].active)
ElevatedButton.icon(
  onPressed: () {
    setState(() {
      friends.removeAt(index);
    });
  },
  icon: const Icon(
    Icons.delete,
    color: Colors.red,
  ), // Icon
  label: const Text(
    'Delete',
  ), // Text
  style:
    ElevatedButton.styleFrom(
      side: const BorderSide(
        color: Colors.red,
        width: 2,
      ), // BorderSide
    ),
),
```

```
const SizedBox(height: 10),

if (!friends[index].active)
  const Text(
    'Warning: This student is inactive',
    style: TextStyle(
      color: Colors.red,
      fontWeight: FontWeight.bold
    ), // TextStyle
  ), // Text
```

- Conditional widget code

🚩 Flag 3 — The Empty Directory

Objective: Handle situations where there are no students to display.

Modify your Student Directory so it detects when the student list is empty.

Create an **empty state**.

Examples:

- "No students found"
- Empty-state icon
- Button to add a student

Test

Delete all students in your application (not the code)

Instead of showing a blank screen, your application should display your empty state.

Screenshot:

No students found.

The student list is currently empty.

Add Student

- Empty student list
- Empty-state UI

```
if (friends.isEmpty)
  Center(
    child: SizedBox(
      width: 500,
      child: Card(
        elevation: 8,
        shape: RoundedRectangleBorder(
          borderRadius: BorderRadius.circular(20),
          side: const BorderSide(
            color: Color.fromARGB(255,152,0,169),
            width: 4,
          ), // BorderSide
        ), // RoundedRectangleBorder
        child: Padding(
          padding: const EdgeInsets.all(30.0),
          child: Column(
            children: [
              const Icon(
                Icons.school_outlined,
                size: 70,
                color: Color.fromARGB(255,152,0,169),
              ), // Icon

              const SizedBox(height: 15),

              const Text(
                'No students found.',
                style: TextStyle(
                  fontSize: 24,
                  fontWeight: FontWeight.bold,
                  color: Colors.black,
                ), // TextStyle
                textAlign: TextAlign.center,
              ), // Text
            ],
          ),
        ),
      ),
    ),
  )
```

```

const Text(
  'No students found.',
  style: TextStyle(
    fontSize: 24,
    fontWeight: FontWeight.bold,
    color: Colors.black,
  ), // TextStyle
  textAlign: TextAlign.center,
), // Text

const SizedBox(height: 10),

const Text(
  'The student list is currently empty.',
  style: TextStyle(
    fontSize: 16,
    color: Colors.black54,
  ), // TextStyle
  textAlign: TextAlign.center,

```

- Condition checking for an empty list

🚩 Flag 4 — Loading the Directory

Objective: Display different UI while student data is being loaded.

Create a loading state for your Student Directory.

Research how Flutter can conditionally display a loading indicator.

Examples:


- `CircularProgressIndicator`
- Loading message
- Loading placeholder

Test


When the application is in a loading state, the student list should not be displayed as the main content.

Once loading is complete, the Student Directory should appear.

Screenshot:



- Loading state

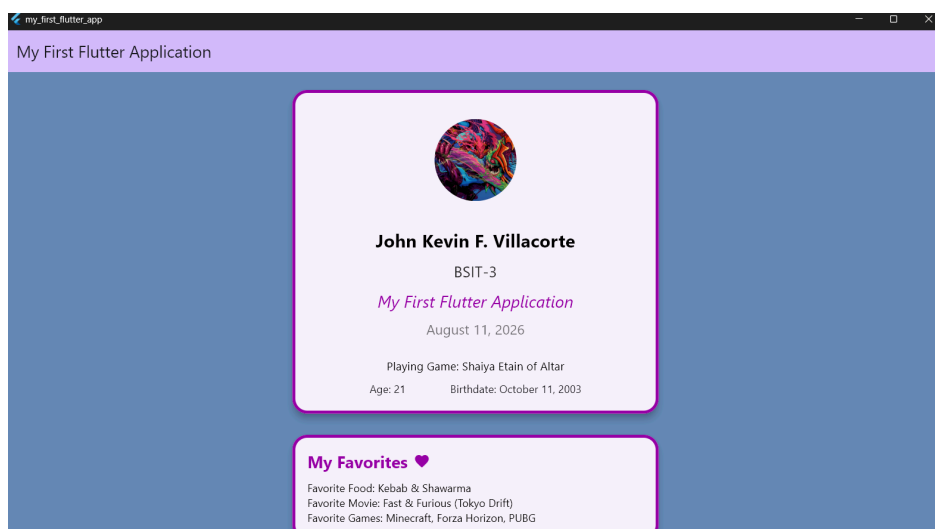

- Loaded state

```
Future.delayed(const Duration(seconds: 5), () {
  setState(() {
    loading = false;
  });
}); // Future.delayed

super.initState();
}

@override
void dispose() {
  controller.dispose();
  super.dispose();
}

@override
Widget build(BuildContext context) {
  Widget content;

  if (loading) {
    content = Center(
      child: CircularProgressIndicator(
        value: controller.value,
      ), // CircularProgressIndicator
    ); // Center
  } else {
```

- Conditional loading logic

🚩 Flag 5 — Multiple States

Objective: Make your Student Directory handle multiple UI states correctly.

Your application should now be able to display:

1. Loading
2. Students available
3. No students available

Determine which state should be displayed based on your data.

Test

Verify each state:

Loading

→ Loading UI

Students available


→ Student List

Empty list

→ Empty State

Only the appropriate UI should appear at a time.

Screenshot:




- Loading state



Recmar Atis
BSMT
Playing Basketball
Active
Year Level: 2
Age: 24
Student ID: 2026-001
Email: recmargahi@gmail.com
Favorite Subject: Mathematics

 Favorite  Edit  Delete



Larfie Atis

- Student list state

No students found.

The student list is currently empty.

[Add Student](#)



New Student

BSMT

Billiard

Active

Year Level: 1

Age: 19

Student ID: 2026-010

Email: newstudent@gmail.com

Favorite Subject: Seamanship



Favorite



Edit



Delete

- Empty state

🚩 Flag 6 — States Work Together

Objective: Make sure conditional UI does not break your existing interactions.

Test the combination of:

- Favorite
- Delete
- Edit
- Active/Inactive
- Show/Hide
- Empty state
- Loading state

Test Scenario

1. Favorite a student.
2. Change or display their Active/Inactive state.
3. Delete students until the directory becomes empty.
4. Verify the Empty State appears.
5. Reload or restore students.
6. Verify the Student Directory appears again.

The application should continue functioning correctly as its state changes.

Screenshot:



Recmar Atis

BSMT

Playing Basketball

Active

Year Level: 2

Age: 24

Student ID: 2026-001

Email: recmargahi@gmail.com

Favorite Subject: Mathematics

FAVORITE STUDENT



Favorited



Edit



Delete

- Multiple conditional states working



Edit Friend

You selected Recmar Atis for editing.

Close

Year Level: 2

Age: 24

Student ID: 2026-001

Email: recmargahi@gmail.com

Favorite Subject: Mathematics

FAVORITE STUDENT



Favorited



Edit



Delete

- Interactive Student Card

No students found.

The student list is currently empty.

Add Student

- Empty State
- Application functioning normally

🚩 Flag 7 — Save Your Progress

Objective: Commit and push your completed Conditional UI Student Directory.

Use a proper Git commit message.

Branch:

feature/conditional-ui

Screenshot:

```
Windows PowerShell
feature/student-interactions
feature/student-list
main
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git status
On branch feature/conditional-ui
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    Capture The Flag 5_conditional-ui.pdf

nothing added to commit but untracked files present (use "git add" to track)
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git add .
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git commit -m "feat: conditional-ui pdf"
[feature/conditional-ui b763d57] feat: conditional-ui pdf
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Capture The Flag 5_conditional-ui.pdf
PS C:\Users\kevin\IT314\IT314AB_Villacorte> git push origin feature/conditional-ui
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 702.52 KiB | 16.34 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting:
remote:   https://github.com/Kebs-deck/IT314AB_Villacorte/pull/new/feature/conditional-ui
remote:
To https://github.com/Kebs-deck/IT314AB_Villacorte.git
* [new branch]      feature/conditional-ui -> feature/conditional-ui
PS C:\Users\kevin\IT314\IT314AB_Villacorte>
```

- Successful commit
- Current branch
- Terminal showing the commit