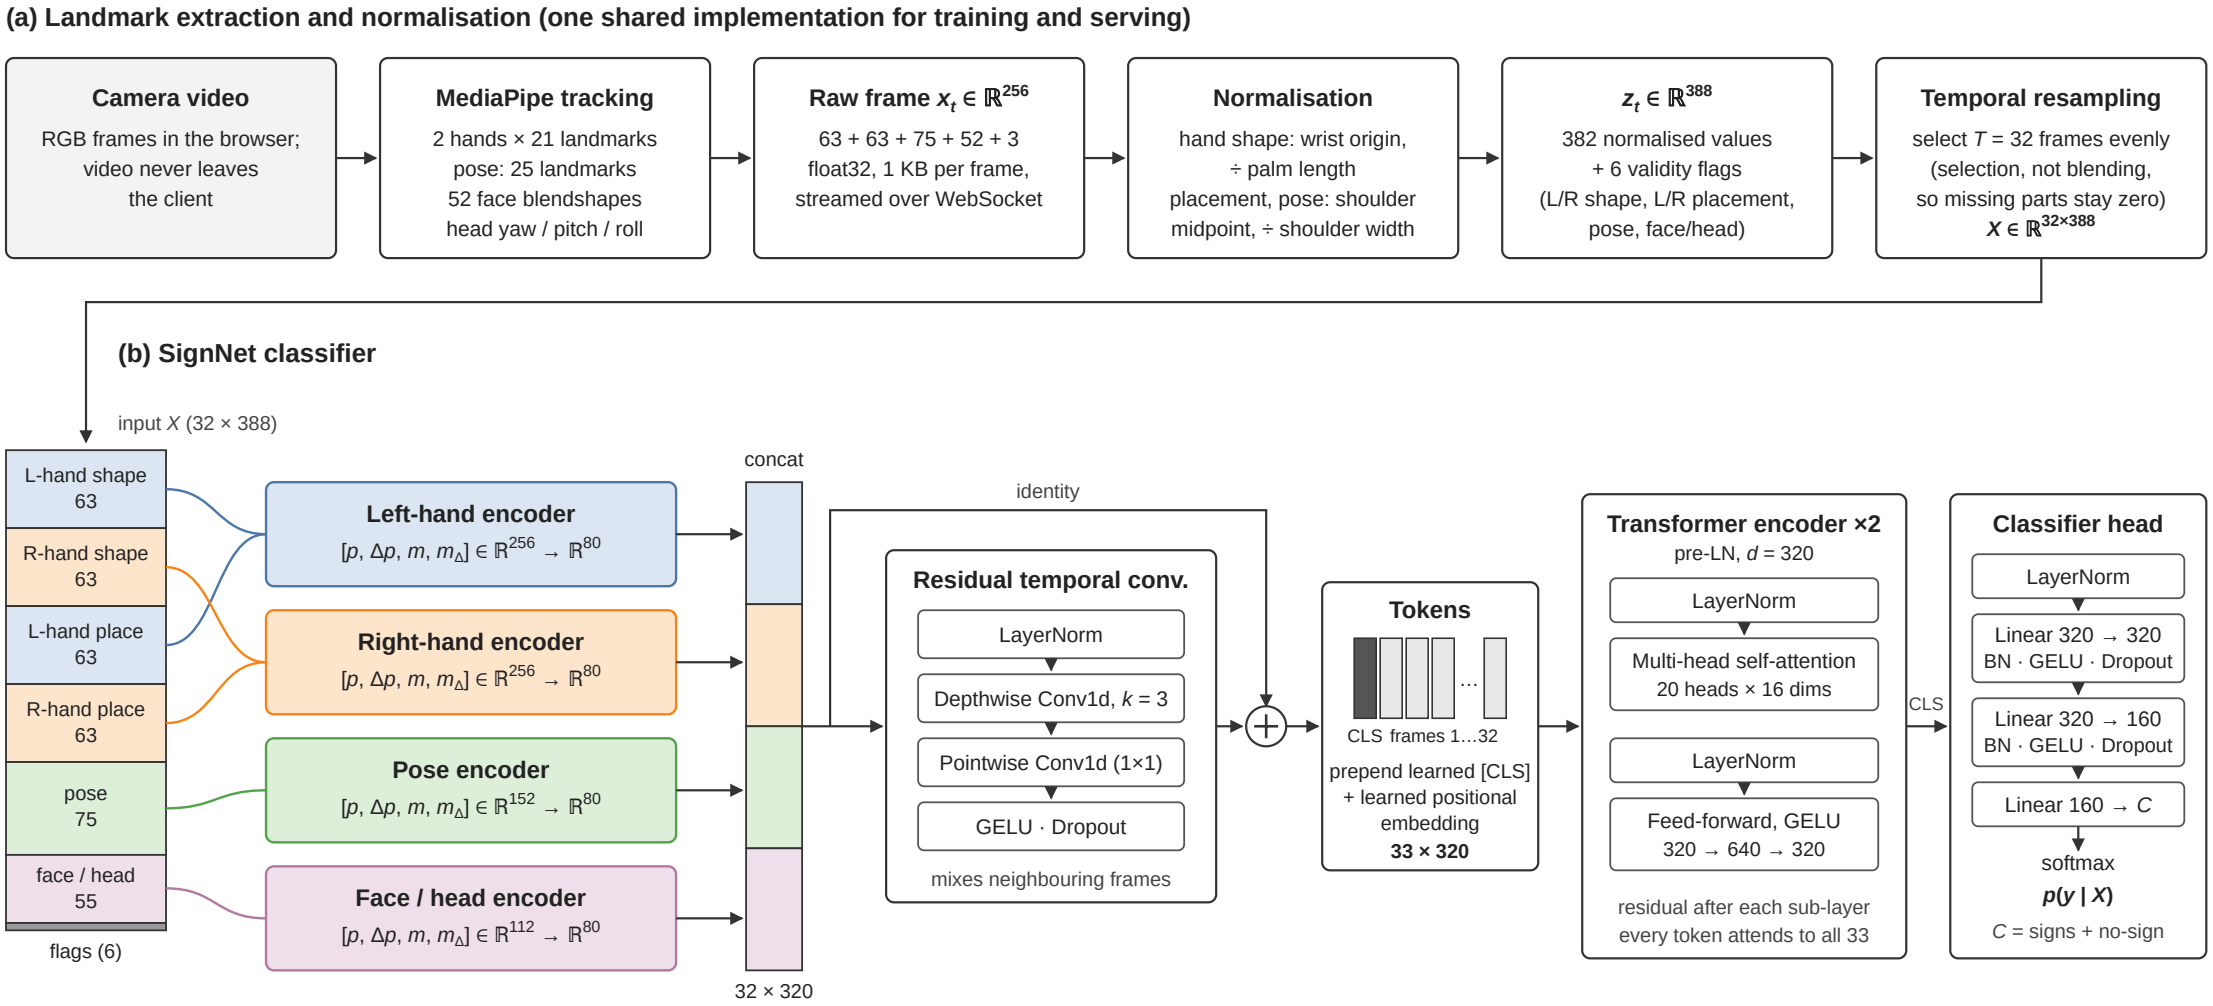


each, per frame: Linear (→ 320) → GELU → Linear (320 → 160) → GELU → Linear (160 → 80) → GELU → LayerNorm; learned embedding e_{miss} if region absent

p: positions · Δp: frame difference, 0 unless both frames valid · m: validity flags

Trainable parameters: 2,424,160 + 161·C (2,440,421 for 100 signs + no-sign). Embedding width d = 320 (4 regions × 80). All dropout p = 0.1. Exported to ONNX and run on CPU.