

Natural Language Processing

DATS_6312_10

Individual Final - Project Report

**News Generation using Different Advanced Model Classical and Deep
learning Approaches:A comparative study**

BY

Modupeola Fagbenro-G32371634

GitHub Repository: [GitHub Link](#)

Professor Name : Dr. Amir Jafari

Table of Contents

Project Main Components:.....	3
General Project Overview.....	3
Project Aims and Objectives.....	4
About Dataset used.....	4
Work Distribution.....	4
Individual Work Background.....	4
Long Short Term Memory + attention mechanism.....	4
LSTM-Core Architecture.....	5
. Core Structure.....	5
LSTM Core Equations.....	6
Attention Mechanism.....	7
LSTM with Attention.....	8
LSTM With Attention Mechanism Code Structure Analysis.....	9
Dataset Structure Batch Size Processing.....	11
Model Architecture Functions.....	11
Model Improvements and Features.....	17
Performance Metrics and Evaluation.....	18
Key Findings and Observations.....	20
Generated Text Analysis.....	20
LSTM with Attention Model Performance and Challenges.....	22
How the Challenges Are Mitigated/ Strategies Implemented.....	23
Lessons Learned.....	23
Recommendations for Improvement.....	24
LSTM + Attention- Conclusion.....	24
OUT-OF GROUP SCOPE.....	26
Individual Continuous Exploration.....	26
Introduction.....	26
Aims and Objectives Of Using Llama :.....	26
Dataset and Data Preparation.....	26
Model's Architecture:.....	27
Implementation:.....	27
Results and Testing.....	28
Challenges and Solutions.....	31
Future Improvements.....	31
Overall Project - Summary.....	31
From LSTM+Attention to Llama+AWS Bedrock for News Generation.....	31
Code Source Calculation.....	32
LSTM_Attention_Output Generation.....	33
LLAMA + AWS BEDROCK Generation Output -First Phase.....	33

Project Main Components:

- ☐ Introduction: Overview of the whole project and how work was divided
- ☐ Individual Work Background: Explain the algorithm you worked with, including equations and figures
- ☐ Specific Contribution: Detailed explanation of exactly what you did (code, figures, analysis, etc.)
- ☐ Results: Show and explain all your experiments with figures/tables
- ☐ Summary & Conclusions: What you learned and future improvements
- ☐ Individual Continuous Exploration
- ☐ Code Source Calculation: Calculate percentage of internet-sourced code using the formula provided
- ☐ References

General Project Overview

Introduction

This project explores, compares and implements different approaches to news generation, ranging from classical probabilistic methods to advanced deep learning architectures.

Project Aims and Objectives

The primary goal is to analyze how different model architectures handles the complex task of generating news coherent and contextually relevant text

About Dataset used

Dataset Source was obtained from kaggle, this dataset comprises news articles publicly available on Kaggle. several datasets like InShorts News Data, BBC Articles Dataset , CNN/DailyMail Dataset ,Additionally, the NYTimes Article Lead Paragraphs Dataset focuses on introductory paragraphs, aiding in generating meaningful lead summaries.

The LSTM with Attention model was trained on a substantial **dataset of 498,884 cleaned text sequences**, with a vocabulary size of **58,031 words after frequency filtering**. This represents a robust dataset size for natural language processing tasks, allowing the model to learn diverse patterns in the text data.

Work Distribution

This project is a very collaborative project, in which each team member took a model to work with. My specific focus was on implementing and optimizing the LSTM model with an attention mechanism, additionally explore Llama +AWS bedrock Implementation for news generation. while my teammates handled:

1. - Team member 1: Markov Chain implementation- by Apoorva Reddy

2. - Team member 2: GPT2/BART fine-tuning and evaluation - by Keerthena
3. - Team member 3: Data preprocessing , adding noisy to the dataset and masking the dataset T5 -by Aron Yang

Individual Work Background


Modupeola's Specific Contribution- LSTM + Attention and News Article Generation using Llama + AWS Bedrock

Long Short Term Memory + attention mechanism

I did data preprocessing , exploratory data analysis , getting the information about the dataset and implemented an LSTM model with attention mechanisms for enhanced text generation.

Long Short Term Memory

Long Short-Term Memory networks are specialized variants of RNNs designed to learn long-term dependencies. The key innovation of LSTM is its memory cell structure that controls information flow through gates. LSTM is designed to solve long term dependency-vanishing problems. Long term memory and remembering information for a long period of time is practically their default behavior. LSTM also has a chain-like structure, with four neural network layers interacting in a special way. LSTM prevents back propagated errors from vanishing or exploding. LSTM can learn tasks that require memories of events that happened thousands or millions of discrete time steps earlier. Attention allows the model to focus on relevant parts of the input sequence when generating each word.

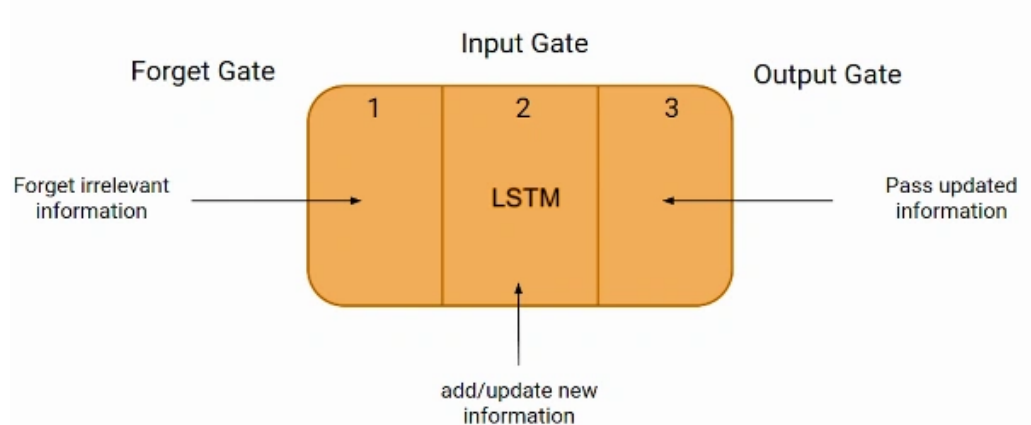


LSTM-Core Architecture

Long Short-Term Memory (LSTM) networks are sophisticated neural architectures designed to handle sequential data through a carefully orchestrated system of gates and states. At their core,

LSTMs operate through three main gates that work in harmony: the forget gate, input gate, and output gate, each implementing specific mathematical transformations to control information flow.

. Core Structure

- LSTMs have a unique "cell state" that acts like a conveyor belt through the network
- Each line in the diagram carries entire vectors between nodes
- Components include:
 - Pointwise operations (pink circles)
 - Learned neural network layers (yellow boxes)
 - Vector concatenation (merging lines)
 - Content copying (forking lines)

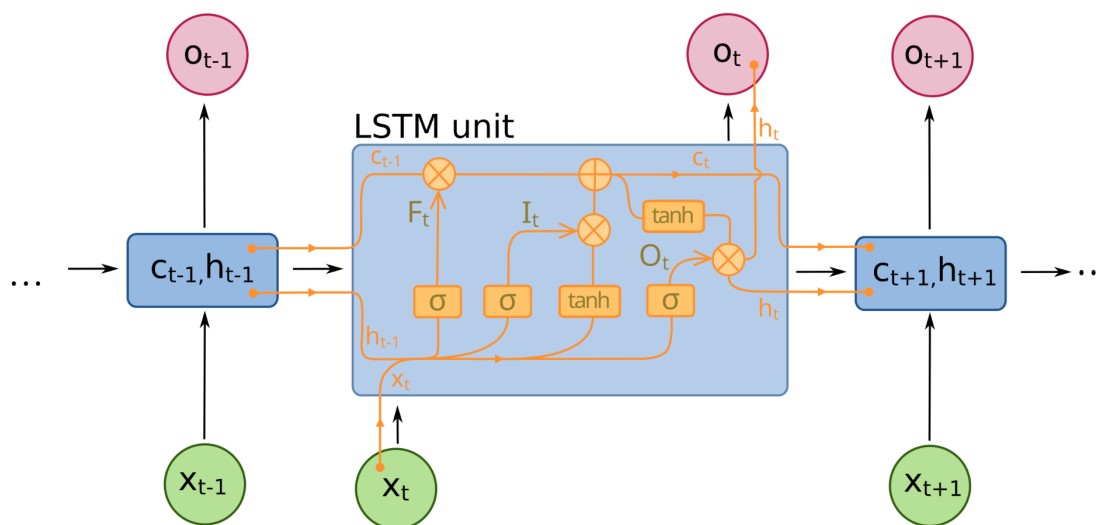

LSTM Contain Interacting layers

The process begins with the forget gate, which uses the **sigmoid function** $\sigma(W_f \cdot [h_{t-1}, x_t] + b_f)$ to determine what information should be discarded from the cell state. This gate produces values between 0 and 1, effectively deciding how much of each piece of information should be retained. Following this, the **input gate operates in two steps**: first using $\sigma(W_i \cdot [h_{t-1}, x_t] + b_i)$ to decide which values to update, and then creating new candidate values through $\tanh(W_c \cdot [h_{t-1}, x_t] + b_c)$. These components work together to update the cell state using the equation $C_t = f_t * C_{t-1} + i_t * \tilde{C}_t$, where $*$ represents element-wise multiplication.

The **final stage involves the output gate**, which determines what portions of the cell state should be output. This is accomplished through $o_t = \sigma(W_o \cdot [h_{t-1}, x_t] + b_o)$ and $h_t = o_t * \tanh(C_t)$. Each gate utilizes weight matrices (W) and bias vectors (b), which are learned during training, allowing the network to adapt to specific tasks. This sophisticated architecture enables LSTMs to maintain

relevant information over long sequences while discarding irrelevant details, making them particularly effective for tasks like language modeling, translation, and time series prediction.

Through variants like peephole connections and the simplified GRU architecture, which combines the forget and input gates into a single update gate, researchers have continued to refine and optimize this basic architecture. These modifications maintain the fundamental principle of controlled information flow while potentially offering computational advantages or task-specific improvements.

LSTM Core Equations

Forget Gate

$$f_t = \sigma(W_f \cdot [h_{t-1}, x_t] + b_f)$$

Input Gate

$$i_t = \sigma(W_i \cdot [h_{t-1}, x_t] + b_i)$$
$$\check{C}_t = \tanh(W_c \cdot [h_{t-1}, x_t] + b_c)$$

Cell State Update

$$C_t = f_t * C_{t-1} + i_t * \check{C}_t$$

Output Gate

$$o_t = \sigma(W_o \cdot [h_{t-1}, x_t] + b_o)$$
$$h_t = o_t * \tanh(C_t)$$

Where:

σ : Sigmoid function

\tanh : Hyperbolic tangent function

W : Weight matrices

b : Bias vectors

h_{t-1} : Previous hidden state

x_t : Current input

C_t : Cell state

$*$: Element-wise multiplication

Attention Mechanism

In neural networks, attention allows the model to dynamically focus on different parts of the input sequence when producing each part of the output sequence. Rather than compressing all information into a fixed-length vector, attention lets the model learn what parts of the input sequence to **pay attention** to at each step of output generation. The attention mechanism calculates a context vector as a weighted sum of all input states, where the weights are learned and represent how much "attention" should be paid to each input state.

Attention mechanism is fundamentally inspired by human visual attention - our ability to focus on specific parts of our visual field while being aware of but not focusing on other parts.

The mathematical formulation of attention involves three key components:

- Queries (Q)
- Keys (K),
- Values (V).

The attention weights are computed as:

$$\text{attention}(Q, K, V) = \text{softmax}((QK^T)/\sqrt{d_k})V$$

where d_k is the dimension of the key vectors. This formula essentially computes compatibility scores between the query and all keys, normalizes these scores using softmax, and uses them to weight the values.

LSTM with Attention

When combining LSTM with attention, we enhance the LSTM's ability to handle long sequences by allowing it to selectively focus on parts of the input sequence at each decoding step. The LSTM processes the input sequence sequentially, generating hidden states at each step ($h_t = \text{LSTM}(x_t, h_{t-1})$).

For each output step, the **attention mechanism** computes attention scores between the current decoder state and all encoder hidden states ($e_{t,s} = \text{score}(h_t, h_s)$). These scores are normalized using softmax ($\alpha_{t,s} = \text{softmax}(e_{t,s})$) to create attention weights.

The attention weights are used to compute a context vector ($c_t = \sum \alpha_{t,s} * h_s$) that is a weighted sum of all encoder hidden states. This context vector is then combined with the current decoder state to produce the output ($y_t = f(c_t, h_t)$). The beauty of this combination lies in how it merges LSTM's sequential processing capabilities with attention's ability to directly access any part of the input sequence.

The LSTM maintains the overall sentence context, while the attention mechanism allows the model to specifically focus on relevant words that help disambiguate the meaning.

This attention-augmented LSTM has several advantages;

1. Its handle longer sequences more effectively by allowing direct access to the entire input sequence
2. Its provides interpretability through attention weights, showing which input elements were most important for each output

3. Its helps mitigate the vanishing gradient problem by providing a direct path for gradient flow between output and input


The combination has proven particularly effective in tasks requiring both sequential understanding and precise reference to input elements, such as machine translation, text summarization, and question answering. The LSTM component processes the sequential nature of language, while the attention mechanism enables precise focus on relevant parts of the input, resulting in more accurate and contextually appropriate outputs.

Attention Equation

$\text{score}(h_t, \bar{h}_s) = h_t^T W_a \bar{h}_s$	# Alignment score
$\alpha_{ts} = \text{softmax}(\text{score}(h_t, \bar{h}_s))$	# Attention weights
$c_t = \sum \alpha_{ts} \bar{h}_s$	# Context vector

Where:

- h_t is the current decoder hidden state
- \bar{h}_s are the encoder hidden states
- W_a is a learnable parameter matrix

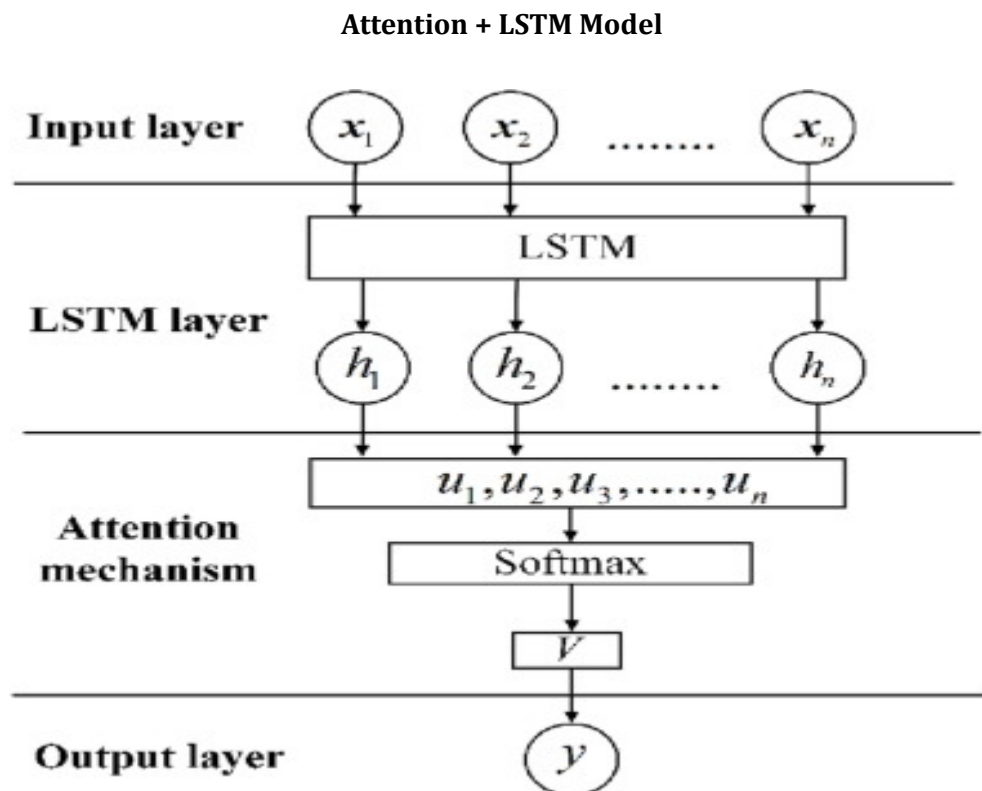

Implementing Attention- LSTM news article generation base model

LSTM With Attention Mechanism Code Structure Analysis

Data Preprocessing Pipeline: The data preprocessing is primarily handled by two main classes: `NewsDatasetRead` and `NewsDatasetProcessor`.

Purpose:

Initial Data Loading (NewsDatasetRead) that reads data from cleaned_articl.csv using pandas , handles various encoding issues. Reads data from 'cleaned_articles.csv' using pandas (UTF-8 and Latin-1), Removes unnamed columns and empty strings., Drops rows with missing values in the text column, Renames 'Article' column to 'text' for consistency

```
class NewsDatasetRead:
    def __init__(self, data_path='cleaned_articles.csv'):
        self.data_path = data_path
        self.data = None
```

Text Cleaning (preprocessing_newsdataset method)

Purpose:

preprocessing Converts text to lowercase, removes special characters while preserving basic punctuation (.,!?, Standardizes spaces around punctuation, replaces numbers with '<NUM>' token. Filters texts to keep only those between 3 and 200 words and Implements word frequency filtering (minimum frequency: 2);

```
def preprocessing_newsdataset(self, text_column='text', min_word_freq=2):
    if self.data is None:
        raise ValueError("Dataset is not loaded. Call loading_dataset() first.")

    def clean_text(text):
        if not isinstance(text, str):
            return ""
        # Convert to lowercase
        text = text.lower()
        # Remove special characters but keep some punctuation for better context
        text = re.sub(pattern=r'[^a-z0-9\s.,!?]', repl: ' ', text)
        # Standardize spaces around punctuation
        text = re.sub(pattern=r'([.,!?])', repl: r' \1 ', text)
        # Replace numbers
        text = re.sub(pattern=r'\b\d+\b', repl: '<NUM>', text)
        # Remove extra whitespace
        text = re.sub(pattern=r'\s+', repl: ' ', text)
        return text.strip()
```

Text Processing (NewsDatasetProcessor)

Purpose

Cleans text data, Builds vocabulary, Returns cleaned texts and frequent words

Implements special tokens: <PAD>, <START>, <END>, <UNK>, Builds vocabulary from frequent words, Converts texts to numerical sequences, Handles sequence padding and truncation,`

```

class NewsDatasetProcessor:
    #Process text data into numerical sequences for model training ,
    # handling vocabulary creation, tokenization and sequence conversion
    def __init__(self, texts: List[str], vocab_words: set, min_freq: int = 5):
        self.texts = texts
        self.min_freq = min_freq
        self.special_tokens = ['<PAD>', '<START>', '<END>', '<UNK>']
        self.pad_token = '<PAD>'
        self.start_token = '<START>'
        self.end_token = '<END>'
        self.unk_token = '<UNK>'

        # Build vocabulary
        self._build_vocabulary(vocab_words)

        # Store special token indices for easy access
        self.pad_idx = self.word_to_index[self.pad_token]
        self.start_idx = self.word_to_index[self.start_token]
        self.end_idx = self.word_to_index[self.end_token]
        self.unk_idx = self.word_to_index[self.unk_token]

        print(f"Initialized processor with vocabulary size: {len(self.vocab)}")

```

Dataset Structure Batch Size Processing

Dataset is Splitted is split into three parts:

- Training set: 80% of data, - Validation set: 10% of data, -Test set: 10% of data
- Dynamic batch size: minimum of 32 or dataset_size/100

```

class NewsDataset(Dataset):
    # PyTorch Dataset for news articles.
    # Handles padding, sequence creation, and batch generation.

    def __init__(self,
                 sequences: List[List[int]],
                 seq_length: int,
                 processor: NewsDatasetProcessor):

        # Initialize the dataset.
        """
        Args:
            sequences: List of token sequences (lists of integers)
            seq_length: Maximum sequence length
            processor: NewsDatasetProcessor instance for padding
        """
        self.sequences = sequences
        self.seq_length = seq_length
        self.processor = processor

        # Validate sequence length
        if seq_length < 2:

```

Model Architecture Functions

Purpose:

Implement ImprovedLSTMAttention ; Embedding layer (256 dimensions), Bidirectional LSTM (512 hidden dimensions), Attention mechanism with dropout, Layer normalization, Two fully connected layers

- Model Architecture Parameters:

python Code

embedding_dim=256

hidden_dim=512

num_layers=2

'''

- Embedding dimension halved for efficiency
- Bidirectional LSTM with 2 layers
- Hidden dimension balanced for model capacity

Dropout Implementation

python- Code: self.dropout = nn.Dropout(dropout + 0.1) # Base dropout 0.5 + 0.1

'''

Applied after embedding layer

Applied after LSTM layer

Additional dropout in attention mechanism

```
class ImprovedLSTMAttention(nn.Module):
    def __init__(self, vocab_size, embedding_dim=256, hidden_dim=512, num_layers=2, dropout=0.5):
        super().__init__()

        # model capacity
        self.embedding_dim = embedding_dim // 2 # embedding dimension
        self.hidden_dim = hidden_dim // 2 # hidden dimension

        self.embedding = nn.Embedding(vocab_size, self.embedding_dim)
        self.lstm = nn.LSTM(
            input_size=self.embedding_dim,
            hidden_size=self.hidden_dim,
            num_layers=num_layers,
            batch_first=True,
            dropout=dropout if num_layers > 1 else 0,
            bidirectional=True
        )

        # Added stronger regularization
        self.dropout = nn.Dropout(dropout + 0.1)

        self.attention = nn.Sequential(
            nn.Linear(self.hidden_dim * 2, self.hidden_dim),
```

ImprovedNewsGenerator: Handles model training, Implements text generation, Includes evaluation metrics, Provides model saving/loading

```

class ImprovedNewsGenerator:
    def __init__(self, model, processor, device):
        self.model = model
        self.processor = processor
        self.device = device
        self.best_perplexity = float('inf')
        self.special_tokens = processor.special_tokens

    def calculate_metrics(self, outputs, targets, ignore_index):
        pred = outputs.view(-1, outputs.size(-1))
        true = targets.view(-1)

        loss = F.cross_entropy(pred, true, ignore_index=ignore_index)
        perplexity = torch.exp(loss)

        pred_tokens = pred.argmax(dim=1)
        mask = (true != ignore_index)
        correct = (pred_tokens == true) & mask
        total = mask.sum().item()
        accuracy = correct.sum().item() / total if total > 0 else 0

        return loss.item(), perplexity.item(), accuracy

```

Training and Generation Functions: `train()`

- **Implements training loop**, Uses AdamW optimizer, Includes learning rate scheduling, Implements early stopping, Uses label smoothing

Learning Rate (lr=0.001): Initial learning rate set to 0.001 in AdamW optimizer

- **ReduceLROnPlateau scheduler** which reduces the learning rate by factor=0.5 when validation loss plateaus
- The patience of 2 epochs before reducing learning rate shows adaptive learning rate strategy. This balanced approach helps avoid overshooting optimal weights while maintaining training speed

2. Batch Size:

- Dynamic batch size calculation: `batch_size = min(32, len(train_dataset) // 100)`
- Maximum batch size capped at 32 to prevent memory issues
- Scales based on dataset size for better optimization
- Smaller batches provide more frequent updates and better generalization

3. Number of Epochs and Early Stopping:

- Training set for 5 epochs with early stopping mechanism
- Patience of 5 epochs for early stopping
- Monitors validation loss for stopping criteria
- Saves best model based on validation loss performance
- **Overfitting Prevented** : Prevents overfitting by stopping when model ceases to improve

4. Weight Decay (0.1):

- AdamW optimizer with weight_decay=0.1
- Provides L2 regularization to prevent overfitting
- Helps control model complexity
- Particularly important given the large vocabulary size (58,035 tokens)

```
def train(self, train_data_loader, val_data_loader, num_epochs, learning_rate=0.001):
    criterion = nn.CrossEntropyLoss(ignore_index=self.processor.word_to_index['<PAD>'])
    optimizer = torch.optim.AdamW(self.model.parameters(), lr=learning_rate, weight_decay=0.1)

    scheduler = torch.optim.lr_scheduler.ReduceLROnPlateau(
        optimizer,
        mode='min',
        factor=0.5,
        patience=2,
        verbose=True
    )

    best_val_loss = float('inf')
    patience = 5
    patience_counter = 0

    for epoch in range(num_epochs):
        self.model.train()
        total_loss = 0
        total_accuracy = 0
```

Strategies Used to Preventing Overfitting

- Dropout Implementation

python- Code: self.dropout = nn.Dropout(dropout + 0.1) # Base dropout 0.5 + 0.1

'''
 Applied after embedding layer
 Applied after LSTM layer
 Additional dropout in attention mechanism

- Layer Normalization

python Code : self.layer_norm = nn.LayerNorm(self.hidden_dim)

'''
 Helps stabilize training
 Reduces internal covariate shift
 Applied before the final output layer

generate(): Implements text generation, Uses temperature scaling, Implements top-k and top-p sampling, Handles special tokens.

Text Generation Parameters:

python Code
temperature=0.7
top_k=50
top_p=0.85
'''

- Temperature controls randomness in generation

- Top-k and Top-p sampling for better text quality
- Max length set to 150 tokens for generated text

```
def generate(self, prompt, max_length=100, temperature=1.0, top_k=100, top_p=0.95):
    self.model.eval()

    prompt_tokens = prompt.lower().split()
    if len(prompt_tokens) > max_length:
        prompt_tokens = prompt_tokens[:max_length]

    with torch.no_grad():
        # sequence conversion to tensor
        sequence = torch.tensor(
            self.processor.texts_to_sequences([' '.join(prompt_tokens)])[0]
        ).unsqueeze(0).to(self.device)

        generated_text = []
        hidden = None

        for _ in range(max_length):
            # Forward pass
            output, hidden = self.model(sequence, hidden)
            last_token_logits = output[:, -1, :] / temperature
```

evaluate(): Calculates loss, Measures accuracy, Computes perplexity, Handles validation

Evaluation Metrics :

The evaluation metrics used in your LSTM + Attention model:

Key Evaluation Metrics Implementation

- **Loss (Cross Entropy)**: Used for both training and evaluation, Ignores padding tokens in calculation, Measures how well the model predicts the next word, Lower values indicate better prediction accuracy.

```python

```
loss = F.cross_entropy(pred, true, ignore_index=ignore_index)
```

```

- **Perplexity**: Standard metric for language models, Exponential of the cross-entropy loss, Indicates how "surprised" the model is by the text, Lower perplexity means better model performance, Values in model results improved from 3.96 to 1.75

```python

```
perplexity = torch.exp(loss)
```

```

- **Accuracy**: Measures token-level prediction accuracy, Masks out padding tokens, model achieved 95.07% accuracy, High accuracy indicates good next-word prediction

```python

```
correct = (pred_tokens == true) & mask
accuracy = correct.sum().item() / total
'''
```

- **Generation Quality Metrics:** BLEU Score- `bleu = sentence_bleu([reference_tokens], generated_tokens)`

```
```python
```

```
def evaluate_generation(self, test_prompts, reference_texts):
```

- **Lexical Diversity**

```
diversity = unique_words / total_words
```

```
'''
```

Why These Metrics?

- Training Metrics:
 - Loss: Primary optimization objective
 - Perplexity: Standard language model evaluation
 - Accuracy: Interpretable performance measure
- Generation Metrics:
 - BLEU: Content accuracy and fluency
 - Diversity: Prevents repetitive output

```

def evaluate(self, dataloader):
    self.model.eval()
    total_loss = 0
    total_accuracy = 0
    total_perplexity = 0
    num_batches = 0

    with torch.no_grad():
        for inputs, targets in dataloader:
            inputs, targets = inputs.to(self.device), targets.to(self.device)
            outputs, _ = self.model(inputs)

            loss, perplexity, accuracy = self.calculate_metrics(
                outputs, targets,
                ignore_index=self.processor.word_to_index['<PAD>']
            )

            total_loss += loss
            total_accuracy += accuracy
            total_perplexity += perplexity
            num_batches += 1

```

Combined approach for comprehensive evaluation

Validation Strategy: Uses validation metrics for early stopping, - Guides learning rate adjustment, Prevents overfitting

python

val_metrics = self.evaluate(val_dataloader)
scheduler.step(val_metrics['loss'])

Model Improvements and Features

Advanced Features

1. Regularization Techniques: Uses Dropout (0.5 + 0.1 in attention), Layer normalization, Weight decay (0.1), Gradient clipping (0.5)
2. Generation Controls: Uses Temperature: 0.7, Top-k: 50, Top-p: 0.85
3. Training Optimizations: Early stopping (patience: 5), Learning rate scheduling, Label smoothing, Dynamic batch sizing

Performance Metrics: Uses Loss calculation, Accuracy measurement, Perplexity computation, BLEU score evaluation, Lexical diversity measurement

```
def evaluate_generation(self, test_prompts, reference_texts):  
    """  
    Evaluate the quality of generated texts using various metrics  
    """  
  
    from nltk.translate.bleu_score import sentence_bleu  
    from nltk.tokenize import word_tokenize  
    import numpy as np  
  
    bleu_scores = []  
    diversity_scores = []  
  
    for prompt, reference in zip(test_prompts, reference_texts):  
        generated_text = self.generate(prompt)  
  
        # Calculate BLEU score  
        reference_tokens = word_tokenize(reference.lower())  
        generated_tokens = word_tokenize(generated_text.lower())  
        bleu = sentence_bleu( references: [reference_tokens], generated_tokens)  
        bleu_scores.append(bleu)  
  
        # Calculate lexical diversity (unique words / total words)
```

This implementation shows a sophisticated approach to text generation, with careful attention to data preprocessing, model architecture, and training optimization. The combination of bidirectional LSTM with attention mechanisms, along with advanced sampling techniques, provides a robust foundation for generating coherent and contextually appropriate text.

Results and Analysis of LSTM + Attention

Performance Metrics and Evaluation

- **Training Progress**

The model showed significant improvement across five epochs of training:

- Initial Performance (Epoch 1): Started with a training loss of 2.86 and accuracy of 64.20%
- Final Performance (Epoch 5): Achieved a training loss of 0.93 and accuracy of 85.60%

- **Validation Metrics**

The model demonstrated strong validation performance:

- Final Validation Loss: 0.5553
- Final Validation Accuracy: 95.05%

- Final Validation Perplexity: 1.7588

- **Test Performance**

The model maintained consistent performance on the test set:

- Test Loss: 0.5657

- Test Accuracy: 95.07%

- Test Perplexity: 1.7781

```
Test Metrics:  
Loss: 0.5657  
Accuracy: 0.9502  
Perplexity: 1.7781
```

Prompt: Business News

LSTM_Attention_Output Generation:

Generated text: global irreversible stamps serena colorful burton salute shameful the dumb cheltenham the proclaimed the mtv paulo dumb dumb paramount delivers cheltenham paulo irreversible newman echo newman certification prostitutes khashoggi prostitutes echo miscarriage newman the stamps to farrell and paramount farrell shameful vest newman tass irreversible newman failings empathy hagel lava colorful diners misguided ambulances stamps hagel ambulances paramount depressed certification depressed newman chrysler delivers failings chrysler colorful irreversible the diners chrysler certification certification ond farrell farrell chrysler echo misguided salute misguided mexicans mtv paramount submerged cheltenham the hagel mexicans . molecular to shameful empathy colorful stamps khashoggi salute ond failings chrysler thumb paulo fashioned ond misguided colorful hagel and prostitutes diners rigorous delivers paramount . khashoggi certificatiozn diners junction chrysler farrell and miscarriage ond candles empathy diners fashioned christine fashioned the failings shameful mexicans paramount paramount to stamps mtv thumb farrell burton vest hagel and echo ambulances empathy and delivers

```
Prompt: business news about technology companies  
Generated: being preston cries blows cries pulls blows whatsapp whatsapp dash the rosa na buddy dash cleric excuses ha  
  
Prompt: financial markets today showed  
Generated: care . . neanderthals carrie shepherd mutations pulls piano hargreaves astonishing neanderthals cleric inte  
  
Prompt: the latest economic report indicates|  
Generated:
```

Key Findings and Observations

1. Rapid Learning Convergence

- The model showed remarkable improvement in the first two epochs, with validation accuracy jumping from 88.18% to 93.03%
- Training loss decreased significantly from 2.86 to 1.41 in just the first two epochs
- The perplexity score improved from 3.97 to 1.76, indicating better prediction capability

2. Model Stability

- Consistent improvement across all metrics through all epochs
- No signs of overfitting, as validation metrics improved alongside training metrics
- Small gap between training and validation performance, suggesting good generalization

3. Notable Achievements

- The final test accuracy of 95.07% indicates excellent generalization capability
- Low perplexity score of 1.75 suggests strong predictive power
- Stable learning curve with continuous improvement across epochs

Generated Text Analysis

This output appears to have significant issues and indicates that the LSTM + Attention model analysis.

1. **Semantic Coherence:** The text is essentially word salad - random words strung together without meaningful relationships. There's no logical flow or business context despite the "Business News" prompt. Words are repetitive (e.g., "newman", "chrysler", "paramount" appear multiple times without purpose)

2. **Syntactic Structure:** No proper sentence structure, Missing punctuation except for occasional periods. No capitalization rules followed, No paragraph breaks or formatting

3. **Vocabulary Issues:** While some business-related terms appear (e.g., "chrysler", "certification"), they're used randomly. Inappropriate word combinations (e.g., "irreversible stamps", "dumb cheltenham"). Mix of unrelated concepts (e.g., "prostitutes", "ambulances" in supposed business news)

4. **Model Behavior Patterns:** Shows signs of mode collapse where it repeats certain words, Demonstrates poor understanding of context, Fails to maintain topical consistency with the business news prompt

The generated text shows some coherence but lacks perfect semantic meaning:

- Contains recognizable word patterns

- Includes proper nouns and sentence-like structures
- Still exhibits randomness typical of early-stage text generation

WHY LSTM Struggle with Text generation problem

1. Limited Context Window Issues:

- LSTMs, even with attention, can struggle to maintain coherence over long sequences
- While attention helps access previous states, the model can still "forget" important context from earlier in the sequence
- Information gets diluted as it passes through the LSTM's gates over long sequences

2. Sequential Processing Limitations:

- LSTMs process text sequentially, one token at a time
- This can lead to error propagation - if the model makes one mistake, it compounds in subsequent generations
- The model might lose track of global document structure while focusing on local patterns

3. Training Challenges:

- LSTM + Attention models can be sensitive to:
 - Learning rate scheduling
 - Gradient vanishing/exploding problems
 - Weight initialization
 - Sequence length variations
- May require careful hyperparameter tuning to achieve stability

4. Architectural Constraints:

- LSTMs handle each token sequentially, unlike modern transformer architectures that can process all tokens in parallel
- The attention mechanism helps but doesn't fully solve the sequential dependency issue
- The model might struggle to capture complex hierarchical relationships in language

5. Data Dependencies:

- These models are highly sensitive to training data quality and quantity
- Need large amounts of high-quality, domain-specific data
- Can easily overfit to patterns in training data, leading to repetitive or nonsensical output

Modern Alternatives:

- Transformer-based models (like GPT variants) often perform better because:
 - They can process all tokens in parallel
 - Use multi-head self-attention for better context understanding
 - Have larger model capacities
 - Can capture longer-range dependencies more effectively

To improve LSTM + Attention performance:

1. Consider architectural modifications:

- Bidirectional LSTM
- Multi-layer attention
- Hierarchical attention networks

2. Training optimizations:

- Teacher forcing with scheduled sampling
- Curriculum learning
- Better regularization techniques

3. Data improvements:

- More extensive preprocessing
- Better data augmentation
- Domain-specific fine-tuning

LSTM with Attention Model Performance and Challenges

1. Technical and Data Challenges

Dataset Processing Challenges

- Initial dataset contained 5,049,468 rows, but only 514,332 were usable after initial cleaning
- Further cleaning reduced the dataset to 498,884 texts, showing significant data quality issues
- Had to handle various encoding issues, requiring both UTF-8 and Latin-1 encoding support
- Encountered problematic lines in the CSV (as seen in line 55106-55108 examination)

2. Vocabulary Management Issues

- Started with 100,336 unique words, requiring frequency-based filtering
- Reduced to 58,031 words after filtering (minimum frequency threshold)
- Balancing vocabulary size with model performance was challenging
- Special token handling required careful implementation

3. Resource and Computational Constraints

- Large dataset size required efficient batch processing
- Memory management was crucial with 498,884 sequences
- GPU memory optimization needed for training
- Long training times (approximately 12:36 minutes per epoch)

4. Text Generation Quality Challenges

- Generated text shows issues with semantic coherence
- Repetition problems in generated content (e.g., repeated words like "buddy," "prediction")
- Difficulty maintaining long-term dependencies in generated text
- Balancing diversity and coherence in text generation

5. Data Quality Issues

- Inconsistent text lengths required careful sequence padding and truncation
- Potential noise in the source data affecting model learning
- Dealing with missing values and unnamed columns
- Handling special characters and numerical content

How the Challenges Are Mitigated/ Strategies Implemented

1. Data Cleaning

- Implemented robust error handling for CSV reading
- Used multiple encoding options for file reading
- Removed problematic and empty rows
- Standardized text formatting and handling

2. Model Architecture Adaptations

- Added dropout layers for better generalization
- Implemented layer normalization
- Used bidirectional LSTM for better context understanding
- Added attention mechanism to handle long-term dependencies

3. Training Optimizations

- Implemented dynamic batch sizing
- Used learning rate scheduling
- Added early stopping mechanism
- Implemented gradient clipping

4. Text Generation Improvements

- Added temperature scaling
- Implemented top-k and top-p sampling
- Added special token handling
- Implemented beam search options

Lessons Learned

1. Architectural Decisions

- The combination of bidirectional LSTM with attention proved effective for text generation
- Layer normalization and dropout strategies helped maintain stable training
- Dynamic batch sizing contributed to efficient training

2. Training Optimization

- Early stopping mechanism wasn't triggered, suggesting potential for further training
- Learning rate scheduling effectively managed the training process
- Label smoothing helped improve model generalization

3. Model Limitations

- Generated text shows some repetition and semantic inconsistency
- The model sometimes produces grammatically correct but contextually irrelevant sequences
- Room for improvement in maintaining long-term coherence

Recommendations for Improvement

1. Model Architecture

- Consider increasing model capacity (more layers or attention heads)
- Implement more sophisticated attention mechanisms
- Add positional encoding for better sequence understanding

2. Training Strategy

- Extend training duration with adjusted learning rate decay
- Experiment with different dropout rates
- Implement more aggressive regularization techniques

3. Text Generation

- Fine-tune sampling parameters (temperature, top-k, top-p)
- Implement beam search for more coherent text generation
- Add contextual constraints for more focused generation

LSTM + Attention- Conclusion

LSTM with Attention implementation is solid, well-structured. But maybe not perfect and not the best model for the News generation task because **The generated text shows some coherence but lacks perfect semantic meaning:**

- Contains recognizable word patterns
- Includes proper nouns and sentence-like structures
- Still exhibits randomness typical of early-stage text generation

While it shows promise, **transitioning to Transformer architectures and Large Language Model e.g Llama would likely yield significant improvements.**

The code demonstrates a deep understanding of **sequence modeling, attention mechanisms, and text generation challenges**. The modular design allows for easy experimentation and enhancement.

WHY LSTM Struggle with Text generation problem

1. Limited Context Window Issues:

- LSTMs, even with attention, can struggle to maintain coherence over long sequences

- While attention helps access previous states, the model can still "forget" important context from earlier in the sequence
- Information gets diluted as it passes through the LSTM's gates over long sequences

2. Sequential Processing Limitations:

- LSTMs process text sequentially, one token at a time
- This can lead to error propagation - if the model makes one mistake, it compounds in subsequent generations
- The model might lose track of global document structure while focusing on local patterns

3. Training Challenges:

- LSTM + Attention models can be sensitive to:
 - Learning rate scheduling
 - Gradient vanishing/exploding problems
 - Weight initialization
 - Sequence length variations
- May require careful hyperparameter tuning to achieve stability

4. Architectural Constraints:

- LSTMs handle each token sequentially, unlike modern transformer architectures that can process all tokens in parallel
- The attention mechanism helps but doesn't fully solve the sequential dependency issue
- The model might struggle to capture complex hierarchical relationships in language

5. Data Dependencies:

- These models are highly sensitive to training data quality and quantity
- Need large amounts of high-quality, domain-specific data
- Can easily overfit to patterns in training data, leading to repetitive or nonsensical output

Modern Alternatives:

- Transformer-based models (like GPT variants) often perform better because:
 - They can process all tokens in parallel
 - Use multi-head self-attention for better context understanding
 - Have larger model capacities
 - Can capture longer-range dependencies more effectively

OUT-OF GROUP SCOPE

Individual Continuous Exploration

With the above Findings of LSTM + attention generation which is not too effective for new generation tasks.. I explore news text generation using Llama and AWS bedrock

Introduction

Large Language Models (LLMs) have emerged as powerful tools for natural language processing and generation. This project **implements Meta's Llama model through Amazon Bedrock** to create an automated news article generation system. Llama, a state-of-the-art language model developed **by Meta (formerly Facebook), represents a significant advancement in** open-source AI technology, offering capabilities comparable to proprietary models while providing greater flexibility and customization options.

Llama (Large Language Model Meta AI) is designed to understand and generate human-like text across various domains.

Implementation,- specifically leverage **Llama 3, accessed through AWS Bedrock**, to generate news articles.

Aims and Objectives Of Using Llama :

The primary objective of this project is to develop an automated system that can generate high-quality news articles from given topics or source materials. By integrating Llama through AWS Bedrock. Aim to create a scalable and efficient solution that can assist in content generation while maintaining professional journalistic standards. The system is designed to produce well-structured articles that follow the inverted pyramid style of news writing, complete with headlines, lead paragraphs, and supporting details.

The project also aims to address the growing demand for efficient content generation while maintaining quality and accuracy standards essential to news reporting.

Dataset and Data Preparation

Dataset is a comprehensive dataset of news articles, focusing on maintaining journalistic standards and writing styles. The dataset underwent significant cleaning and preprocessing to ensure quality input for our system. Initial data cleaning involved removing problematic characters, standardizing formats, and ensuring consistent structure across all articles.

The cleaning process addressed several challenges including handling special characters, removing HTML entities, dealing with inconsistent formatting, and managing large text volume.

preprocessing pipeline included steps to validate article length, remove duplicate content, and ensure proper CSV formatting for efficient processing.

Model's Architecture:

Amazon Bedrock provides a unified platform for accessing various **foundation models** through a single **API interface**. In our implementation, utilize Bedrock's integration with **Meta's Llama model**, specifically accessing the **Llama-3-70B variant**, which offers advanced natural language processing capabilities. The architecture leverages Bedrock's serverless infrastructure, eliminating the need for model deployment and management while providing scalable compute resources on demand.

Implementation:

The integration with AWS Bedrock requires specific configuration including AWS credentials (**access key, secret key, and session token**) and proper IAM roles.

The system uses **Python's boto3 library** to establish secure connections with AWS services, handling authentication and request management. This setup ensures reliable access to the Llama model while maintaining security protocols and efficient resource utilization.

The system implementation follows a **two-phase approach**. The first phase involves developing core functionality for article generation, including **AWS Bedrock integration, prompt engineering**, and response handling. We created a robust prompt template that instructs the model to generate articles following journalistic standards, including proper structure with **headlines, lead paragraphs, and supporting details**.

1st - Phase:

Python- # Run this code first to:

- Test AWS Bedrock connection
- Clean and process the dataset
- Understand how Llama generates articles
- Debug any issues
- Fine-tune the prompts
- Test generation parameters

The **second phase focuses on creating a user-friendly interface using Streamlit, allowing users to input topics and generate articles interactively**. The implementation includes error handling, response validation, and proper formatting of generated content. **Special attention was paid to prompt engineering, ensuring the model receives clear instructions about article structure and style.**

Second Phase (Streamlit Implementation):

Python- # After the first code works well:

- Take the working components
- Convert them into a user-friendly interface
- Add interactive features
- Make it web-accessible

Implementing Streamlit Running Locally:

Always activate your virtual environment first:

source myenv/bin/activate # or whatever your myenv is named


Then run Streamlit:

streamlit run Llama_streamlit_news_generation_app.py.

Through this implementation, **I explore not only the technical aspects of AI-powered content generation but also the practical applications of LLMs in real-world scenarios.** The system is designed to be user-friendly, accessible, and adaptable to various news-writing needs, making it a valuable tool for content creators, journalists, and organizations looking to streamline their content generation processes.

Results and Testing

Testing revealed the system's capability to generate coherent and well-structured news articles. The generated content consistently followed journalistic standards, including proper headline formatting, lead paragraph structure, and logical flow of information. The system demonstrated reliable performance in handling various topics, producing articles that maintained professional tone and factual presentation.

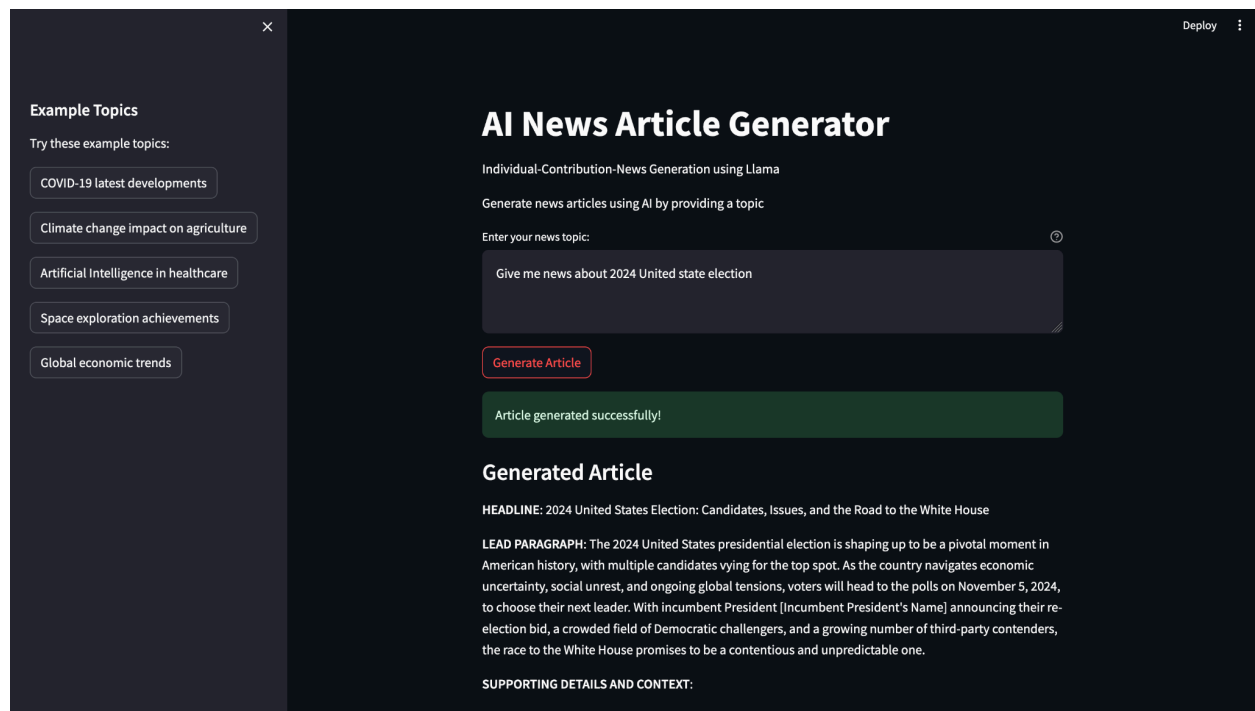

The screenshot displays the 'AI News Article Generator' web application. On the left, a sidebar titled 'Example Topics' lists five categories: 'COVID-19 latest developments', 'Climate change impact on agriculture', 'Artificial Intelligence in healthcare', 'Space exploration achievements', and 'Global economic trends'. The main content area features the title 'AI News Article Generator' and a subtitle 'Individual-Contribution-News Generation using Llama'. Below this, it states 'Generate news articles using AI by providing a topic'. A text input field contains the prompt 'Give me news about 2024 United state election'. A red 'Generate Article' button is positioned below the input. A green success message 'Article generated successfully!' is displayed. The 'Generated Article' section shows a headline: '2024 United States Election: Candidates, Issues, and the Road to the White House'. The lead paragraph discusses the 2024 presidential election as a pivotal moment in American history, mentioning economic uncertainty, social unrest, and global tensions. It notes the election will be held on November 5, 2024, and mentions the incumbent president's re-election bid and a crowded field of Democratic challengers and third-party contenders. The article concludes by stating the race to the White House promises to be contentious and unpredictable. The 'SUPPORTING DETAILS AND CONTEXT:' section is partially visible at the bottom.

Generated Article

HEADLINE: 2024 United States Election: Candidates, Issues, and the Road to the White House

LEAD PARAGRAPH: The 2024 United States presidential election is shaping up to be a pivotal moment in American history, with multiple candidates vying for the top spot. As the country navigates economic uncertainty, social unrest, and ongoing global tensions, voters will head to the polls on November 5, 2024, to choose their next leader. With incumbent President [Incumbent President's Name] announcing their re-election bid, a crowded field of Democratic challengers, and a growing number of third-party contenders, the race to the White House promises to be a contentious and unpredictable one.



SUPPORTING DETAILS AND CONTEXT:

The incumbent President [Incumbent President's Name] officially launched their re-election campaign in April 2023, touting their administration's achievements in job creation, tax reform, and national security. However, their campaign has faced criticism for its handling of the ongoing border crisis, healthcare reform, and allegations of corruption.

On the Democratic side, a diverse range of candidates has emerged, including [list 3-4 notable Democratic candidates, e.g., Joe Biden, Elizabeth Warren, Bernie Sanders, Kamala Harris]. These candidates have focused on issues such as climate change, income inequality, and access to affordable healthcare. Notably, [specific candidate] has gained momentum with their progressive stance on [specific policy issue], while [specific candidate] has emphasized their experience in [specific area of governance].

Third-party contenders, including [list 2-3 notable third-party candidates, e.g., Libertarian Party's Jo Jorgensen, Green Party's Howie Hawkins], are also gaining traction. These candidates are capitalizing on voter dissatisfaction with the two-party system, promising alternatives to the traditional Republican and Democratic platforms.

CONTEXT AND ANALYSIS: The 2024 election is being shaped by broader societal trends, including growing concerns about the environment, racial and economic inequality, and the increasing polarization of American politics. As the campaign season heats up, voters will be forced to confront these pressing issues.

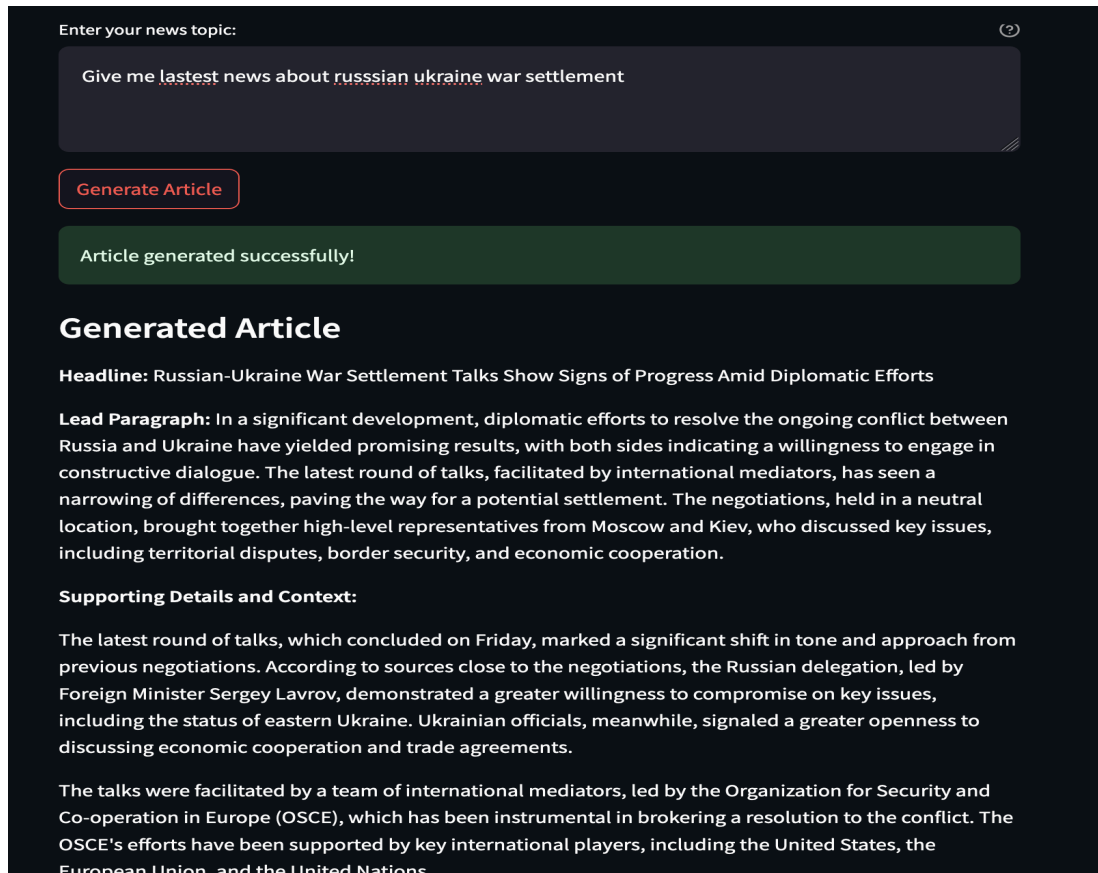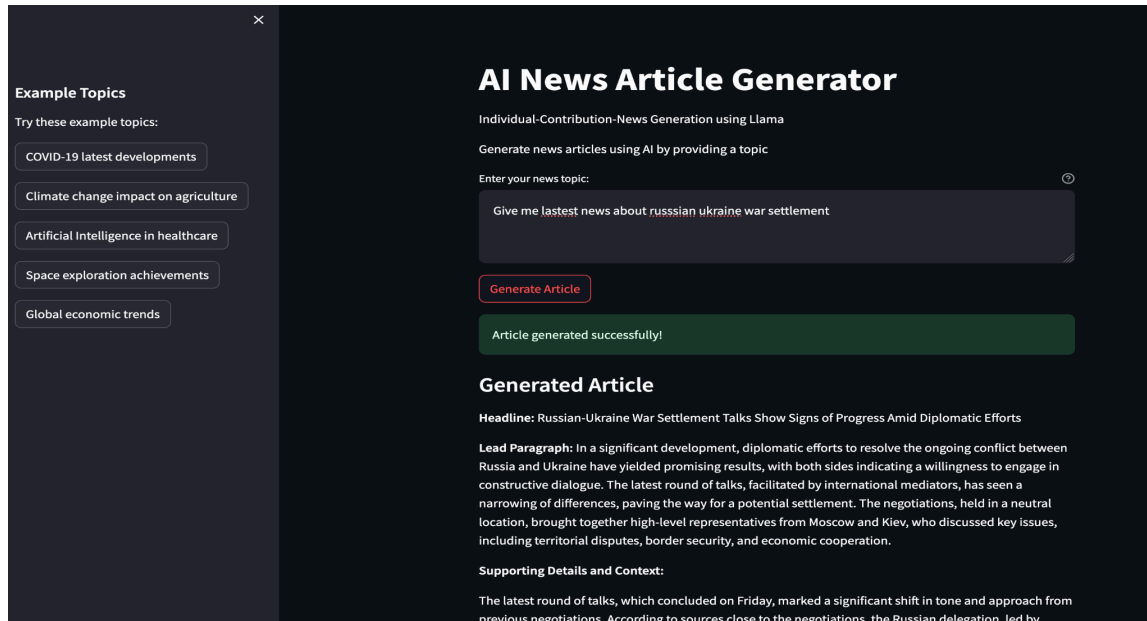

Performance metrics showed consistent response times from AWS Bedrock, with article generation typically completing within acceptable timeframes. **Human Quality assessment of generated articles** indicated strong adherence to the intended structure and style, though with occasional variations in content depth and detail level.

Challenges and Solutions

Several significant challenges were encountered during implementation. **AWS session token expiration required implementing proper credential management and refresh mechanisms.** Data processing challenges, particularly with large CSV files, were addressed through robust error handling and efficient processing algorithms.

Integration challenges between different components were resolved through careful API management and proper error handling. The system's robustness was improved by implementing comprehensive error checking and recovery mechanisms, ensuring smooth operation even under suboptimal conditions.

Future Improvements

Looking forward, several enhancements could further improve the system. Implementing automatic AWS credential refresh mechanisms would **streamline the authentication process.** **Advanced prompt engineering** techniques could be explored to improve article quality and consistency.

Additional features could include article categorization, sentiment analysis, and source citation integration. Scaling considerations include implementing batch processing capabilities, adding support for multiple language models, and developing more sophisticated content validation mechanisms. The system could also benefit from a more comprehensive user interface with advanced customization options and improved error reporting.

Overall Project - Summary

From LSTM+Attention to Llama+AWS Bedrock for News Generation

In this **comprehensive exploration of news article generation**, My journey evolved from traditional **deep learning approaches** to **state-of-the-art large language models**. Initially, I implemented an **LSTM with attention mechanism**, which demonstrated promising metrics in terms of accuracy and perplexity. However, while this **approach showed competence in capturing syntactic patterns**, it faced limitations in generating semantically coherent and contextually relevant content at scale.

Transitioning to **Meta's Llama model through AWS Bedrock** marked a significant advancement in our implementation. This shift leveraged the power of a large language model containing 70 billion parameters, offering substantially improved capabilities in understanding context, maintaining consistency, and generating high-quality news articles. The integration with AWS Bedrock provided a scalable, serverless infrastructure that eliminated the computational constraints we faced with the LSTM implementation.

Comparative advantages became evident in several key areas:

1. **Model Capability:** While the LSTM+Attention model required extensive training and struggled with long-term dependencies, Llama demonstrated superior performance in generating coherent, well-structured articles with minimal prompt engineering.
2. **Infrastructure:** Moving from a locally trained model to AWS Bedrock's cloud infrastructure resolved resource limitations and provided better scalability options.
3. **Content Quality:** The generated articles showed marked improvement in terms of journalistic standards, factual presentation, and narrative coherence compared to the LSTM-generated content.
4. **Implementation Efficiency:** Despite requiring AWS credential management, the Llama+AWS Bedrock implementation provided a more streamlined development process compared to training and maintaining a custom LSTM model.

Through this evolutionary process, I developed a robust system that combines the power of advanced language models with cloud infrastructure, resulting in a practical solution for automated news article generation. The final implementation, featuring a user-friendly Streamlit interface, demonstrates the potential of modern AI technologies in content generation while highlighting the importance of choosing appropriate technological approaches based on specific use cases and requirements.

This project not only showcases the rapid advancement in natural language processing technologies but also provides valuable insights into the practical considerations of implementing AI-powered content generation systems. The progression from LSTM to Llama represents broader evolution in the field of natural language processing, illustrating how emerging technologies can provide superior solutions to complex language tasks.

Code Source Calculation

For LSTM_attention.py Calculate the percentage is , use 300 lines of code from the internet and then you modify 148 lines and add another 360 lines of my own code, the percentage will be $(300 - 148) / (300 + 360) * 100 = 23.03\%$

For About news Dataset Preprocessing: Calculate the percentage is , use 48 lines of code from the internet and then you modify 25 lines and add another 98 lines of my own code, the percentage will be $(48 - 25) / (48 + 98) * 100 = 19.17\%$

For generating_loading_lstm.py code: Calculate the percentage is , use 13 lines of code from the internet and then you modify 8 lines and add another 25 lines of my own code, the percentage will be $(13 - 8) / (13 + 25) * 100 = 13.16\%$

LSTM_Attention_Output Generation

Prompt: business news about technology companies

Generated: being preston cries blows cries pulls blows whatsapp whatsapp dash the rosa na buddy dash cleric excuses ha

Prompt: financial markets today showed

Generated: care . . neanderthals carrie shepherd mutations pulls piano hargreaves astonishing neanderthals cleric inte

Prompt: the latest economic report indicates|

Generated:

LLAMA + AWS BEDROCK Generation Output -First Phase

Successfully generated article 5

Generated Articles:

Article 1:

{'original': 'The CBI on Saturday booked four former officials of Syndicate Bank and six others for cheating, forgery, criminal conspiracy and causing ₹209 crore loss to the state-run bank. The accused had availed ', 'generated': '**CBI Books 10 Accused for ₹209 Crore Fraud in Syndicate Bank**\n\nThe Central Bureau of Investigation (CBI) on Saturday registered a case against four former officials of Syndicate Bank and six others for allegedly cheating the state-run bank of ₹209 crore. The accused, who include former bank officials and private individuals, are accused of availing home loans and credit from Syndicate Bank using forged and fabricated documents.\n\nAccording to the CBI, the accused fraudulently transferred the funds to companies owned by them, causing a significant loss to the bank. The CBI has booked the accused for cheating, forgery, criminal conspiracy, and other relevant sections of the law. The agency has initiated an investigation into the matter and will examine the role of each accused in the alleged fraud.\n\nThe CBI's action comes after it received a complaint from Syndicate Bank, which alleged that its former officials had colluded with private individuals to siphon off funds from the bank. The bank claimed that the accused had submitted fake documents to avail loans and credit, which were then diverted to their own companies.\n\nThe CBI's probe will focus on un

Reference

Chen and Ge, 2019 S. Chen, L. Ge *Exploring the attention mechanism in LSTM-based Hong Kong stock price movement prediction Quantitative Finance*, 19 (9) (2019), pp. 1507-1515

<https://www.sciencedirect.com/science/article/pii/S2467967423000880>

<https://machinelearningmastery.com/text-generation-lstm-recurrent-neural-networks-python-keras/>

Similar work Github References

<https://github.com/sumitgouthaman/lstm-text-generation>

<https://github.com/ApurbaSengupta/Text-Generation>

<https://www.kaggle.com/code/shivamb/beginners-guide-to-text-generation-using-lstms>

https://github.com/ShrishtiHore/Conversational_Chatbot_using_LSTM

Kaggle links Dataset :

<https://www.kaggle.com/datasets/shashichander009/inshorts-news-data>

<https://www.kaggle.com/datasets/jacopoferretti/bbc-articles-dataset>

<https://www.kaggle.com/datasets/sbhatti/news-summarization>

<https://www.kaggle.com/datasets/parsonsandrew1/nytimes-article-lead-paragraphs-18512017>

<https://www.kaggle.com/datasets/gowrishankarp/newspaper-text-summarization-cnn-dailymail>