

**Duration : 1.598 s** Start: Oct 20, 9:09:39.225 PM End: Oct 20, 9:09:40.823 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 10 10 40 50 60 40 50 60 40 50 60 Pass % 70 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

Feature			Scei	nario			Step		
Name	Duration	T	P	F	S	<b>T</b>	P	F	S
This is to test Items added to Cart on RahulShetty Academy Registration page	1.402 s	2	0	2	0	6	0	0	6
This is to test facebook.com	0.094 s	1	0	1	0	2	0	0	2
This is to test google.com	0.085 s	1	0	1	0	2	0	0	2

FEATURES SUMMARY -- 3 --

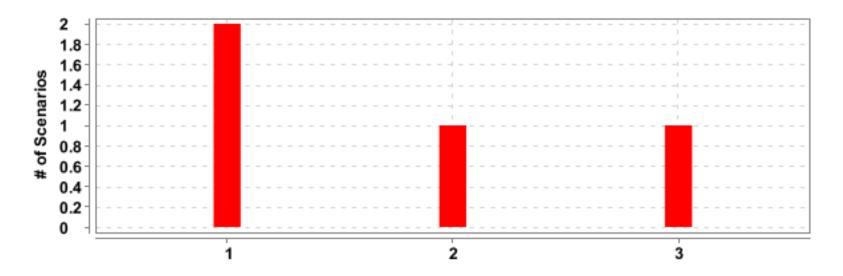

#	Feature Name	T	P	F	S	Duration
1	This is to test Items added to Cart on RahulShetty Academy Registration page	2	0	2	0	1.402 s
2	This is to test facebook.com	1	0	1	0	0.094 s
3	This is to test google.com	1	0	1	0	0.085 s

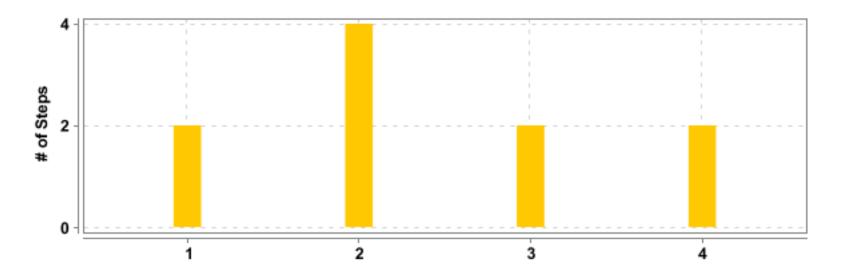

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	This is to test Items added to Cart on RahulShetty Academy Registration *	Add Item to Cart in Rahul Shetty academy Shopping Application	2	0	0	2	1.286 s
2	This is to test Items added to Cart on RahulShetty Academy Registration *	Login with correct credentials	4	0	0	4	0.095 s
3	This is to test facebook.com	To test the facebook URL opening on browser	2	0	0	2	0.094 s
4	This is to test google.com	To test the URL opening on browser	2	0	0	2	0.085 s


<sup>\*</sup> The feature name and/or scenario name has been cropped to fit in the available space.

**DETAILED SECTION** 

## This is to test Items added to Cart on RahulShetty Academy Registration page

FAILED	DURATION - 1.402 s	Scenarios		Steps	
		Total - 2		Total - 6	
/ 9:09:39.225 PM // 9	9:09:40.627 PM /	Pass - 0	2	Pass - 0	6
		Fail - 2		Fail - 0	
		Skip - 0		Skip - 6	

### **Add Item to Cart in Rahul Shetty academy Shopping Application**

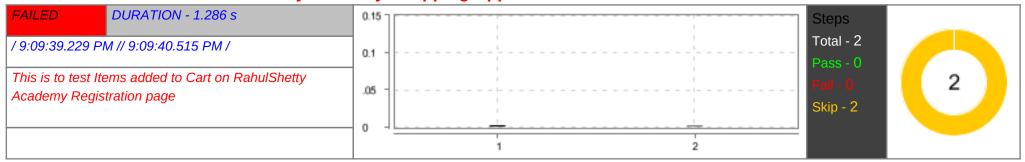


#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser()	FAILED	1.249 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6'		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision: 'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version: FirefoxDriver		
	at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:98)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java.402)		
1	Given User enters the website through URL	SKIPPED	0.002 s
2	Then User gets the title of the page "Let's Shop"	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.000 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		

# **Login with correct credentials**

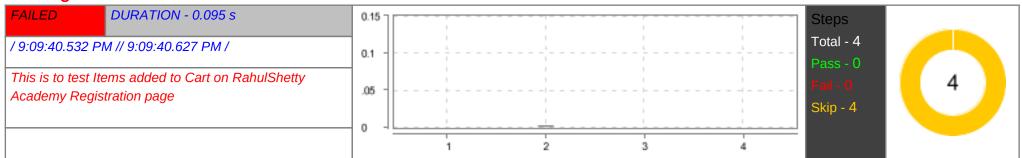


#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser()	FAILED	0.085 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init driver(DriverFactory.java:33)</init></init></init></init>		

#	Step / Hook Details	Status	Duration
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision:		
	'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version:		
	FirefoxDriver		
	at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:98)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java.200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java.200)		
	at 10. cucumber. junit. Cucumber. run Chilu(Cucumber. java. 30)		<u> </u>

DETAILED SECTION -- 9 --


#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	Given user is on login page	SKIPPED	0.000 s
2	When user enters email "keer26@gmail.com"	SKIPPED	0.001 s
3	And user enters password "Keerthu@1988"	SKIPPED	0.000 s
4	And user clicks on Login button	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException		
	at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.001 s
	java.lang.NullPointerException		
	at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		

#### This is to test facebook.com

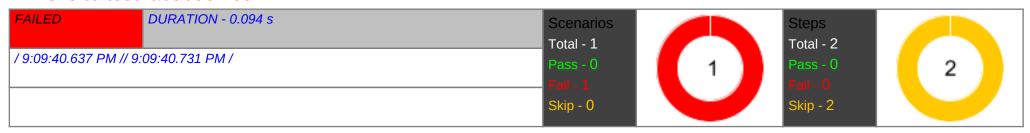

To test the facebook URL opening on browser

DETAILED SECTION -- 10 --

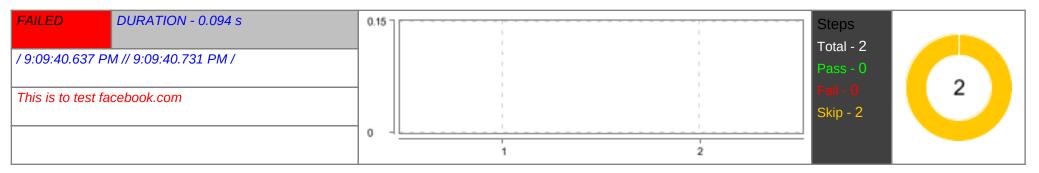

<b>‡</b>	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser()	FAILED	0.088 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6'		
	at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565)		
	at org.openga.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		
	at org.openga.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openga.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openga.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision:		
	'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version:		
	FirefoxDriver		
	at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.lnvoker.dolnvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:98)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
1	When User enters the facebook URL in the browser	SKIPPED	0.000 s
2	Then the facebook has to opened in the driver	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException		


DETAILED SECTION -- 12 --

#	Step / Hook Details	Status	Duration
	at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.000 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		

# This is to test google.com

	Steps	
	Total - 2	
1	Pass - 0	2
	Fail - 0	
	Skip - 2	
	1	1 Pass - 0 Fail - 0

## To test the URL opening on browser

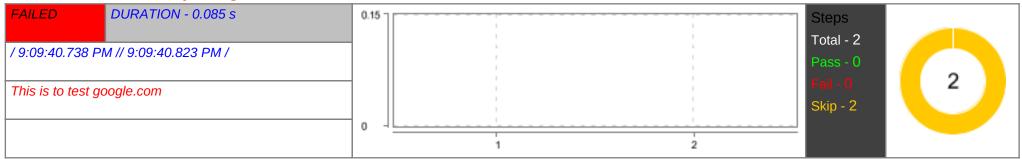

#	Step / Hook Details	Status	Duration
	BEFORE - AppHooks.ApplicationHooks.launchBrowser()	FAILED	0.079 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'VSPLBLRLT0831', ip: '192.168.1.6' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94) at com.Factory.DriverFactory.init_driver(DriverFactory.java:33) at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)</init></init></init></init>		

#	Step / Hook Details	Status	Duration
	Caused by: org.openqa.selenium.WebDriverException: Driver server process died prematurely. Build info: version: '4.5.0', revision:		
	'fe167b119a' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_341' Driver info: driver.version:		
	FirefoxDriver		
	at org.openqa.selenium.remote.service.DriverService.start(DriverService.java:226)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:98)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:98)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:94)</init>		
	at com.Factory.DriverFactory.init_driver(DriverFactory.java:33)		
	at AppHooks.ApplicationHooks.launchBrowser(ApplicationHooks.java:33)		
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:98)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		

DETAILED SECTION -- 14 --

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:210)		
1	When User enters the designated URL in the browser	SKIPPED	0.000 s
2	Then the google has to opened in the driver	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:46)		
	AFTER - AppHooks.ApplicationHooks.quitBrowser()	FAILED	0.001 s
	java.lang.NullPointerException at AppHooks.ApplicationHooks.quitBrowser(ApplicationHooks.java:38)		